

Chapter 173-250 WAC

CONSTRUCTION GRANTS PROGRAM—PRIORITY RATING SYSTEM AND PROJECT PRIORITY LIST

WAC

173-250-010	Purpose and scope.
173-250-020	Definitions.
173-250-030	Development and approval of the system.
173-250-040	Development and approval of the state project priority list.

WAC 173-250-010 Purpose and scope. The director shall publish a priority rating and ranking system annually which shall be used for the purpose of constituting a project priority list. The purpose of this chapter is to describe (1) the criteria to be considered when establishing the numerical rating parameters portion of the system, (2) the criteria to be considered when establishing the administrative and management ranking procedures portion of the system, (3) the process to be followed in seeking approval of the system, (4) how the system is to be used to constitute a project priority list, and (5) the process to be followed in seeking approval of the project priority list.

[Statutory Authority: RCW 43.21A.080. 78-09-067 (Order DE 78-11), § 173-250-010, filed 8/24/78.]

WAC 173-250-020 Definitions. For the purpose of this chapter:

(1) "Category of projects" means one of the following: (a) Secondary treatment, (b) more stringent treatment, (c) infiltration-inflow correction, (d) major sewer system rehabilitation, (e) new collection sewer and appurtenances, (f) new interceptors and appurtenances, (g) correction of combined sewer overflows and (h) subsurface disposal systems.

(2) "Director" means the director of the Washington state department of ecology, or his duly authorized representative.

(3) "Priority rating and ranking system" (hereinafter referred to as the system) means the process and criteria used by the department of ecology to rate and rank projects in the state that are considered eligible for assistance under the construction grants program. Ranking criteria include the administrative and management procedures for constituting and revising the project priority list.

(4) Project means any one of the following: (a) Facility planning (step 1), (b) design (step 2), (c) and construction (step 3).

(5) Project priority list means the annual list of rated and ranked projects for which federal and state grant assistance is expected during the five-year planning period starting at the beginning of the next federal fiscal year.

(6) Significant revisions means changes to the approved project priority list which effect the public-at-large.

(7) "Wastewater treatment works construction grants program" (hereinafter referred to as the construction grants program) means the federal funded program under Title II of Public Law 95-217 and the state funded program under chapter 43.83A RCW (Referendum 26) that provides for grants to public and private entities for the purpose of constructing or upgrading treatment works to meet the

requirements of the state and federal water pollution control laws.

[Statutory Authority: RCW 43.21A.080. 78-09-067 (Order DE 78-11), § 173-250-020, filed 8/24/78.]

WAC 173-250-030 Development and approval of the system. (1) The director will establish project rating parameters which consider, but are not limited to, the following criteria:

(a) The severity of the pollution problem in navigable waters and ground waters;

(b) The existing population affected;

(c) The need for preservation of high quality waters;

(d) The need for protection of the public health by improving the sanitary condition of surface and underground waters; and

(e) Violation of state water quality standards and other enforceable provisions of Public Law 95-217.

(2) The director will establish project ranking procedures which consider, but are not limited to, the following criteria:

(a) Numerical rating of each project achieved in accordance with the priority rating criteria established under WAC 173-250-030(1);

(b) Readiness for grant award during the next federal fiscal year;

(c) Readiness for grant award during each of the ensuing four federal fiscal years following the next;

(d) Phasing of large dollar amount projects to allow for effective distribution of grant funds;

(e) A proper mix of projects which are ready for facility planning, design and construction;

(f) Determination of the priority to be given each category of projects;

(g) Total federal or state grant funds available during the next fiscal year and anticipated during each of the ensuing four fiscal years;

(h) The deadline for obligation of federal funds;

(i) Special needs of small and rural communities; and

(j) An identification of what constitutes significant revisions to the approved project priority list (including bypass, deletion or addition of projects).

(3) The system will be described each year and be the subject of an annual public hearing. Notice of this hearing shall appear in the state Register pursuant to chapter 34.08 RCW.

(4) A fact sheet describing the proposed system shall be developed by the director each year and be available to the public at the regional offices of the department of ecology at least fifteen days prior to the public hearing.

(5) After reviewing public comments the director will revise the proposed system as appropriate. A summary of state responses to public comment and to any public hearing testimony shall be prepared and made available for distribution to the public.

(6) The proposed system as published by the director shall be submitted each year to the Federal Environmental Protection Agency for approval.

[Statutory Authority: RCW 43.21A.080. 78-09-067 (Order DE 78-11), § 173-250-030, filed 8/24/78.]

WAC 173-250-040 Development and approval of the state project priority list. (1) A list of prospective projects will be developed using the municipal needs inventory, the NPDES permit files, and requests received from municipal entities, and information received from local and state health agencies.

(2) The director shall utilize the published system to constitute a project priority list as follows:

(a) Use the project rating parameters to generate a numerical score for each prospective project; and

(b) Use the project ranking procedures to constitute the project priority list.

(3) The fundable portion of the project priority list shall include those projects planned for award during the first year of the five-year planning period and shall not exceed the total federal funds expected to be available during the year less all applicable reserves provided for by federal regulations.

(4) Thirty days public notice shall be given that the project priority list will be the subject of a public hearing. Notice of this hearing shall appear in the state Register pursuant to chapter 34.08 RCW.

(5) The project priority list will be available to the public at the regional offices of the department of ecology, at least fifteen days prior to the public hearing.

(6) The public comments will be reviewed and the director shall approve the project priority list as proposed or as revised in accordance with public comments.

(7) The project priority list, as approved by the director, shall be submitted to the Federal Environmental Protection Agency for review to ensure compliance with the approved system.

(8) Significant revisions to the approved project priority list shall be the subject of the public notice and hearing process as set forth in WAC 173-250-040 (4), (5), (6), and (7).

[Statutory Authority: RCW 43.21A.080. 78-09-067 (Order DE 78-11), § 173-250-040, filed 8/24/78.]

Chapter 173-255 WAC

LIMITATIONS ON USE OF REFERENDUM 26 GRANT FUNDS FOR WATER POLLUTION ABATEMENT

WAC

173-255-010	Purpose and scope.
173-255-020	Effective date.
173-255-030	Definitions.
173-255-040	Limitation of programs eligible for funding under Referendum Bill No. 26.
173-255-050	Limitation on grant awards within the municipal grants program.
173-255-060	Provision of guidelines.

WAC 173-255-010 Purpose and scope. The purpose of this chapter is to set forth the limitations on uses of moneys administered by the department of ecology pursuant to chapter 43.83A RCW (Referendum Bill No. 26). The limitations are necessary to insure that these funds will be used to their optimum extent to protect the resources and environment of the state of Washington and the health and safety of its people by providing adequate publicly owned

facilities and systems for the collection, treatment and disposal of solid and liquid waste materials.

[Statutory Authority: RCW 43.21A.080. 78-09-066 (Order DE 78-12), § 173-255-010, filed 8/24/78.]

WAC 173-255-020 Effective date. All projects, or phases of projects, which have not received a federal or state grant award for design, before the effective date of this chapter will be subject to provisions contained herein.

[Statutory Authority: RCW 43.21A.080. 78-09-066 (Order DE 78-12), § 173-255-020, filed 8/24/78.]

WAC 173-255-030 Definitions. For the purpose of this chapter:

(1) "Department" means the Washington state department of ecology.

(2) "Agricultural pollution grants program" means the program of grants administered by the department for the planning, design and construction of publicly owned or operated agricultural pollution abatement facilities.

(3) "Lake restoration grants program" means the program of state grants administered by the department for the planning, design and implementation of lake restoration projects.

(4) "Marina pumpout grants program" means the program of state grants administered by the department for the design and construction of sewage pumpout facilities and dump stations at publicly owned or operated marinas.

(5) "Municipal wastewater treatment works construction grants program" (hereinafter referred to as the construction grants program) means the federal/state matching program of grants under Title II of Public Law 95-217 to municipal entities for the purpose of upgrading their treatment works to meet the effluent requirements of state and federal law.

(6) "Water supply residual waste treatment works grants program" means the program of state grants administered by the department for the design and construction of pollution abatement facilities for publicly owned or operated water supply plants in existence on February 3, 1976, that discharge residual wastes to the waters of the state.

(7) "Individual systems" means privately owned treatment works serving one or more principal residences or small commercial establishments constructed prior to and inhabited on or before December 27, 1977, to abate an existing water pollution or public health problem.

(8) "Industrial cost recovery program" means the program established under Title II section 204(b) of the Federal Water Pollution Control Act Amendments (Public Law 92-217) to recover the cost of municipal treatment systems attributed to industrial users, when a municipal treatment system has been funded with federal funds under Title II.

(9) Industrial user:

(a) Any nongovernmental user of publicly owned treatment works which discharges more than twenty-five thousand gallons per day of sanitary waste, or a volume of process waste or combined process and sanitary waste, equivalent to twenty-five thousand gallons per day of sanitary waste.

(b) Any nongovernmental user of a publicly owned treatment works which discharges wastewater to the treat-

ment works which contains toxic pollutants or poisonous solids, liquids, or gases in sufficient quantity either singly or by interaction with other wastes, to injure or interfere with any sewage treatment process, constitute a hazard to humans or animals, create a public nuisance, or create any hazard in or have an adverse effect on the waters receiving any discharge from the treatment works.

(c) All commercial users of an individual system constructed with grant assistance under section 201(h) of the Clean Water Act of 1977 (P.L. 95-217).

(10) "Innovative and alternative technology projects" means those projects employing innovative and alternative wastewater treatment processes and techniques as defined by EPA guidelines in 40 CFR 35, Appendix E, and which are eligible for federal grants under 40 CFR 35.908 promulgated on April 25, 1978, or hereafter modified.

[Statutory Authority: RCW 43.21A.080. 78-09-066 (Order DE 78-12), § 173-255-030, filed 8/24/78.]

WAC 173-255-040 Limitation of programs eligible for funding under Referendum Bill No. 26. (1) The following programs shall be eligible for state matching grants in an amount not to exceed fifty percent of the total eligible cost of a project as determined by the department: The marina pumpout grants program, the water supply plant residual waste treatment works grants program, the lake restoration grants program, the state construction grants program and the agricultural pollution grants program. The department may authorize a matching grant less than fifty percent of the total eligible cost of a project in those cases where it would be in the public interest, or where federal matching funds are available and it would be in the public interest to secure a local matching portion.

(2) The federal construction grants program may be eligible for state matching grants in an amount not to exceed fifteen percent of the total eligible cost of a project as determined by the department except as provided in WAC 173-255-050(1).

[Statutory Authority: RCW 43.21A.080. 80-08-050 (Order DE 80-24), § 173-255-040, filed 6/30/80; 78-09-066 (Order DE 78-12), § 173-255-040, filed 8/24/78.]

WAC 173-255-050 Limitation on grant awards within the municipal grants program. (1) The state matching grants for innovative and alternative technology projects shall be limited to nine percent which is the same portion of the nonfederal share as other types of projects funded under the construction grants program.

(2) Expenditure of funds under the provisions of chapter 43.83A RCW is limited to public bodies which are defined in the statute to mean any agency, political subdivision, taxing district, or municipal corporation thereof, and those Indian tribes now or hereafter recognized as such by the federal government for participation in the federal land and water conservation program and which may constitutionally receive grants or loans from the state of Washington. This provision and definition prohibits the expenditure of state funds for matching grants for, among others:

(a) Individual systems; and

(b) That portion of the construction of a municipal treatment works attributable to industrial users. Such portion

is to be determined through the environmental protection agency's industrial cost recovery program.

[Statutory Authority: RCW 43.21A.080. 78-09-066 (Order DE 78-12), § 173-255-050, filed 8/24/78.]

WAC 173-255-060 Provision of guidelines. The department will publish guidelines which establish procedures, under each of the Referendum 26 grant programs, for the grant application and award process.

[Statutory Authority: RCW 43.21A.080. 78-09-066 (Order DE 78-12), § 173-255-060, filed 8/24/78.]

Chapter 173-270 WAC

PUGET SOUND HIGHWAY RUNOFF PROGRAM

WAC

173-270-010	Purpose, authority, and applicability.
173-270-020	Definitions.
173-270-030	Best management practices.
173-270-040	Vegetation management program.
173-270-050	New construction.
173-270-060	Existing facilities.
173-270-070	Monitoring.
173-270-080	Reporting.
173-270-090	Enforcement.
173-270-100	Severability.

WAC 173-270-010 Purpose, authority, and applicability. (1) Purpose. The purpose of this chapter is to:

(a) Control highway runoff into waters of the state to the maximum extent possible under state law;

(b) Establish procedures and criteria for WSDOT's highway runoff program mandated by the Puget Sound water quality management plan pursuant to chapter 90.70 RCW; and

(c) Provide for appropriate consultation and coordination with tribes, local governments, and other interested and affected parties.

(2) Authority. The authority for this chapter is provided by chapters 90.48 and 90.70 RCW.

(3) Applicability. This chapter applies to all state highway rights of way in the Puget Sound basin which WSDOT owns or controls by long-term lease or easement, or for which WSDOT has maintenance responsibility. This chapter is applicable subject to the availability of appropriated funds or other funding sources.

Note: Copies of statutes and administrative rules incorporated by reference as a part of this chapter are available at ecology offices in Lacey, Washington during regular business hours.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-010, filed 5/21/91, effective 6/21/91.]

WAC 173-270-020 Definitions. The definitions in this section apply to this chapter unless the context requires otherwise.

(1) "Average daily traffic" or "ADT" means the total traffic volume during a given time period (in whole days) greater than one day and less than one year divided by the number of days in that time period. ADT is determined by WSDOT.

(2) "Best management practices" or "BMPs" means physical, structural, and/or managerial practices that when

used singly or in combination prevent or reduce pollution of water and have been approved by ecology. BMPs are listed and described in the manual defined in subsection (9) of this section.

(3) "Broadcast application" means a uniform application of pesticides to an entire area.

(4) "Buffer zone" means the minimum distance that a pesticide is permitted to be applied from a physical feature or sensitive area.

(5) "Capital improvement program plan" means a schedule of permanent physical structural improvements budgeted to fit financial resources.

(6) "Ecology" means the Washington state department of ecology.

(7) "EPA" means the U.S. Environmental Protection Agency.

(8) "Experimental BMP" means any treatment or methodology proposed for treatment of highway runoff that is not in the highway runoff manual, defined in subsection (9) of this section, and is being studied by WSDOT and/or ecology for adoption as a BMP.

(9) "Highway runoff manual" means the manual adopted by WSDOT and approved by ecology that contains BMPs to prevent or reduce pollution, and described in WAC 173-270-030.

(10) "Integrated pest management" or "IPM" means the selection, integration, and implementation of pest control that consists of: Prevention of pest problems; monitoring and evaluation of pests, damage and results of treatment; acknowledgment of population levels of pests that can be tolerated based on legal, economic, health, or aesthetic thresholds; use of natural control agents in an ecosystem; reliance to the maximum extent possible on nonhazardous biological, mechanical, and cultural treatment of pests; application of pesticides in a manner that minimizes damage to the ecosystem's natural controls and integrity; and use of pesticides only after all other methods have been evaluated.

(11) "Local government" means a county, city, town, or special purpose district that has authority to manage stormwater.

(12) "New construction" means the addition of one or more lanes, ramps, bridges, or other major structures to an existing state highway or the construction of a new state highway.

(13) "Pest" means any form of plant or animal life or virus (except virus on or in living man or other animal) which is normally considered to be a pest or which the director of the WSDA may declare by regulation to be a pest, including but not limited to, any insect, other arthropod, fungus, rodent, nematode, mollusk, or weed.

(14) "Pest treatment" means mechanical, biological, cultural, or chemical procedures or methods to manage, control, or reduce the influence of a pest.

(15) "Pesticide" means as defined by chapter 17.21 RCW, the Washington Pesticide Act, and regulated by the United States Environmental Protection Agency and WSDA.

(16) "Pollution" means such contamination or other alteration of the physical, chemical, or biological properties of any waters of the state, including change in temperature, taste, color, turbidity, or odor of the waters, or such discharge of any liquid, gaseous, solid, radioactive, or other substance into any waters of the state as will or is likely to

create a nuisance or render such waters harmful, detrimental, or injurious to the public health, safety or welfare, or to domestic, commercial, industrial, agricultural, recreational, or other legitimate beneficial use, or to livestock, wild animals, birds, fish, or other aquatic life.

(17) "Puget Sound basin" means the waters of Puget Sound south of Admiralty Inlet including Hood Canal and Saratoga Passage; the waters north to the Canadian border, including portions of the Strait of Georgia; the Strait of Juan de Fuca south of the Canadian border; and all land draining into these waters as mapped in WAC 173-500-040 Water resource inventory areas numbers 1 through 19.

(18) "Quality assurance and control plan" means a collection of policies, objectives, principles, and procedures for attaining data of known and accepted quality and establishes standards of performance for sampling, monitoring, and measurement.

(19) "Sensitive area" means an area or that due to its ground or surface water characteristics may be adversely affected or altered directly or indirectly by pollution and requires special vegetation management, stormwater management, or other practices.

(20) "Spot treatment" means the application of pesticides to a selected individual area or species.

(21) "Stormwater management manual" means the technical manual prepared by ecology for use by local governments and WSDOT that contains BMPs to prevent or reduce pollution in stormwater.

(22) "Stormwater treatment" means chemical, biological, or mechanical procedures or structural methods to remove, reduce, or neutralize pollution.

(23) "Waters of the state" means lakes, rivers, ponds streams, inland waters, underground waters, salt waters, and all other surface waters and water courses within the jurisdiction of the state of Washington.

(24) "Wetlands" means those areas that are inundated or saturated by surface or ground water at a frequency and duration sufficient to support, and that under normal circumstances do support, a prevalence of vegetation typically adapted for life in saturated soil conditions. Wetlands generally include swamps, marshes, bogs, and similar areas. Wetlands are identified and delineated by the *"Federal Manual for Identifying Jurisdictional Wetlands"* dated January 19, 1989.

(25) "WSDA" means the Washington state department of agriculture.

(26) "WSDOT" means the Washington state department of transportation.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-020, filed 5/21/91, effective 6/21/91.]

WAC 173-270-030 Best management practices. (1) Approved manual required. Six months after the effective date of ecology's stormwater management manual or six months after the effective date of this chapter, whichever is later, WSDOT shall submit to ecology a highway runoff manual. If WSDOT proposes to adopt a manual other than ecology's stormwater management manual as its highway runoff manual, WSDOT shall formally consult with the tribes and local governments about the contents of the highway runoff manual. The highway runoff manual shall

be consistent with ecology's stormwater management manual and shall be adopted by WSDOT only after obtaining ecology's approval. After obtaining ecology's approval, WSDOT shall use the highway runoff manual to direct stormwater management for its existing and new facilities and rights of way in the Puget Sound basin.

(2) Amendments to manual.

(a) Ecology initiates amendments. If ecology amends its stormwater management manual to change or add a BMP or other technical requirement that applies to highways, ecology shall notify WSDOT in writing and send WSDOT a copy of the amendment. This notification shall include ecology's determination as to whether the highway runoff manual complies with the amendment. If the highway runoff manual does not comply with the amendment, WSDOT shall submit proposed amendments within sixty days unless ecology agrees to a time extension. Such proposed amendment shall be subject to ecology's review and approval.

(b) WSDOT initiates amendments. Amendments proposed by WSDOT to the approved highway runoff manual shall be submitted to ecology for review and approval. WSDOT shall formally consult with affected tribes and local governments during the development of proposed amendments. Ecology shall review and approve, conditionally approve or deny the proposed amendments within sixty days from the submittal date.

(3) More stringent standards.

(a) WSDOT shall use the minimum standards established in the highway runoff manual but may use more stringent standards.

(b) When a state highway is located in the jurisdiction of a local government that is required by ecology to utilize more stringent standards to protect the quality of receiving waters, WSDOT shall comply with the same standards to promote uniform stormwater treatment.

(c) WSDOT shall comply with standards identified in watershed action plans for WSDOT rights of ways as required by WAC 400-12-570.

(4) Project coordination. WSDOT shall consult with appropriate tribes and local governments and evaluate local conditions for design, construction, and maintenance of stormwater facilities as indicated in WSDOT's utilities manual. Other agencies and organizations that have an interest or expertise in stormwater may also be consulted. WSDOT, tribes, and local governments are encouraged to jointly develop and maintain stormwater facilities.

(5) Contents of manual. The highway runoff manual shall include, but not be limited to, the following:

(a) BMPs for the control of erosion and sedimentation from construction sites, including standards for operation and maintenance;

(b) Hydrologic analysis procedures, including selection of design storms and estimation of runoff;

(c) Design, operation, and maintenance standards for retention and/or detention facilities and conveyance systems that shall emphasize systems which maximize water quality benefits as well as water quantity control, such as inclusion of biofiltration techniques where practicable;

(d) BMPs for the control of pests, excluding weed control which shall be addressed in the vegetation management program described in WAC 173-270-040;

(e) BMPs for the selection and use of deicing chemicals and traction grit which, as a minimum, shall consist of the following: (i) Traction grit particles should be as large as suitable for application on highways for traction purposes because large particles are less readily transported into waters of the state; (ii) selection and use of deicing chemicals shall include consideration of potential effects on water quality and the beneficial uses of potentially affected waters; (iii) stockpiles containing deicing chemicals shall be investigated for existing and potential water quality problems; and (iv) stockpiles that have an identified problem shall be covered, curbed, diked, placed on an impervious surface, and/or located so runoff can not carry dissolved chemicals into waters of the state; and

(f) BMPs for waste disposal from highway runoff system maintenance.

(6) Experimental BMPs.

(a) WSDOT request. WSDOT may request in writing that ecology approve the use of an experimental BMP for one or several sites. The request shall include, but need not be limited to, a description of: (i) The experimental BMP; (ii) why the experimental BMP is being requested; (iii) why the BMPs in the highway runoff manual are not appropriate; (iv) applicable construction techniques; (v) the site or sites at which use of the experimental BMP is proposed; (vi) the characteristics of the site or sites; (vii) design criteria for the experimental BMP; (viii) maintenance procedures; (ix) cost estimates; (x) monitoring procedures; (xi) the time needed for monitoring; (xii) the anticipated results; (xiii) if appropriate, an approved BMP that could be used if the experimental BMP fails; and (xiv) consultation with interested and affected parties including tribes, local governments, and contiguous property owners.

(b) Ecology review and approval. After reviewing WSDOT's request, ecology may approve, conditionally approve, or deny the use of the experimental BMP for specific sites. Any approval shall be for a period of time not to exceed four years unless ecology determines, upon request and justification by WSDOT, that unusual circumstances justify a longer time period.

(c) Evaluation criteria. In evaluating an experimental BMP, ecology shall consider factors it deems appropriate, including, but not limited to: The experimental BMP's effectiveness in protecting water quality and beneficial uses; its reliability, cost, ease of construction; and maintenance requirements.

(d) BMP status. Before ecology's authorization for WSDOT's use of the experimental BMP expires, WSDOT shall consult with affected tribes, local governments, or property owners. WSDOT shall document the results of the experimental BMP and shall determine whether to request amendment of the highway runoff manual to include the experimental BMP as an approved BMP. Before ecology's authorization expires, WSDOT shall either request an amendment to the highway runoff manual under subsection (2)(b) of this section or inform ecology in writing that it is not proposing to amend the highway runoff manual to include the BMP. Based upon the predicted results in the original request, monitoring data and other information relevant to WSDOT's request, ecology shall determine whether an experimental BMP that is not proposed to be

included in the highway runoff manual shall be replaced with an approved BMP.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-030, filed 5/21/91, effective 6/21/91.]

WAC 173-270-040 Vegetation management program. (1) General. The purposes of vegetation management in highway rights of way are to establish and maintain stable plant communities that resist encroachment by undesirable plants, noxious weeds, and other pests; meet WSDOT operational, health, natural resources, and environmental standards; be cost effective; and protect the public investment with minimal negative impacts on the environment.

(2) Program required. WSDOT shall prepare and implement a vegetation management program for all state highways within the Puget Sound basin. WSDOT shall obtain ecology's preliminary approval of the program before WSDOT conducts a public hearing. WSDOT shall formally consult with the tribes and local governments during preparation of the proposed program. After the public hearing, WSDOT shall obtain ecology's approval before WSDOT adopts the program. The program shall be adopted by September 30, 1991. WSDOT and ecology shall review the program at least every two years beginning September 30, 1993. Either ecology or WSDOT may initiate amendment of the program. Amendments shall be prepared, approved, and adopted in accordance with the procedures of this subsection for the initial development of the vegetation management program.

(3) Contents of program.

(a) The vegetation management program shall include, but need not be limited to vegetation management policies; technical guidelines; procedures to implement policies and guidelines; and roadside management plan procedures and standards.

(b) Vegetation management policies. These policies, at a minimum, shall address:

(i) Operational, aesthetic, and environmental standards;

(ii) Integrated pest management;

(iii) Coordination between WSDOT and local governments, abutting property owners, and tribes, including public notification, option to maintain by contiguous property owner and the option to maintain by a preferred management technique of the contiguous property owner;

(iv) Recordkeeping;

(v) Training and education for vegetation management employees; and

(vi) Testing for pesticides at storage, loading, and mixing areas and, if necessary, in ground water and nearby surface water that may be contaminated by or affected by pesticides.

(c) Technical guidelines. These guidelines, at a minimum, shall address:

(i) Integrated pest management which shall address monitoring, establishing injury levels, setting action levels, selecting treatment, and evaluating treatment.

(A) Monitoring. Monitoring guidelines shall provide for: Identification of the potential pest and/or problem and sensitive areas; and observation of the vegetation on the site, or the site itself for potential pest problems at regular

intervals. The schedule and methods of monitoring shall be appropriate to minimize the severity of damage caused by the pest.

(B) Establishing injury levels. Guidelines for establishing injury levels shall provide for determination of when a pest is likely to cause significant damage and require action to prevent unacceptable damage or public safety problems. Accurate records shall be kept so adequate data is available to make decisions. A problem shall be noted before any action is taken.

(C) Setting action levels. Guidelines for setting action levels shall provide for prioritization of target species and determination of when to initiate action so that unacceptable injury levels are not reached.

(D) Selecting treatment. Selection of pest treatment strategies and tactics shall provide for safety of highway users; protect the environment and human health; and provide for the stewardship of the public investment. This shall include an effort to minimize the use of chemical controls.

(E) Evaluating treatment. After pest treatment, the site shall be inspected to determine whether the pest treatment had the desired results. Adequate time shall be provided for the pest treatment to function before it is evaluated. If the pest treatment did not have the desired results, the treatment may be modified. Desired results may be examined to determine if they were realistic and/or appropriate;

(ii) Measures to reduce the amount of pesticides used to the least possible including measures to reduce the use of any state restricted use pesticides on WSDA's list for the protection of ground water found in WAC 16-228-164;

(iii) Criteria for the selection of pesticides that shall include, but not be limited to, target specificity, toxicity, persistence, migration characteristics, time of application and site conditions of treatment area, including slope and permeability;

(iv) Procedures for sampling and analysis for pesticide contamination in storage, loading, and mixing areas and, if appropriate, ground water and surface water with the use of Puget Sound protocols for sediment sampling of marine sediment for EPA priority pollutants is recommended where appropriate;

(v) A spill cleanup plan;

(vi) Methods for safe transportation of pesticides;

(vii) A recordkeeping system on pesticide use, including format;

(viii) Criteria for the identification of sensitive areas;

(ix) Buffer zones to protect waters of the state, public and private supply wells and watersheds, irrigation ditches, ecology regulated areas, and sensitive areas;

(x) Pesticide storage including a requirement that pesticides shall be stored in a secure building with an impermeable floor and controlled drains;

(xi) Vegetation selection in accordance with WSDOT's design manual with emphasis given to reduced maintenance; and

(xii) Vegetation management personnel training and education.

(d) Procedures for the implementation of the policies and guidelines.

(e) Procedures and standards for the preparation and implementation of roadside management plans for specific

segments of state highway to assist WSDOT field crews manage state highway rights of way according to the approved vegetation management policies and technical guidelines. WSDOT shall consult with affected tribes, local governments, and other interested parties during preparation of these procedures and standards. WSDOT shall consult with affected tribes, local governments, and other interested parties during preparation of roadside management plans. These plans, at a minimum, shall address:

- (i) Goals and objectives;
- (ii) Identification of sensitive areas and minimum buffer zones;
- (iii) Maintenance activities;
- (iv) Budget estimates; and
- (v) Evaluation methods and standards.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-040, filed 5/21/91, effective 6/21/91.]

WAC 173-270-050 New construction. WSDOT shall incorporate BMPs in all new construction projects for which design is started after the effective date of this chapter. For projects that are being designed or constructed when this chapter becomes effective, WSDOT shall implement BMPs to the maximum extent practicable to protect water quality. If the cost of constructing water quality BMPs makes a project that is being designed when this chapter becomes effective impracticable, then such BMPs shall be retrofitted at a later date. WSDOT shall submit water pollution control plans to ecology for review and approval for new construction and shall obtain other appropriate authorizations prior to construction.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-050, filed 5/21/91, effective 6/21/91.]

WAC 173-270-060 Existing facilities. (1) Inventory required. WSDOT shall prepare and maintain an inventory of all state highways in the Puget Sound basin. The purpose of the inventory is to determine where water quality BMPs need to be installed, to assist identification of priority projects, and to provide a basis for the evaluation of the program. WSDOT shall begin its inventory on highways with an ADT of fifty thousand or greater. The inventory and rating of highways with an ADT of less than fifty thousand shall be sufficient to provide projects for the six-year capital improvement program plan.

(2) Contents of inventory. The inventory shall be developed for homogeneous highway segments and shall include, but not be limited to:

(a) Highway segment identification including name, location, type, traffic volume classification, local government(s) with jurisdiction, interested tribes, and WSDOT district;

(b) Status of stormwater management as follows: (i) BMPs are present and/or a local government is receiving and/or treating the highway runoff; (ii) BMPs are feasible or the local government will receive and/or treat highway runoff; or (iii) BMPs are not practicable; and

(c) Name of any water quality project completed since the effective date of this chapter, length of project, year of construction, and cost.

(3) Priority rating and ranking.

(a) WSDOT shall establish an annual project priority list for each WSDOT district within the Puget Sound basin. For each fiscal year WSDOT shall select needed improvements for each district inventoried as required by subsection (1) of this section. WSDOT shall divide these needed improvements into projects, considering funds available but in no case less than one project per year in each district unless all needed projects are completed.

(b) Priority rating criteria. WSDOT shall develop a priority rating and ranking system and submit it to ecology for concurrence.

(c) Priority ranking. WSDOT, using the priority ratings and rankings prepared using the system required in subsection (2)(b) of this section, shall determine which projects are to be implemented in each WSDOT district during the fiscal year. WSDOT may modify this ranking for good reason including the participation in a joint project proposed by a local government or tribe.

(4) Capital improvement program plan.

(a) The capital improvement program plan is to promote efficient use of resources, to coordinate projects, to aid compliance with the long-range program targets set forth in subsection (5) of this section and to ensure that difficult projects and those that require lengthy lead time are constructed in a reasonable time.

(b) WSDOT shall prepare a biennially updated water quality capital improvement program plan. WSDOT shall consult with ecology, tribes, and local governments throughout the planning process including the inventory. The capital improvement program plan shall be for a six-year period and include the following:

(i) An inventory of potential projects for the six-year period, including fiscal, technical, work force, legislative requirements, restrictions, and an initial evaluation of their relative priority;

(ii) A schedule for potential execution of projects in a long-range program list which considers priority relationships of projects coupled with legislative, fiscal, technical, and work force restrictions;

(iii) Selection of projects for early action from this schedule; and

(iv) Formal adoption by WSDOT after public review.

(c) Ecology shall review the proposed WSDOT capital improvement program plan and submit written comments to WSDOT before public review and again before adoption by WSDOT.

(d) After a public hearing, WSDOT shall adopt the capital improvement program plan after making appropriate revisions deemed necessary by public input.

(5) Long-range program.

(a) WSDOT shall complete all practicable BMP projects or transmit highway runoff to tribes or local governments for stormwater treatment for highways with an ADT of fifty thousand and greater by December 31, 2005, and for other highways by December 31, 2015.

(b) At least every six years WSDOT and ecology shall evaluate these target dates. Ecology or WSDOT may initiate revision of the target dates. In evaluating any proposed revision of a target date, ecology and WSDOT are to consider factors including, but not limited to, the number and projected costs of the projects yet to be completed, the degree of difficulty to construct the remaining sites, the

projected level of funding, any revisions to the state water quality standards and any revisions to the manual required by WAC 173-270-030(1).

(6) Negotiations. Before transmitting to or requesting treatment of highway runoff by a tribe, local government or property owner, WSDOT shall negotiate with the tribe, local government, or property owner. WSDOT shall provide relevant information that shall include, but not be limited to, existing agreements to accept highway runoff, characteristics of the highway runoff, the reasons WSDOT is not treating the runoff on its own right of way and any proposed financial considerations for quality and/or quantity control.

(7) Disposal sites. WSDOT shall prepare an inventory, by district and maintenance area, of all sites, including all known inactive sites, where WSDOT disposes highway sweepings and sediments from stormwater facilities maintenance activities. Inventory information for WSDOT owned and leased sites and sites WSDOT for which has an easement shall include a scaled map illustrating property boundaries and the extent of the fill area, and where possible, an estimate of the volume of the fill present.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-060, filed 5/21/91, effective 6/21/91.]

WAC 173-270-070 Monitoring. (1) BMP effectiveness monitoring.

(a) Monitoring procedures. WSDOT shall formulate and implement monitoring procedures for each type of BMP employed. The procedures shall include a quality assurance and control plan.

(b) Waivers. After application by WSDOT, ecology may grant a waiver from monitoring a BMP if ecology determines there is adequate knowledge about the BMP's water quality performance.

(2) Pesticide monitoring. WSDOT shall formulate a pesticide monitoring policy, including but not limited to, threshold determination and frequency of monitoring. WSDOT also shall formulate procedures for monitoring pesticides, including the use of benthic organisms.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-070, filed 5/21/91, effective 6/21/91.]

WAC 173-270-080 Reporting. (1) Biennial report required. WSDOT shall prepare and submit to ecology a report by September 30 of each odd-numbered year beginning September 30, 1991.

(2) Content of report. The biennial report shall include, but is not limited to:

(a) Monitoring report for both approved and experimental BMPs and pesticides describing monitoring procedures and interpreting results. Included may be recommendations to improve monitoring procedures, findings on which BMPs are the most effective, combinations of BMPs that optimize pollution removal, and recommendations for experimental BMPs;

(b) A pesticide usage inventory, including (i) the amount of pesticides by product by pounds of active ingredient applied for shoulder residual, landscaped areas, brush control, general weed control, noxious weed control, spot treatment and broadcast application by district, area, highway

segment, and if feasible, by county and (ii) an analysis and interpretation shall be included with the data;

(c) Storage, loading, and mixing area soil and ground water contamination report for the presence of pesticides, including any cleanup efforts required, proposed, or completed since the adoption of this chapter;

(d) A deicing chemicals and traction grit usage report including:

(i) Product and quantities of deicing chemicals used in the Puget Sound basin by WSDOT district and maintenance area including chemical properties and known effects upon water quality;

(ii) Stockpile locations, with quantities of traction grit abrasive and deicing chemicals used during each season;

(iii) Cleanup practices to prevent or lessen traction grit and deicing chemical entry into waters of the state;

(iv) Locations prohibiting use of deicing chemicals or specific products due to water quality considerations;

(v) Training of personnel;

(vi) Experiments conducted on new products or procedures and experiments that WSDOT proposes;

(e) BMP maintenance report. Reports that shall submit BMP maintenance reports to ecology that shall include, but are not limited to:

(i) Dates that segments of state highway BMPs are inspected and/or maintained;

(ii) The general condition of BMPs;

(iii) Maintenance accomplished;

(iv) The need to reconstruct any BMPs;

(v) Any evaluation of a BMP type;

(vi) Estimated cost to maintain a BMP;

(vii) Suggested improvements to BMPs or their maintenance procedures; and

(viii) Training of personnel;

(f) Inventory for state highways with a fifty thousand ADT or greater required by WAC 173-270-060(1);

(g) Priority list for state highways with less than fifty thousand ADT required by WAC 173-270-060(3);

(h) Capital improvement program required by WAC 173-270-060(4);

(i) Inventory of all WSDOT highway disposal sites required by WAC 173-270-060(6);

(j) Status of roadside management plans by district and maintenance area; and

(k) A summary of the negotiations required by WAC 173-270-060(6).

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-080, filed 5/21/91, effective 6/21/91.]

WAC 173-270-090 Enforcement. Water quality requirements of this chapter shall be enforced through all methods available to ecology, including, but not limited to, those described in chapter 90.48 RCW. For all nonwater quality shortfalls WSDOT shall submit written explanation to ecology, together with proposed remedies.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-090, filed 5/21/91, effective 6/21/91.]

WAC 173-270-100 Severability. If any provision of this chapter or its application to any person, entity, or circumstance is held invalid, the remainder of this chapter or

the application of the provision to other persons, entities, or circumstances shall not be affected.

[Statutory Authority: Chapters 90.48 and 90.70 RCW. 91-11-091 (Order 91-06), § 173-270-100, filed 5/21/91, effective 6/21/91.]

Chapter 173-300 WAC
CERTIFICATION OF OPERATORS OF SOLID
WASTE INCINERATOR AND LANDFILL
FACILITIES

WAC

173-300-010	Authority and purpose.
173-300-020	Definitions.
173-300-030	Duties of the board of advisors.
173-300-040	Board of advisors—Staff services and facilities.
173-300-050	Operator certification required at incineration facilities.
173-300-060	Operator certification required at landfill facilities.
173-300-070	Certification of inspectors.
173-300-080	Applications and certification requirements.
173-300-090	Training and examinations.
173-300-100	Certificate term.
173-300-110	Renewal of certificate.
173-300-120	Fees.
173-300-130	Revocation.
173-300-140	Reciprocity.
173-300-150	Unlawful acts—Variance from requirements.
173-300-160	Penalties.
173-300-170	Appeals.
173-300-180	Incineration of biomedical or medical waste.

WAC 173-300-010 Authority and purpose. One of the basic requirements of the act relating to solid waste (chapter 431, Laws of 1989) is to have the owner or operator in responsible charge of a solid waste incinerator or solid waste landfill be certified in the operation and maintenance of the facility. To achieve this, the department shall, to the greatest extent possible, rely on the certification standards and procedures developed by national organizations and the federal government. Certification under this act is available to all individuals who can meet the minimum qualifications for a given type of facility. Operating personnel not required to be certified by chapter 70.95D RCW are encouraged to become certified on a voluntary basis. NOTE: All codes, standards, rules, or regulations cited in this chapter are available for inspection at the Department of Ecology, Mail Stop PV-11, Olympia, WA 98504-8711.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-010, filed 12/18/90, effective 1/1/91.]

WAC 173-300-020 Definitions. (1) "Ash" means the residue including any air pollution flue dusts from combustion or incineration of material including solid wastes.

Note: Please see definition for "special incinerator ash."

(2) "Biomedical waste" means solid waste of the following types:

(a) "Animal waste" which includes waste animal carcasses, body parts, and bedding of animals that were known to have been deliberately infected or inoculated with human pathogenic microorganisms during research.

(b) "Liquid human body fluids" means waste which includes waste liquid emanating or derived from humans including but not limited to human blood and blood products, serum and plasma, sputum, drainage secretions,

cerebrospinal fluid, synovial fluid, pleural fluid, peritoneal fluid, pericardial fluid and amniotic fluid that exceeds fifty milliliters per container, storage vessel, or plastic bag and cannot be and has not been directly discarded into a sanitary sewage system.

(c) "Cultures and stocks" means waste which includes waste cultures and stocks of microbiological agents infectious to humans, human serums and discarded live and attenuated vaccines infectious to humans, human blood specimens, and laboratory wastes that are contaminated with these agents or specimens.

(d) "Biosafety level 4 disease waste" which includes wastes contaminated with blood, excretions, exudates, or secretions from humans or animals who are isolated to protect others from highly communicable infectious diseases which are identified as viruses assigned to Biosafety Level 4 by the Centers for Disease Control, National Institute of Health, Biosafety in Microbiological and Biomedical Laboratories, 2nd Edition, 1988. These viruses include, but are not limited to, Congo-Crimean hemorrhagic fever, tick-borne encephalitis virus complex (Absettarov, Hanzalova, Hypr, Kumlinge, Kyasanur Forest disease, Omsk hemorrhagic fever, and Russian spring-summer encephalitis), Marburg, Ebola, Junin, Lassa, and Machupo.

(e) "Pathological waste" which includes waste human source biopsy materials, tissues, and anatomical parts that emanate from surgery, obstetrical procedures, autopsy, and laboratory procedures. "Pathological waste" does not include teeth or formaldehyde or other preservative agents, human corpses, remains, and anatomical parts that are intended for interment or cremation.

(f) "Sharps waste" which includes waste hypodermic needles, syringes, IV tubing with needles attached, scalpel blades, and lancets that have been used in animal or human patient care or treatment in medical research.

(3) "Biomedical waste treatment" means incineration, steam sterilization, or any method, technique, or process that changes the biological character or composition of biomedical waste to render it noninfectious. Any waste, except sharps, that has been treated shall not be considered biohazardous or biomedical.

(4) "Board" means the board of advisors for solid waste incinerator and landfill certification established by RCW 70.95D.050.

(5) "Certificate" means the certificate of competency issued by the director stating that the operator has met the requirements for the operation and maintenance of a specific classification of solid waste incinerator or landfill facility.

(6) "Certificate holder" means the individual to whom a certificate is issued.

(7) "Commercial waste" means non-hazardous solid waste which is generated by the commercial business sector.

(8) "Department" means the Washington state department of ecology.

(9) "Director" means the director of the department of ecology or the director's designee.

(10) "Fee" means only those monies to be paid for examinations, certification, or renewal.

Note: Fees shall not include the costs of training or other educational opportunities.

(11) "Hog fuel" means woodwaste which is reduced in size to facilitate burning.

(12) "Incineration" means reducing the volume of solid wastes by use of an enclosed device using controlled flame combustion.

(13) "Incinerator" means an enclosed mechanical combustion device which has as its primary purpose the burning and reduction of the volume of solid waste or solid waste-derived fuel. Crematoria facilities that have combustion devices that burn human corpses, or burn animal bodies exclusively, in a manner that is not a solid waste reduction measure, or burn primarily hog fuel waste are not included in this definition. NOTE: Crematoria facilities that burn any kind of biomedical, treated or untreated medical waste, human or animal, or other solid waste, in their incinerator shall be subject to this rule.

(14) "Incineration facility" means any municipal or private activity that has as part of its operations a solid waste incinerator. It may also include means for storage, preparation, and conveyance of the solid waste fuel, and air pollution control equipment.

(15) "Incinerator operator in responsible charge" means an individual who is the owner or who is designated as the on-site operator in responsible charge of operation and maintenance duties at a solid waste incineration facility.

(16) "Inspector" means any person employed by any public agency that inspects the operation of solid waste incinerators, or the operation of solid waste landfills, to determine the compliance of the facility with state and local laws or rules.

(17) "Institutional waste" means non-hazardous solid waste which is generated by any commercial or noncommercial service establishment.

(18) "Landfill" means an operating disposal facility or part of a facility at which solid waste is placed in or on land and which is not a land treatment.

(19) "Landfill operator in responsible charge" means an individual who is the owner or who is designated as the on-site or on-call operator in responsible charge of operation and maintenance duties at a landfill facility.

(20) "Limited purpose landfill" means a landfill that receives solid waste of a limited type or types of known and consistent composition.

(21) "Monofill" means a disposal facility or part of a facility which is not a land treatment facility, at which only a single, specific substance is deposited in or on.

(22) "Municipal solid waste" means any combination of non-hazardous solid waste generated by residential sources, and any institutional waste, commercial waste, and industrial waste. NOTE: Household hazardous wastes are an excluded waste under WAC 173-303-071 and therefore may be disposed of in a municipal or incinerated landfill or incinerated. Small quantities of hazardous waste may also be landfilled providing the waste complies with WAC 173-303-070 (8)(a) and (b).

(23) "Owner" means, in the case of a town or city, the city or town acting through its chief executive officer or the lessee if operated pursuant to a lease or contract; in the case of a county, the chief elected official of the county legislative authority or the chief elected official's designee; in the case of a board of public utilities, association, municipality, or other public body, the president or chief elected official

of the body or the president's or chief elected official's designee; in the case of a privately owned landfill or incinerator, the legal owner.

(24) "Reciprocity" means the automatic recognition of comparable training from another state, the federal government, a local government, or a professional association. NOTE: Correction of deficiencies such as a lack of training in Washington state solid waste law shall be required for certification.

(25) "Reserved" means a section having no requirements and which is set aside for future possible rule-making as a note to the regulated community.

(26) "Solid waste" or "wastes" as defined in RCW 70.95.030 (1989 ed.) means all putrescible and nonputrescible solid and semisolid wastes including, but not limited to, garbage, rubbish, ashes, industrial wastes, swill, demolition and construction wastes, abandoned vehicles or parts thereof, and recyclable materials. NOTE: Treated biomedical waste or medical waste not defined as biomedical waste shall be considered to be solid waste. Woodwaste is also considered solid waste.

(27) "Special incinerator ash" means ash residues resulting from the operation of incineration or energy recovery facilities managing municipal solid waste from residential, commercial, and industrial establishments, if the ash residues are: (a) Not otherwise regulated as hazardous wastes under chapter 70.105 RCW; and (b) are not regulated as a hazardous waste under the federal Resource Conservation and Recovery Act, 42 U.S.C. Sec. 6901 et seq.

(28) "Woodwaste" means solid waste consisting of wood pieces or particles generated as a by-product or waste from the manufacturing of wood products, and the handling and storage of raw materials, trees, and stumps. This includes but is not limited to sawdust, chips, shavings, bark, pulp, and log sort yard waste, but does not include wood pieces or particles containing chemical preservatives such as creosote, pentachlorophenol, or copper-chrome-arsenate.

Note: All applicable terms not defined above shall have the same meaning as those defined in chapter 173-304 WAC.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-020, filed 12/18/90, effective 1/1/91.]

WAC 173-300-030 Duties of the board of advisors.

(1) As a standing subcommittee of the state's solid waste advisory committee created under RCW 70.95D.050, the board of advisors shall report to the solid waste advisory committee four times a year or as directed in accordance with RCW 70.95D.040.

(2) The board shall act as an advisory committee to the department and shall assist in the development and review of the rules adopted under this chapter.

(3) The board shall assist in the development and evaluation of the training and testing material required for certification.

(4) On matters of revocation of certification, the board shall hold a hearing and make recommendations to the director.

(5) The board shall encourage operating personnel other than those who are required to be certified in chapter 70.95D RCW to become certified on a voluntary basis.

(6) Members shall receive no compensation for their services but shall be reimbursed for their travel expenses while engaged in business of the committee in accordance with RCW 43.03.050 and 43.03.060 as now existing or hereafter amended.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-030, filed 12/18/90, effective 1/1/91.]

WAC 173-300-040 Board of advisors—Staff services and facilities. The department shall furnish necessary staff services and facilities required by the board of advisors.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-040, filed 12/18/90, effective 1/1/91.]

WAC 173-300-050 Operator certification required at incineration facilities. (1) After January 1, 1992, it shall be unlawful to operate a solid waste incineration facility without a certified operator in responsible charge on-site during all hours of operation.

(2) All other operational employees are to be encouraged to become certified on a voluntary basis.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-050, filed 12/18/90, effective 1/1/91.]

WAC 173-300-060 Operator certification required at landfill facilities. (1) After January 1, 1992, it shall be unlawful to operate the following types of landfills without an on-site certified landfill operator in responsible charge during all hours of operation when accepting waste, and during the closure phase of the facility. The operator's specific role in the closure phase shall be specified in the closure plan. However, the certified operator may be away from the facility on official business or personal emergencies for periods of one day or less provided they are on-call and available to respond in case of an emergency at the facility.

(a) All municipal waste landfills.

(b) All problem waste landfills. NOTE: Problem waste landfills are presently reserved per WAC 173-304-463.

(c) All special incinerator ash landfills or monofills. NOTE: In a case where a monofill is a separate cell at a municipal waste landfill, the responsible operator in charge of the complete facility may assume responsibility of the operation of the monofills.

(d) All inert waste and demolition waste landfills.

(e) All limited purpose solid waste landfills.

(2) These standards do not apply to:

(a) Dangerous waste landfills;

(b) Drop box facilities;

(c) Interim solid waste handling sites;

(d) Landspreading disposal facilities;

(e) Piles;

(f) Transfer stations;

(g) Waste recycling facilities; and

(h) Composting facilities.

(3) Owners of small landfills with a total capacity at closure of two hundred thousand cubic yards of solid waste or less, may make application to the department to have their facility operated and maintained by a certified operator who is in responsible charge on an on-call basis at all times the landfill is operating, provided that a certified operator visit the site once each working day. The department shall

consider all applications on a case-by-case basis. The department shall base its decision on the following requirements:

(a) A physical inspection of the facility by the department to ascertain that the facility is being operated in a manner that is protective of human health and the environment;

(b) That the facility has an up-to-date approved facility operating plan and is in compliance with all other sections of chapter 173-304 WAC;

(c) That the status of all facility variances, compliance schedules, and related grants are current as required; and

(d) All other applicable laws and regulations are strictly adhered to.

(4) All landfills having on-call designations shall reapply for the designation every five years from the date of issuance. This designation may be revoked at any time the facility does not meet the minimum requirements.

(5) When a position required to be filled by an on-site certified landfill operator is vacated for a period of not longer than a maximum of thirty calendar days due to an emergency such as a short-term illness, the landfill owner may apply to the department for a variance that allows the facility be operated and maintained by a certified operator on an on-call basis as outlined in this section. These requirements may be waived temporarily at the director's discretion.

(6) All other operational employees are to be encouraged to become certified on a voluntary basis.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-060, filed 12/18/90, effective 1/1/91.]

WAC 173-300-070 Certification of inspectors. (1) Any person who is employed by a public agency to inspect the operation of a landfill or incinerator described under this chapter to determine the compliance of the facility with state or local laws or rules shall receive, in addition to the successful completion of the training and examination process as an operator under this chapter, training relevant to the inspection procedure.

(2) Inspectors shall be exempt from all certification fees.

[Statutory Authority: Chapter 70.95D RCW. 91-12-040 (Order 91-30), § 173-300-070, filed 6/4/91, effective 7/5/91. Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-070, filed 12/18/90, effective 1/1/91.]

WAC 173-300-080 Applications and certification requirements. (1) An application for incineration, landfill operator, or inspector certification shall be filed with the department. An application fee shall accompany each application. The department shall make application forms available upon request.

(2) Upon receipt of the completed application and application fee, the department shall determine:

(a) If the applicant has successfully completed the required training and examinations;

(b) The status of a reciprocal certification; and

(c) That the facility at which the applicant is employed is in compliance with local and state laws or rules.

(3) Upon successful determination of all requirements and the payment of the certification fees provided for in

WAC 173-300-110 and 173-300-120, the appropriate operator or inspector certificate will be issued.

(4) An owner may apply for a variance for a temporary certificate without an examination to fill a vacated position required by WAC 173-300-050 and 173-300-060 to have a certified operator, or 173-300-070, in the case of a certified inspector. A temporary certificate shall be valid for a period of not more than twelve months from date of issue.

(5) Persons holding a current operators certificate from any national organization, educational institution, the federal government, other states, or a province may be granted an interim certification provided the applicant meets the requirements of WAC 173-300-140.

(a) No interim certification shall be issued or be valid after January 1, 1992.

(b) Interim certification shall not automatically qualify an operator for certification.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-080, filed 12/18/90, effective 1/1/91.]

WAC 173-300-090 Training and examinations. (1) The department shall prepare or cause to be prepared educational materials and opportunities to fulfill requirements of WAC 173-300-080(2) to help develop the skills necessary to operate a solid waste incinerator or solid waste landfill according to state and federal laws.

(2) The board of advisors shall assist in the development of written examinations to be used in determining the competency of operators. Incinerator operators shall also be required to successfully complete an examination to determine the competency needed to operate and maintain the facility for which the operator is responsible.

(3) Examinations shall be held immediately at the end of all required operator training courses. Additional examinations shall be held at places and times set by the board.

(4) All examinations shall be graded by the department or the department's designee and the applicant shall be notified by mail of the score attained. Examinations shall not be returned to the applicant.

(5) An applicant who fails to pass an examination must be reexamined at the next scheduled examination. An additional application form and examination fee shall be required. No individual will be allowed to retake the same examination.

(6) An applicant who fails to pass a second examination shall be required to repeat the certification training.

(7) The board shall forward the recommendations for certification of those examined to the director.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-090, filed 12/18/90, effective 1/1/91.]

WAC 173-300-100 Certificate term. Except as provided for in WAC 173-300-080(4), the term for any certificate or renewal thereof shall be from the first of January of the year of issuance until the thirty-first of December three years thereafter.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-100, filed 12/18/90, effective 1/1/91.]

WAC 173-300-110 Renewal of certificate. (1) Except as provided in WAC 173-300-080(4), all certificates

(1992 Ed.)

held by incinerator operators, landfill operators, and inspectors shall be renewable upon presentation of evidence that the certificate holder successfully completed a refresher course administered by the department, and successfully attended other professional educational opportunities approved by the department.

(2) The department shall mail renewal notices and refresher course information to all certificate holders eligible for renewal four months prior to the date the certificate expires.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-110, filed 12/18/90, effective 1/1/91.]

WAC 173-300-120 Fees. (1) A fee of \$50.00 for each examination administered by the department shall accompany the application for examination.

(2) After an applicant successfully completes the examination and is notified by the department of the results, the applicant shall pay a certification fee of \$200.00 to the department within thirty days of the date of the results notification.

(3) A fee of \$50.00 is required to apply for consideration of certification through reciprocity under WAC 173-300-140. After determining that the reciprocal criteria has been met, the department will notify the applicant:

(a) That the applicant is deficient in a required area(s), and the process to correct the deficiency; or

(b) That the applicant has successfully completed all requirements for certification and that the applicant must pay a certification fee of \$200.00 to the department within thirty days of the date of notification.

(4) A \$200.00 renewal fee must accompany an application for certificate renewal.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-120, filed 12/18/90, effective 1/1/91.]

WAC 173-300-130 Revocation. (1) When a certificate is not renewed, such certificate, upon notice by the director, shall be suspended for sixty days.

(a) If renewal of the certificate is not completed during the suspension period, the director shall mail a written notice of revocation by certified mail to the certificate holder's employer as last known by the department and to the certificate holder at the address last known by the department.

(b) If, during the revocation notice period, the certificate is not renewed, the certificate shall be revoked ten days after such notice is mailed.

(2) Certificates may also be revoked when a majority of the board so recommends to the director, and the director agrees, upon finding:

(a) Fraud or deceit in obtaining the certificate;

(b) Gross negligence in the operation or inspection of an incineration or landfill facility;

(c) Violation of the requirements of chapter 70.95D RCW, this chapter or of any lawful rule, regulation or order of the department; or if,

(d) The facility operated by the certified employee is operated in violation of local, state, or federal environmental laws.

(3) No revocation shall be made under subsection (2) of this section unless the operator has been notified that revocation is proposed, has been advised of the grounds therefore, and has been given an opportunity to appear before the board and be heard on the matter.

(4) A person whose certificate is revoked under this section shall not be eligible to apply for a certificate for one year from the effective date of the final order of revocation.

(5) Whenever an individual's certificate is revoked, the individual shall not be certified again until:

(a) He or she has repeated all required training for certification or has completed other requirements recommended by the board and approved by the department;

(b) Has applied for certification pursuant to WAC 173-300-090;

(c) Paid the application fees; and

(d) Upon notification, paid the certification fee within thirty days of notification.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-130, filed 12/18/90, effective 1/1/91.]

WAC 173-300-140 Reciprocity. The director may, with the approval of the board of advisors, waive examinations for applicants holding valid incinerator or landfill operators certificates, or inspector certificates issued by other states, a province, the federal government, or a professional association having comparable standards as determined by the board.

(1) Applications for reciprocity will be considered when:

(a) The training received by the applicant is comparable to training offered by the state of Washington. A detailed syllabus outlining all relevant training must be released by the appropriate training facility for review and approval by the board. Those applicants with deficiencies shall have the deficiencies resolved before certification is granted, applicants must contact the department within one year of application;

(b) The department receives written confirmation from the certifying authority of the state, province, the federal government, or professional association in which the applicant is certified, that the certificate is currently valid and was earned by passing a written examination. A copy of the exam passed by the applicant must also be released for review by the board; and

(c) The application fee is received.

(2) The board shall review and compare out-of-state examinations with Washington's examinations to determine at which level the examination is most equivalent.

(3) Training in state of Washington solid waste law shall be required for certification.

(4) Incinerator operators shall be required to successfully complete an examination to determine the competency needed to operate and maintain the facility for which the operator is currently responsible.

(5) Certificates shall be issued to each reciprocity applicant who meets the minimum training and examination requirements set forth in WAC 173-300-080. Upon notification by the department that the applicant meets all the criteria, the certification fee is due within thirty days from the date of notification.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-140, filed 12/18/90, effective 1/1/91.]

WAC 173-300-150 Unlawful acts—Variance from requirements. After January 1, 1992, it is unlawful for any person, firm, corporation, municipal corporation, or other governmental subdivision or agency to operate a solid waste incineration or landfill facility unless an operator in responsible charge is duly certified by the director under this chapter or any lawful rule or order of the department. The department shall allow the owner or operator of a landfill or solid waste incineration facility to request a variance from this requirement under emergency conditions. Emergency conditions may include but are not limited to unexpected health related problems that incapacitate the operator or an unexpected termination of employment of the operator. The department may impose such conditions as may be necessary to protect human health and the environment during the term of the variance.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-150, filed 12/18/90, effective 1/1/91.]

WAC 173-300-160 Penalties. Any person, including any firm, corporation, municipal corporation, or other governmental subdivision or agency, with the exception of incinerator operators, violating any provision of this chapter, is guilty of a misdemeanor. Incinerator operators who violate any provision of this chapter shall be guilty of a gross misdemeanor. Each day of operation in violation of this chapter shall constitute a separate offense. The prosecuting attorney or the attorney general, as appropriate, shall secure injunctions of continuing violations of any provisions of this chapter.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-160, filed 12/18/90, effective 1/1/91.]

WAC 173-300-170 Appeals. Decisions of the director under this chapter may be appealed within thirty days from the date of notice thereof to the pollution control hearings board pursuant to chapter 43.21B RCW and chapter 370-08 WAC.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-170, filed 12/18/90, effective 1/1/91.]

WAC 173-300-180 Incineration of biomedical or medical waste. Incineration of biomedical, treated or untreated medical waste shall be conducted under sufficient burning conditions to reduce all combustible material to a form such that no portion of the combustible material is visible in its uncombusted state.

[Statutory Authority: Chapter 70.95D RCW and RCW 70.95.710. 91-01-093, § 173-300-180, filed 12/18/90, effective 1/1/91.]

Chapter 173-303 WAC DANGEROUS WASTE REGULATIONS

WAC

173-303-010	Purpose.
173-303-016	Identifying solid waste.
173-303-017	Recycling processes involving solid waste.
173-303-020	Applicability.

173-303-030	Abbreviations.	173-303-515	Special requirements for used oil burned for energy recovery.
173-303-040	Definitions.	173-303-520	Special requirements for reclaiming spent lead acid battery wastes.
173-303-045	References to EPA's hazardous waste and permit regulations.	173-303-525	Special requirements for recyclable material utilized for precious metal recovery.
173-303-050	Department of ecology cleanup authority.	173-303-550	Special requirements for facilities managing special waste.
173-303-060	Notification and identification numbers.	173-303-560	Minimum standards for facilities managing special waste.
173-303-070	Designation of dangerous waste.	173-303-575	(Reserved.)
173-303-071	Excluded categories of waste.	173-303-600	Final facility standards.
173-303-072	Procedures and bases for exempting and excluding wastes.	173-303-610	Closure and postclosure.
173-303-075	Certification of designation.	173-303-620	Financial requirements.
173-303-080	Dangerous waste lists.	173-303-630	Use and management of containers.
173-303-081	Discarded chemical products.	173-303-640	Tank systems.
173-303-082	Dangerous waste sources.	173-303-645	Releases from solid waste management units.
173-303-083	Infectious dangerous wastes.	173-303-650	Surface impoundments.
173-303-084	Dangerous waste mixtures.	173-303-655	Land treatment.
173-303-090	Dangerous waste characteristics.	173-303-660	Waste piles.
173-303-100	Dangerous waste criteria.	173-303-665	Landfills.
173-303-101	Toxic dangerous wastes.	173-303-670	Incinerators.
173-303-102	Persistent dangerous wastes.	173-303-680	Miscellaneous units.
173-303-103	Carcinogenic dangerous wastes.	173-303-700	Requirements for the Washington state extremely hazardous waste management facility at Hanford.
173-303-104	Generic dangerous waste numbers.	173-303-800	Permit requirements for dangerous waste management facilities.
173-303-110	Sampling and testing methods.	173-303-801	Types of dangerous waste management facility permits.
173-303-120	Recycled, reclaimed, and recovered wastes.	173-303-802	Permits by rule.
173-303-121	(Reserved.)	173-303-804	Emergency permits.
173-303-130	Containment and control of infectious wastes.	173-303-805	Interim status permits.
173-303-140	Land disposal restrictions.	173-303-806	Final facility permits.
173-303-141	Treatment, storage, or disposal of dangerous waste.	173-303-807	Trial burns for dangerous waste incinerator final facility permits.
173-303-145	Spills and discharges into the environment.	173-303-808	Demonstrations for dangerous waste land treatment final facility permits.
173-303-150	Division, dilution, and accumulation.	173-303-809	Research, development and demonstration permits.
173-303-160	Containers.	173-303-810	General permit conditions.
173-303-161	Overpacked containers (labpacks).	173-303-815	(Reserved.)
173-303-170	Requirements for generators of dangerous waste.	173-303-820	(Reserved.)
173-303-180	Manifest.	173-303-825	(Reserved.)
173-303-190	Preparing dangerous waste for transport.	173-303-830	Permit changes.
173-303-200	Accumulating dangerous waste on-site.	173-303-840	Procedures for decision making.
173-303-201	Special accumulation standards.	173-303-845	Appeal of decision.
173-303-202	Special requirements for generators of between two hundred twenty and two thousand two hundred pounds per month that accumulate dangerous waste in tanks.	173-303-900	Public involvement and participation.
173-303-210	Generator recordkeeping.	173-303-902	Citizen/proponent negotiations.
173-303-220	Generator reporting.	173-303-905	Response to requests for public records.
173-303-230	Special conditions.	173-303-910	Petitions.
173-303-240	Requirements for transporters of dangerous waste.	173-303-950	Violations and enforcement.
173-303-250	Dangerous waste acceptance, transport, and delivery.	173-303-960	Special powers and authorities of the department.
173-303-260	Transporter recordkeeping.	173-303-9901	Flow chart for designating dangerous wastes.
173-303-270	Discharges during transport.	173-303-9902	Narrative for designating dangerous wastes.
173-303-280	General requirements for dangerous waste management facilities.	173-303-9903	Discarded chemical products list.
173-303-281	Notice of intent.	173-303-9904	Dangerous waste sources list.
173-303-282	Siting criteria.	173-303-9905	Dangerous waste constituents list.
173-303-283	Performance standards.	173-303-9906	Toxic dangerous waste mixtures graph.
173-303-290	Required notices.	173-303-9907	Persistent dangerous waste mixtures graph.
173-303-300	General waste analysis.		
173-303-310	Security.		
173-303-320	General inspection.		
173-303-330	Personnel training.		
173-303-340	Preparedness and prevention.		
173-303-350	Contingency plan and emergency procedures.		
173-303-355	Superfund Amendments and Reauthorization Act Title III coordination.		
173-303-360	Emergencies.	173-303-275	DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER
173-303-370	Manifest system.		Transfer facilities (or collection facilities). [Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-275, filed 2/10/82.] Repealed by 84-14-031 (Order DE 84-22), filed 6/27/84. Statutory Authority: Chapter 70.105 RCW.
173-303-380	Facility recordkeeping.	173-303-284	Notice of intent. [Statutory Authority: Chapter 70.105 RCW. 88-07-039 (Order 87-37), § 173-303-284, filed 3/11/88.] Repealed by 88-18-083 (Order 88-29), filed 9/6/88. Statutory Authority: Chapter 70.105 RCW.
173-303-390	Facility reporting.	173-303-285	Location standards. [Statutory Authority: Chapter 70.105 RCW. 88-07-039 (Order 87-37), § 173-303-285, filed 3/11/88.] Repealed by 88-18-083 (Order 88-29), filed 9/6/88. Statutory Authority: Chapter 70.105 RCW.
173-303-395	Other general requirements.		
173-303-400	Interim status facility standards.		
173-303-430	(Reserved.)		
173-303-440	(Reserved.)		
173-303-500	Recycling requirements for state-only dangerous waste.		
173-303-505	Special requirements for recyclable materials used in a manner constituting disposal.		
173-303-510	Special requirements for dangerous wastes burned for energy recovery.		

- 173-303-286 Performance standards. [Statutory Authority: Chapter 70.105 RCW. 88-07-039 (Order 87-37), § 173-303-286, filed 3/11/88.] Repealed by 88-18-083 (Order 88-29), filed 9/6/88. Statutory Authority: Chapter 70.105 RCW.
- 173-303-420 Siting standards. [Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-420, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-420, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-420, filed 6/26/87. Statutory Authority: RCW 70.105.200 through 70.105.270. 87-03-014 (Order 86-37), § 173-303-420, filed 1/13/87. Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-420, filed 4/18/84.] Repealed by 90-20-016, filed 9/21/90, effective 10/22/90. Statutory Authority: RCW 43.21A.080 and 70.105.210, et seq.
- 173-303-901 Response to requests for public records. [Statutory Authority: Chapter 70.105 RCW. 88-07-039 (Order 87-37), § 173-303-901, filed 3/11/88.] Repealed by 88-18-083 (Order 88-29), filed 9/6/88. Statutory Authority: Chapter 70.105 RCW.

WAC 173-303-010 Purpose. This regulation implements chapter 70.105 RCW, the Hazardous Waste Management Act of 1976 as amended in 1980 and 1983, and implements, in part, chapter 70.105A RCW, and Subtitle C of Public Law 94-580, the Resource Conservation and Recovery Act, which the legislature has empowered the department to implement. The purposes of this regulation are to:

- (1) Designate those solid wastes which are dangerous or extremely hazardous to the public health and environment;
- (2) Provide for surveillance and monitoring of dangerous and extremely hazardous wastes until they are detoxified, reclaimed, neutralized, or disposed of safely;
- (3) Provide the form and rules necessary to establish a system for manifesting, tracking, reporting, monitoring, recordkeeping, sampling, and labeling dangerous and extremely hazardous wastes;
- (4) Establish the siting, design, operation, closure, post-closure, financial, and monitoring requirements for dangerous and extremely hazardous waste transfer, treatment, storage, and disposal facilities;
- (5) Establish design, operation, and monitoring requirements for managing the state's extremely hazardous waste disposal facility;
- (6) Establish and administer a program for permitting dangerous and extremely hazardous waste management facilities; and
- (7) Encourage recycling, reuse, reclamation, and recovery to the maximum extent possible.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-010, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-010, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-010, filed 2/10/82. Formerly WAC 173-302-010.]

WAC 173-303-016 Identifying solid waste. (1) Purpose and applicability.

- (a) The purpose of this section is to identify those materials that are and are not solid wastes.
- (b)(i) The definition of solid waste contained in this section applies only to wastes that also are dangerous for purposes of the regulations implementing chapter 70.105 RCW. For example, it does not apply to materials (such as

nondangerous scrap, paper, textiles, or rubber) that are not otherwise dangerous wastes and that are recycled.

(ii) This section identifies only some of the materials which are solid wastes and dangerous wastes under chapter 70.105 RCW. A material which is not defined as a solid waste in this section, or is not a dangerous waste identified or listed in this section, is still a solid waste and a dangerous waste for purposes of these sections if reason and authority exists under chapter 70.105 RCW and WAC 173-303-960. Within the constraints of chapter 70.105 RCW, this shall include but not be limited to any material that: Is accumulated, used, reused, or handled in a manner that poses a threat to public health or the environment; or, due to the dangerous constituent(s) in it, when used or reused would pose a threat to public health or the environment.

(c) Certain materials are solid wastes but are excluded from the requirements of this chapter by WAC 173-303-071.

(2) The following terms are used and shall have the meanings as defined in WAC 173-303-040:

- (a) Boiler
- (b) By-product
- (c) Incinerator
- (d) Industrial furnace
- (e) Reclaim
- (f) Recover
- (g) Recycle
- (h) Used or reused (see reuse or use)
- (i) Sludge
- (j) Scrap metal
- (k) Spent material

(3) Definition of solid waste.

(a) A solid waste is any discarded material that is not excluded by WAC 173-303-017(2) or that is not excluded by variance granted under WAC 173-303-017(5).

(b) A discarded material is any material which is:

- (i) Abandoned, as explained in subsection (4) of this section; or
- (ii) Recycled, as explained in subsection (5) of this section; or
- (iii) Considered inherently waste-like, as explained in subsection (6) of this section.

(4) Materials are solid waste if they are abandoned by being:

- (a) Disposed of; or
- (b) Burned or incinerated; or

(c) Accumulated, stored, or treated (but not recycled) before or in lieu of being abandoned by being disposed of, burned, or incinerated.

(5) Materials are solid wastes if they are recycled—accumulated, stored, or treated before recycling—as specified in (a) through (d) of this subsection.

(a) Used in a manner constituting disposal. Materials noted with a "*" in column 1 of Table 1 are solid wastes when they are:

(i)(A) Applied to or placed on the land in a manner that constitutes disposal; or

(B) Used to produce products that are applied to or placed on the land or are otherwise contained in products that are applied to or placed on the land (in which cases the product itself remains a solid waste).

(ii) However, commercial chemical products listed in WAC 173-303-9903 or which exhibit any of the criteria or characteristics listed in WAC 173-303-100 are not solid wastes if they are applied to the land and that is their ordinary manner of use.

(b) Burning for energy recovery. Materials noted with a "*" in column 2 of Table 1 are solid wastes when they are:

- (i) Burned to recover energy;
- (ii) Used to produce a fuel or are otherwise contained in fuels (in which cases the fuel itself remains a solid waste).

However, commercial chemical products listed in WAC 173-303-9903 or which exhibit any of the criteria or characteristics listed in WAC 173-303-100 are not solid wastes if they are themselves fuels.

(c) Reclaimed. Materials noted with a "*" in column 3 of Table 1 are solid wastes when reclaimed.

(d)(i) Accumulated speculatively. Materials noted with a "*" in column 4 of Table 1 are solid wastes when accumulated speculatively.

(ii) A material is "accumulated speculatively" if it is accumulated before being recycled. A material is not accumulated speculatively, however, if the person accumulating it can show that the material is potentially recyclable and has a feasible means of being recycled; and that—during the calendar year (commencing on January 1)—the amount of material that is recycled, or transferred to a different site for recycling, equals at least seventy-five percent by weight or volume of the amount of that material accumulated at the beginning of the period. In calculating the percentage of turnover, the seventy-five percent requirement is to be applied to each material of the same type (e.g., slags from a single smelting process) that is recycled in the same way (i.e., from which the same material is recovered or that is used in the same way). Materials accumulating in units that would be exempt from regulation under WAC 173-303-071 (3)(n) are not to be included in making the calculation. (Materials that are already defined as solid wastes also are not to be included in making the calculation.) Materials are no longer in this category once they are removed from accumulation for recycling, however.

Note: The terms "spent materials," "sludges," "by-products," and "scrap metal" are defined in WAC 173-303-040.

- 1 The characteristics of dangerous waste are described in WAC 173-303-090.
- 2 The dangerous waste criteria are described in WAC 173303-084 and 173-303-101 through 173-303-103.

(6) Inherently waste-like materials. The following materials are solid wastes when they are recycled in any manner:

(a) Dangerous Waste Nos. F020, F021 (unless used as an ingredient to make a product at the site of generation), F022, F023, F026, and F028.

(b) The department will use the following criteria to add wastes to (a) of this subsection:

(i)(A) The materials are ordinarily disposed of, burned, or incinerated; or

(B) The materials contain toxic constituents listed in WAC 173-303-9905 and these constituents are not ordinarily found in raw materials or products for which the materials substitute (or are found in raw materials or products in smaller concentrations) and are not used or reused during the recycling process; and

(ii) The material may pose a substantial hazard to human health or the environment when recycled.

(7) Documentation of claims that materials are not solid wastes or are conditionally exempt from regulation. Respondents in actions to enforce regulations implementing chapter 70.105 RCW who raise a claim that a certain material is not a solid waste, or is conditionally exempt from regulation, must demonstrate that there is a known market or disposition for the material, and that they meet the terms of the exclusion or exemption. In doing so, they must provide appropriate documentation (such as contracts showing that a second person uses the material as an ingredient in a production process) to demonstrate that the material is not a waste, or is exempt from regulation. In addition, owners or operators of facilities claiming that they actually are recycling materials must show that they have the necessary equipment to do so.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-016, file 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-016, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-016, filed 6/27/84.]

TABLE 1

	Use constituting disposal WAC 173-303- 016 (5)(a)	Energy recovery/ fuel WAC 173-303- 016 (5)(b)	Reclamation WAC 173-303- 016 (5)(c)	Speculative accumulation WAC 173-303- 016 (5)(d)
Spent materials	(*)	(*)	(*)	(*)
Commercial chemical products	(*)	(*)	—	—
By-products listed in WAC 173-303-9904	(*)	(*)	(*)	(*)
Sludges listed in WAC 173-303-9904	(*)	(*)	(*)	(*)
By-products exhibiting a characteristic ¹ or criteria ²	(*)	(*)	—	(*)
Sludges exhibiting a characteristic ¹ or criteria ²	(*)	(*)	—	(*)
Scrap metal	(*)	(*)	(*)	(*)

WAC 173-303-017 Recycling processes involving solid waste.

(1) The purpose of this section is to identify those materials that are and are not solid wastes when recycled. Certain materials, as described in subsection (2) of this section, would not typically be considered to involve waste management and are exempt from the requirements of this chapter. All recycling processes not exempted by subsection (2) of this section are subject to the recycling requirements of WAC 173-303-120.

(2) General categories of materials that are not solid waste when recycled.

(a) Except as provided in subsection (3) of this section, materials are not solid wastes when they can be shown to be recycled by being:

- (i) Used or reused as ingredients in an industrial process to make a product provided the materials are not being reclaimed; or

(ii) Used or reused as effective substitutes for commercial products; or

(iii) Returned to the original process from which they are generated without first being reclaimed. The material must be returned as a substitute for raw material feedstock, and the process must use raw materials as principal feedstocks.

(b) Except as provided in subsection (3) of this section, the department has determined that the following materials when used as described are not solid wastes:

(i) Pulping liquors (i.e., black liquor) that are reclaimed in a pulping liquor recovery furnace and then reused in the pulping process;

(ii) Spent pickle liquor which is reused in wastewater treatment at a facility holding a national pollutant discharge elimination system (NPDES) permit, or which is being accumulated, stored, or treated before such reuse;

(iii) Spent sulfuric acid used to produce virgin sulfuric acid.

(3) The following materials are solid wastes, even if the recycling involves use, reuse, or return to the original process (as described in subsection (2)(a) of this section):

(a) Materials used in a manner constituting disposal, or used to produce products that are applied to the land; or

(b) Materials burned for energy recovery, used to produce a fuel, or contained in fuels; or

(c) Materials accumulated speculatively as defined in WAC 173-303-016 (5)(d)(ii); or

(d) Materials listed in WAC 173-303-016(6); or

(e) Any materials that the department determines are being accumulated, used, reused or handled in a manner that poses a threat to public health or the environment.

(4) Documentation of claims that materials are not solid wastes or are conditionally exempt from regulation. Respondents in actions to enforce regulations implementing chapter 70.105 RCW who raise a claim that a certain material is not a solid waste, or is conditionally exempt from regulation, must demonstrate that there is a known market or disposition for the material, and that they meet the terms of the exclusion or exemption. In doing so, they must provide appropriate documentation (such as contracts showing that a second person uses the material as an ingredient in a production process) to demonstrate that the material is not a waste, or is exempt from regulation. In addition, owners or operators of facilities claiming that they actually are recycling materials must show that they have the necessary equipment to do so.

(5) Variances from classification as a solid waste.

(a) In accordance with the standards and criteria in (b) of this subsection and the procedures in subsection (7) of this section, the department may determine on a case-by-case basis that the following recycled materials are not solid wastes:

(i) Materials that are accumulated speculatively without sufficient amounts being recycled (as defined in WAC 173-303-016 (5)(d)(ii));

(ii) Materials that are reclaimed and then reused within the original primary production process in which they were generated;

(iii) Materials that have been reclaimed but must be reclaimed further before the materials are completely recovered;

(iv) State-only dangerous materials (not regulated as hazardous wastes (defined in WAC 173-303-040) by EPA) which serve as an effective substitute for a commercial product or raw material.

(b) Standards and criteria for variances from classification as a solid waste.

(i) The department may grant requests for a variance from classifying as a solid waste those materials that are accumulated speculatively without sufficient amounts being recycled if the applicant demonstrates that sufficient amounts of the material will be recycled or transferred for recycling in the following year. If a variance is granted, it is valid only for the following year, but can be renewed, on an annual basis, by filing a new application. The department's decision will be based on the following standards and criteria:

(A) The manner in which the material is expected to be recycled, when the material is expected to be recycled, and whether this expected disposition is likely to occur (for example, because of past practice, market factors, the nature of the material, or contractual arrangements for recycling);

(B) The reason that the applicant has accumulated the material for one or more years without recycling seventy-five percent of the volume accumulated at the beginning of the year;

(C) The quantity of material already accumulated and the quantity expected to be generated and accumulated before the material is recycled;

(D) The extent to which the material is handled to minimize loss;

(E) Other relevant factors.

(ii) The department may grant requests for a variance from classifying as a solid waste those materials that are reclaimed and then reused as feedstock within the original primary production process in which the materials were generated if the reclamation operation is an essential part of the production process. This determination will be based on the following criteria:

(A) How economically viable the production process would be if it were to use virgin materials, rather than reclaimed materials;

(B) The prevalence of the practice on an industry-wide basis;

(C) The extent to which the material is handled before reclamation to minimize loss;

(D) The time periods between generating the material and its reclamation, and between reclamation and return to the original primary production process;

(E) The location of the reclamation operation in relation to the production process;

(F) Whether the reclaimed material is used for the purpose for which it was originally produced when it is returned to the original process, and whether it is returned to the process in substantially its original form;

(G) Whether the person who generates the material also reclaims it;

(H) Other relevant factors.

(iii) The department may grant requests for a variance from classifying as a solid waste those materials that have been reclaimed but must be reclaimed further before recovery is completed if, after initial reclamation, the resulting material is commodity-like (even though it is not yet a

commercial product, and has to be reclaimed further). This determination will be based on the following factors:

- (A) The degree of processing the material has undergone and the degree of further processing that is required;
- (B) The value of the material after it has been reclaimed;
- (C) The degree to which the reclaimed material is like an analogous raw material;
- (D) The extent to which an end market for the reclaimed material is guaranteed;
- (E) The extent to which the reclaimed material is handled to minimize loss;
- (F) Other relevant factors.

(iv) The department may grant requests for a variance from classifying as a solid waste those materials that serve as an effective substitute for a commercial product or raw material, when such material is not regulated as hazardous waste (defined in WAC 173-303-040) by EPA, if the materials are recycled in a manner such that they more closely resemble products or raw materials rather than wastes. This determination will be based on the following factors:

- (A) The effectiveness of the material for the claimed use;
 - (B) The degree to which the material is like an analogous raw material or product;
 - (C) The extent to which the material is handled to minimize loss or escape to the environment;
 - (D) The extent to which an end market for the reclaimed material is guaranteed;
 - (E) The time period between generating the material and its recycling;
 - (F) Other factors as appropriate.
- (6) Variance to be classified as a boiler.

In accordance with the standards and criteria in WAC 173-303-040 (definition of "boiler"), and the procedures in subsection (7) of this section the department may determine on a case-by-case basis that certain enclosed devices using controlled flame combustion are boilers, even though they do not otherwise meet the definition of boiler contained in WAC 173-303-040, after considering the following criteria:

- (a) The extent to which the unit has provisions for recovering and exporting thermal energy in the form of steam, heated fluids, or heated gases; and
 - (b) The extent to which the combustion chamber and energy recovery equipment are of integral design; and
 - (c) The efficiency of energy recovery, calculated in terms of the recovered energy compared with the thermal value of the fuel; and
 - (d) The extent to which exported energy is utilized; and
 - (e) The extent to which the device is in common and customary use as a "boiler" functioning primarily to produce steam, heated fluids, or heated gases; and
 - (f) Other factors, as appropriate.
- (7) Procedures for variances from classification as a solid waste or to be classified as a boiler.

The department will use the following procedures in evaluating applications for variances from classification as a solid waste or applications to classify particular enclosed flame combustion devices as boilers:

(a) The applicant must apply to the department. The application must address the relevant criteria contained in subsections (5)(b) or (6) of this section.

(b) The department will evaluate the application and issue a draft public notice tentatively granting or denying the application. Notification of this tentative decision will be provided by newspaper advertisement and radio broadcast in the locality where the recycler is located. The department will accept comment on the tentative decision for thirty days, and may also hold a public hearing upon request or at its discretion. The department will issue a final decision after receipt of comments and after the hearing (if any), and this decision may not be appealed to the department.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-017, file 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-017, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-017, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-017, filed 6/27/84.]

WAC 173-303-020 Applicability. This chapter 173-303 WAC shall apply to all persons who handle dangerous wastes including, but not limited to:

- (1) Generators;
- (2) Transporters;
- (3) Owners and operators of dangerous waste recycling, transfer, storage, treatment, and disposal facilities; and
- (4) The operator of the state's extremely hazardous waste management facility.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-020, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-020, filed 2/10/82. Formerly WAC 173-302-020.]

WAC 173-303-030 Abbreviations. The following abbreviations are used in this regulation.

- (1) ASTM - American Society for Testing Materials
- (2) APHA - American Public Health Association
- (3) CDC - Center for Disease Control
- (4) CFR - Code of Federal Regulations
- (5) DOT - Department of Transportation
- (6) °C - degrees Celsius
- (7) DW - dangerous waste
- (8) DWS - drinking water standards of the Safe Drinking Water Act
- (9) EHW - extremely hazardous waste
- (10) EP - extraction procedure
- (11) EPA - Environmental Protection Agency
- (12) °F - degrees Fahrenheit
- (13) g - gram
- (14) IARC - International Agency for Research on Cancer
- (15) kg - kilogram (one thousand grams)
- (16) L - liter
- (17) lb - pound
- (18) LC₅₀ - lethal concentration 50 percent kill
- (19) LD₅₀ - lethal dose 50 percent kill
- (20) M - molar (gram molecular weights per liter of solution)
- (21) mg - milligram (one thousandth of a gram)
- (22) NFPA - National Fire Protection Association
- (23) NIOSH - National Institute for Occupational Safety and Health

- (24) pH - negative logarithm of the hydrogen ion concentration
- (25) POTW - publicly owned treatment works
- (26) ppm - parts per million (weight/weight)
- (27) RCRA - Resource Conservation and Recovery Act
- (28) RCW - Revised Code of Washington
- (29) TLM₉₆ - toxic limit median, 96 hours
- (30) TSD facility - transfer, treatment, storage, or disposal facility
- (31) UBC - Uniform Building Code
- (32) UFC - Uniform Fire Code
- (33) USCG - United States Coast Guard
- (34) USGS - United States Geological Survey
- (35) WAC - Washington Administrative Code
- (36) % - percent
- (37) # - number

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-030, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-030, filed 2/10/82. Formerly WAC 173-302-030.]

WAC 173-303-040 Definitions. When used in this regulation, the following terms have the meanings given below.

"Aboveground tank" means a device meeting the definition of "tank" in this section and that is situated in such a way that the entire surface area of the tank is completely above the plane of the adjacent surrounding surface and the entire surface area of the tank (including the tank bottom) is able to be visually inspected.

"Active life" of a facility means the period from the initial receipt of dangerous waste at the facility until the department receives certification of final closure.

"Active portion" means that portion of a facility which is not a closed portion, and where dangerous waste recycling, reuse, reclamation, transfer, treatment, storage or disposal operations are being or have been conducted after:

The effective date of the waste's designation by 40 CFR Part 261; and

March 10, 1982, for wastes designated only by this chapter and not designated by 40 CFR Part 261. (See also "closed portion" and "inactive portion.")

"Acutely hazardous waste" means dangerous waste sources (listed in WAC 173-303-9904) F020, F021, F022, F023, F026, or F027, and discarded chemical products (listed in WAC 173-303-9903) that are identified with a dangerous waste number beginning with a "P" or that show an "X" or "A" in the reason for designation column.

"Ancillary equipment" means any device including, but not limited to, such devices as piping, fittings, flanges, valves, and pumps, that is used to distribute, meter, or control the flow of dangerous waste from its point of generation to a storage or treatment tank(s), between dangerous waste storage and treatment tanks to a point of disposal on-site, or to a point of shipment for disposal off-site.

"Aquatic LC₅₀" (same as TLM₉₆) means a concentration in mg/L (ppm) which kills in 96 hours half of a group of ten or more of a medium sensitivity warm water species of fish such as *Lepomis macrochirus* (bluegill) or *Pimephales promelas* (flathead minnow), or cold water species such as

salmonidae, when using the testing method described in WAC 173-303-110.

"Aquifer" means a geologic formation, group of formations, or part of a formation capable of yielding a significant amount of ground water to wells or springs.

"Asbestos containing waste material" means any waste that contains more than one percent asbestos by weight and that can be crumbled, pulverized, or reduced to powder when dry, by hand pressure.

"Batch" means any waste which is generated less frequently than once a month.

"Berm" means the shoulder of a dike.

"Boiler" means an enclosed device using controlled flame combustion and having the following characteristics:

The unit must have physical provisions for recovering and exporting thermal energy in the form of steam, heated fluids, or heated gases; and

The unit's combustion chamber and primary energy recovery section(s) must be of integral design. To be of integral design, the combustion chamber and the primary energy recovery section(s) (such as waterwalls and superheaters) must be physically formed into one manufactured or assembled unit. A unit in which the combustion chamber and the primary energy recovery section(s) are joined only by ducts or connections carrying flue gas is not integrally designed; however, secondary energy recovery equipment (such as economizers or air preheaters) need not be physically formed into the same unit as the combustion chamber and the primary energy recovery section. The following units are not precluded from being boilers solely because they are not of integral design: Process heaters (units that transfer energy directly to a process stream), and fluidized bed combustion units; and

While in operation, the unit must maintain a thermal energy recovery efficiency of at least sixty percent, calculated in terms of the recovered energy compared with the thermal value of the fuel; and

The unit must export and utilize at least seventy-five percent of the recovered energy, calculated on an annual basis. In this calculation, no credit shall be given for recovered heat used internally in the same unit. (Examples of internal use are the preheating of fuel or combustion air, and the driving of induced or forced draft fans or feedwater pumps); or

The unit is one which the department has determined, on a case-by-case basis, to be a boiler, after considering the standards in WAC 173-303-017(6).

"By-product" means a material that is not one of the primary products of a production process and is not solely or separately produced by the production process. Examples are process residues such as slags or distillation column bottoms. The term does not include a co-product that is produced for the general public's use and is ordinarily used in the form it is produced by the process.

"Carcinogenic" means a material known to contain an IARC positive or suspected, human or animal carcinogen.

"Closed portion" means that portion of a facility which an owner or operator has closed, in accordance with the approved facility closure plan and all applicable closure requirements.

"Closure" means the requirements placed upon all TSD facilities to ensure that all such facilities are closed in an acceptable manner (see also "post-closure").

"Commercial chemical product or manufacturing chemical intermediate" refers to a chemical substance which is manufactured or formulated for commercial or manufacturing use which consists of the commercially pure grade of the chemical, any technical grades of the chemical that are produced or marketed, and all formulations in which the chemical is the sole active ingredient.

"Compliance procedure" shall mean any proceedings instituted pursuant to the Hazardous Waste Disposal Act as amended in 1980 and 1983, and chapter 70.105A RCW, or regulations issued under authority of state law, which seeks to require compliance, or which is in the nature of an enforcement action or an action to cure a violation. A compliance procedure includes a notice of intention to terminate a permit pursuant to WAC 173-303-830(5), or an application in the state superior court for appropriate relief under the Hazardous Waste Management Act. A compliance procedure is considered to be pending from the time a notice of violation or of intent to terminate a permit is issued or judicial proceedings are begun, until the department notifies the owner or operator in writing that the violation has been corrected or that the procedure has been withdrawn or discontinued.

"Component" means either the tank or ancillary equipment of a tank system.

"Constituent" or "dangerous waste constituent" means a chemically distinct component of a dangerous waste stream or mixture.

"Container" means any portable device in which a material is stored, transported, treated, disposed of, or otherwise handled.

"Contingency plan" means a document setting out an organized, planned, and coordinated course of action to be followed in case of a fire, explosion, or release of dangerous waste or dangerous waste constituents which could threaten the public health or environment.

"Contract" means the written agreement signed by the department and the state operator.

"Corrosion expert" means a person who, by reason of his knowledge of the physical sciences and the principles of engineering and mathematics, acquired by a professional education and related practical experience, is qualified to engage in the practice of corrosion control on buried or submerged metal piping systems and metal tanks. Such a person must be certified as being qualified by the National Association of Corrosion Engineers (NACE) or be a registered professional engineer who has certification or licensing that includes education and experience in corrosion control on buried or submerged metal piping systems and metal tanks.

"Dangerous waste constituents" means those constituents listed in WAC 173-303-9905 and any other constituents that have caused a waste to be a dangerous waste under this chapter.

"Dangerous waste management unit" is a contiguous area of land on or in which dangerous waste is placed, or the largest area in which there is a significant likelihood of mixing dangerous waste constituents in the same area. Examples of dangerous waste management units include a

surface impoundment, a waste pile, a land treatment area, a landfill cell, an incinerator, a tank and its associated piping and underlying containment system and a container storage area. A container alone does not constitute a unit; the unit includes containers and the land or pad upon which they are placed.

"Dangerous wastes" means those solid wastes designated in WAC 173-303-070 through 173-303-103 as dangerous or extremely hazardous waste. As used in this chapter, the words "dangerous waste" will refer to the full universe of wastes regulated by this chapter (including dangerous and extremely hazardous waste), while the abbreviation "DW" will refer to that part of the regulated universe which is dangerous only, and not extremely hazardous. (See also "extremely hazardous waste" and "hazardous waste" definitions.)

"Department" means the department of ecology.

"Dermal LD₅₀" means the single dosage in milligrams per kilogram (mg/kg) body weight which, when dermally (skin) applied for 24 hours, within 14 days kills half of a group of ten rabbits each weighing between 2.0 and 3.0 kilograms.

"Designated facility" means the facility designated by the generator on the manifest to receive a dangerous waste shipment and which is authorized pursuant to this chapter or RCRA to recycle or manage dangerous waste.

"Dike" means an embankment or ridge of natural or man-made materials used to prevent the movement of liquids, sludges, solids, or other substances.

"Director" means the director of the department of ecology or his designee.

"Discharge" or "dangerous waste discharge" means the accidental or intentional release of hazardous substances, dangerous waste or dangerous waste constituents [constituents] such that the substance, waste or a waste constituent may enter or be emitted into the environment. Release includes, but is not limited to, the actions of: Spilling, leaking, pumping, pouring, emitting, dumping, emptying, depositing, placing, or injecting.

"Disposal" means the discharging, discarding, or abandoning of dangerous wastes or the treatment, decontamination, or recycling of such wastes once they have been discarded or abandoned. This includes the discharge of any dangerous wastes into or on any land, air, or water.

"Domestic sewage" means untreated sanitary wastes from residential sources that pass through a sewer system to a publicly owned treatment works (POTW) for treatment.

"Draft permit" means a document prepared under WAC 173-303-840 indicating the department's tentative decision to issue or deny, modify, revoke and reissue, or terminate a permit. A notice of intent to terminate or deny a permit are types of draft permits. A denial of a request for modification, revocation and reissuance, or termination as discussed in WAC 173-303-830 is not a draft permit.

"Elementary neutralization unit" means a device which: Is used for neutralizing wastes which are dangerous wastes only because they exhibit the corrosivity characteristics defined in WAC 173-303-090 or are listed in WAC 173-303-081, or in 173-303-082 only for this reason; and

Meets the definition of tank, tank system, container, transport vehicle, or vessel.

"Environment" means any air, land, water, or ground water.

"EPA/state identification number" or "EPA/state ID#" means the number assigned by EPA or by the department of ecology to each generator, transporter, and TSD facility.

"Existing tank system" or "existing component" means a tank system or component that is used for the storage or treatment of dangerous waste and that is in operation, or for which installation has commenced on or prior to February 3, 1989. Installation will be considered to have commenced if the owner or operator has obtained all federal, state, and local approvals or permits necessary to begin physical construction of the site or installation of the tank system and if either:

A continuous on-site physical construction or installation program has begun; or

The owner or operator has entered into contractual obligations, which cannot be cancelled or modified without substantial loss, for physical construction of the site or installation of the tank system to be completed within a reasonable time.

"Existing TSD facility" means a facility which was in operation or for which construction commenced on or before November 19, 1980, for wastes designated by 40 CFR Part 261, or August 9, 1982, for wastes designated only by this chapter and not designated by 40 CFR Part 261. A facility has commenced construction if the owner or operator has obtained permits and approvals necessary under federal, state, and local statutes, regulations, and ordinances and either:

A continuous on-site, physical construction program has begun; or

The owner or operator has entered into contractual obligation, which cannot be cancelled or modified without substantial loss, for physical construction of the facility to be completed within a reasonable time.

"Extremely hazardous waste" means those dangerous wastes designated in WAC 173-303-070 through 173-303-103 as extremely hazardous. The abbreviation "EHW" will be used in this chapter to refer to those dangerous wastes which are extremely hazardous. (See also "dangerous waste" and "hazardous waste" definitions.)

"Facility" means all contiguous land, and structures, other appurtenances, and improvements on the land used for recycling, reusing, reclaiming, transferring, storing, treating, or disposing of dangerous waste. Unless otherwise specified in this chapter, the terms "facility," "treatment, storage, disposal facility," "TSD facility," "dangerous waste facility" or "waste management facility" shall be used interchangeably.

"Final closure" means the closure of all dangerous waste management units at the facility in accordance with all applicable closure requirements so that dangerous waste management activities under WAC 173-303-400 and 173-303-600 through 173-303-670 are no longer conducted at the facility. Areas only subject to generator standards WAC 173-303-170 through 173-303-230 need not be included in final closure.

"Food chain crops" means tobacco, crops grown for human consumption, and crops grown to feed animals whose products are consumed by humans.

"Freeboard" means the vertical distance between the top of a tank or surface impoundment dike, and the surface of the waste contained therein.

"Fugitive emissions" means the emission of contaminants from sources other than the control system exit point. Material handling, storage piles, doors, windows and vents are typical sources of fugitive emissions.

"Generator" means any person, by site, whose act or process produces dangerous waste or whose act first causes a dangerous waste to become subject to regulation.

"Genetic properties" means those properties which cause or significantly contribute to mutagenic, teratogenic, or carcinogenic effects in man or wildlife.

"Ground water" means water which fills voids below the land surface and in the earth's crust.

"Halogenated hydrocarbons" (HH) means any organic compounds which, as part of their composition, include one or more atoms of fluorine, chlorine, bromine, iodine, or astatine. The requirements of this chapter apply to only those halogenated hydrocarbons which can be obtained using the testing method described in WAC 173-303-110, testing methods, and which are persistent dangerous wastes.

"Hazardous substances" means any liquid, solid, gas, or sludge, including any material, substance, product, commodity, or waste, regardless of quantity, that exhibits any of the physical, chemical or biological properties described in WAC 173-303-090, 173-303-101, 173-303-102, or 173-303-103.

"Hazardous wastes" means those solid wastes designated by 40 CFR Part 261, and regulated as hazardous waste by the United States EPA. This term will never be abbreviated in this chapter to avoid confusion with the abbreviations "DW" and "EHW." (See also "dangerous waste" and "extremely hazardous waste" definitions.)

"Ignitable waste" means a dangerous waste that exhibits the characteristic of ignitability described in WAC 173-303-090(5).

"Inactive portion" means that portion of a facility which has not recycled, treated, stored, or disposed dangerous waste after:

The effective date of the waste's designation, for wastes designated under 40 CFR Part 261; and

March 10, 1982, for wastes designated only by this chapter and not designated by 40 CFR Part 261.

"Incinerator" means any enclosed device using controlled flame combustion that neither meets the criteria for classification as a boiler nor is listed as an industrial furnace.

"Incompatible waste" means a dangerous waste which is unsuitable for placement in a particular device or facility because it may corrode or decay the containment materials, or is unsuitable for mixing with another waste or material because the mixture might produce heat or pressure, fire or explosion, violent reaction, toxic dusts, fumes, mists, or gases, or flammable fumes or gases.

"Industrial-furnace" means any of the following enclosed devices that are integral components of manufacturing processes and that use controlled flame devices to accomplish recovery of materials or energy; cement kilns, lime kilns, aggregate kilns, phosphate kilns, blast furnaces, smelting, melting, and refining furnaces (including pyrometallurgical devices such as cupolas, reverberator furnaces, sintering machines, roasters and foundry furnaces), titanium dioxide chloride process oxidation reactors, coke

ovens, methane reforming furnaces, combustion devices used in the recovery of sulfur values from spent sulfuric acid, and pulping liquor recovery furnaces. The department may decide to add devices to this list on the basis of one or more of the following factors:

The device is designed and used primarily to accomplish recovery of material products;

The device burns or reduces secondary materials as ingredients in an industrial process to make a material product;

The device burns or reduces secondary materials as effective substitutes for raw materials in processes using raw materials as principal feedstocks;

The device burns or reduces raw materials to make a material product;

The device is in common industrial use to produce a material product; and

Other factors, as appropriate.

"Infectious waste" means organisms or materials listed in WAC 173-303-083, infectious dangerous wastes.

"Inground tank" means a device meeting the definition of "tank" in this section whereby a portion of the tank wall is situated to any degree within the ground, thereby preventing visual inspection of that external surface area of the tank that is in the ground.

"Inhalation LC₅₀" means a concentration in milligrams of substance per liter of air which, when administered to the respiratory tract for 4 hours or less, kills within 14 days half of a group of ten rats each weighing between 200 and 300 grams.

"Inner liner" means a continuous layer of material placed inside a tank or container which protects the construction materials of the tank or container from the waste or reagents used to treat the waste.

"Installation inspector" means a person who, by reason of his knowledge of the physical sciences and the principles of engineering, acquired by a professional education and related practical experience, is qualified to supervise the installation of tank systems.

"Interim status permit" means a temporary permit given to TSD facilities which qualify under WAC 173-303-805.

"Land disposal" means placement in a facility or on the land with the intent of leaving the dangerous waste at closure, and includes, but is not limited to, placement for disposal purposes in a: Landfill; surface impoundment; waste pile; injection well; land treatment facility; salt dome or salt bed formation; underground mine or cave; concrete vault; bunker; or miscellaneous unit.

"Landfill" means a disposal facility, or part of a facility, where dangerous waste is placed in or on land and which is not a land treatment facility, a surface impoundment, or an underground injection well, a salt dome formation, a salt bed formation, an underground mine, or a cave.

"Land treatment" means the practice of applying dangerous waste onto or incorporating dangerous waste into the soil surface so that it will degrade or decompose. If the waste will remain after the facility is closed, this practice is disposal.

"Leachable inorganic waste" means solid dangerous waste (i.e., passes paint filter test) that is not an organic/ carbonaceous waste and exhibits the toxicity characteristic

(dangerous waste numbers D004 to D011, only) under WAC 173-303-090(8).

"Leachate" means any liquid, including any components suspended in the liquid, that has percolated through or drained from dangerous waste.

"Leak-detection system" means a system capable of detecting the failure of either the primary or secondary containment structure or the presence of a release of dangerous waste or accumulated liquid in the secondary containment structure. Such a system must employ operational controls (e.g., daily visual inspections for releases into the secondary containment system of aboveground tanks) or consist of an interstitial monitoring device designed to detect continuously and automatically the failure of the primary or secondary containment structure or the presence of a release of dangerous waste into the secondary containment structure.

"Legal defense costs" means any expenses that an insurer incurs in defending against claims of third parties brought under the terms and conditions of an insurance policy.

"Liner" means a continuous layer of man-made or natural materials which restrict the escape of dangerous waste, dangerous waste constituents, or leachate through the sides, bottom, or berms of a surface impoundment, waste pile, or landfill.

"Major facility" means a facility or activity classified by the department as major.

"Manifest" means the shipping document, prepared in accordance with the requirements of WAC 173-303-180, which is used to identify the quantity, composition, origin, routing, and destination of a dangerous waste while it is being transported to a point of transfer, disposal, treatment, or storage.

"Manufacturing process unit" means a unit which is an integral and inseparable portion of a manufacturing operation, processing a raw material into a manufacturing intermediate or finished product, reclaiming spent materials or reconditioning components.

"New tank system" or "new tank component" means a tank system or component that will be used for the storage or treatment of dangerous waste and for which installation has commenced after February 3, 1989; except, however, for purposes of WAC 173-303-640 (4)(g)(ii) and 173-303-400(3), a new tank system is one for which construction commences after February 3, 1989. (See also "existing tank system.")

"New TSD facility" means a facility which began operation or for which construction commenced after November 19, 1980, for wastes designated by 40 CFR Part 261, or August 9, 1982, for wastes designated only by this chapter and not designated by 40 CFR Part 261.

"Miscellaneous unit" means a dangerous waste management unit where dangerous waste is treated, stored, or disposed of and that is not a container, tank, surface impoundment, pile, land treatment unit, landfill, incinerator, boiler, industrial furnace, underground injection well with appropriate technical standards under 40 CFR Part 146, or unit eligible for a research, development, and demonstration permit under WAC 173-303-809.

"NIOSH registry" means the registry of toxic effects of chemical substances which is published by the National Institute for Occupational Safety and Health.

"Nonsudden accident" or "nonsudden accidental occurrence" means an unforeseen and unexpected occurrence which takes place over time and involves continuous or repeated exposure.

"Occurrence" means an accident, including continuous or repeated exposure to conditions, which results in bodily injury or property damage which the owner or operator neither expected nor intended to occur.

"Off-specification used oil fuel" means used oil fuel that exceeds any specification level described in Table 1 in WAC 173-303-515.

"Onground tank" means a device meeting the definition of "tank" in this section and that is situated in such a way that the bottom of the tank is on the same level as the adjacent surrounding surface so that the external tank bottom cannot be visually inspected.

"On-site" means the same, geographically contiguous, or bordering property. Travel between two properties divided by a public right of way, and owned, operated, or controlled by the same person, shall be considered on-site travel if: The travel crosses the right of way at a perpendicular intersection; or, the right of way is controlled by the property owner and is inaccessible to the public.

"Operator" means the person responsible for the overall operation of a facility. (See also "state operator.")

"Oral LD₅₀" means the single dosage in milligrams per kilogram (mg/kg) body weight, when orally administered, which, within 14 days, kills half a group of ten or more white rats each weighing between 200 and 300 grams.

"Organic/carbonaceous waste" means a dangerous waste that contains combined concentrations of greater than ten percent organic/carbonaceous constituents in the waste; organic/carbonaceous constituents are those substances that contain carbon-hydrogen, carbon-halogen, or carbon-carbon chemical bonding.

"Partial closure" means the closure of a dangerous waste management unit in accordance with the applicable closure requirements of WAC 173-303-400 and 173-303-600 through 173-303-670 at a facility that contains other active dangerous waste management units. For example, partial closure may include the closure of a tank (including its associated piping and underlying containment systems), landfill cell, surface impoundment, waste pile, or other dangerous waste management unit, while other units of the same facility continue to operate.

"Permit" means an authorization which allows a person to perform dangerous waste transfer, storage, treatment, or disposal operations, and which typically will include specific conditions for such facility operations. Permits must be issued by one of the following:

- The department, pursuant to this chapter;
- United States EPA, pursuant to 40 CFR Part 270; or
- Another state authorized by EPA, pursuant to 40 CFR Part 271.

"Permit-by-rule" means a provision of this chapter stating that a facility or activity is deemed to have a dangerous waste permit if it meets the requirements of the provision.

"Persistence" means the quality of a material which retains more than half of its initial activity after one year (365 days) in either a dark anaerobic or dark aerobic environment at ambient conditions.

"Person" means any person, firm, association, county, public or municipal or private corporation, agency, or other entity whatsoever.

"Pesticide" means but is not limited to: Any substance or mixture of substances intended to prevent, destroy, control, repel, or mitigate any insect, rodent, nematode, mollusk, fungus, weed, and any other form of plant or animal life, or virus (except virus on or in living man or other animal) which is normally considered to be a pest or which the department of agriculture may declare to be a pest; any substance or mixture of substances intended to be used as a plant regulator, defoliant, or desiccant; any substance or mixture of substances intended to be used as spray adjuvant; and, any other substance intended for such use as may be named by the department of agriculture by regulation. Herbicides, fungicides, insecticides, and rodenticides are pesticides for the purposes of this chapter.

"Pile" means any noncontainerized accumulation of solid, nonflowing dangerous waste that is used for treatment or storage.

"Point source" means any confined and discrete conveyance from which pollutants are or may be discharged. This term includes, but is not limited to, pipes, ditches, channels, tunnels, wells, cracks, containers, rolling stock, concentrated animal feeding operations, or watercraft, but does not include return flows from irrigated agriculture.

"Polycyclic aromatic hydrocarbons" (PAH) means those hydrocarbon molecules composed of two or more benzene rings. For the purposes of this chapter, the PAH of concern for designation are only those PAH with more than three rings and less than seven rings.

"Post-closure" means the requirements placed upon disposal facilities (e.g., landfills, impoundments closed as disposal facilities, etc.) after closure to ensure their environmental safety for a number of years after closure. (See also "closure.")

"Publicly owned treatment works" or "POTW" means any device or system, owned by the state or a municipality, which is used in the treatment, recycling, or reclamation of municipal sewage or liquid industrial wastes. This term includes sewers, pipes, or other conveyances only if they convey wastewater to a POTW.

"Reactive waste" means a dangerous waste that exhibits the characteristic of reactivity described in WAC 173-303-090(7).

"Reclaim" means to process a material in order to recover useable products, or to regenerate the material. Reclamation is the process of reclaiming.

"Recover" means extract a useable material from a solid or dangerous waste through a physical, chemical, biological, or thermal process. Recovery is the process of recovering.

"Recycle" means to use, reuse, or reclaim a material.

"Regulated unit" means any new or existing surface impoundment, landfill, land treatment area or waste pile that receives any dangerous waste after:

January 26, 1983 for wastes regulated by 40 CFR Part 261;

October 31, 1984 for wastes designated only by this chapter and not regulated by 40 CFR Part 261; or

The date six months after a waste is newly identified by amendments to 40 CFR Part 261 or this chapter which cause the waste to be regulated.

"Representative sample" means a sample which can be expected to exhibit the average properties of the sample source.

"Reuse or use" means to employ a material either:

As an ingredient (including use as an intermediate) in an industrial process to make a product (for example, distillation bottoms from one process used as feedstock in another process). However, a material will not satisfy this condition if distinct components of the material are recovered as separate end products (as when metals are recovered from metal-containing secondary materials); or

In a particular function or application as an effective substitute for a commercial product (for example, spent pickle liquor used as phosphorous precipitant and sludge conditioner in wastewater treatment).

"Run-off" means any rainwater, leachate, or other liquid which drains over land from any part of a facility.

"Run-on" means any rainwater, leachate, or other liquid which drains over land onto any part of a facility.

"Schedule of compliance" means a schedule of remedial measures in a permit including an enforceable sequence of interim requirements leading to compliance with this chapter.

"Scrap metal" means bits and pieces of metal parts (e.g., bars, turnings, rods, sheets, wire) or metal pieces that may be combined together with bolts or soldering (e.g., radiators, scrap automobiles, railroad box cars), which when worn or superfluous can be recycled.

"Sludge" means any solid, semisolid, or liquid waste generated from a municipal, commercial, or industrial wastewater treatment plant, water supply treatment plant, or air pollution control facility. This term does not include the treated effluent from a wastewater treatment plant.

"Solid acid waste" means a dangerous waste that exhibits the characteristic of low pH under the corrosivity tests of either WAC 173-303-090 (6)(a)(ii) or (b).

"Special incinerator ash" means ash residues resulting from the operation of incineration or energy recovery facilities managing municipal solid waste from residential, commercial and industrial establishments, if the ash residues are designated as dangerous waste only by this chapter and not designated as hazardous waste by 40 CFR Part 261.

"Special waste" means any dangerous waste that is solid only (nonliquid, nonaqueous, nongaseous), that is not a regulated hazardous waste under 40 CFR Part 261, and that is designated as only DW in WAC 173-303-090, 173-303-101, 173-303-102, or 173-303-103. Any solid waste that is EHW or that is regulated by the United States EPA as hazardous waste cannot be a special waste.

"Spent material" means any material that has been used and as a result of contamination can no longer serve the purpose for which it was produced without processing.

"Stabilization" and "solidification" means a technique that limits the solubility and mobility of dangerous waste constituents. Solidification immobilizes a waste through physical means and stabilization immobilizes the waste by bonding or chemically reacting with the stabilizing material.

"State operator" means the person responsible for the overall operation of the state's extremely hazardous waste facility on the Hanford Reservation.

"Storage" means the holding of dangerous waste for a temporary period. "Accumulation" of dangerous waste, by the generator on the site of generation, is not storage as long

as the generator complies with the applicable requirements of WAC 173-303-200 and 173-303-201.

"Sudden accident" means an unforeseen and unexpected occurrence which is not continuous or repeated in nature.

"Sump" means any pit or reservoir that meets the definition of tank and those troughs/trenches connected to it that serves to collect dangerous waste for transport to dangerous waste storage, treatment, or disposal facilities.

"Surface impoundment" means a facility or part of a facility which is a natural topographic depression, man-made excavation, or diked area formed primarily of earthen materials (although it may be lined with man-made materials), and which is designed to hold an accumulation of liquid dangerous wastes or dangerous wastes containing free liquids. The term includes holding, storage, settling, and aeration pits, ponds, or lagoons, but does not include injection wells.

"Tank" means a stationary device designed to contain an accumulation of dangerous waste, and which is constructed primarily of nonearthen materials to provide structural support.

"Tank system" means a dangerous waste storage or treatment tank and its associated ancillary equipment and containment system.

"Thermal treatment" means the use of a device which uses primarily elevated temperatures to treat a dangerous waste.

"TLM₉₆" means the same as "Aquatic LC₅₀".

"Totally enclosed treatment facility" means a facility for treating dangerous waste which is directly connected to a production process and which prevents the release of dangerous waste or dangerous waste constituents into the environment during treatment.

"Toxic" means having the properties to cause or to significantly contribute to death, injury, or illness of man or wildlife.

"Transfer facility" or "collection facility" means a facility at which dangerous waste shipments are collected, consolidated, and stored for more than ten days before transfer to a storage, treatment, or disposal facility.

"Transportation" means the movement of dangerous waste by air, rail, highway, or water.

"Transporter" means a person engaged in the off-site transportation of dangerous waste.

"Travel time" means the period of time necessary for a dangerous waste constituent released to the soil (either by accident or intent) to enter any on-site or off-site aquifer or water supply system.

"Treatability study" means a study in which a dangerous waste is subjected to a treatment process to determine: Whether the waste is amenable to the treatment process; what pretreatment (if any) is required; the optimal process conditions needed to achieve the desired treatment; the efficiency of a treatment process for a specific waste or wastes; or the characteristics and volumes of residuals from a particular treatment process. Also included in this definition for the purpose of the exemptions contained in WAC 173-303-071 (3)(r) and (s), are liner compatibility, corrosion, and other material compatibility studies and toxicological and health effects studies. A "treatability study" is not a means to commercially treat or dispose of dangerous waste.

"Treatment" means the physical, chemical, or biological processing of dangerous waste to make such wastes nondangerous or less dangerous, safer for transport, amenable for energy or material resource recovery, amenable for storage, or reduced in volume.

"Treatment zone" means a soil area of the unsaturated zone of a land treatment unit within which dangerous wastes are degraded, transformed or immobilized.

"Triple rinsing" means the cleaning of containers in accordance with the requirements of WAC 173-303-160 (2)(b), containers.

"Underground injection" means the subsurface emplacement of fluids through a bored, drilled, or driven well, or through a dug well, where the depth of the dug well is greater than the largest surface dimension.

"Underground tank" means a device meeting the definition of "tank" in this section whose entire surface area is totally below the surface of and covered by the ground.

"Unfit-for-use tank system" means a tank system that has been determined through an integrity assessment or other inspection to be no longer capable of storing or treating dangerous waste without posing a threat of release of dangerous waste to the environment.

"Unsaturated zone" means the zone between the land surface and the water table.

"Uppermost aquifer" means the geological formation nearest the natural ground surface that is capable of yielding ground water to wells or springs. It includes lower aquifers that are hydraulically interconnected with this aquifer within the facility property boundary.

"Used oil" means oil that has been refined from crude oil, used, and, as a result of such use, is contaminated by physical or chemical impurities.

"Waste water treatment unit" means a device which:

Is part of a waste water treatment facility which is subject to regulation under either:

Section 402 or section 307(b) of the Federal Clean Water Act; or

Chapter 90.48 RCW, State Water Pollution Control Act, provided that any dangerous waste treated at the facility is designated only by this chapter, chapter 173-303 WAC, and is not regulated as hazardous waste under 40 CFR Part 261; and

Handles dangerous waste as defined in WAC 173-303-070 through 173-303-103 in either of the following manner:

Receives and treats or stores an influent dangerous waste water; or

Generates and accumulates or treats or stores a dangerous waste water treatment sludge; and

Meets the definition of tank or tank system in this section.

"Water or rail (bulk shipment)" means the bulk transportation of dangerous waste which is loaded or carried on board a vessel or railcar without containers or labels.

"Zone of engineering control" means an area under the control of the owner/operator that, upon detection of a dangerous waste release, can be readily cleaned up prior to the release of dangerous waste or dangerous constituents to ground water or surface water.

Any terms used in this chapter which have not been defined in this section shall have either the same meaning as

set forth in Title 40 CFR Parts 260, 264, 270, and 124 or else shall have their standard, technical meaning.

As used in this chapter, words in the masculine gender also include the feminine and neuter genders, words in the singular include the plural, and words in the plural include the singular.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-040, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-040, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-040, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-040, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-040, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-040, filed 2/10/82. Formerly WAC 173-302-040.]

WAC 173-303-045 References to EPA's hazardous waste and permit regulations. Any references in this chapter to any parts, subparts, or sections from EPA's hazardous waste regulations, including 40 CFR Parts 260 through 280 and Part 124, shall be in reference to those rules as they existed on July 1, 1990. Copies of the appropriate referenced federal requirements are available upon request from the department.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-045, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-045, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-045, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-045, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-045, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-045, filed 2/10/82.]

WAC 173-303-050 Department of ecology cleanup authority. The department may conduct or contract for the removal of dangerous wastes or hazardous substances where there has been or is a potential for discharge or release, regardless of quantity or concentration, which could pose a threat to public health or the environment.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-050, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-050, filed 2/10/82. Formerly WAC 173-302-060.]

WAC 173-303-060 Notification and identification numbers. (1) Any person who generates, transports, offers for transport, or transfers a dangerous waste, or who owns or operates a dangerous waste TSD facility shall have a current EPA/state identification number (EPA/state ID#). Any person who offers a dangerous waste to a transporter or to a dangerous waste TSD facility which does not have an EPA/state ID#, or whose EPA/state ID# has been cancelled or withdrawn, shall be in violation of this regulation.

(2) Every person who must have an EPA/state ID#, and who has not already received his ID#, must notify the department by obtaining and completing a Washington state notification of dangerous waste activities, Form 2, and submitting the completed form to the department. Any person already assigned an EPA/state ID# must submit a revised notification Form 2 to the department prior to any changes to his company's name, mailing address, ownership, physical location, or type of dangerous waste activity. Any change in location will require the issuance of a new EPA/

state ID#. An EPA/state ID# may not be used at new company locations. Notification of dangerous waste activities, Form 2 and instructions for its completion may be obtained by contacting the department.

(3) Any person with an EPA/state ID# may request that his ID# be withdrawn if he will no longer be handling dangerous waste at the site the ID# has been assigned to. Any person whose ID# has been withdrawn must notify the department before he uses the ID# at any later date. Notification must be in writing, except in the case of emergencies (e.g., fires, spills, etc.) such notification may be provided by telephone first, and followed within one week by a written notification. Withdrawal will only be granted when all applicable requirements of this chapter and chapter 173-305 WAC have been met.

(4) Any person with an EPA/state ID# may request that his ID# be cancelled if he will no longer occupy the site. Notification must be in writing. An EPA/state ID# shall be considered cancelled only after issuance of written confirmation by the department and when all applicable requirements of this chapter and chapter 173-305 WAC have been met.

(5) Any person with a current EPA/state ID# must submit an annual report as required by WAC 173-303-070(8), 173-303-220, and 173-303-390. Any person that has withdrawn or cancelled their ID# and received confirmation from the department must submit an annual report for the calendar year in which their request was approved.

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-060, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-060, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-060, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-060, filed 2/10/82.]

WAC 173-303-070 Designation of dangerous waste.

(1) Purpose and applicability.

(a) This section describes the procedures for determining whether or not a solid waste is DW or EHW.

(b) The procedures in this section are applicable to any person who generates a solid waste (including recyclable materials) that is not exempted or excluded by this chapter or by the department. Any person who must determine whether or not his solid waste is designated must follow the procedures set forth in subsection (3) of this section. Any person who determines by these procedures that his waste is designated DW or EHW shall be subject to all applicable requirements of this chapter.

(2)(a) Once a material has been determined to be a dangerous waste, then any solid waste generated from the recycling, treatment, storage, or disposal of that dangerous waste is a dangerous waste unless and until:

(i) The generator has been able to accurately describe the variability or uniformity of the waste over time, and has been able to obtain demonstration samples which are representative of the waste's variability or uniformity; and

(ii)(A) It does not exhibit any of the characteristics of WAC 173-303-090; and

(B) If it was a listed waste under WAC 173-303-080 through 173-303-083, it also has been exempted pursuant to WAC 173-303-910(3); or

(iii) If originally designated only through WAC 173-303-084 or 173-303-101 through 173-303-103, it does not

exhibit any of the criteria of WAC 173-303-101 through 173-303-103.

Such solid waste shall include but not be limited to any sludge, spill residue, ash emission control dust, leachate, or precipitation run-off. Precipitation run-off will not be considered a dangerous waste if it can be shown that the run-off has not been contaminated with the dangerous waste, or that the run-off is adequately addressed under existing state laws (e.g. chapter 90.48 RCW), or that the run-off does not exhibit any of the criteria or characteristics described in WAC 173-303-100.

(b) Materials that are reclaimed from solid wastes and that are used beneficially (as provided in WAC 173-303-016 and 173-303-017) are not solid wastes and hence are not dangerous wastes under this section unless the reclaimed material is burned for energy recovery or used in a manner constituting disposal.

(3) Designation procedures.

(a) To determine whether or not his waste is designated a person shall check his waste against the following sections, and in the following order:

(i) First, Discarded chemical products, WAC 173-303-081;

(ii) Second, Dangerous waste sources, WAC 173-303-082;

(iii) Third, Infectious dangerous wastes, WAC 173-303-083;

(iv) Fourth, Dangerous waste mixtures, WAC 173-303-084; and

(v) Last, Dangerous waste characteristics, WAC 173-303-090.

(b) In addition to the designation procedures specified in (a) of this subsection, a person may choose or may be required under subsection (4) of this section to check his waste against the following sections, and in the following order:

(i) First, Toxic dangerous wastes, WAC 173-303-101;

(ii) Second, Persistent dangerous wastes, WAC 173-303-102;

(iii) Last, Carcinogenic dangerous wastes, WAC 173-303-103.

(c) A person shall check each section, in the order set forth, until he determines that his waste is designated. Once his waste is designated through the lists, mixtures and characteristics, he need not determine any other designations for his waste, except as required by subsection (4) or (5) of this section. For the purposes of designating through the criteria, if a person determines that his waste is designated DW, then he must assure that it is not also EHW by checking it against the remaining sections. If the designation procedures identify a waste as both EHW and DW (e.g., a waste may be DW for corrosivity and EHW for EP toxicity), the waste must be designated EHW. If a person has checked his waste against each section that he is required by this section to check and his waste is not designated, then his waste is not subject to the requirements of chapter 173-303 WAC.

Any person who wishes to seek an exemption for a waste which has been designated DW or EHW shall comply with the requirements of WAC 173-303-072.

(4) Criteria designation required. Notwithstanding any other provisions of this chapter, the department may require

any person to determine whether or not his waste is designated under the dangerous waste criteria, WAC 173-303-100 through 173-303-103, if the department has reason to believe that his waste would be designated DW or EHW by the dangerous waste criteria, or if the department has reason to believe that his waste is designated improperly (e.g., the waste has been designated DW but should actually be designated EHW by the criteria). If a person, pursuant to the requirements of this subsection, determines that his waste is a dangerous waste or that its designation must be changed, then he shall be subject to the applicable requirements of this chapter 173-303 WAC. The department shall base a requirement to designate a waste by the dangerous waste criteria on evidence that includes, but is not limited to:

- (a) Test information indicating that the person's waste may be DW or EHW;
- (b) Evidence that the person's waste is very similar to another person's already designated DW or EHW;
- (c) Evidence that the person's waste has historically been a DW or EHW; or
- (d) Evidence or information about a person's manufacturing materials or processes which indicate that his wastes may be DW or EHW.

(5) Special knowledge. If a generator has designated his waste under the dangerous waste lists, WAC 173-303-080 through 173-303-082, or mixtures, WAC 173-303-084, and has knowledge that his waste also exhibits any of the dangerous waste characteristics, WAC 173-303-090, or that his waste also meets any of the dangerous waste criteria, WAC 173-303-101 through 173-303-103, or both, then he shall also designate his waste in accordance with those dangerous waste characteristics, or criteria, or both.

(6) Dangerous waste numbers. When a person is reporting or keeping records on a dangerous waste, he shall use all the dangerous waste numbers which he knows are assignable to his waste from the dangerous waste lists, characteristics, or criteria. For example, if his waste is ignitable *and* contains extremely hazardous concentrations of halogenated hydrocarbons, he shall use the dangerous waste numbers of D001 and WPO1. This shall not be construed as requiring a person to designate his waste beyond those designation requirements set forth in subsections (2), (3), (4), and (5) of this section.

(7) Quantity exclusion limits; aggregated waste quantities.

(a) Quantity exclusion limits. In each of the designation sections describing the lists, characteristics, and criteria, quantity exclusion limits (QEL) are identified. The QEL are used to distinguish when a dangerous waste is only subject to the small quantity generator provisions, and when a dangerous waste is fully subject to the requirements of this chapter. Any solid waste which is not excluded or exempted and which is listed by or exhibits the characteristics or criteria of this chapter is a dangerous waste. Small quantity generators who produce dangerous waste below the QEL are subject to certain requirements described in subsection (8) of this section.

(b) Aggregated waste quantities. A person may be generating, accumulating, or storing more than one kind of dangerous waste identified by this chapter. In such cases, the person must consider the aggregate quantity of his wastes when determining whether or not his waste amounts exceed

the specific quantity exclusion limits (QEL). Waste quantities must be aggregated for all wastes with common QEL's. For the purposes of this subsection, when aggregating waste quantities, a person shall include in his calculation dangerous wastes produced by on-site treatment or recycling of dangerous wastes and dangerous wastes being accumulated or stored. For example, if a person generates, accumulates, or stores 300 pounds of an ignitable waste and 300 pounds of a persistent waste, then both wastes are regulated because their aggregate waste quantity (600 pounds) exceeds their common QEL of 220 pounds. On the other hand, if a person generates, accumulates, or stores one pound of an EHW discarded chemical product and 300 pounds of a corrosive waste, their quantities would not be aggregated because they do not share a common QEL (2.2 pounds and 220 pounds, respective QEL's). Additional guidance on aggregating waste quantities is available from the department.

(c) The following are categories of waste that are excluded from the quantity determination and need not be aggregated as required by (b) of this subsection when calculating total waste quantities.

(i) Dangerous waste that is recycled and that is excluded from regulation under WAC 173-303-120 (2)(a), (3)(d) or (e) is not included in the quantity determinations of this section and is not subject to any requirements of this section.

(ii) Spent materials that are generated, reclaimed, and subsequently reused on-site, so long as such spent materials have been counted once.

(8) Small quantity generators.

(a) A person is a small quantity generator and is subject to the requirements of this subsection if his waste is designated under subsection (3) of this section, and the quantity of waste that he generates, accumulates, or stores (or the aggregated quantity if he generates more than one kind of waste) does not exceed the quantity exclusion limit for such waste (or wastes). If a person generates, accumulates, or stores any dangerous wastes that exceed the QEL, then all dangerous waste generated, accumulated, or stored by that person is subject to the requirements of this chapter. For example, if a person generates four pounds of an EHW discarded chemical product (QEL is 2.2 pounds) and 200 pounds of an ignitable waste (QEL is 220 pounds), then both wastes are fully regulated, and the person is not a small quantity generator for either waste. A small quantity generator may accumulate such listed or characteristic waste on-site, however when the quantity (or aggregate quantity) on-site at any time exceeds the quantity exclusion limit for such waste (or wastes) he will not be a small quantity generator and will be subject to all applicable requirements of this chapter. A small quantity generator who generates, accumulates, or stores waste in excess of the quantity exclusion limit and becomes subject to the full requirements of this chapter cannot again be a small quantity generator until after all dangerous waste on-site at the time he became fully regulated have been removed, treated, or disposed.

(b) A small quantity generator will not be subject to the requirements of this chapter if he:

(i) Complies with subsections (1), (2), (3), and (4) of this section; and

(ii) Either treats or disposes of his dangerous waste in an on-site facility, or ensures delivery to an off-site facility, either of which is:

(A) Permitted (including permit-by-rule, interim status, or final status) under WAC 173-303-800 through 173-303-840;

(B) Authorized to manage dangerous waste by another state with a hazardous waste program approved under 40 CFR Part 271, or by EPA under 40 CFR Part 270;

(C) Permitted to manage moderate-risk waste under chapter 173-304 WAC (Minimum functional standards for solid waste handling), operated in accordance with state and local regulations, and consistent with the applicable local hazardous waste plan that has been approved by the department;

(D) A facility that beneficially uses or reuses, or legitimately recycles or reclaims his dangerous waste, or that treats his waste prior to such recycling activities; or

(E) Permitted to manage municipal or industrial solid waste in accordance with state or local regulations, or in accordance with another state's solid waste laws if the waste is sent out of state; and

(iii) Submits an annual report in accordance with WAC 173-303-220 if he has obtained an EPA/state identification number pursuant to WAC 173-303-060.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251), 91-07-005 (Order 90-42), § 173-303-070, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-070, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-070, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-070, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-070, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-070, filed 2/10/82.]

WAC 173-303-071 Excluded categories of waste.

(1) Purpose. Certain categories of waste have been excluded from the requirements of chapter 173-303 WAC, except for WAC 173-303-050, because they generally are not dangerous waste, are regulated under other state and federal programs, or are recycled in ways which do not threaten public health or the environment. WAC 173-303-071 describes these excluded categories of waste.

(2) Excluding wastes. Any persons who generate a common class of wastes and who seek to categorically exclude such class of wastes from the requirements of this chapter shall comply with the applicable requirements of WAC 173-303-072. No waste class will be excluded if any of the wastes in the class are regulated as hazardous waste under 40 CFR Part 261.

(3) Exclusions. The following categories of waste are excluded from the requirements of chapter 173-303 WAC, except for WAC 173-303-050, 173-303-145, and 173-303-960:

(a) Domestic sewage. "Domestic sewage" means untreated sanitary wastes from residential sources that pass through a sewer system to a publicly owned treatment works (POTW) for treatment. This exclusion does not apply to the generation, treatment, storage, recycling, or other management of dangerous wastes prior to discharge into the sanitary sewage system. Owners or operators of POTWs managing dangerous wastes may qualify for a permit-by-rule pursuant to WAC 173-303-802(4);

(b) Industrial wastewater discharges that are point-source discharges subject to regulation under Section 402 of the Clean Water Act. This exclusion does not apply to the collection, storage, or treatment of industrial waste-waters prior to discharge, nor to sludges that are generated during industrial wastewater treatment. Owners or operators of certain wastewater treatment facilities managing dangerous wastes may qualify for a permit-by-rule pursuant to WAC 173-303-802(5);

(c) Household wastes, including household waste that has been collected, transported, stored, or disposed. Wastes which are residues from or are generated by the management of household wastes (e.g., leachate, ash from burning of refuse-derived fuel) are not excluded by this provision. "Household wastes" means any waste material (including garbage, trash, and sanitary wastes in septic tanks) derived from households (including single and multiple residences, hotels and motels, bunkhouses, ranger stations, crew quarters, campgrounds, picnic grounds, and day-use recreation areas);

(d) Agricultural crops and animal manures which are returned to the soil as fertilizers;

(e) Asphaltic materials designated only for the presence of PAHs by WAC 173-303-084(6) or 173-303-102. For the purposes of this exclusion, asphaltic materials means materials intended and used for structural and construction purposes (e.g., roads, dikes, paving) which are produced from mixtures of oil and sand, gravel, ash or similar substances;

(f) Roofing tars and shingles, except that these wastes are not excluded if mixed with wastes listed in WAC 173-303-081 or 173-303-082, or if they exhibit any of the characteristics specified in WAC 173-303-090;

(g) Waste wood or wood products that fails the test for the toxicity characteristic solely for arsenic and which is not a dangerous waste for any other reason or reasons, if the waste is generated by persons who utilize the arsenical-treated wood or wood products for these materials' intended end use;

(h) Irrigation return flows;

(i) Materials subjected to in-situ mining techniques which are not removed from the ground during extraction;

(j) Mining overburden returned to the mining site;

(k) Polychlorinated biphenyl (PCB) wastes:

(i) PCB wastes whose disposal is regulated by EPA under 40 CFR 761.60 and that are dangerous either because they fail the test for toxicity characteristic (WAC 173-303-090(8), Dangerous waste codes D018 through D043 only) or because they are designated only by this chapter and not designated by 40 CFR Part 261, are exempt from regulation under this chapter except for WAC 173-303-510, 173-303-515, and 173-303-960;

(ii) Wastes that would be designated as dangerous waste under this chapter solely because they are listed as W001 under WAC 173-303-9904 when, using EPA's PCB testing method 600/4-81-045, the waste can be shown to contain less than one part per million (ppm) PCB or when, using ASTM method D 4059-86, the waste can be shown to contain less than two parts per million (ppm) PCB;

(iii) Wastes that would be designated as dangerous waste under this chapter solely because they are listed as W001 under WAC 173-303-9904 when such wastes are:

(A) Stored in a manner equivalent to the requirements of 40 CFR 761.65; and

(B) Within one year of removal from service, disposed of either in an incinerator that complies with 40 CFR 761.70, in a chemical waste landfill that complies with 40 CFR 761.75, in a high efficiency boiler that complies with 40 CFR 761.60 (a)(2)(iii) or (a)(3)(iii), or in a facility otherwise approved in accordance with 40 CFR 761.60(e);

(l) Samples:

(i) Except as provided in (l)(ii) of this subsection, a sample of solid waste or a sample of water, soil, or air, which is collected for the sole purpose of testing to determine its characteristics or composition, is not subject to any requirements of this chapter, when:

(A) The sample is being transported to a lab for testing or being transported to the sample collector after testing; or

(B) The sample is being stored by the sample collector before transport, by the laboratory before testing, or by the laboratory after testing prior to return to the sample collector; or

(C) The sample is being stored temporarily in the laboratory after testing for a specific purpose (for example, until conclusion of a court case or enforcement action).

(ii) In order to qualify for the exemptions in (l)(i) of this subsection, a sample collector shipping samples to a laboratory and a laboratory returning samples to a sample collector must:

(A) Comply with United States Department of Transportation (DOT), United States Postal Service (USPS), or any other applicable shipping requirements; or

(B) Comply with the following requirements if the sample collector determines that DOT or USPS, or other shipping requirements do not apply:

(I) Assure that the following information accompanies the sample:

(AA) The sample collector's name, mailing address, and telephone number;

(BB) The laboratory's name, mailing address, and telephone number;

(CC) The quantity of the sample;

(DD) The date of shipment;

(EE) A description of the sample; and

(II) Package the sample so that it does not leak, spill, or vaporize from its packaging.

(iii) This exemption does not apply if the laboratory determines that the waste is dangerous but the laboratory is no longer meeting any of the conditions stated in (l)(i) of this subsection;

(m) Asbestos wastes or asbestos containing wastes which would be designated only as respiratory carcinogens by WAC 173-303-084 or 173-303-103, and any other inorganic wastes which are designated only under WAC 173-303-084 or 173-303-103 because they are respiratory carcinogens, if these wastes are managed in compliance with or in a manner equivalent to the asbestos management procedures of 40 CFR Part 61;

(n) Dangerous waste generated in a product or raw material storage tank, a product or raw material transport vehicle or vessel, a product or raw material pipeline, or in a manufacturing process unit or an associated nonwaste-treatment-manufacturing unit until it exits the unit in which it was generated. This exclusion does not apply to surface

impoundments, nor does it apply if the dangerous waste remains in the unit more than ninety days after the unit ceases to be operated for manufacturing, or for storage or transportation of product or raw materials;

(o) Waste pickle liquor sludge generated by lime stabilization of spent pickle liquor from the iron and steel industry (SIC codes 331 and 332), except that these wastes are not excluded if they exhibit one or more of the dangerous waste criteria (WAC 173-303-100 through 173-303-103) or characteristics (WAC 173-303-090);

(p) Wastes from burning any of the materials exempted from regulation by WAC 173-303-120 (2)(a)(v), (vi), (vii), (viii), or (ix);

(q) As of January 1, 1987, secondary materials that are reclaimed and returned to the original process or processes in which they were generated where they are reused in the production process provided:

(i) Only tank storage is involved, and the entire process through completion of reclamation is closed by being entirely connected with pipes or other comparable enclosed means of conveyance;

(ii) Reclamation does not involve controlled flame combustion (such as occurs in boilers, industrial furnaces, or incinerators);

(iii) The secondary materials are never accumulated in such tanks for over twelve months without being reclaimed;

(iv) The reclaimed material is not used to produce a fuel, or used to produce products that are used in a manner constituting disposal; and

(v) The generator ensures that any residues (e.g., sludges, filters, etc.) produced from the collection, reclamation, and reuse of the secondary materials are delivered to a dangerous waste treatment, storage, or disposal facility or legitimate recycler. The generator must be able to provide documentation of such delivery. If the generator can demonstrate that the residues do not exhibit any of the dangerous waste characteristics (WAC 173-303-090) and criteria (WAC 173-303-100 through 173-303-103), then he is exempt from the requirements of this condition in this item (v).

(r) Treatability study samples.

(i) Except as provided in (r)(ii) of this subsection, persons who generate or collect samples for the purpose of conducting treatability studies as defined in WAC 173-303-040 are not subject to the requirements of WAC 173-303-180, 173-303-190, and 173-303-200 (1)(a), nor are such samples included in the quantity determinations of WAC 173-303-070 (7) and (8) and 173-303-201 when:

(A) The sample is being collected and prepared for transportation by the generator or sample collector; or

(B) The sample is being accumulated or stored by the generator or sample collector prior to transportation to a laboratory or testing facility; or

(C) The sample is being transported to the laboratory or testing facility for the purpose of conducting a treatability study; or

(D) The sample or waste residue is being transported back to the original generator from the laboratory or testing facility.

(ii) The exemption in (r)(i) of this subsection is applicable to samples of dangerous waste being collected and

shipped for the purpose of conducting treatability studies provided that:

(A) The generator or sample collector uses (in "treatability studies") no more than 1000 kg of any dangerous waste, 1 kg of acutely hazardous waste, or 250 kg of soils, water, or debris contaminated with acutely hazardous waste for each process being evaluated for each generated waste stream; and

(B) The mass of each sample shipment does not exceed 1000 kg of dangerous waste, 1 kg of acutely hazardous waste, or 250 kg of soils, water, or debris contaminated with acutely hazardous waste; and

(C) The sample must be packaged so that it will not leak, spill, or vaporize from its packaging during shipment and the requirements of (r)(ii)(C)(I) or (II) of this subsection are met.

(I) The transportation of each sample shipment complies with United States Department of Transportation (DOT), United States Postal Service (USPS), or any other applicable shipping requirements; or

(II) If the DOT, USPS, or other shipping requirements do not apply to the shipment of the sample, the following information must accompany the sample:

(AA) The name, mailing address, and telephone number of the originator of the sample;

(BB) The name, address, and telephone number of the laboratory or testing facility that will perform the treatability study;

(CC) The quantity of the sample;

(DD) The date of shipment; and

(EE) A description of the sample, including its dangerous waste number.

(D) The sample is shipped, within ninety days of being generated or of being taken from a stream of previously generated waste, to a laboratory or testing facility which is exempt under (s) of this subsection or has an appropriate final facility permit or interim status; and

(E) The generator or sample collector maintains the following records for a period ending three years after completion of the treatability study:

(I) Copies of the shipping documents;

(II) A copy of the contract with the facility conducting the treatability study;

(III) Documentation showing:

(AA) The amount of waste shipped under this exemption;

(BB) The name, address, and EPA/state identification number of the laboratory or testing facility that received the waste;

(CC) The date the shipment was made; and

(DD) Whether or not unused samples and residues were returned to the generator.

(F) The generator reports the information required under (r)(ii)(E)(III) of this subsection in its annual report.

(iii) The department may grant requests, on a case-by-case basis, for quantity limits in excess of those specified in (r)(ii)(A) of this subsection, for up to an additional 500 kg of nonacute hazardous waste, 1 kg of acute hazardous waste, and 250 kg of soils, water, or debris contaminated with acute hazardous waste or for up to an additional 10,000 kg of wastes regulated only by this chapter and not regulated by 40 CFR Part 261, to conduct further treatability study

evaluation when: There has been an equipment or mechanical failure during the conduct of a treatability study; there is a need to verify the results of previously conducted treatability study; there is a need to study and analyze alternative techniques within a previously evaluated treatment process; or there is a need to do further evaluation of an ongoing treatability study to determine final specifications for treatment. The additional quantities allowed are subject to all the provisions in (r)(i) and (ii)(B) of this subsection. The generator or sample collector must apply to the department in the state where the sample is collected and provide in writing the following information:

(A) The reason the generator or sample collector requires additional quantity of sample for the treatability study evaluation and the additional quantity needed;

(B) Documentation accounting for all samples of dangerous waste from the waste stream which have been sent for or undergone treatability studies including the date each previous sample from the waste stream was shipped, the quantity of each previous shipment, the laboratory or testing facility to which it was shipped, what treatability study processes were conducted on each sample shipped, and the available results of each treatability study;

(C) A description of the technical modifications or change in specifications which will be evaluated and the expected results;

(D) If such further study is being required due to equipment or mechanical failure, the applicant must include information regarding the reason for the failure or breakdown and also include what procedures or equipment improvements have been made to protect against further breakdowns; and

(E) Such other information that the department considers necessary.

(s) Samples undergoing treatability studies at laboratories and testing facilities. Samples undergoing treatability studies and the laboratory or testing facility conducting such treatability studies (to the extent such facilities are not otherwise subject to chapter 70.105 RCW) are not subject to the requirements of this chapter, except WAC 173-303-050, 173-303-145, and 173-303-960 provided that the conditions of (s)(i) through (xiii) of this subsection are met. A mobile treatment unit (MTU) may qualify as a testing facility subject to (s)(i) through (xiii) of this subsection. Where a group of MTUs are located at the same site, the limitations specified in (s)(i) through (xiii) of this subsection apply to the entire group of MTUs collectively as if the group were one MTU.

(i) No less than forty-five days before conducting treatability studies the laboratory or testing facility notifies the department in writing that it intends to conduct treatability studies under this subsection.

(ii) The laboratory or testing facility conducting the treatability study has an EPA/state identification number.

(iii) No more than a total of 250 kg of "as received" dangerous waste is subjected to initiation of treatment in all treatability studies in any single day. "As received" waste refers to the waste as received in the shipment from the generator or sample collector.

(iv) The quantity of "as received" dangerous waste stored at the laboratory or testing facility for the purpose of evaluation in treatability studies does not exceed 1000 kg,

the total of which can include 500 kg of soils, water, or debris contaminated with acutely hazardous waste or 1 kg of acutely hazardous waste. This quantity limitation does not include:

- (A) Treatability study residues; and
- (B) Treatment materials (including nondangerous solid waste) added to "as received" dangerous waste.
- (v) No more than ninety days have elapsed since the treatability study for the sample was completed, or no more than one year has elapsed since the generator or sample collector shipped the sample to the laboratory or testing facility, whichever date first occurs.
- (vi) The treatability study does not involve the placement of dangerous waste on the land or open burning of dangerous waste.
- (vii) The laboratory or testing facility maintains records for three years following completion of each study that show compliance with the treatment rate limits and the storage time and quantity limits. The following specific information must be included for each treatability study conducted:
 - (A) The name, address, and EPA/state identification number of the generator or sample collector of each waste sample;
 - (B) The date the shipment was received;
 - (C) The quantity of waste accepted;
 - (D) The quantity of "as received" waste in storage each day;
 - (E) The date the treatment study was initiated and the amount of "as received" waste introduced to treatment each day;
 - (F) The date the treatability study was concluded;
 - (G) The date any unused sample or residues generated from the treatability study were returned to the generator or sample collector or, if sent to a designated TSD facility, the name of the TSD facility and its EPA/state identification number.
- (viii) The laboratory or testing facility keeps, on-site, a copy of the treatability study contract and all shipping paper associated with the transport of treatability study samples to and from the facility for a period ending three years from the completion date of each treatability study.
- (ix) The laboratory or testing facility prepares and submits a report to the department by March 15 of each year that estimates the number of studies and the amount of waste expected to be used in treatability studies during the current year, and includes the following information for the previous calendar year:
 - (A) The name, address, and EPA/state identification number of the laboratory or testing facility conducting the treatability studies;
 - (B) The types (by process) of treatability studies conducted;
 - (C) The names and addresses of persons for whom studies have been conducted (including their EPA/state identification numbers);
 - (D) The total quantity of waste in storage each day;
 - (E) The quantity and types of waste subjected to treatability studies;
 - (F) When each treatability study was conducted;
 - (G) The final disposition of residues and unused sample from each treatability study.

(x) The laboratory or testing facility determines whether any unused sample or residues generated by the treatability study are dangerous waste under WAC 173-303-070 and if so, are subject to the requirements of this chapter, unless the residues and unused samples are returned to the sample originator under the exemption in (r) of this subsection.

(xi) The laboratory or testing facility notifies the department by letter when it is no longer planning to conduct any treatability studies at the site.

(xii) The date the sample was received, or if the treatability study has been completed, the date of the treatability study, is marked and clearly visible for inspection on each container.

(xiii) While being held on site, each container and tank is labeled or marked clearly with the words "dangerous waste" or "hazardous waste." Each container or tank must also be marked with a label or sign which identifies the major risk(s) associated with the waste in the container or tank for employees, emergency response personnel and the public.

Note: If there is already a system in use that performs this function in accordance with local, state, or federal regulations, then such system will be adequate.

(t) Petroleum-contaminated media and debris that fail the test for the toxicity characteristic of WAC 173-303-090(8) (dangerous waste numbers D018 through D043 only) and are subject to the corrective action regulations under 40 CFR Part 280.

(u) Special incinerator ash (as defined in WAC 173-303-040).

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-071, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-071, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-071, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-071, filed 6/3/86; 85-09-042 (Order DE-85-02), § 173-303-071, filed 4/15/85; 84-09-088 (Order DE 83-36), § 173-303-071, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-071, filed 2/10/82.]

WAC 173-303-072 Procedures and bases for exempting and excluding wastes. (1) Purpose and applicability.

(a) The purpose of this section is to describe the procedures that will be followed by generators and the department when wastes are considered for exemption or exclusion from the requirements of this chapter. Any person(s) whose waste is exempted or excluded will not be subject to the requirements of this chapter unless the department revokes the exemption or exclusion.

(b) Any person seeking a waste exemption must submit a petition to the department according to the procedures of WAC 173-303-910(3). A petition for exemption will be assessed against the applicable bases for exemption described in subsections (3), (4), and (5) of this section.

(c) Any persons seeking to categorically exclude a class of wastes must submit a petition to the department according to the procedures of WAC 173-303-910(4). A petition for exclusion will be assessed against the applicable bases for exclusion described in subsection (6) of this section.

(2) Department procedures. When considering, granting, or denying a petition for exemption or exclusion, the

department shall follow the appropriate procedures described in WAC 173-303-910(1).

(3) Bases for exempting wastes. To successfully petition the department to exempt a waste, the petitioner must demonstrate to the satisfaction of the department that:

(a) He has been able to accurately describe the variability or uniformity of his waste over time, and has been able to obtain demonstration samples which are representative of his waste's variability or uniformity; and, either

(b) The representative demonstration samples of his waste are not designated DW or EHW by the dangerous waste criteria, WAC 173-303-100 through 173-303-103; or

(c) It can be shown, from information developed by the petitioner through consultation with the department, that his waste does not otherwise pose a threat to public health or the environment. However, this basis for exemption is not applicable to wastes that exhibit any of the characteristics specified in WAC 173-303-090, except 173-303-090(6)(a)(iii).

(4) Additional bases for exempting listed wastes. In addition to the demonstrations required by subsections (3)(a) and (b) of this section, for wastes listed in WAC 173-303-081 or 173-303-082 the petitioner must also demonstrate to the satisfaction of the department that his waste is not capable of posing a substantial present or potential threat to public health or the environment when improperly treated, stored, transported, disposed of or otherwise managed. The following factors will be considered by the department when assessing such a demonstration:

(a) Whether or not the listed waste contains the constituent or constituents which caused it to be listed. (For the purposes of this subsection, the constituents referred to will include any of the dangerous waste constituents listed in WAC 173-303-9905);

(b) The nature of the threat posed by the waste constituent(s);

(c) The concentration of the constituent(s) in the waste;

(d) The potential of the constituent(s) or any degradation product of the constituent(s) to migrate from the waste into the environment under the types of improper management considered in (h) of this subsection;

(e) The persistence of the constituent(s) or any degradation product of the constituent(s);

(f) The potential for the constituent(s) or any degradation product of the constituent(s) to degrade into nonharmful constituents and the rate of degradation;

(g) The degree to which the constituent(s) or degradation product of the constituent(s) bioaccumulates in ecosystems;

(h) The plausible types of improper management to which the waste could be subjected;

(i) The quantities of the waste generated at individual generation sites or on a state-wide basis. Under this factor, the department will also consider whether or not the waste is listed under WAC 173-303-081 as a discarded chemical product and occurs in a relatively pure form. Any waste discarded chemical product which exceeds the quantity exclusion limit specified in WAC 173-303-081(2) for that waste will not be exempted;

(j) The nature and severity of the public health and environmental damage that has occurred as a result of the

improper management of wastes containing the constituent(s);

(k) Actions taken by other governmental agencies or regulatory programs based on the health or environmental threat posed by the waste or waste constituent(s); and

(l) Such other factors as may be appropriate.

(5) Bases for exempting wastes designated solely for the presence of chromium. The department will exempt a waste which is designated because of the presence of chromium if the petitioner can demonstrate that:

(a) The waste is not designated for any other characteristic under WAC 173-303-090, or for any of the criteria specified in WAC 173-303-101, 173-303-102 or 173-303-103;

(b) The waste is not listed in WAC 173-303-081 or 173-303-082 due to the presence of any constituent from WAC 173-303-9905 other than chromium;

(c) The waste is typically and frequently managed in nonoxidizing environments or under nonoxidizing conditions; and

(d) Either of the following demonstrations can be made:

(i) The waste is generated from a process which uses trivalent chromium exclusively (or nearly exclusively), the process does not generate hexavalent chromium, and the chromium in the waste is exclusively (or nearly exclusively) trivalent chromium; or

(ii) Under test procedures approved by the department, the toxicity characteristic extract of the waste can be shown to contain less than five milligrams per liter (5 mg/L) of hexavalent chromium.

(6) Bases for categorically excluding classes of wastes. This subsection does not apply to any waste class that includes hazardous waste regulated under 40 CFR Part 261. To successfully petition the department to categorically exclude a class of wastes, petitioners must demonstrate to the satisfaction of the department that the petition or petitions for exclusion:

(a) Accurately describe the class of wastes for which categorical exclusion is sought and show that the class of wastes does not include any wastes which would be regulated as hazardous waste under 40 CFR Part 261;

(b) Describe the variability or uniformity of the class of wastes over time and in relation to the individual wastes that comprise the class of waste;

(c) Discuss the generators and their individual wastes that belong to the class of wastes and, to the extent practical, any generators or individual wastes that, although belonging to the class of wastes, are not represented by the petition or petitions; and

(d) For each individual waste within the class of wastes, provide the demonstration described by subsection (3) of this section, except that where it is determined by consultation with the department to be impractical to provide the demonstration for each individual waste, the petitioner or petitioners shall provide the demonstration for samples of the individual wastes determined by consultation with the department to be representative of the class of wastes.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-072, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 84-14-031 (Order DE 84-22), § 173-303-072, filed 6/27/84.]

WAC 173-303-075 Certification of designation. (1) Purpose and applicability.

(a) The purpose of WAC 173-303-075 is to establish procedures by which the generator of a solid waste may apply to the department for a review of his waste, and for a determination of the designation of his waste. When a final determination is made, the department shall issue a certificate of designation which shall describe the status of the generator's waste with respect to the designation requirements of this chapter 173-303 WAC.

(b) The provisions of this section are applicable to any person who produces a solid waste, who may be subject to the requirements of this chapter 173-303 WAC as the generator of a dangerous waste and who wishes to obtain a certificate designating the status of his waste.

(2) Certification. Any person who produces a solid waste which could be a dangerous waste may apply to the department, in accordance with the guidelines published pursuant to WAC 173-303-075(4), for a certificate of designation for his waste.

(a) The certificate of designation will describe the status of the designation for a waste or wastes as follows:

(i) Either, the certificate will state that the waste or wastes listed in the certificate are designated dangerous waste; or

(ii) The certificate will state that the waste or wastes listed in the certificate are not designated dangerous waste under the designation lists or characteristics of WAC 173-303-080 through 173-303-090; or

(iii) The certificate will state that the waste or wastes listed in the certificate are not designated dangerous waste under the dangerous waste lists, characteristics or criteria, WAC 173-303-080 through 173-303-103.

(b) The certificate of designation will, at a minimum, include the following information:

(i) The name, address, telephone number and, where applicable, the EPA/state identification number of the person to whom the certificate is issued;

(ii) A statement of the status of the designation of the waste or wastes listed in the certificate and, if designated, whether DW or EHW;

(iii) A listing of the waste or wastes for which the certificate has been issued;

(iv) The signature of the director or his designee;

(v) The date on which the certificate was issued; and

(vi) The period of time or conditions for which the certificate is valid.

(c) Once a certificate of designation has been issued to a person, that person is no longer subject to the designation procedures of WAC 173-303-080 through 173-303-103, unless the period of time for which the certificate is valid expires, the conditions under which the certificate is valid change, or the department withdraws its certification of designation in accordance with WAC 173-303-075(5). If the certificate states that the waste or wastes listed in it are designated, then the person to whom the certificate is issued shall comply with all applicable requirements of this chapter 173-303 WAC. If the certificate states that the waste or wastes listed in it are not designated, then the person to whom the certificate is issued is not subject to the requirements of this chapter 173-303 WAC, unless the certificate

becomes invalid or the department withdraws its certification.

(d) While an application for a certificate of designation is pending final action by the department, the person applying for certification must comply with all applicable requirements of this chapter 173-303 WAC.

(e) While a certificate of designation is being amended, in accordance with WAC 173-303-075(5), the certificate shall remain in effect except for those parts of the certificate which the department specifically suspends.

(3) Designation. Determination of the status of designation for a waste or wastes for which a certificate of designation is being sought shall follow the procedures set forth in this subsection.

(a) A waste shall be certified as a dangerous waste if it is designated under any of the methods set forth in WAC 173-303-080 through 173-303-103.

(b) A waste shall be certified as not a dangerous waste if:

(i) It has only been checked against WAC 173-303-080 through 173-303-090 (lists and characteristics) and it is not designated; or

(ii) It has been checked against the dangerous waste lists, characteristics and criteria, WAC 173-303-080 through 173-303-103, and it is not designated.

(4) Application. Any person who wishes to apply for a certificate of designation shall do so according to the certification guidelines published by and available from the department. The department shall follow the procedures specified in the certification guidelines when considering an application for a certificate.

(5) Review of certification. Review of and changes to or withdrawal of certificates of designation shall be performed by the department according to the procedures specified in the certification guidelines, available from the department. At a minimum, the certification guidelines provide for the following procedures:

(a) The department will periodically review each certificate of designation to insure that it is current and accurately states the proper designation for the waste or wastes listed on the certificate.

(b) The department may amend, or any person with a certificate of designation may request the department to amend, any certificate in the event that changes to the certificate are necessary to keep it current or maintain its accuracy. The person will obtain concurrence of the department if he wishes to amend his certificate to reflect changes in the information on the certificate (e.g., new wastes, changes in waste properties, changes of address, etc.).

(c) The department reserves the authority to withdraw any certificate of designation if there is reason to believe that the certificate results in a threat to public health or the environment. If a certificate is withdrawn, then the waste or wastes listed on the certificate shall be subject to all applicable requirements of this chapter 173-303 WAC.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-075, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-075, filed 2/10/82.]

WAC 173-303-080 Dangerous waste lists. The dangerous waste lists include:

- (1) WAC 173-303-081, Discarded chemical products;
- (2) WAC 173-303-082, Dangerous waste sources.

[Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-080, filed 1/4/89. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-080, filed 2/10/82.]

WAC 173-303-081 Discarded chemical products.

(1) A waste shall be designated as a dangerous waste if it is handled in any of the manners described in (e) of this subsection, and if it is a residue from the management of:

(a) A commercial chemical product or manufacturing chemical intermediate which has the generic name listed in the discarded chemical products list, WAC 173-303-9903;

(b) An off-specification commercial chemical product or manufacturing chemical intermediate which if it had met specifications would have the generic name listed in the discarded chemical products list, WAC 173-303-9903;

(c) Any containers, inner liners, or residue remaining in a container or in an inner liner removed from a container that has held any commercial chemical product or manufacturing chemical intermediate that has, or any off-specification commercial chemical product or manufacturing chemical intermediate which if it had met specifications would have, the generic name listed on the acutely dangerous chemical products list of WAC 173-303-9903, unless the containers or inner liners are empty as described in WAC 173-303-160(2);

(d) Any residue or contaminated soil, water, or other debris resulting from the cleanup of a spill of a commercial chemical product or manufacturing chemical intermediate which has, or of an off-specification commercial chemical product or manufacturing chemical intermediate which if it had met specifications would have, the generic name listed in the discarded chemical products list, WAC 173-303-9903;

(e) The materials or items described in (a), (b), (c), and (d) of this subsection are dangerous wastes when they are:

(i) Discarded or intended to be discarded as described in WAC 173-303-016 (3)(b)(i);

(ii) Burned for purposes of energy recovery in lieu of their original intended use;

(iii) Used to produce fuels in lieu of their original intended use;

(iv) Applied to the land in lieu of their original intended use; or

(v) Contained in products that are applied to the land in lieu of their original intended use.

(2) Quantity exclusion limits:

(a) A person with a waste or wastes (including residues from the management of wastes) identified in subsection (1) of this section, shall be a dangerous waste generator (and may not be considered a small quantity generator as provided in WAC 173-303-070(8)) if the amount of his waste exceeds the following quantity exclusion limits:

(i) For chemicals designated on the acutely dangerous chemical products list of WAC 173-303-9903 - 2.2 lbs. (1.0 kg) per month or per batch. Such wastes are designated EHW;

(ii) For chemicals and for residues from the cleanup of spills involving chemicals designated on the moderately dangerous chemical products list of WAC 173-303-9903 -

220 lbs. (100 kg) per month or per batch. Such wastes are designated DW;

(iii) For containers or inner liners which held any chemical designated on the acutely dangerous chemical products list of WAC 173-303-9903 - 2.2 lbs. (1.0 kg) of residue remaining in the containers or inner liners per month or per batch unless the containers or inner liners meet the definition of empty and have been triple rinsed as described in WAC 173-303-160(2);

(iv) For residues, contaminated soil, water, or other debris from the cleanup of a spill of any chemical designated on the acutely dangerous chemical products list of WAC 173-303-9903 - 220 lbs. (100 kg) per month or per batch. Such wastes are designated EHW.

(b) A person's total monthly waste quantity shall be the sum of all his wastes which share a common quantity exclusion limit (e.g., the total quantity of all EHW discarded chemical products, the total quantity of all residues contaminated by EHW discarded chemical products, etc.) which were generated during a month or a batch operation at each specific waste generation site.

(3) Dangerous waste numbers and mixtures. A waste which has been designated as a discarded chemical product dangerous waste shall be assigned the dangerous waste number or numbers listed in WAC 173-303-9903 next to the generic chemical or chemicals which caused the waste to be designated. If a person mixes a solid waste with a waste that would be designated as a discarded chemical product under this section, then the entire mixture shall be designated. The mixture designation shall be the same as the designation for the discarded chemical product which was mixed with the solid waste. For example, a mixture containing 2.2 lbs. (1 kg) of Aldrin (dangerous waste number P004; EHW designation) and 22 lbs. (10 kg) of a solid waste, would be designated as an EHW, and would have the dangerous waste number P004.

(4) For the purposes of this chapter, the term "acutely hazardous waste" shall include discarded chemical products (listed in WAC 173-303-9903) that are identified with a dangerous waste number beginning with a "P" or that show an "X" or "A" in the reason for designation column.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-081, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-081, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-081, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-081, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-081, filed 2/10/82.]

WAC 173-303-082 Dangerous waste sources. (1)

The dangerous waste sources list appears in WAC 173-303-9904. Any waste which is listed or which is a residue from the management of a waste listed on the dangerous waste sources list shall be designated a dangerous waste, and shall be identified as DW, except that WAC 173-303-9904 includes several footnotes describing circumstances under which certain dangerous waste sources should be designated EHW rather than DW.

(2) Quantity exclusion limit. A person whose waste is listed in WAC 173-303-9904 (including residues from the management of such wastes) shall be a dangerous waste

generator (and may not be considered a small quantity generator as provided in WAC 173-303-070(8)) if the amount of his waste exceeds the following quantity exclusion limits:

(a) 2.2 lbs. (1 kg) per month or per batch for wastes listed with the dangerous waste numbers F020, F021, F022, F023, F026, or F027. For the purposes of this chapter, the term "acutely hazardous waste" shall include dangerous waste sources F020, F021, F022, F023, F026, and F027;

(b) 220 lbs. (100 kg) per month or per batch of any residue or contaminated soil, waste or other debris resulting from the cleanup of a spill, into or on any land or water of a waste listed in (a) of this subsection; or

(c) 220 lbs. (100 kg) per month or per batch for all other wastes.

(3) Care should be taken in the proper designation of these wastes and of mixtures of these wastes and solid wastes. If a person mixes a solid waste with a waste that would be designated as a dangerous waste source under this section, then the entire mixture shall be designated as a dangerous waste source. The mixture shall have the same designation (DW or EHW), and shall have the same dangerous waste number as the dangerous waste source which was mixed with the solid waste.

(4) For the purposes of this section, any dangerous waste source listed in WAC 173-303-9904 which lists more than one chemical compound must be designated as a dangerous waste if it contains any one or any combination of the listed chemical compounds. For example, a spent nonhalogenated solvent containing both xylene and acetone must be designated as dangerous waste source F003.

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-082, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-082, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-082, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-082, filed 2/10/82.]

WAC 173-303-083 Infectious dangerous wastes.
(Reserved.)

[Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-083, filed 2/10/82.]

WAC 173-303-084 Dangerous waste mixtures. (1) Purpose. It is the purpose of this section to describe the means for designating a waste mixture containing dangerous wastes which are not listed in WAC 173-303-081 through 173-303-083.

(2) References. The National Institute for Occupational Safety and Health's (NIOSH) *Registry of Toxic Effects of Chemical Substances* (Registry) is adopted by reference. The table in the United States EPA's regulations 40 CFR Table 302.4 (Spill Table) is adopted by reference.

(3) Waste mixture defined. For the purposes of this section, a waste mixture shall be any waste about which some or all of its constituents and concentrations are known, and which has not been designated as:

(a) A discarded chemical product under WAC 173-303-081;

(b) A dangerous waste source under WAC 173-303-082;

(c) An infectious dangerous waste under WAC 173-303-083; or

(d) A dangerous waste that has been designated by the criteria of WAC 173-303-101 through 173-303-103.

(4) A person who has a waste mixture shall use data which is available to him, and, when such data is inadequate for the purposes of this section, shall refer to the NIOSH Registry and/or to the EPA Spill Table to determine:

(a) Toxicity data or category for each known constituent in his waste;

(b) Whether or not each known constituent of his waste is a halogenated hydrocarbon or a polycyclic aromatic hydrocarbon with greater than three rings and less than seven rings; and,

(c) Whether or not each known constituent of his waste is an International Agency for Research on Cancer (IARC) human or animal, positive or suspected carcinogen.

(5) Toxicity.

(a) If a person has toxic constituents in his waste, he shall determine the toxic category for each known toxic constituent. The toxic category for each constituent may be determined directly from EPA'S Spill Table, or by obtaining data from the NIOSH Registry and checking this data against the toxic category table, below. If data is available for more than one of the four toxicity criteria (aquatic, oral, inhalation, or dermal), then the data of severest toxicity shall be used, and the most acutely toxic category shall be assigned to the constituent. If EPA's Spill Table and the NIOSH Registry do not agree on the same category, then the category arrived at using the NIOSH Registry will take precedence. If toxicity data for a constituent cannot be found in EPA'S Spill Table, NIOSH Registry, or other source reasonably available to a person, then he need not determine the toxic category for that constituent.

TOXIC CATEGORY TABLE

Category	TLm ₉₆ (Fish) or, Aquatic (Fish)	Oral (Rat) LD ₅₀ (mg/kg)	Inhalation (Rat) LC ₅₀ (mg/L)	Dermal (Rabbit) LD ₅₀ (mg/kg)
	LC ₅₀ (ppm)			
X	<.1	<.5	<.02	< 2
A	.1 - 1	.5 - 5	.02 - .2	2 - 20
B	1 - 10	5 - 50	.2 - 2	20 - 200
C	10 - 100	50 - 500	2 - 20	200 - 2000
D	100 - 1000	500 - 5000	20 - 200	2000 - 20,000

(b) A person whose waste mixture contains one or more toxic constituents shall determine the equivalent concentration for his waste from the following formula:

$$\text{Equivalent Concentration(\%)} = \sum X\% + \frac{\sum A\%}{10} + \frac{\sum B\%}{100} + \frac{\sum C\%}{1000} + \frac{\sum D\%}{10,000}$$

where $\sum(X,A,B,C, \text{ or } D) \%$ is the sum of all the concentration percentages for a particular toxic category.

Example 1. A person's waste mixture contains: Aldrin (X Category) - .01%; Diuron (B Category) - 1%; Benzene (C Category) - 4%; Phenol (C Category) - 2%; Cyclohexane

(C Category) - 5%; Water (nontoxic) - 87%. His equivalent concentration (E.C.) would be:

$$\begin{aligned} \text{E.C. (\%)} &= .01\% + \frac{0\%}{10} + \frac{1\%}{100} + \frac{(4\% + 2\% + 5\%)}{1000} + \frac{0\%}{10,000} \\ &= .01\% + 0\% + .01\% + .011\% + 0\% = .031\% \end{aligned}$$

So his equivalent concentration equals .031%.

(c) A person whose waste mixture contains toxic constituents shall determine his designation from the toxic dangerous waste mixtures graph in WAC 173-303-9906 by finding the equivalent concentration percentage for his waste along the abscissa, finding his total waste mixture quantity along the ordinate, and plotting the point on the graph where the horizontal line drawn from his total waste mixture quantity intersects the vertical line drawn from his waste mixture's equivalent concentration. If the plotted point is in the area marked DW, he shall designate his waste as DW; if the plotted point is in the area marked EHW, he shall designate his waste as EHW.

(d) If a person knows only some of the toxic constituents in his waste mixture, or only some of the constituent concentrations, and if his waste is undesignated for those known constituents or concentrations, then his waste is not designated for toxicity under this subsection.

(e) Toxic dangerous waste mixtures graph. The toxic dangerous waste mixtures graph appears in WAC 173-303-9906.

(6) Persistence.

(a) A person whose waste mixture contains one or more halogenated hydrocarbons for which the concentrations are known shall determine his total halogenated hydrocarbon concentration by summing the concentration percentages for all of those halogenated hydrocarbons for which he knows the concentrations in his waste mixture.

Example 2. A person's waste mixture contains: Carbon tetrachloride - .009%; DDT - .012%; 1,1,1 - trichloroethylene - .02%. His total halogenated hydrocarbon concentration would be:

$$\text{Total HH Concentration (\%)} = .009\% + .012\% + .02\% = .041\%$$

(b) A person whose waste mixture contains one or more polycyclic aromatic hydrocarbons with more than three rings and less than seven rings for which the concentrations are known shall determine his total polycyclic aromatic hydrocarbon concentration by summing the concentration percentages for all of those polycyclic aromatic hydrocarbons with more than three rings and less than seven rings about which he knows the concentration in his waste mixture.

Example 3. A person's waste mixture contains: Chrysene - .08%; 3, 4 - benzopyrene - 1.22%. His total polycyclic aromatic hydrocarbon concentration would be:

$$\text{Total PAH Concentration (\%)} = .08\% + 1.22\% = 1.3\%$$

(c) A person whose waste mixture contains halogenated hydrocarbons shall determine his designation from the persistent dangerous waste mixtures graph in WAC 173-303-9907 by finding the total halogenated hydrocarbon concentration for his waste along the abscissa, finding his total waste mixture quantity along the ordinate, and plotting the point on the graph where the horizontal line drawn from his

total waste mixture quantity intersects the vertical line drawn from his waste mixture's total halogenated hydrocarbon concentration. If the plotted point is in the area marked DW, then he shall designate his waste DW; if the plotted point is in the area marked EHW, then he shall designate his waste EHW.

(d) A person whose waste mixture contains polycyclic aromatic hydrocarbons with more than three rings and less than seven rings shall determine his designation from the persistent dangerous waste mixtures graph in WAC 173-303-9907 by finding the total polycyclic aromatic hydrocarbon concentration of his waste along the abscissa, finding his total waste mixture quantity along the ordinate, and plotting the point on the graph where the horizontal line drawn from his total waste mixture quantity intersects the vertical line drawn from his waste mixture's total polycyclic aromatic hydrocarbon concentration. If the plotted point is in the area marked EHW, then he shall designate his waste EHW. If the plotted point is outside of the area marked EHW, then his waste is not designated.

(e) If a person knows only some of the persistent constituents in his waste mixture, or only some of the constituent concentrations, and if his waste is undesignated for those known constituents or concentrations, then his waste is not designated for persistence under this subsection.

(f) Persistent dangerous waste mixtures graph. The persistent dangerous waste mixtures graph appears in WAC 173-303-9907.

(7) Carcinogens. Any person whose waste mixture contains one or more IARC human or animal, sufficient or limited carcinogen(s) shall designate his waste DW if:

(a) The total concentration of carcinogen(s) in his waste exceeds 1.0% of the waste quantity; and

(b) The monthly or batch waste quantity exceeds 220 lbs. (100 kg).

(c) For designation purposes, any IARC human or animal, sufficient or limited carcinogen that is so rated because of studies involving implantation of the substance into test animals as sole cause for the IARC rating, shall not be carcinogenic. This additional information is available in the IARC *Monographs on the Evaluation of the Carcinogenic Risk of Chemicals to Humans*.

(8) Assigning dangerous waste numbers. A person whose waste is a dangerous waste mixture shall assign a dangerous waste number from the generic dangerous waste numbers table in WAC 173-303-104, Generic dangerous waste numbers. He shall assign the dangerous waste number from the table which corresponds to the designation for his dangerous waste.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-084, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-084, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-084, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-084, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-084, filed 2/10/82.]

WAC 173-303-090 Dangerous waste characteristics.

(1) Purpose. The purpose of this section is to set forth characteristics which a solid waste might exhibit and which would cause that waste to be a dangerous waste.

(2) Representative samples. The department will consider a sample obtained using any of the applicable sampling methods described in WAC 173-303-110(2), sampling and testing methods, to be a representative sample.

(3) Equivalent test methods. The testing methods specified in this section shall be the only acceptable methods, unless the department approves an equivalent test method in accordance with WAC 173-303-910(2).

(4) Quantity exclusion limit. A solid waste is a dangerous waste if it exhibits one or more of the dangerous waste characteristics described in subsections (5), (6), (7), and (8) of this section. If a person's solid waste exhibits one or more of these characteristics, then he shall be a dangerous waste generator (and may not be considered a small quantity generator as provided in WAC 173-303-070(8)) if the quantity of his waste exceeds 220 lbs. (100 kg) per month or per batch.

(5) Characteristic of ignitability.

(a) A solid waste exhibits the characteristic of ignitability if a representative sample of the waste has any of the following properties:

(i) It is a liquid, other than an aqueous solution containing less than 24 percent alcohol by volume, and has a flash point less than 60 degrees C (140 degrees F), as determined by a Pensky-Martens Closed Cup Tester, using the test method specified in ASTM Standard D-93-79 or D-93-80, or a Setaflash Closed Cup Tester, using the test method specified in ASTM Standard D-3278-78;

(ii) It is not a liquid and is capable, under standard temperature and pressure, of causing fire through friction, absorption of moisture or spontaneous chemical changes and, when ignited, burns so vigorously and persistently that it creates a hazard;

(iii) It is an ignitable compressed gas as defined in 49 CFR 173.300 and as determined by the test methods described in that regulation; or,

(iv) It is an oxidizer as defined in 49 CFR 173.151.

(b) A solid waste that exhibits the characteristic of ignitability, but is not designated as a dangerous waste under any of the dangerous waste lists, WAC 173-303-080 through 173-303-084, or dangerous waste criteria, WAC 173-303-101 through 173-303-103, shall be designated DW, and shall be assigned the dangerous waste number of D001.

(6) Characteristic of corrosivity.

(a) A solid waste exhibits the characteristic of corrosivity if a representative sample of the waste has any one or more of the following properties:

(i) It is aqueous, and has a pH less than or equal to 2, or greater than or equal to 12.5, as determined by a pH meter using Method 5.2 in *Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods*, available from the department;

(ii) It is liquid, and corrodes steel (SAE 1020) at a rate greater than 0.250 inch (6.35 mm) per year at a test temperature of 55 degrees C (130 degrees F) as determined by the test method specified in NACE (National Association of Corrosion Engineers) Standard TM-01-69 as standardized in *Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods*. The NACE Standard is available from the department; or

(iii) It is solid or semi-solid, and when mixed with an equal weight of water results in a solution, the liquid portion

of which has the property specified in (a)(i) of this subsection. Procedures for preparing and extracting the solution and liquid are described in the test procedures of WAC 173-303-110 (3)(a).

(b) A solid waste that exhibits the characteristic of corrosivity, but is not designated as a dangerous waste under any of the dangerous waste lists, WAC 173-303-080 through 173-303-084, or dangerous waste criteria, WAC 173-303-101 through 173-303-103, shall be designated DW, and shall be assigned the dangerous waste number of D002.

(7) Characteristic of reactivity.

(a) A solid waste exhibits the characteristic of reactivity if a representative sample of the waste has any of the following properties:

(i) It is normally unstable and readily undergoes violent change without detonating;

(ii) It reacts violently with water;

(iii) It forms potentially explosive mixtures with water;

(iv) When mixed with water, it generates toxic gases, vapors or fumes in a quantity sufficient to present a danger to human health or the environment;

(v) It is a cyanide or sulfide bearing waste which, when exposed to pH conditions between 2 and 12.5 can generate toxic gases, vapors or fumes in a quantity sufficient to present a danger to human health or the environment;

(vi) It is capable of detonation or explosive reaction if it is subjected to a strong initiating source or if heated under confinement;

(vii) It is readily capable of detonation or explosive decomposition or reaction at standard temperature and pressure; or

(viii) It is a forbidden explosive as defined in 49 CFR 173.51, or a Class A explosive as defined in 49 CFR 173.53, or a Class B explosive as defined in 49 CFR 173.88.

(b) A solid waste that exhibits the characteristic of reactivity, but is not designated as a dangerous waste under any of the dangerous waste lists, WAC 173-303-080 through 173-303-084, or dangerous waste criteria, WAC 173-303-101 through 173-303-103, shall be designated DW, and shall be assigned the dangerous waste number of D003.

(8) Toxicity characteristic.

(a) A solid waste exhibits the toxicity characteristic if, using the *Toxicity Characteristic Leaching Procedure* (TCLP, found in Appendix II of 40 CFR Part 261 or available upon request from the department) or equivalent methods approved by the department under WAC 173-303-110(5), the extract from a representative sample of the waste contains any of the contaminants listed in the toxicity characteristic list in (c) of this subsection, at concentrations equal to or greater than the respective value given in the list. When the waste contains less than 0.5 percent filterable solids, the waste itself, after filtering using the methodology outlined in the TCLP, is considered to be the extract for the purposes of this subsection.

(b) A solid waste that exhibits the toxicity characteristic, but is not designated as a dangerous waste under any of the dangerous waste lists, WAC 173-303-080 through 173-303-084, or dangerous waste criteria, WAC 173-303-101 through 173-303-103, has the dangerous waste number specified in the list which corresponds to the toxic contaminant causing it to be dangerous.

(c) Toxicity characteristic list. Two levels of concentration are established for the contaminants listed. Any waste containing one or more contaminants with concentrations at or above the EHW threshold shall cause that waste to be designated EHW. Any waste containing contaminants which occur at concentrations at or above the DW threshold only (i.e., no EHW contaminants), shall be designated DW.

TOXICITY CHARACTERISTICS LIST:

Maximum Concentration of Contaminants for the Toxicity Characteristic

Dangerous Waste Number	Contaminant	(Chemical Abstracts Services #)	EHW (mg/L)	DW (mg/L)
D004	Arsenic	(7440-38-2)	500	5.0
D005	Barium	(7440-39-3)	10,000	100.0
D018	Benzene	(71-43-2)	50	0.5
D006	Cadmium	(7440-43-9)	100	1.0
D019	Carbon tetrachloride	(56-23-5)	50	0.5
D020	Chlordane	(57-74-9)	3.0	0.03
D021	Chlorobenzene	(108-90-7)	10,000	100.0
D022	Chloroform	(67-66-3)	600	6.0
D007	Chromium	(7440-47-3)	500	5.0
D023	o-Cresol	(95-48-7)	/1/	20,000
D024	m-Cresol	(108-39-4)	/1/	20,000
D025	p-Cresol	(106-44-5)	/1/	20,000
D026	Cresol	/1/	/1/	200.0
D016	2,4-D	(94-75-7)	1,000	10.0
D027	1,4-Dichlorobenzene	(106-46-7)	750	7.5
D028	1,2-Dichloroethane	(107-06-2)	50	0.5
D029	1,1-Dichloroethylene	(75-35-4)	70	0.7
D030	2,4-Dinitrotoluene	(121-14-2)	/2/	13
D012	Endrin	(72-20-8)	2	0.02
D031	Heptachlor (and its epoxide)	(76-44-8)	0.8	0.008
D032	Hexachlorobenzene	(118-74-1)	/2/	13
D033	Hexachlorobutadiene	(87-68-3)	50	0.5
D034	Hexachloroethane	(67-72-1)	300	3.0
D008	Lead	(7439-92-1)	500	5.0
D013	Lindane	(58-89-9)	40	0.4
D009	Mercury	(7439-97-6)	20	0.2
D014	Methoxychlor	(72-43-5)	1,000	10.0
D035	Methyl ethyl ketone	(78-93-3)	20,000	200.0
D036	Nitrobenzene	(98-95-3)	200	2.0
D037	Pentachlorophenol	(87-86-5)	10,000	100.0
D038	Pyridine	(110-86-1)	/2/	500
D010	Selenium	(7782-49-2)	100	1.0
D011	Silver	(7440-22-4)	500	5.0
D039	Tetrachloroethylene	(127-18-4)	70	0.7
D015	Toxaphene	(8001-35-2)	50	0.5
D040	Trichloroethylene	(79-01-6)	50	0.5
D041	2,4,5-Trichlorophenol	(95-95-4)	40,000	400.0
D042	2,4,6-Trichlorophenol	(88-06-2)	200	2.0
D017	2,4,5-TP (Silvex)	(93-72-1)	100	1.0
D043	Vinyl chloride	(75-01-4)	20	0.2

/1/ If 0-, m-, and p-Cresol concentrations cannot be differentiated, the total cresol (D026) concentration is used. The DW level for total cresol is 200 mg/L and the EHW level for total cresol is 20,000 mg/L.

/2/ Quantitation limit is greater than the calculated regulatory level. The quantitation limit therefore becomes the regulatory level.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-090, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-090, filed 6/26/87;

86-12-057 (Order DE-85-10), § 173-303-090, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-090, filed 6/27/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-090, filed 2/10/82.]

WAC 173-303-100 Dangerous waste criteria. (1)

The dangerous waste criteria consist of:

- (a) Toxic dangerous wastes, WAC 173-303-101;
- (b) Persistent dangerous wastes, WAC 173-303-102;
- (c) Carcinogenic dangerous wastes, WAC 173-303-103;

and

(d) Dangerous waste characteristics, WAC 173-303-090.

(2) Applicability. Any person who has established that his waste meets any of the dangerous waste criteria is a dangerous waste generator, and shall comply with the applicable requirements set forth in this chapter. A person shall use the dangerous waste criteria to designate his waste pursuant to WAC 173-303-070 (3)(b), or (4), or to exempt his waste pursuant to WAC 173-303-072, or to otherwise establish the risk which his waste presents to public health and the environment.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-100, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-100, filed 2/10/82.]

WAC 173-303-101 Toxic dangerous wastes. (1)

Purpose. This section describes methods for determining the toxicity of a waste and the criteria by which a toxic waste shall be designated DW or EHW.

(2) Categorization.

(a) The following toxic category table establishes categories (X, A, B, C, or D) for particular toxicity levels. The X category is the most toxic, and the D category is least toxic. Substances which have toxicity levels below the D category are generally considered to be nontoxic.

TOXIC CATEGORY TABLE

Category	TLm ₉₆ (Fish or, Aquatic (Fish)	Oral (Rat)	Inhalation (Rat)	Dermal (Rabbit)
	LC ₅₀ (ppm)	LD ₅₀ (mg/kg)	LC ₅₀ (mg/L)	LD ₅₀ (mg/kg)
X	<.1	<.5	<.02	< 2
A	.1 - 1	.5 - 5	.02 - .2	2 - 20
B	1 - 10	5 - 50	.2 - 2	20 - 200
C	10 - 100	50 - 500	2 - 20	200 - 2000
D	100 - 1000	500 - 5000	20 - 200	2000 - 20,000

(b) In order to determine the toxic categories for the constituents in his waste, a person must obtain toxicity data on the constituents either through knowledge he has about his waste, or by obtaining data from the two sources referenced in subsection (3)(a) and (b) of this section, (EPA's Spill Table and NIOSH Registry). If data obtained for a constituent is available for more than one of the toxicity criteria (aquatic, oral, inhalation, or dermal), then the data of severest toxicity shall be used to assign the most acutely toxic category to the waste constituent.

(3) Establishing waste toxicity. A person shall establish the toxicity of his waste or waste constituents by applying his knowledge about his waste, or by using the following information sources or testing methods, or all of these:

(a) The National Institute for Occupational Safety and Health (NIOSH) document *Registry of Toxic Effects of Chemical Substances* (Registry);

(b) The United States EPA's regulation 40 CFR Table 302.4 (Spill Table); and

(c) The bioassay testing methods adopted under WAC 173-303-110(3).

(4) Book designation procedure.

(a) A person may use the book designation procedure described in this paragraph only if:

(i) He knows the toxic categories (as set forth in subsection (2) of this section) for the significant toxic constituents in his waste;

(ii) He knows the concentrations of the significant toxic constituents in his waste; and

(iii) He can demonstrate to the department beyond a reasonable doubt that any waste constituents about which he has limited or no knowledge do not significantly affect the toxicity of his waste.

(b) Equivalent concentration. A person who is book designating his waste shall determine the equivalent concentration (in percent) of the toxic constituents in his waste by using the following formula:

$$\text{Equivalent Concentration(\%)} = \Sigma X\% + \frac{\Sigma A\%}{10} + \frac{\Sigma B\%}{100} + \frac{\Sigma C\%}{1000} + \frac{\Sigma D\%}{10,000}$$

where $\Sigma(X,A,B,C, \text{ or } D)\%$ is the sum of all the concentration percentages for a particular toxic category.

Example 1. A person's waste contains: Aldrin (X Category) - .01%; Diuron (B Category) - 1%; Benzene (C Category) - 4%; Phenol (C Category) - 2%; Cyclohexane (C Category) - 5%; Water (nontoxic) - 87%. His equivalent concentration (E.C.) would be:

$$\begin{aligned} \text{E.C. (\%)} &= .01\% + \frac{0\%}{10} + \frac{1\%}{100} + \frac{(4\% + 2\% + 5\%)}{1000} + \frac{0\%}{10,000} \\ &= .01\% + 0\% + .01\% + .011\% + 0\% = .031\% \end{aligned}$$

So his equivalent concentration equals .031%.

(c) Toxic dangerous waste graph. To book designate his waste, a person shall use the toxic dangerous waste mixtures graph in WAC 173-303-9906, by finding the equivalent concentration percentage for his waste along the abscissa, finding his total waste quantity along the ordinate, and plotting the point on the graph where the horizontal line drawn from his total waste quantity intersects the vertical line drawn from his waste mixture's equivalent concentration. If the plotted point is in the area marked DW, he shall designate his waste DW; if the plotted point is in the area marked EHW, he shall designate his waste EHW.

(5) Designation from bioassay data. If a person has established the toxicity of his waste by means of the bioassay test methods adopted under WAC 173-303-110(3), and has determined his waste's toxicity range (C category or greater toxicity, or D category toxicity), then he shall designate his waste according to the toxic dangerous waste designation table, below.

TOXIC DANGEROUS WASTE DESIGNATION TABLE

If your waste's toxic range falls in the . . .	And your monthly or batch waste quantity is . . .	Then your waste's designation is . . .
D Category	Greater than 220 lbs. (100 kg)	DW
X, A, B, or C Category	40-220 lbs. (18.2-100 kg)	DW
	Greater than 220 lbs. (100 kg)	EHW

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-101, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-101, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-101, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-101, filed 2/10/82. Formerly chapter 173-302 WAC.]

WAC 173-303-102 Persistent dangerous wastes. (1)

Purpose. This section describes the procedures for designating wastes which contain halogenated hydrocarbons (HH) and/or polycyclic aromatic hydrocarbons with more than three rings and less than seven rings (PAH).

(2) Concentration determination. A person shall determine the concentration of HH and/or PAH in his waste by either testing his waste as specified in (a) of this subsection, or by the calculation procedures described in (b) of this subsection.

(a) Concentration tests. A person shall test his waste to determine its concentration level as follows:

(i) For HH - By using the testing methods specified in WAC 173-303-110 (3)(a)(v); and,

(ii) For PAH - By using the testing methods specified in WAC 173-303-110 (3)(a)(vi).

(b) Concentration calculations. If a person knows the concentrations of the significant persistent constituents in his waste, and if he can demonstrate to the department beyond a reasonable doubt that any remaining persistent constituents for which he does not know the concentrations would not contribute significantly to the total persistent concentration, then he may calculate the concentration of persistent constituents in his waste as follows:

(i) A person whose waste contains one or more halogenated hydrocarbons for which the concentrations are known shall determine his total halogenated hydrocarbon concentration by summing the concentration percentages for all of his waste's significant halogenated hydrocarbons.

Example 1. A person's waste contains: Carbon tetrachloride - .009%; DDT - .012%; 1,1,1 - trichloroethylene - .02%. His total halogenated hydrocarbon concentration would be:

$$\text{Total HH Concentration (\%)} = .009\% + .012\% + .02\% = .041\%$$

(ii) A person whose waste contains one or more polycyclic aromatic hydrocarbons with more than three rings and less than seven rings for which the concentrations are

known shall determine his total polycyclic aromatic hydrocarbon concentration by summing the concentration percentages for all of his waste's significant polycyclic aromatic hydrocarbons with more than three rings and less than seven rings.

Example 2. A person's waste contains: Chrysene - .08%; 3, 4 - benzopyrene - 1.22%. His total polycyclic aromatic hydrocarbon concentration would be:

Total PAH Concentration (%) = .08% + 1.22% = 1.3%

(3) Designation criteria and quantity. A person whose waste contains persistent (HH or PAH) constituents shall designate his waste according to the persistent dangerous waste table, below, if his monthly or batch waste quantity exceeds 220 lbs. (100 kg).

PERSISTENT DANGEROUS WASTE TABLE

If your waste contains. . .	At a concentration level of. . .	Then your waste's designation is. . .
Halogenated	0.01 to 1.0%	DW
Hydrocarbons (HH)	greater than 1.0%	EHW
Polycyclic Aromatic Hydrocarbons (PAH)	greater than 1.0%	EHW*

* No DW concentration level for PAH.

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-102, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-102, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-102, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-102, filed 2/10/82. Formerly WAC 173-302-130.]

WAC 173-303-103 Carcinogenic dangerous wastes.

(1) Criteria. A substance which is listed in the National Institute for Occupational Safety and Health (NIOSH) document *Registry of Toxic Effects of Chemical Substances* (Registry), or any other scientific or technical documents, as an IARC (International Agency for Research on Cancer) human or animal, sufficient or limited carcinogen, shall be a carcinogenic substance for the purposes of this section. Any IARC identified substance which is an inorganic, respiratory carcinogen shall be a carcinogenic substance only if it occurs in a friable format (i.e., if it is in a waste which easily crumbles and forms dust which can be inhaled).

(2) Designation. Any person whose waste contains one or more IARC carcinogen(s) shall designate his waste if:

(a) The monthly or batch waste quantity exceeds 220 lbs. (100 kg); and either

(b)(i) The concentration of any one IARC sufficient (human or animal) carcinogen exceeds 1.0% of the waste quantity. Such waste shall be designated EHW, and such designation shall take precedence over any DW designation determined by (b)(ii) or (iii) of this subsection; or

(ii) The concentration of any one IARC sufficient (human or animal) carcinogen exceeds 0.01% of the waste quantity. Such waste shall be designated DW; or

(iii) The total concentration summed for all IARC sufficient and limited (human and animal) carcinogens exceeds 1.0% of the waste quantity. Such waste shall be designated DW.

(c) For designation purposes, any IARC human or animal, sufficient or limited carcinogen that is so rated because of studies involving implantation of the substance into test animals as sole cause for the IARC rating, shall not be carcinogenic. This additional information is available in the IARC *Monographs on the Evaluation of the Carcinogenic Risk of Chemicals to Humans*.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-103, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-103, filed 6/26/87; 84-14-031 (Order DE 84-22), § 173-303-103, filed 6/27/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-103, filed 2/10/82.]

WAC 173-303-104 Generic dangerous waste numbers.

(1) Purpose. This section sets forth the dangerous waste number for each of the dangerous waste criteria designations.

(2) Characteristics. A waste which exhibits any of the dangerous waste characteristics, WAC 173-303-090, shall be assigned the dangerous waste number corresponding to the characteristic(s) exhibited by the waste.

(3) Criteria. The following table shall be used for assigning dangerous waste numbers to wastes designated by the dangerous waste criteria or by WAC 173-303-084.

GENERIC DANGEROUS WASTE NUMBERS TABLE

Dangerous Waste#	Dangerous Waste Criteria and Designation
	Toxic Dangerous Wastes
WT01-----	EHW
WT02-----	DW
	Persistent Dangerous Wastes
	Halogenated Hydrocarbons
WP01-----	EHW
WP02-----	DW
	Polycyclic Aromatic Hydrocarbons
WP03-----	EHW
	Carcinogenic Dangerous Wastes
WC01-----	EHW
WC02-----	DW

[Statutory Authority: Chapter 70.105 RCW. 84-14-031 (Order DE 84-22), § 173-303-104, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-104, filed 2/10/82.]

WAC 173-303-110 Sampling and testing methods.

(1) Purpose. This section describes the testing methods which may be used in the process of designating a dangerous waste.

(2) Representative samples.

(a) The methods and equipment used for obtaining representative samples of a waste will vary with the type and form of the waste. The department will consider samples collected using the sampling methods below, for wastes with properties similar to the indicated materials, to be representative samples of the wastes:

(i) Crushed or powdered material - ASTM Standard D346-75;

- (ii) Extremely viscous liquid - ASTM Standard D140-70;
- (iii) Fly ash-like material - ASTM Standard D2234-86;
- (iv) Soil-like material - ASTM Standard D1452-65;
- (v) Soil or rock-like material - ASTM Standard D420-69;
- (vi) Containerized liquid wastes - "COLIWASA" described in *Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods*, SW-846, revised July 1982, as amended by Update 1 (April 1984) and Update 2 (April 1985); and,
- (vii) Liquid waste in pits, ponds, lagoons, and similar reservoirs - "Pond Sampler" described in *Test Methods for the Evaluation of Solid Waste, Physical/Chemical Methods*, SW-846, revised July 1982, as amended by Update 1 (April 1984) and Update 2 (April 1985).

(b) Copies of these representative sampling methods are available from the department except for the ASTM standards which can be obtained by writing to:

ASTM
1916 Race Street
Philadelphia, PA 19103.

(3) Test procedures. Copies of the test procedures listed in this subsection can be obtained from the department by writing to the appropriate address below:

For copies of WDOE test methods:

Attn: Test Procedures
Hazardous Waste Section, PV-11
Department of Ecology
Olympia, Washington 98504

For copies of SW 846:

Superintendent of Documents
U.S. Government Printing Office
Washington, D.C. 20401

For copies of ASTM methods:

ASTM
1916 Race Street
Philadelphia, PA 19103

The document titles and included test procedures are as follows:

(a) *Chemical Testing Methods for Complying with the Dangerous Waste Regulation*, March 1982, revised July 1983, describing methods for testing:

- (i) Ignitability;
 - (ii) Corrosivity, including the addendum, *Test Method for Determining pH of Solutions in Contact with Solids*, March 1984;
 - (iii) Reactivity;
 - (iv) EP Toxicity;
 - (v) Halogenated hydrocarbons; and
 - (vi) Polycyclic aromatic hydrocarbons;
- (b) *Biological Testing Methods*, the latest revision, describing procedures for:

- (i) Static acute fish toxicity test; and
- (ii) Acute oral rat toxicity test;

(c) *Test Methods for Evaluating Solid Waste, Physical/Chemical Methods*, SW-846 (the most recent edition and all updates) is adopted by reference. This includes:

(i) Method 9095 (Paint Filter Liquids Test), demonstrating the absence or presence of free liquids in either a containerized or bulk waste;

(ii) Reserved;

(d) 40 CFR Part 261 Appendix X is adopted by reference for the purpose of analysis for chlorinated dibenzo-p-dioxins and dibenzofurans;

(e)(i) The determination of Polychlorinated Biphenyls in Transformer Fluids and Waste Oils, EPA-600/4-81-045; and

(ii) Analysis of Polychlorinated Biphenyls in Mineral Insulating Oils by Gas Chromatography, ASTM Standard D 4059-86.

(4) Substantial changes to the testing methods described above shall be made only after the department has provided adequate opportunity for public review and comment on the proposed changes. The department may, at its discretion, schedule a public hearing on the proposed changes.

(5) Equivalent testing methods. Any person may request the department to approve an equivalent testing method by submitting a petition, prepared in accordance with WAC 173-303-910(2), to the department.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-110, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-110, filed 1/4/89; 86-12-057 (Order DE-85-10), § 173-303-110, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-110, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-110, filed 2/10/82.]

WAC 173-303-120 Recycled, reclaimed, and recovered wastes.

(1) This section describes the requirements for persons who recycle materials that are solid wastes and dangerous. Except as provided in subsections (2) and (3) of this section, dangerous wastes that are recycled are subject to the requirements for generators, transporters, and storage facilities of subsection (4) of this section. Dangerous wastes that are recycled will be known as "recyclable materials."

(2)(a) The following recyclable materials are solid wastes and sometimes are dangerous wastes. However, they are subject only to the requirements of (b) of this subsection, WAC 173-303-050, 173-303-145 and 173-303-960:

- (i) Industrial ethyl alcohol that is reclaimed;
- (ii) Used batteries (or used battery cells) returned to a battery manufacturer for regeneration;
- (iii) Used oil that exhibits one or more of the characteristics or criteria of dangerous waste and is recycled in some manner other than:

- (A) Being burned for energy recovery; or
- (B) Being used in a manner constituting disposal, except when such use is by the generator on his own property;
- (iv) Scrap metal;

(v) Fuels produced from the refining of oil-bearing dangerous wastes along with normal process streams at a petroleum refining facility if such wastes result from normal petroleum refining, production, and transportation practices;

(vi) Oil reclaimed from dangerous waste resulting from normal petroleum refining, production, and transportation

practices, which oil is to be refined along with normal process streams at a petroleum refining facility;

(vii) Coke and coal tar from the iron and steel industry that contains dangerous waste from the iron and steel production process;

(viii)(A) Dangerous waste fuel produced from oil-bearing dangerous wastes from petroleum refining, production, or transportation practices, or produced from oil reclaimed from such dangerous wastes, where such dangerous wastes are reintroduced into a process that does not use distillation or does not produce products from crude oil so long as the resulting fuel meets the used oil specification under WAC 173-303-515 (1)(d) and so long as no other dangerous wastes are used to produce the dangerous waste fuel;

(B) Dangerous waste fuel produced from oil-bearing dangerous waste from petroleum refining production, and transportation practices, where such dangerous wastes are reintroduced into a refining process after a point at which contaminants are removed, so long as the fuel meets the used oil fuel specification under WAC 173-303-515 (1)(d); and

(C) Oil reclaimed from oil-bearing dangerous wastes from petroleum refining, production, and transportation practices, which reclaimed oil is burned as a fuel without reintroduction to a refining process, so long as the reclaimed oil meets the used oil fuel specification under WAC 173-303-515 (1)(e); and

(ix) Petroleum coke produced from petroleum refinery dangerous wastes containing oil at the same facility at which such wastes were generated, unless the resulting coke product exhibits one or more of the characteristics of dangerous waste in WAC 173-303-090.

(b) Any recyclable material listed in (a) of this subsection will be subject to the applicable requirements listed in subsection (4) of this section if the department determines, on a case-by-case basis, that:

(i) It is being accumulated, used, reused, or handled in a manner that poses a threat to public health or the environment; or

(ii) Due to the dangerous constituent(s) in it, any use or reuse would pose a threat to public health or the environment. Such recyclable material will be listed in WAC 173-303-016(6).

(3) The following recyclable materials are not subject to the requirements of this section but are subject to the requirements of WAC 173-303-070 through 173-303-110, 173-303-160, 173-303-500 through 173-303-525, and all applicable provisions of WAC 173-303-800 through 173-303-840:

(a) Recycling requirements for state-only dangerous wastes (see WAC 173-303-500);

(b) Recyclable materials used in a manner constituting disposal (see WAC 173-303-505);

(c) Dangerous wastes burned for energy recovery in boilers and industrial furnaces that are not regulated under Subpart O of 40 CFR Part 265 or WAC 173-303-670 (see WAC 173-303-510);

(d) Used oil that is burned for energy recovery in boilers and industrial furnaces that are not regulated under Subpart O of 40 CFR Part 265 or WAC 173-303-670, if such used oil:

(i) Exhibits one or more of the characteristics of a dangerous waste; or

(ii) Is designated as DW solely through WAC 173-303-084 or 173-303-101 through 173-303-103; or

(iii) Is designated solely as W001, (see WAC 173-303-515);

(e) Spent lead-acid batteries that are being reclaimed (see WAC 173-303-520);

(f) Recyclable materials from which precious metals are reclaimed (see WAC 173-303-525).

(4) Those recycling processes not specifically discussed in subsections (2) and (3) of this section are generally subject to regulation only up to and including storage prior to recycling. For the purpose of this section, recyclable materials received from off-site shall be considered stored unless they are moved into an active recycling process within twenty-four hours after being received. An active recycling process refers to a dynamic recycling operation that occurs within a recycling unit such as a distillation or centrifuge unit. The phrase does not refer to passive storage-like activities that occur, for example, when tanks or containers are used for phase separation or for settling impurities. Passive storage-like activities are not eligible for the recycling exemption under this subsection.

The recycling process itself is generally exempt from regulation unless the department determines, on a case-by-case basis, that the recycling process poses a threat to public health or the environment.

Unless specified otherwise in subsections (2) and (3) of this section:

(a) Generators of recyclable materials are subject to all applicable requirements of this chapter including, but not limited to, WAC 173-303-170 through 173-303-230;

(b) Transporters of recyclable materials are subject to all applicable requirements of this chapter including, but not limited to, WAC 173-303-240 through 173-303-270;

(c) Owners or operators of facilities that receive recyclable materials from off-site and recycle these recyclable materials without storing them before they are recycled are subject to the following requirements:

(i) WAC 173-303-060,

(ii) WAC 173-303-283 through 173-303-290,

(iii) WAC 173-303-310 through 173-303-395,

(iv) WAC 173-303-630 (2) through (10), and

(v) WAC 173-303-640 (2) through (10), except 173-303-640 (8)(c) and the second sentence of WAC 173-303-640 (8)(a) (i.e., a recycler, unless otherwise required to do so, does not have to prepare a closure plan, a cost estimate for closure, or provide financial responsibility for his tank system to satisfy the requirements of this section). In lieu of the dates in WAC 173-303-640 (2) and (4), for existing tank systems regulated under this subsection, owners and operators must complete the assessment of the tank system's integrity by June 1, 1992, and must meet the secondary containment requirements of WAC 173-303-640(4) by January 12, 1993;

(vi) The owner or operator must obtain data, by screening-type analysis if necessary, confirming the designation of each waste stream, such that each dangerous waste received can be effectively recycled without jeopardizing human health or the environment. The owner or operator must verify the waste designation periodically, so that it is

accurate and current, but at least once every six months or on a batch basis if shipments of a specific waste stream are less frequent. Copies of all analyses and data must be retained for at least five years and made available to the department upon request.

(d) Owners or operators of facilities that store recyclable materials before they are recycled are subject to the following requirements including, but not limited to:

(i) For all recyclers, the applicable provisions of:

(A) WAC 173-303-280 through 173-303-395,

(B) WAC 173-303-420,

(C) WAC 173-303-800 through 173-303-840;

(ii) For recyclers with interim status permits, the applicable storage provisions of WAC 173-303-400 including Subparts F through L of 40 CFR Part 265;

(iii) For recyclers with final facility permits, the applicable storage provisions of:

(A) WAC 173-303-600 through 173-303-650, and

(B) WAC 173-303-660.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-120, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-120, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-120, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-120, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-120, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-120, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-120, filed 2/10/82.]

WAC 173-303-121 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-121, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-121, filed 4/18/84.]

WAC 173-303-130 Containment and control of infectious wastes. (Reserved.)

[Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-130, filed 2/10/82.]

WAC 173-303-140 Land disposal restrictions. (1) Purpose.

(a) The purpose of this section is to encourage the best management practices for dangerous wastes according to the priorities of RCW 70.105.150 which are, in order of priority:

(i) Reduction;

(ii) Recycling;

(iii) Physical, chemical, and biological treatment;

(iv) Incineration;

(v) Stabilization and solidification; and

(vi) Landfill.

(b) This section identifies dangerous wastes that are restricted from land disposal, describes requirements for restricted wastes, and defines the circumstances under which a prohibited waste may continue to be land disposed.

(c) For the purposes of this section, the term "landfill," as stated in the priorities of RCW 70.105.150, shall be the same as the term "land disposal." Land disposal will be used in this section to identify the lowest waste management priority.

(2) Applicability.

The land disposal restrictions of this section apply to any person who owns or operates a land disposal facility in

Washington state and to any generator affected by the restrictions and prohibitions in subsection (4) of this section, unless allowed pursuant to subsections (5), (6), or (7) of this section.

(3) Definitions.

When used in this section the following terms have the meaning provided in this subsection. All other terms have the meanings given under WAC 173-303-040.

(a) "Dangerous waste constituents" means those constituents listed in WAC 173-303-9905 and any other constituents which have caused a waste to be a dangerous waste under this chapter.

(b) "Ignitable waste" means a dangerous waste that exhibits the characteristic of ignitability described in WAC 173-303-090(5).

(c) "Land disposal" means placement in a facility or on the land with the intent of leaving the dangerous waste at closure, and includes, but is not limited to, placement for disposal purposes in a: Landfill; surface impoundment; waste pile; injection well; land treatment facility; salt dome or salt bed formation; underground cave or mine; concrete vault or bunker.

(d) "Leachable inorganic waste" means solid dangerous waste (i.e., passes paint filter test) that is not an organic/carbonaceous waste and exhibits the characteristic of EP toxicity described in WAC 173-303-110.

(e) "Organic/carbonaceous waste" means a dangerous waste that contains combined concentrations of greater than ten percent organic/carbonaceous constituents in the waste; organic/carbonaceous constituents are those substances that contain carbon-hydrogen, carbon-halogen, or carbon-carbon chemical bonding.

(f) "Reactive waste" means a dangerous waste that exhibits the characteristic of reactivity described in WAC 173-303-090(7).

(g) "Solid acid waste" means a dangerous waste that exhibits the characteristic of low pH under the corrosivity tests of either WAC 173-303-090 (6)(a)(ii) or (iii).

(h) "Stabilization" and "solidification" mean a technique that limits the solubility and mobility of dangerous waste constituents. Solidification immobilizes a waste through physical means and stabilization immobilizes the waste by bonding or chemically reacting with the stabilizing material.

(4) Land disposal restrictions and prohibitions. The land disposal requirements of this subsection apply to land disposal in Washington state.

(a) Disposal of extremely hazardous waste (EHW). No person shall land dispose of EHW, except as provided in subsection (5) of this section, at any land disposal facility in the state. No person shall land dispose of EHW at the facility established under RCW 70.105.050, except as provided by subsections (5), (6), and (7) of this section. A person is encouraged to reclaim, recycle, recover, treat, detoxify, neutralize, or otherwise process EHW to remove or reduce its harmful properties or characteristics, provided that such processing is performed in accordance with the requirements of this chapter.

(b) Disposal of liquid waste. Special requirements for the disposal of liquid waste in landfills.

(i) Bulk or noncontainerized liquid waste or waste containing free liquids must not be placed in a landfill unless, before disposal, the liquid waste or waste containing

free liquids is treated so that free liquids are no longer present.

(ii) Containers holding free liquids must not be placed in a landfill unless:

(A) All free-standing liquid:

(I) Has been removed by decanting, or other methods; or

(II) Has been mixed with absorbent or stabilized (solidified) so that free-standing liquid is no longer observed; or

(III) Has been otherwise eliminated; or

(B) The container is very small, such as an ampule; or

(C) The container is a lab pack and is disposed of in accordance with WAC 173-303-161 and this chapter.

(iii) To demonstrate the absence or presence of free liquids in either a containerized or a bulk waste, the following tests must be used: Method 9095 (Paint Filter Liquids Test) as described in Test Methods for Evaluating Solid Wastes, Physical/Chemical Methods. (EPA Publication No. SW-846.)

(c) Disposal of ignitable and reactive waste. No person shall land dispose ignitable or reactive waste, except as provided in subsections (5), (6), or (7) of this section. A person is encouraged to reclaim, recycle, recover, treat, detoxify, neutralize, or otherwise process these wastes to remove or reduce their harmful properties or characteristics, provided that such processing is performed in accordance with the requirements of this chapter.

(d) Disposal of solid acid waste. No person shall land dispose solid acid waste, except as provided in subsections (5), (6), or (7) of this section. A person is encouraged to reclaim, recycle, recover, treat, detoxify, neutralize, or otherwise process these wastes to remove or reduce their harmful properties or characteristics, provided that such processing is performed in accordance with the requirements of this chapter.

(e) Disposal of organic/carbonaceous waste.

(i) No person shall land dispose organic/carbonaceous waste, except as provided in subsections (5), (6), or (7) of this section. A person is encouraged to reclaim, recycle, recover, treat, detoxify, or otherwise process these wastes to remove or reduce their harmful properties or characteristics, provided that such processing is performed in accordance with the requirements of this chapter. Organic/carbonaceous wastes must be incinerated as a minimum management method according to the dangerous waste management priorities as defined in subsection (1)(a) of this section.

(ii) This prohibition against the land disposal of organic/carbonaceous waste does not apply to black mud generated from the caustic leach recovery of cryolite at primary aluminum smelting plants.

(iii) This prohibition against the land disposal of organic/carbonaceous waste does not apply to any person who certifies to the department that recycling, treatment and incineration facilities are not available within a radius of one thousand miles from Washington state's borders. Such certification must be sent to the department by certified mail and must include: The name, address and telephone number of the person certifying; a brief description of the organic/carbonaceous waste covered by the certification; a discussion of the efforts undertaken to identify available recycling, treatment and incineration facilities; and the signature of the

person responsible for the certification and development of information used to support the certification. Records and information supporting the certification must be retained by the certifying person and must be made available to the department upon request.

A certification that has been properly submitted to the department will remain valid until the department determines that a recycling, treatment or incineration facility is available within a radius of one thousand miles from Washington state's borders and the person who submitted the certification is unable to demonstrate otherwise. A recycling, treatment or incineration facility will be considered by the department to be available if such facility: Is operating, and; can safely and legally recycle, treat or incinerate the organic/carbonaceous waste, and; has sufficient capacity to receive and handle significant amounts of the waste, and; agrees to accept the waste.

(f) Disposal of leachable inorganic waste. No person shall land dispose a leachable inorganic waste, except as provided in subsections (5), (6), or (7) of this section. Leachable inorganic waste must be stabilized (solidified) as a minimum management method according to the dangerous waste management priorities as defined in subsection (1)(a) of this section or the leachable inorganic waste must be lab packaged in a container that complies with WAC 173-303-161. A person is encouraged to reclaim, recycle, recover, treat, detoxify, or otherwise process these wastes to remove or reduce their harmful properties or characteristics, provided that such processing is performed in accordance with the requirements of this chapter.

(g) Disposal of dioxin containing wastes. These wastes are regulated by federal regulations contained in 40 CFR Part 268 that restrict the land disposal of dioxin containing wastes.

(h) Disposal of solvent wastes. These wastes are regulated by federal regulations contained in 40 CFR Part 268 that restrict the land disposal of solvent wastes.

(5) Treatment in land disposal facilities. The land disposal restrictions in subsection (4) of this section do not apply to persons treating dangerous wastes in surface impoundments, waste piles, or land treatment facilities provided that such treatment is performed in accordance with the requirements of this subsection and this chapter.

(a) Surface impoundment treatment.

(i) Liquid waste, extremely hazardous waste (EHW), solid acid waste, leachable inorganic waste, and organic/carbonaceous waste may be placed in surface impoundments for purposes of treatment provided the owner/operator can demonstrate that effective treatment of the dangerous waste constituents will occur and at closure the owner/operator complies with the prohibitions and restrictions of subsection (4) of this section.

(ii) Ignitable waste and reactive waste may be placed in surface impoundments provided that:

(A) The conditions in (a)(i) of this subsection are complied with; and

(B) The ignitable or reactive waste is treated, rendered, or mixed before or immediately after placement in the impoundment so that the resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under WAC 173-303-090, and 173-303-395(1) is complied with.

(b) Waste pile treatment.

(i) Leachable inorganic waste, liquid waste, extremely hazardous waste (EHW), solid acid waste, and organic/carbonaceous waste may be placed in waste piles for purposes of treatment provided the owner/operator can demonstrate that effective treatment of dangerous waste constituents will occur and that at closure the owner/operator will be in compliance with the prohibitions and restrictions of subsection (4) of this section.

(ii) Ignitable waste and reactive waste may be placed in a waste pile provided that:

(A) The conditions in (b)(i) of this subsection are complied with; and

(B) The placement of the ignitable or reactive waste onto an existing waste pile results in the waste or mixture no longer meeting the definition of ignitable or reactive under WAC 173-303-090, and complies with WAC 173-303-395(1).

(c) Land treatment.

(i) Liquid waste, extremely hazardous waste (EHW), organic/carbonaceous waste, and leachable inorganic waste may be land treated provided that the owner/operator can demonstrate that effective treatment of dangerous waste constituents will occur, and at the end of the post-closure care period the owner/operator will be in compliance with subsection (4) of this section.

(ii) Ignitable waste and reactive waste may be land treated provided that:

(A) The conditions in (c)(i) of this subsection are complied with; and

(B) The ignitable or reactive waste is immediately incorporated into the soil so that the resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under WAC 173-303-090, and complies with WAC 173-303-395(1).

(6) Case-by-case exemptions to a land disposal prohibition. Any person may petition the department for an exemption from a prohibition in subsection (4) of this section for the land disposal of a dangerous waste. The procedures to submit a petition to the department are specified in WAC 173-303-910(6). The department may deny any petition if it determines that there is a potential for dangerous waste constituents to migrate from the land disposal facility where the waste is to be placed. The department will deny any petition when exemption would result in a substantial or imminent threat to public health or the environment. The department will deny any petition when exemption would result in a violation of applicable state laws.

The department may grant an exemption from the prohibitions and restrictions of subsection (4) of this section based on the demonstrations specified in (a), (b), (c), or (d) of this subsection.

(a) Land disposal exemption for treatment residuals. Any person may request an exemption from a land disposal prohibition in subsection (4) of this section for treatment residuals by demonstrating to the department that:

(i) The person has applied the best achievable management method to the original waste; and

(ii) Application of additional management methods to the treatment residuals would prevent the person from

utilizing the best achievable management methods for the original dangerous waste; and

(iii) The land disposal of the treatment residuals does not pose a greater risk to the public health and the environment than land disposal of the original dangerous waste would pose.

(b) Economic hardship exemption. Any person may request an exemption from a prohibition in subsection (4) of this section for the land disposal of a dangerous waste by demonstrating to the department that alternative management of the dangerous waste will impose an unreasonable economic burden in relation to the threat of harm to public health and the environment. It will be solely within the discretion of the department to approve or deny the requests for exemptions based on economic hardship.

(c) Leachable inorganic waste exemption. Any person may request an exemption from the stabilization (solidification) requirement in subsection (4)(f) of this section by demonstrating to the department that:

(i) The stabilization (solidification) of a dangerous waste is less protective of human health and the environment than landfilling; or

(ii) Stabilization (solidification) capacity is unavailable. This demonstration may include technical and practical difficulties associated with providing alternative capacity. A person must provide a detailed schedule and plan for alternative capacity; or

(iii) Stabilization (solidification) techniques have been applied to the original waste and further efforts at stabilization (solidification) would not result in significantly reducing the solubility and mobility of the dangerous waste constituents.

(d) Organic/carbonaceous waste exemption. Any person may request an exemption from the requirements in subsection (4) of this section by demonstrating to the department that:

(i) Alternative management methods for organic/carbonaceous waste are less protective of public health and the environment than stabilization or landfilling; or

(ii)(A) The organic/carbonaceous waste has a heat content less than 3,000 BTU/LB or contains greater than sixty-five percent water or other noncombustible moisture; and

(B) Incineration is the only management method available within a radius of one thousand miles from Washington state's border (i.e., recycling or treatment are not available).

(7) Emergency cleanup provision. The department may, on a case-by-case basis, grant an exception to the land disposal restrictions in subsection (4) of this section for an emergency cleanup where an imminent threat to public health and the environment exists. Any exception will require compliance with applicable state law and will require (consistent with the nature of the emergency and imminent threat) application of the waste management priorities of RCW 70.105.150.

[Statutory Authority: Chapter 70.105 RCW. 88-02-057 (Order DE 83-36), § 173-303-140, filed 1/5/88, effective 2/5/88; 84-09-088 (Order DE 83-36), § 173-303-140, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-140, filed 2/10/82.]

WAC 173-303-141 Treatment, storage, or disposal of dangerous waste. (1) A person shall only offer a designated dangerous waste to a TSD facility which is operating either: Under a permit issued pursuant to the requirements of this chapter; or, if the TSD facility is located outside of this state, under interim status or a permit issued by United States EPA under 40 CFR Part 270, or under interim status or a permit issued by another state which has been authorized by United States EPA pursuant to 40 CFR Part 271.

(2) A person may offer a state only designated dangerous waste (not regulated as a hazardous waste by EPA) to a facility which is located outside of this state and which does not meet the requirements of subsection (1) of this section if:

(a) The facility receiving the waste will legitimately treat or recycle the dangerous waste (disposal is an unacceptable management practice);

(b) The generator has on file a letter or copy of a letter signed by the regulatory authority in the receiving state that the receiving facility may accept the waste;

(c) The generator uses a transporter with a valid EPA/state identification number;

(d) The generator complies with all other applicable requirements, including manifesting, packaging and labeling, with respect to the shipping of the waste. However, the EPA/state identification number for the receiving facility is not required on the manifest or annual report; and

(e) The generator receives from the receiving facility a signed and dated copy of the manifest.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-141, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-141, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-141, filed 2/10/82.]

WAC 173-303-145 Spills and discharges into the environment. (1) Purpose and applicability. This section sets forth the requirements for any person responsible for a spill or discharge of a dangerous waste or hazardous substance into the environment, except when such release is otherwise permitted under state or federal law. For the purposes of complying with this section, a transporter who spills or discharges dangerous waste or hazardous substances during transportation will be considered the responsible person. This section shall apply when any dangerous waste or hazardous substance is intentionally or accidentally spilled or discharged into the environment (unless otherwise permitted) such that human health or the environment is threatened, regardless of the quantity of dangerous waste or hazardous substance.

(2) Notification. Any person who is responsible for a spill or nonpermitted discharge shall immediately notify the individuals and authorities described for the following situations:

(a) For spills or discharges onto the ground or into groundwater or surface water, notify all local authorities in accordance with the local emergency plan. If necessary, check with the local emergency service coordinator and the fire department to determine all notification responsibilities under the local emergency plan. Also, notify the appropriate regional office of the department of ecology;

(b) For spills or discharges which result in emissions to the air, notify all local authorities in accordance with the

local emergency plan. If necessary, check with the local emergency service coordinator and the fire department to determine all notification responsibilities under the local emergency plan. Also, in western Washington notify the local air pollution control authority, or in eastern Washington notify the appropriate regional office of the department of ecology.

(3) Mitigation and control. The person responsible for a spill or nonpermitted discharge shall take appropriate immediate action to protect human health and the environment (e.g., diking to prevent contamination of state waters, shutting of open valves).

(a) In addition, the person responsible for a spill or discharge shall:

(i) Clean up all released dangerous wastes or hazardous substances, or take such actions as may be required or approved by federal, state, or local officials acting within the scope of their official responsibilities. This may include complete or partial removal of released dangerous wastes or hazardous substances as may be justified by the nature of the released dangerous wastes or hazardous substances, the human and environmental circumstances of the incident, and protection required by the Water Pollution Control Act, chapter 90.48 RCW;

(ii) Designate and treat, store or dispose of all soils, waters, or other materials contaminated by the spill or discharge in accordance with this chapter 173-303 WAC. The department may require testing in order to determine the amount or extent of contaminated materials, and the appropriate designation, treatment, storage, or disposal for any materials resulting from clean-up; and

(iii) If the property on which the spill or discharge occurred is not owned or controlled by the person responsible for the incident, restore the area impacted by the spill or discharge, and replenish resources (e.g., fish, plants) in a manner acceptable to the department.

(b) Where immediate removal or temporary storage of spilled or discharged dangerous wastes or hazardous substances is necessary to protect human health or the environment, the department may direct that removal be accomplished without a manifest, by transporters who do not have EPA/state identification numbers.

(4) Nothing in WAC 173-303-145 shall eliminate any obligations to comply with reporting requirements which may exist in a permit or under other state or federal regulations.

[Statutory Authority: Chapters 70.105 and 70.105D RCW. 92-15-036 (Order 91-44), § 173-303-145, filed 7/8/92, effective 8/8/92. Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-145, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-145, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-145, filed 2/10/82.]

WAC 173-303-150 Division, dilution, and accumulation. (1) Any action taken to evade the intent of this regulation by dividing or diluting wastes to change their designation shall be prohibited, except for the purposes of treating, neutralizing, or detoxifying such wastes.

(2) Separation of a homogeneous waste into heterogeneous phases (e.g., separation of a suspension into sludge

and liquid phases, or of a solvent/water mixture into solvent and water phases, etc.) shall not be considered as division, provided that the person generating the waste either:

(a) Designates the homogeneous waste before separation, and handles the entire waste accordingly; or

(b) Designates each phase of the heterogeneous waste, in accordance with the dangerous waste designation requirements of this chapter, and handles each phase accordingly.

(3) For the purposes of designation, quantities of continuously generated wastes shall be summed monthly. All wastes generated less frequently than once a month shall be considered as batch or single event wastes.

[Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-150, filed 2/10/82. Formerly WAC 173-302-150.]

WAC 173-303-160 Containers. (1) Waste quantity. Containers and inner liners shall not be considered as a part of the waste when measuring or calculating the quantity of a dangerous waste. Only the weight of the residues in nonempty or nonrinsed containers or inner liners will be considered when determining waste quantities.

(2) A container or inner liner is "empty" when:

(a) All wastes in it have been taken out that can be removed using practices commonly employed to remove materials from that type of container or inner liner (e.g., pouring, pumping, aspirating, etc.) and, whichever quantity is least, either less than one inch of waste remains at the bottom of the container or inner liner, or the volume of waste remaining in the container or inner liner is equal to one percent or less of the container's total capacity, or, if the container's total capacity is greater than one hundred ten gallons, the volume of waste remaining in the container or inner liner is no more than 0.3 percent of the container's total capacity. A container which held compressed gas is empty when the pressure inside the container equals or nearly equals atmospheric pressure; and

(b) If the container or inner liner held acutely hazardous waste, as defined in WAC 173-303-040, or pesticides bearing the danger or warning label, the container or inner liner has been rinsed at least three times with an appropriate cleaner or solvent. The volume of cleaner or solvent used for each rinsing shall be ten percent or more of the container's or inner liner's capacity. In lieu of rinsing for containers that might be damaged or made unusable by rinsing with liquids (e.g., fiber or cardboard containers without inner liners), an empty container may be vacuum cleaned, struck, with the open end of the container up, three times (e.g., on the ground, with a hammer or hand) to remove or loosen particles from the inner walls and corners, and vacuum cleaned again. Equipment used for the vacuum cleaning of residues from containers or inner liners must be decontaminated before discarding, in accordance with procedures approved by the department.

Any rinsate or vacuumed residue which results from the cleaning of containers or inner liners shall whenever possible be reused in a manner consistent with the original intended purpose of the substance in the container or inner liner. In the case of a farmer, if the rinsate is a pesticide residue then the rinsate shall be managed or reused in a manner consistent with the instructions on the pesticide label, provided that

when the label instructions specify disposal or burial, such disposal or burial must be on the farmer's own (including rented, leased or tenanted) property. Otherwise, the rinsate shall be checked against the designation requirements (WAC 173-303-070 through 173-303-103) and, if designated, managed according to the requirements of this chapter.

(3) Any residues remaining in containers or inner liners that are "empty" as described in subsection (2) of this section will not be subject to the requirements of this chapter, and will not be considered as accumulated wastes for the purposes of calculating waste quantities.

(4) A person may petition the department to approve alternative container rinsing processes in accordance with WAC 173-303-910(1).

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-160, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-160, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-160, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-160, filed 2/10/82. Formerly WAC 173-302-140.]

WAC 173-303-161 Overpacked containers (labpacks). Small containers of dangerous waste may be placed in overpacked drums (or labpacks) provided that the following conditions are met:

(1) Dangerous waste must be packaged in nonleaking inside containers. The inside containers must be of a design and constructed of a material that will not react dangerously with, be decomposed by, or be ignited by the contained waste. Inside containers must be tightly and securely sealed and, to the extent possible, should be full and have as little air as possible in them to minimize voids. The inside containers must be of the size and type specified in the Department of Transportation (DOT) hazardous materials regulations (49 CFR Parts 173, 178, and 179), if those regulations specify a particular inside container for the waste;

(2) The inside containers must be overpacked in an open head DOT-specification metal shipping container (49 CFR Parts 178 and 179) of no more than 416-liter (110 gallon) capacity and surrounded by, at a minimum, a sufficient quantity of absorbent material to completely absorb all of the liquid contents of the inside containers. The metal outer container must be full after packing with inside containers and absorbent material;

(3) The absorbent material used must not be capable of reacting dangerously with, being decomposed by, or being ignited by the contents of the inside containers in accordance with WAC 173-303-395 (1)(b);

(4) Incompatible wastes, as defined in WAC 173-303-040, must not be placed in the same outside container; and

(5) Reactive wastes, other than cyanide- or sulfide-bearing waste as defined in WAC 173-303-090 (7)(a)(v), must be treated or rendered nonreactive prior to packaging in accordance with subsections (1) through (4) of this section. Cyanide- and sulfide-bearing reactive waste may be packed in accordance with subsections (1) through (4) of this section without first being treated or rendered nonreactive.

(6) An itemized listing of the chemicals, their concentrations and quantities per labpack must be kept by the generator and must be readily available in case of an emergency

during shipment, and for the purposes of preparing annual reports under WAC 173-303-220.

[Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-161, filed 1/4/89; 86-12-057 (Order DE-85-10), § 173-303-161, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-161, filed 4/18/84.]

WAC 173-303-170 Requirements for generators of dangerous waste. (1) A person shall be a dangerous waste generator if his solid waste is designated by the requirements of WAC 173-303-070 through 173-303-103.

(a) The generator shall be responsible for designating his waste as DW or EHW.

(b) The generator may request an exemption for his dangerous waste according to the procedures of WAC 173-303-072.

(2) A dangerous waste generator shall notify the department and obtain an EPA/state identification number as required by WAC 173-303-060, and shall comply with the requirements of WAC 173-303-170 through 173-303-230.

(3) Except for the accumulation and storage of dangerous wastes for less than ninety days as allowed under WAC 173-303-200, any generator who transfers, stores, treats, or disposes of dangerous waste on-site shall perform his operations in accordance with the TSD facility requirements of this chapter.

(4) The generator of a special waste may, upon approval by the department, for special waste only:

(a) Develop and implement an alternative manifest mechanism in lieu of the requirements of WAC 173-303-180 for special waste shipments. Such alternative mechanism might employ a single manifest for multiple shipments of the same special waste, might not require signatures or multiple copies for transporters or designated receiving facilities, and might include such other factors as the generator might develop and the department approve. The generator must, however, demonstrate to the department's satisfaction before implementing the alternative mechanism that it will assure accurate tracking and recording of waste shipments, and that the mechanism provides for the proper submission of exception reports as specified in WAC 173-303-220(2). The generator shall be responsible for assuring that all transporters and facilities involved in implementing the alternative manifest mechanism are complying with the terms and conditions of the mechanism as approved by the department; and

(b) Pursuant to the requirements of WAC 173-303-200, accumulate special waste in containers and tanks for up to one hundred eighty days, and accumulate special waste in piles for up to ninety days provided that he complies with WAC 173-303-660 (2), (3)(a), (b)(i), (ii)(A), (7), (8), and (9)(a).

(5) The generator must comply with the special land disposal restrictions for certain dangerous wastes in WAC 173-303-140.

[Statutory Authority: Chapter 70.105 RCW. 88-02-057 (Order DE 83-36), § 173-303-170, filed 1/5/88, effective 2/5/88; 87-14-029 (Order DE-87-4), § 173-303-170, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-170, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-170, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-170, filed 2/10/82.]

WAC 173-303-180 Manifest. Before transporting dangerous waste or offering dangerous waste for transport off the site of generation, the generator shall prepare a manifest and shall follow all applicable procedures described in this section.

(1) This subsection describes the form and contents of dangerous waste manifests. 40 CFR Part 262 Appendix - Uniform Hazardous Waste Manifest and Instructions (EPA Forms 8700-22 and 8700-22A and Their Instructions) is adopted by reference. The manifest shall be EPA Form 8700-22 and, if necessary, EPA Form 8700-22A. The manifest must be prepared in accordance with the instructions for these forms, as described in the uniform manifest Appendix of 40 CFR Part 262, and in addition must contain the following information in the specified shaded items of the uniform manifest:

(a) Item D, and O if the continuation sheet 8700-22A is used - The first transporter's telephone number must be provided in this space;

(b) Item F, and Q if the continuation sheet 8700-22A is used - If a second transporter is used, then the second transporter's telephone number must be provided in this space;

(c) Item H - The designated receiving facility's telephone number must be provided in this space; and

(d) Item I, and R if the continuation sheet 8700-22A is used - The dangerous waste number (e.g., F001, D006, WT02, P102) must be provided in this space for each corresponding waste entered and described under Item 11, and 28 if the continuation sheet 8700-22A is used. As discussed in subsection (5) of this section, dangerous waste numbers WL01 or WL02 may be used in this space for labpacks.

(2) The manifest shall consist of enough copies to provide the generator, transporter(s), and facility owner/operator with a copy, and a copy for return to the generator.

(3) Manifest procedures.

(a) The generator shall:

(i) Sign and date the manifest certification by hand;

(ii) Obtain the handwritten signature of the initial transporter and date of acceptance on the manifest; and

(iii) Retain one copy in accordance with WAC 173-303-210, Generator recordkeeping.

(b) The generator shall give the remaining manifest copies to the transporter.

(c) If the transporter is unable to deliver the dangerous waste shipment to the designated facility or the alternate facility, the generator must either designate another facility or instruct the transporter to return the waste shipment.

(d) For shipments of dangerous waste within the United States solely by water (bulk shipments only), the generator must send three copies of the manifest dated and signed in accordance with this section to the owner or operator of the designated facility or the last water (bulk shipment) transporter to handle the waste in the United States if exported by water. Copies of the manifest are not required for each transporter.

(e) For rail shipments of dangerous waste within the United States which originate at the site of generation, the generator must send at least three copies of the manifest dated and signed in accordance with this section to:

(i) The next nonrail transporter, if any; or

- (ii) The designated facility if transported solely by rail; or
- (iii) The last rail transporter to handle the waste in the United States if exported by rail.

(4) Special requirements for shipments to the Washington EHW facility at Hanford.

(a) All generators planning to ship dangerous waste to the EHW facility at Hanford shall notify the facility in writing and by sending a copy of the prepared manifest prior to shipment.

(b) The generator shall not ship any dangerous waste without prior approval from the EHW facility. The state operator may exempt classes of waste from the requirements of WAC 173-303-180 (4)(a) and (b) where small quantities or multiple shipments of a previously approved waste are involved, or there exists an emergency and potential threat to public health and safety.

(5) Special instructions for shipment of labpacks. For purposes of completing the uniform dangerous waste manifest, dangerous waste numbers WL01 (for labpacks containing wastes designated as EHW) or WL02 (for labpacks containing wastes designated only as DW) may be used to complete Items I and R in lieu of the dangerous waste numbers that would otherwise be assigned to the contents of the labpack.

[Statutory Authority: Chapter 70.105 RCW, 86-12-057 (Order DE-85-10), § 173-303-180, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-180, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260, 82-05-023 (Order DE 81-33), § 173-303-180, filed 2/10/82. Formerly WAC 173-302-180 and 173-302-190.]

WAC 173-303-190 Preparing dangerous waste for transport. The generator shall fulfill the following requirements before transporting off-site or offering for off-site transport any dangerous waste.

(1) Packaging. The generator shall package all dangerous waste for transport in accordance with United States DOT regulations on packaging, 49 CFR Parts 173, 178, and 179.

(2) Labeling. The generator shall label each package in accordance with United States DOT regulations, 49 CFR Part 172.

(3) Marking. The generator shall:

(a) Mark each package of dangerous waste in accordance with United States DOT regulations, 49 CFR Part 172; and

(b) Mark each package containing one hundred ten gallons or less of dangerous waste with the following, or equivalent words and information, displayed in accordance with 49 CFR 172.304:

HAZARDOUS WASTE - State and federal law prohibits improper disposal. If found, contact the nearest police or public safety authority, and the Washington state department of ecology or the United States Environmental Protection Agency.

Generator's Name and Address

.....
.....
.....

Manifest Document Number

.....

(4) Placarding. The generator shall placard, or offer to the initial transporter all appropriate placards in accordance with United States DOT regulations, 49 CFR Part 172, Subpart F.

[Statutory Authority: Chapter 70.105 RCW, 84-09-088 (Order DE 83-36), § 173-303-190, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260, 82-05-023 (Order DE 81-33), § 173-303-190, filed 2/10/82.]

WAC 173-303-200 Accumulating dangerous waste on-site. (1) A generator, not to include transporters as referenced in WAC 173-303-240(3), may accumulate dangerous waste on-site without a permit for ninety days or less after the date of generation, provided that:

(a) All such waste is shipped off-site to a designated facility or placed in an on-site facility which is permitted by the department under WAC 173-303-800 through 173-303-845 in ninety days or less. The department may, on a case-by-case basis, grant a maximum thirty day extension to this ninety day period if dangerous wastes must remain on-site due to unforeseen, temporary and uncontrollable circumstances. A generator who accumulates dangerous waste for more than ninety days is an operator of a storage facility and is subject to the facility requirements of this chapter and the permit requirements of this chapter as a storage facility unless he has been granted an extension to the ninety day period allowed pursuant to this subsection;

(b) The waste is placed in containers and the generator complies with WAC 173-303-630 (2), (3), (4), (5), (6), (8), and (9), or the waste is placed in tanks and the generator complies with WAC 173-303-640 (2) through (10), except WAC 173-303-640 (8)(c) and the second sentence of WAC 173-303-640 (8)(a). (Note: A generator, unless otherwise required to do so, does not have to prepare a closure plan, a cost estimate for closure, or provide financial responsibility for his tank system to satisfy the requirements of this section.) In lieu of the "sufficient freeboard" requirement of WAC 173-303-640 (5)(b)(iii) for uncovered tanks, the generator must maintain a minimum freeboard of two feet. Such a generator is exempt from the requirements of WAC 173-303-620 and 173-303-610, except for WAC 173-303-610 (2) and (5). For container accumulation (including satellite areas as described in subsection (2)(c) of this section), the department may require that the accumulation area include secondary containment in accordance with WAC 173-303-630(7), if the department determines that there is a potential threat to public health or the environment due to the nature of the wastes being accumulated, or due to a history of spills or releases from accumulated containers. In addition, any new container accumulation areas (but not including new satellite areas, unless required by the department) constructed or installed after September 30, 1986, must comply with the provisions of WAC 173-303-630(7);

(c) The date upon which each period of accumulation begins is marked and clearly visible for inspection on each container;

(d) While being accumulated on site, each container and tank is labeled or marked clearly with the words "dangerous waste" or "hazardous waste." Each container or tank must also be marked with a label or sign which identifies the major risk(s) associated with the waste in the container or tank for employees, emergency response personnel and the public (Note—If there is already a system in use that performs this function in accordance with local, state, or federal regulations, then such system will be adequate); and

(e) The generator complies with the requirements for facility operators contained in WAC 173-303-330 through 173-303-360 (personnel training, preparedness and prevention, contingency plan and emergency procedures, and emergencies), and WAC 173-303-320 (1), (2)(a), (b), (d), and (3) (general inspection).

(2) For the purposes of this section, the ninety-day accumulation period begins on the date that:

(a) The generator first generates a dangerous waste; or

(b) The quantity (or aggregated quantity) of dangerous waste being accumulated by a small quantity generator first exceeds the quantity exclusion limit for such waste (or wastes); or

(c) The quantity of dangerous waste being accumulated in containers in a satellite area exceeds fifty-five gallons of dangerous waste or one quart of acutely hazardous waste (see WAC 173-303-040). For the purposes of this section, a satellite area shall be a location at or near any point of generation where wastes initially accumulate, which is under the control of the operator of the process generating the waste.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-200, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-200, filed 1/4/89; 86-12-057 (Order DE-85-10), § 173-303-200, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-200, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-200, filed 2/10/82.]

WAC 173-303-201 Special accumulation standards.

(1) This section applies to persons who generate less than 2200 pounds (1000 kg) per month and do not accumulate on-site more than 2200 pounds (1000 kg) of dangerous waste. The special provisions of this section do not apply to any acutely hazardous wastes (as defined in WAC 173-303-040) that are being generated or accumulated by the generator.

(2) For purposes of accumulating dangerous waste on-site, persons who generate per month and accumulate on-site less than 2200 pounds (1000 kg) per month of dangerous waste are subject to all applicable provisions of WAC 173-303-200 except as follows:

(a) In lieu of the ninety-day accumulation period, dangerous wastes may be accumulated for one hundred eighty days or less. The department may, on a case-by-case basis, grant a maximum ninety-day extension to this one hundred eighty-day period if the generator must transport his waste, or offer his waste for transportation, over a distance of two hundred miles or more for off-site treatment, storage,

or disposal, and the dangerous wastes must remain on-site due to unforeseen, temporary and uncontrollable circumstances;

(b) The generator need not comply with WAC 173-303-330 (Personnel training); and

(c) In lieu of the contingency plan and emergency procedures required by WAC 173-303-350 and 173-303-360, the generator must comply with the following:

(i) At all times there must be at least one employee either on the premises or on call (i.e., available to respond to an emergency by reaching the facility within a short period of time) with the responsibility for coordinating all emergency response measures specified in (c)(iv) of this subsection. This employee is the emergency coordinator.

(ii) The generator must post the following information next to all emergency communication devices (including telephones, two-way radios, etc.):

(A) The name and telephone number of the emergency coordinator;

(B) Location of fire extinguishers and spill control material, and, if present, fire alarm; and

(C) The telephone number of the fire department, unless the facility has a direct alarm.

(iii) The generator must ensure that all employees are thoroughly familiar with proper waste handling and emergency procedures, relevant to their responsibilities during normal facility operations and emergencies;

(iv) The emergency coordinator or his designee must respond to any emergencies that arise. The applicable responses are as follows:

(A) In the event of a fire, call the fire department or attempt to extinguish it using a fire extinguisher;

(B) In the event of a spill, contain the flow of dangerous waste to the extent possible, and as soon as is practicable, clean up the dangerous waste and any contaminated materials or soil;

(C) In the event of a fire, explosion, or other release which could threaten human health outside the facility or when the generator has knowledge that a spill has reached waters of the state, the generator must immediately notify the department and either the government official designated as the on-scene coordinator, or the National Response Center (using their twenty-four hour toll free number 800/424-8802). The report must include the following information:

(I) The name, address, and EPA/state identification number of the generator;

(II) Date, time, and type of incident (e.g., spill or fire);

(III) Quantity and type of hazardous waste involved in the incident;

(IV) Extent of injuries, if any; and

(V) Estimated quantity and disposition of recovered materials, if any.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-201, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-201, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-201, filed 6/3/86.]

WAC 173-303-202 Special requirements for generators of between two hundred twenty and two thousand two hundred pounds per month that accumulate dangerous waste in tanks. (1) This section applies to generators

of more than two hundred twenty pounds but less than two thousand two hundred pounds of dangerous waste in a calendar month, that accumulate dangerous waste in tanks for less than one hundred eighty days (or two hundred seventy days if the generator must ship the waste greater than two hundred miles), and do not accumulate over two thousand two hundred pounds on-site at any time.

(2) Generators of between two hundred twenty and two thousand two hundred pounds per month of dangerous waste must comply with the following general operating requirements:

(a) Treatment or storage of dangerous waste in tanks must comply with WAC 173-303-395(1).

(b) Dangerous wastes or treatment reagents must not be placed in a tank if they could cause the tank or its inner liner to rupture, leak, corrode, or otherwise fail before the end of its intended life.

(c) Uncovered tanks must be operated to ensure at least sixty centimeters (two feet) of freeboard, unless the tank is equipped with a containment structure (e.g., dike or trench), a drainage control system, or a diversion structure (e.g., standby tank) with a capacity that equals or exceeds the volume of the top sixty centimeters (two feet) of the tank.

(d) Where dangerous waste is continuously fed into a tank, the tank must be equipped with a means to stop this inflow (e.g., waste feed cutoff system or by-pass system to a standby tank).

Note: These systems are intended to be used in the event of a leak or overflow from the tank due to a system failure (e.g., a malfunction in the treatment process, a crack in the tank, etc.).

(3) Generators of between two hundred twenty and two thousand two hundred pounds per month accumulating dangerous waste in tanks must inspect, where present:

(a) Discharge control equipment (e.g., waste feed cutoff systems, by-pass systems, and drainage systems) at least once each operating day, to ensure that it is in good working order;

(b) Data gathered from monitoring equipment (e.g., pressure and temperature gauges) at least once each operating day to ensure that the tank is being operated according to its design;

(c) The level of waste in the tank at least once each operating day to ensure compliance with subsection (2)(c) of this section;

(d) The construction materials of the tank at least weekly to detect corrosion or leaking of fixtures or seams; and

(e) The construction materials of, and the area immediately surrounding, discharge confinement structures (e.g., dikes,) at least weekly to detect erosion or obvious signs of leakage (e.g., wet spots or dead vegetation).

Note: As required by WAC 173-303-320(3), the owner or operator must remedy any deterioration or malfunction he finds.

(4) Generators of between two hundred twenty and two thousand two hundred pounds per month accumulating dangerous waste in tanks must, upon closure of the facility, remove all dangerous waste from tanks, discharge control equipment, and discharge confinement structures.

Note: At closure, as throughout the operating period, unless the owner or operator can demonstrate, in accordance with WAC 173-303-070 (2)(a) or (b), that any solid waste removed from his tank is

not a dangerous waste, the owner or operator becomes a generator of dangerous waste and must manage it in accordance with all applicable requirements of this chapter.

(5) Generators of between two hundred twenty and two thousand two hundred pounds per month must comply with the following special requirements for ignitable or reactive waste:

(a) Ignitable or reactive waste must not be placed in a tank, unless:

(i) The waste is treated, rendered, or mixed before or immediately after placement in a tank so that:

(A) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under WAC 173-303-090 (5) or (7) of this chapter; and

(B) WAC 173-303-395(1) is complied with.

(ii) The waste is stored or treated in such a way that it is protected from any material or conditions that may cause the waste to ignite or react; or

(iii) The tank is used solely for emergencies.

(b) The owner or operator of a facility which treats or stores ignitable or reactive waste in covered tanks must comply with the buffer zone requirements for tanks contained in Tables 2-1 through 2-6 of the National Fire Protection Association's "Flammable and Combustible Liquids Code," (1977 or 1981).

(6) Generators of between two hundred twenty and two thousand two hundred pounds per month must comply with the following special requirements for incompatible wastes:

(a) Incompatible wastes, or incompatible wastes and materials, (see 40 CFR Part 265 Appendix V for examples) must not be placed in the same tank, unless WAC 173-303-395(1) is complied with.

(b) Dangerous waste must not be placed in an unwashed tank which previously held an incompatible waste or material, unless WAC 173-303-395(1) is complied with.

[Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-202, filed 1/4/89.]

WAC 173-303-210 Generator recordkeeping. (1) The generator shall keep a copy of each manifest signed by the initial transporter in accordance with WAC 173-303-180(3), manifest procedures, for three years, or until he receives a signed copy from the designated facility which received the waste. The signed facility copy shall be retained for at least five years from the date the waste was accepted by the initial transporter.

(2) The generator shall keep a copy of each annual report and exception report as required by WAC 173-303-220 for a period of at least five years from the due date of each report. The generator shall keep a copy of his most recent notification (Form 2) until he is no longer defined as a generator under this chapter.

(3) The generator shall keep records of any test results, waste analyses, or other determinations made in accordance with WAC 173-303-170(1) for designating dangerous waste for at least five years from the date that the waste was last transferred for on-site or off-site treatment, storage, or disposal.

(4) Any other records required for generators accumulating wastes on-site as described in WAC 173-303-170 (4)(b)

or 173-303-200 must be retained for at least five years, including, but not limited to such items as inspection logs and operating records.

(5) The periods of retention for any records described in this section shall be automatically extended during the course of any unresolved enforcement action requiring those records or upon request by the director.

(6) All generator records, including plans required by this chapter, shall be made available and furnished upon request by the director.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-210, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-210, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-210, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-210, filed 2/10/82.]

WAC 173-303-220 Generator reporting. The generator shall submit the following reports to the department by the specified due date for each report, or within the time period allowed for each report.

(1) Annual reports.

(a) A generator or any person who has obtained an EPA/state identification number pursuant to WAC 173-303-060 shall submit an annual report to the department, on the Generator Annual Dangerous Waste Report - Form 4 according to the instructions on the form (copies are available from the department), no later than March 1 for the preceding calendar year.

(b) In addition, any generator who stores, treats, or disposes of dangerous waste on-site shall comply with the annual reporting requirements of WAC 173-303-390, Facility reporting.

(2) Exception reports.

(a) A generator who does not receive a copy of the manifest with the handwritten signature of the owner/operator of the designated facility within thirty-five days of the date the waste was accepted by the initial transporter must contact the transporter(s) and/or facility to determine the status of the dangerous waste shipment.

(b) A generator must submit an exception report to the department if he has not received a copy of the manifest with the handwritten signature of the owner/operator of the designated facility within forty-five days of the date the waste was accepted by the initial transporter.

(c) The exception report must include:

(i) A legible copy of the manifest for which the generator does not have confirmation of delivery; and

(ii) A cover letter signed by the generator or his representative explaining the efforts taken to locate the waste and the results of those efforts.

(d) The department may require a generator to submit exception reports in less than forty-five days if it finds that the generator frequently or persistently endangers public health or the environment through improper waste shipment practices.

(3) Additional reports. The director, as he deems necessary under chapter 70.105 RCW, may require a generator to furnish additional reports (including engineering reports, plans, and specifications) concerning the quantities and disposition of the generator's dangerous waste.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-220, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-220, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-220, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-220, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-220, filed 2/10/82.]

WAC 173-303-230 Special conditions. (1) Exporting dangerous waste.

Federal export requirements, administered by EPA, are set forth in 40 CFR 262 Subpart E and specify the procedures applicable to generators of hazardous waste (as defined in WAC 173-303-040). Copies of any forms or reports submitted to the administrator of United States EPA as required by 40 CFR 262 Subpart E shall also be submitted to the department.

(2) Importing dangerous waste. When importing dangerous waste from a foreign country into Washington state, the United States importer shall comply with all the requirements of this chapter for generators, including the requirements of WAC 173-303-180(1), except that:

(a) In place of the generator's name, address and EPA/state identification number, the name and address of the foreign generator and the importer's name, address and EPA/state identification number shall be used; and

(b) In place of the generator's signature on the certification statement, the United States importer or his agent shall sign and date the certification and obtain the signature of the initial transporter.

(3) Empty containers. For the purposes of this chapter, a person who stores, treats, disposes, transports, or offers for transport empty containers of dangerous waste that were for his own use shall not be treated as a generator or as a facility owner/operator if the containers are empty as defined in WAC 173-303-160(2), and either:

(a) The rinsate is not a dangerous waste under this chapter; or

(b) He reuses the rinsate in a manner consistent with the original product or, if he is a farmer and the rinsate contains pesticide residues, he reuses or manages the rinsate in a manner consistent with the instructions on the pesticide label, provided that when the label instructions specify disposal or burial, such disposal or burial must be on the farmer's own (including rented, leased or tenanted) property.

(4) Tank cars. A person rinsing out dangerous waste tote tanks, truck or railroad tank cars shall handle the rinsate according to this chapter, and according to chapter 90.48 RCW, Water pollution control.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-230, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-230, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-230, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-230, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-230, filed 2/10/82.]

WAC 173-303-240 Requirements for transporters of dangerous waste. (1) Transporters shall comply with the requirements of WAC 173-303-060, Notification and identification numbers. Transporters who are involved in interstate transport shall use the identification number

assigned to their national headquarters office, unless the department requires, on a case-by-case basis, that a transporter obtain his own unique EPA/state ID#. Transporters who are involved only in intrastate transport shall use the identification number assigned to their headquarters office located within the state. Transporters who must comply with the generator requirements as a result of a spill at a terminal or during transport shall obtain a separate generator EPA/state ID# for such spill or terminal.

(2) Any person who transports a dangerous waste shall comply with the requirements of WAC 173-303-240 through 173-303-270, when such dangerous waste is required to be manifested by WAC 173-303-180.

Any person who transports special waste shall, if the generator of the waste has implemented an alternative manifest mechanism approved by the department under WAC 173-303-170 (4)(a), comply with the terms and conditions specified by the generator and approved by the department for the alternative manifest mechanism.

(3) Any person who transports a dangerous waste shall also comply with the requirements of WAC 173-303-170 through 173-303-230 for generators, if he:

(a) Transports dangerous waste into the state from another country; or

(b) Mixes dangerous waste of different United States DOT shipping descriptions by mixing them into a single container.

(4) These requirements shall not apply to on-site (as defined in WAC 173-303-040) transportation of dangerous waste by generators, or by owners/operators of permitted TSD facilities.

(5) Transporters may store manifested shipments of dangerous waste in containers meeting the requirements of WAC 173-303-190 (1), (2), and (3) for ten days or less. Transporters may not accumulate or store manifested shipments of dangerous waste for more than ten days. Reference to WAC 173-303-200 in 173-303-240(3) does not constitute authority for storage in excess of ten days for transporters. Transporters who do not comply with these conditions are subject to all applicable TSD facility requirements.

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-240, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-240, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-240, filed 6/27/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-240, filed 2/10/82. Formerly WAC 173-302-210.]

WAC 173-303-250 Dangerous waste acceptance, transport, and delivery. (1) A transporter shall not accept dangerous waste from a generator unless it is accompanied by a manifest signed by the generator in accordance with WAC 173-303-180, Manifest.

(2) Before transporting a dangerous waste shipment, the transporter shall sign and date the manifest, acknowledging acceptance of the dangerous waste. The transporter shall return a signed copy to the generator before commencing transport.

(3) The transporter shall insure that the manifest accompanies the dangerous waste shipment.

(4) A transporter who delivers a dangerous waste to another transporter, or to the designated facility shall:

(a) Obtain the date of delivery and the handwritten signature of that transporter or designated facility owner/signature on the manifest;

(b) Retain one copy of the manifest in accordance with WAC 173-303-260, Transporter recordkeeping; and

(c) Give the remaining copies of the manifest to the accepting transporter or designated facility.

(5) The transporter shall deliver the entire quantity of dangerous waste which he has accepted from a generator or a transporter to:

(a) The designated facility listed on the manifest; or

(b) The alternate designated facility, if the dangerous waste cannot be delivered to the designated facility because an emergency prevents delivery; or

(c) The next designated transporter; or

(d) The place outside the United States designated by the generator.

(6) If the dangerous waste cannot be delivered in accordance with subsection (5) of this section, the transporter shall contact the generator for further directions, and shall revise the manifest according to the generator's instructions.

(7) The requirements of subsections (3), (4), and (8) of this section do not apply to water (bulk shipment) transporters if:

(a) The dangerous waste is delivered by water (bulk shipment) to the designated facility;

(b) A shipping paper containing all the information required on the manifest (excluding the EPA/state identification numbers, generator certification, and signatures) accompanies the dangerous waste;

(c) The delivering transporter obtains the date of delivery and handwritten signature of the owner or operator of the designated facility on either the manifest or the shipping paper;

(d) The person delivering the dangerous waste to the initial water (bulk shipment) transporter obtains the date of delivery and signature of the water (bulk shipment) transporter on the manifest and forwards it to the designated facility; and

(e) A copy of the shipping paper or manifest is retained by each water (bulk shipment) transporter in accordance with WAC 173-303-260(2).

(8) For shipments involving rail transportation, the requirements of subsections (3), (4), and (7) of this section do not apply and the following requirements do apply.

(a) When accepting dangerous waste from a nonrail transporter, the initial rail transporter must:

(i) Sign and date the manifest acknowledging acceptance of the dangerous waste;

(ii) Return a signed copy of the manifest to the nonrail transporter;

(iii) Forward at least three copies of the manifest to:

(A) The next nonrail transporter, if any; or

(B) The designated facility, if the shipment is delivered to that facility by rail; or

(C) The last rail transporter designated to handle the waste in the United States;

(iv) Retain one copy of the manifest and rail shipping paper in accordance with WAC 173-303-260(2).

(b) Rail transporters must ensure that a shipping paper containing all the information required on the manifest (excluding the EPA/state identification numbers, generator

certification, and signatures) accompanies the dangerous waste at all times.

(c) When delivering dangerous waste to the designated facility, a rail transporter must:

(i) Obtain the date of delivery and handwritten signature of the owner or operator of the designated facility on the manifest or the shipping paper (if the manifest has not been received by the facility); and

(ii) Retain a copy of the manifest or signed shipping paper in accordance with WAC 173-303-260(2).

(d) When delivering dangerous waste to a nonrail transporter a rail transporter must:

(i) Obtain the date of delivery and the handwritten signature of the next nonrail transporter on the manifest; and

(ii) Retain a copy of the manifest in accordance with WAC 173-303-260(2).

(e) Before accepting dangerous waste from a rail transporter, a nonrail transporter must sign and date the manifest and provide a copy to the rail transporter.

(9) Transporters who transport dangerous waste out of the United States shall:

(a) Indicate on the manifest the date the dangerous waste left the United States;

(b) Sign the manifest and retain one copy in accordance with WAC 173-303-260(3), Transporter recordkeeping; and

(c) Return a signed copy of the manifest to the generator.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-250, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-250, filed 2/10/82. Formerly WAC 173-302-220 and 173-302-230.]

WAC 173-303-260 Transporter recordkeeping. (1)

A transporter of dangerous waste shall keep a copy of the manifest signed by the generator, himself, and the next designated transporter or the owner or operator of the designated facility for a period of three years from the date the dangerous waste was accepted by the initial transporter.

(2) Water (bulk shipment) and rail transporter recordkeeping.

(a) For shipments delivered to the designated facility by rail or water (bulk shipment), each rail or water (bulk shipment) transporter shall retain a copy of a shipping paper containing all the information required on a manifest (excluding the EPA/state identification numbers, generator certification, and signatures) for a period of three years from the date the dangerous waste was accepted by the initial transporter.

(b) For shipments of dangerous waste by rail within the United States:

(i) The initial rail transporter must keep a copy of the manifest and shipping paper with all the information required on a manifest (excluding the EPA/state identification numbers, generator certification, and signatures) for a period of three years from the date the dangerous waste was accepted by the initial transporter; and

(ii) The final rail transporter must keep a copy of the signed manifest (or the shipping paper if signed by the designated facility in lieu of the manifest) for a period of three years from the date the dangerous waste was accepted by the initial transporter.

(3) A transporter who transports dangerous waste out of the United States shall keep a copy of the manifest, indicating that the dangerous waste left the United States, for a period of three years from the date the dangerous waste was accepted by the initial transporter.

(4) The periods of retention referred to in this section are extended automatically during the course of any unresolved enforcement action regarding the regulated activity, or as requested by the director.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-260, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-260, filed 2/10/82.]

WAC 173-303-270 Discharges during transport. In

the event of a spill or discharge of dangerous waste during transportation, the transporter shall comply with the requirements of WAC 173-303-145, Spills and discharges into the environment. In addition to the notices required by WAC 173-303-145, the transporter shall provide the following notifications:

(1) Give notice to the generator of the waste that a discharge has occurred;

(2) Give notice to the National Response Center (800-424-8802 or 202-426-2675), if required by 49 CFR 171.15;

(3) Report in writing as required by 49 CFR 171.16 to the Director, Office of Hazardous Materials Regulations, Materials Transportation Bureau, Department of Transportation, Washington D.C., 20590; and,

(4) For a water (bulk shipment) transporter, give the same notice as required by 33 CFR 153.203 for oil and hazardous substances.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-270, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-270, filed 2/10/82.]

WAC 173-303-280 General requirements for dangerous waste management facilities. (1) Applicability.

The requirements of WAC 173-303-280 through 173-303-395 apply to all owners and operators of facilities which store, treat, or dispose of dangerous wastes and which must be permitted under the requirements of this chapter 173-303 WAC, unless otherwise specified in this chapter. The owner or operator of a facility which manages special waste may comply with the special requirements specified in WAC 173-303-550 through 173-303-560 in lieu of the general requirements of WAC 173-303-280 through 173-303-395, but only for those special wastes which he manages. Whenever a shipment of dangerous waste is initiated from a facility, the owner or operator of that facility shall comply with the requirements for generators, WAC 173-303-170 through 173-303-230.

(2) Imminent hazard. Notwithstanding any provisions of this chapter, enforcement actions may be brought in the event that the management practices of a facility present an imminent and substantial hazard to the public health and the environment, regardless of the quantity or concentration of a dangerous waste.

(3) Identification numbers. Every facility owner or operator shall apply for an EPA/state identification number from the department in accordance with WAC 173-303-060.

(4) The owner or operator must comply with the special land disposal restrictions for certain dangerous wastes in WAC 173-303-140.

[Statutory Authority: Chapter 70.105 RCW, 88-02-057 (Order DE 83-36), § 173-303-280, filed 1/5/88, effective 2/5/88; 87-14-029 (Order DE-87-4), § 173-303-280, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-280, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-280, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260, 82-05-023 (Order DE 81-33), § 173-303-280, filed 2/10/82.]

WAC 173-303-281 Notice of intent. (1) Purpose.

The purpose of this section is to provide notification to the department, local communities and the public that the siting of a dangerous waste management facility is being considered. Also, to provide general information about the proposed facility owner/operator, the type of facility and the types of wastes to be managed and compliance with the siting criteria.

(2) Applicability. This section applies to owners/operators of proposed facilities. This section also applies to existing facilities for which the department receives an application for expansion. This section does not apply to owners/operators of facilities or portions of facilities who are applying for research, development and demonstration permits, pursuant to section 3005(g) of the Resource Conservation and Recovery Act, codified in 40 CFR Part 270.65. In addition, this section does not apply to owners/operators of facilities operating under an emergency permit pursuant to WAC 173-303-804 or to persons at facilities conducting on-site cleanup of sites under the Comprehensive Environmental Response Compensation and Liability Act, Sections 3004(u), 3004(v), and 3008(h) of the Resource Conservation and Recovery Act, chapter 70.105 RCW, or chapter 70.105D RCW, provided the cleanup activities are being conducted under a consent decree, agreed order, or enforcement order, or is being conducted by the department or United States Environmental Protection Agency. As used in this section:

(a) "Proposed facility" means a facility which has not qualified for interim status under WAC 173-303-805 or for which the department has not issued a final facility permit under WAC 173-303-806 prior to the effective date of this section;

(b) "Existing facility" means a facility which has qualified for interim status under WAC 173-303-805 or for which the department has issued a final facility permit under WAC 173-303-806 prior to the effective date of this section; and

(c) "Expansion" means the enlargement of the land surface area of an existing facility from that described in an interim status permit application or final status permit, the addition of a new dangerous waste management process, or an increase in the overall design capacity of existing dangerous waste management processes at a facility.

(3) Notice of intent to file for an interim status or a dangerous waste permit.

(a) The notice of intent to be prepared by the owners/operators of the applicable facilities shall consist of:

(i) The name, address, and telephone number of the owner, operator, and corporate officers;

(ii) The location of the proposed facility or expansion on a topographic map with specifications as detailed in WAC 173-303-806 (4)(a)(xviii);

(iii) A brief description of the types and amounts of wastes to be managed annually;

(iv) A brief description of the major equipment items proposed, if any, and the waste management activities requiring a permit or revision of an existing permit;

(v) An environmental checklist from the State Environmental Policy Act rules, chapter 197-11 WAC;

(vi) Demonstration of compliance with the siting criteria as required under WAC 173-303-282 (6) and (7). The site conditions with regards to satisfying the criteria are to be assessed as of the date of submittal of the notice of intent to the department;

(vii) For informational purposes a complete summary of compliance violations of permit conditions at hazardous waste management facilities owned or operated by the applicant, its subsidiaries or its parent company, during the ten calendar years preceding the permit application. Along with the summary of compliance violations, as issued by appropriate state or federal regulatory agencies, the applicant shall also submit responses to past violations and any written correspondence with regulatory agencies regarding the compliance status of any hazardous waste management facility owned or operated by the applicant, its subsidiaries or parent company of the owner or operator. A more detailed compliance record must be provided upon request by the department;

(viii) For informational purposes the need for the proposed facility or expansion shall be demonstrated by one of the following methods:

(A) Current overall capacity within Washington is inadequate for dangerous wastes generated in Washington as determined by regional or state dangerous waste management plans; or

(B) The facility is a higher priority management method, as described in RCW 70.105.150, than is currently in place or practical and available for the types of waste proposed to be managed; or

(C) The facility will add to the types of technology available or will reduce cost impacts (not to include transportation costs) to Washington generators for disposal of dangerous wastes; and

(ix) For informational purposes it shall be shown how the capacity of the proposed facility or expansion will affect the overall capacity within the state, in conjunction with existing facilities in Washington.

(b) The notice of intent shall be filed with the department, and copies shall be made available for public review, no less than one hundred fifty days prior to filing an application for a permit or permit revision. Public notification of the notice of intent to file shall be given at the time of filing by announcement in a daily newspaper within the area of the proposed facility or expansion for a minimum of fourteen consecutive days. In addition, the department shall send a copy of the notice of intent to the elected officials of the lead local government and all local governments within the potentially affected area as required by WAC 173-303-902 (5)(b)(i). The department will continue to coordinate with interested local governments throughout the review of the proposal.

(c) Reserved.

[Statutory Authority: RCW 43.21A.080 and 70.105.210, et seq. 90-20-016, § 173-303-281, filed 9/21/90, effective 10/22/90. Statutory Authority:

Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-281, filed 9/6/88.]

WAC 173-303-282 Siting criteria. (1) Purpose. This section establishes siting criteria which serve as an initial screen in the consideration of sites for dangerous waste management facilities. The purpose of the siting criteria is to immediately disqualify proposed dangerous waste facility sites in locations considered unsuitable or inappropriate for the management of dangerous wastes. Under RCW 70.105.200 (1)(d), siting criteria cannot prevent existing dangerous waste management facilities from operating at or below their present level of activity.

A proposed site which is not disqualified under these criteria will be further studied to determine if it qualifies under site specific rules. Compliance with the siting criteria does not imply that a given project at a given location poses an acceptable level of risk, nor does it commit the department to the issuance of a dangerous waste permit. Projects that demonstrate compliance with the siting criteria will be subjected to comprehensive environmental and technical review pursuant to applicable laws and regulations before the department makes a final decision on a dangerous waste permit.

The department may deny a permit or require protective measures such as engineering enhancements or increased setback distances from resources in order to ensure protection of human health and the environment.

(2) Applicability.

(a) Except as otherwise specifically provided, this section applies to:

- (i) Owners/operators of proposed facilities; and
- (ii) Owners or operators of existing land-based facilities at which an expansion of the land based unit is proposed;
- (iii) Owners or operators of existing incinerators at which an expansion is proposed; and

(iv) Owners or operators proposing a significant expansion of other existing dangerous waste management facilities not subject to (a)(i), (ii) and (iii) of this subsection, unless the owner/operator can demonstrate to the satisfaction of the department that the proposed expansion will provide a net increase in protection to human health and the environment beyond that which is currently provided at the facility. However, demonstrations under this subsection (iv) shall not result in treatment or storage facilities expanding into land-based or incineration facilities if siting criteria cannot be satisfied.

(b) This section does not apply to:

(i) Owners/operators of facilities or portions of facilities who are applying for research, development and demonstration permits, pursuant to section 3005(g) of the Resource Conservation and Recovery Act, codified in 40 CFR Part 270.65;

(ii) Owners/operators of facilities operating under an emergency permit pursuant to WAC 173-303-804;

(iii) Persons at facilities conducting on-site cleanup of sites under the Comprehensive Environmental Response Compensation and Liability Act, Sections 3004(u), 3004(v), and 3008(h) of the Resource Conservation and Recovery Act, chapter 70.105 RCW, or chapter 70.105D RCW, provided the cleanup activities are being conducted under a consent decree, agreed order, or enforcement order, or is

being conducted by the department or United States Environmental Protection Agency;

(iv) Persons managing solid wastes who become subject to dangerous waste regulations through amendments to this chapter after the effective date of this section. This provision applies only to those activities operated in accordance with local, state, and federal requirements and which were being conducted prior to becoming subject to Dangerous waste regulations, chapter 173-303 WAC or expansions, if it can be demonstrated to the satisfaction of the department that the proposed expansion of such activities will provide a net increase in protection to human health and the environment beyond that which is currently provided at the facility; or

(v) Owners/operators of facilities which recycle hazardous waste and:

(A) Are otherwise exempt from regulation by this chapter under 120(4) or 515;

(B) Have notified the department pursuant to WAC 173-303-060, prior to the effective date of this section;

(C) Are currently operating as a recycling facility as of the effective date of this regulation; and

(D) Seek only to obtain a tank or container storage permit to support the recycling operation under this chapter.

Further, significant expansions of such storage facilities meeting the qualifications for this exemption may be considered under subsection (2)(a)(iv) of this section.

(3) Definitions. Any terms used in this section that are not defined below shall have the meanings provided in WAC 173-303-040. For the purposes of this section, the following terms shall have the described meanings:

(a) "Aquifer of beneficial use" means an aquifer that contains sufficient quality and quantity of water to allow it to be withdrawn for beneficial uses which include, but are not limited to, uses for domestic, stock watering, industrial, commercial, agricultural, irrigation, mining, fish and wildlife maintenance and enhancement, or recreational purposes.

(b) "Displacement" means the relative movement of any two sides of a fault measured in any direction.

(c) "Domestic water use" means any water used for human consumption, other domestic activities or livestock watering for which the department has issued a permit of water right for surface water diversions pursuant to chapter 90.03 RCW, or for a well pursuant to chapter 90.44 RCW, or for which the department has received a well water report pursuant to RCW 18.104.050, or for any other valid water right claimed in accordance with chapter 90.14 RCW. This does not apply to wells abandoned in compliance with chapter 173-160 WAC.

(d) "Existing facility" means a facility which has qualified for interim status under WAC 173-303-805 or for which the department has issued a final facility permit under WAC 173-303-806, prior to the effective date of this section.

(e) "Expansion" means the enlargement of the land surface area of an existing facility from that described in an interim status permit application or final facility permit, the addition of a new dangerous waste management process, or an increase in overall design capacity of existing dangerous waste management processes at a facility. However, a process or equipment change within the existing handling code (not to include "other") as defined under WAC 173-

303-380 (2)(d) will not be considered a new dangerous waste management process.

(f) "Fault" means a fracture along which rocks or soils on one side have been displaced with respect to those on the other side.

(g) "Holocene" means the most recent epoch of the Quaternary period, extending from the end of the Pleistocene to the present.

(h) "Land-based facility" means a dangerous waste management facility which falls under the definition of land disposal as defined in Section 3004(k) of the Resource Conservation and Recovery Act. These facilities use the land as an integral part of their waste management method and include, but are not limited to, landfills, surface impoundments, waste piles, and land treatment facilities. For the purposes of this section, this would not include waste piles in which the dangerous wastes are stored inside or under a structure that provides protection from precipitation and when runoff, leachate, or other types of waste dispersal are not generated under any conditions.

(i) "Nonland based facility" means a facility which does not use the land as an integral part of its waste management method and is not subject to the requirements of WAC 173-303-806 (4)(a)(xxi). These facilities include, but are not limited to, tanks, containers, and incinerators.

(j) "Perennial surface water body" means a surface water body which is normally continuous with natural flows throughout the year or an annually recurring body of water including lakes, rivers, ponds, streams, reservoirs, inland waters, and saltwaters. This does not include roadside ditches or storm drains. However, this definition does apply to irrigation or domestic water supply channels existing, or planned and approved by a governmental agency, at the time an owner/operator submits a notice of intent.

(k) "Preempted facility" means any facility that includes as a significant part of its activities any of the following operations: (i) Landfill; (ii) incineration; (iii) land treatment; (iv) surface impoundment to be closed as a landfill; or (v) waste pile to be closed as a landfill.

(l) "Prime farmland" means the land which has the best combination of physical and chemical characteristics for producing food, feed, forage, fiber or oilseed crops, and is also available for these uses. It has the soil quality, growing season, and moisture supply needed to economically produce sustained high yields of crops when treated and managed, including water management, according to acceptable farming methods. In general, prime farmland has an adequate and dependable water supply from precipitation or irrigation, a favorable temperature and growing season, acceptable acidity or alkalinity, acceptable salt and sodium content, and few or no rocks. It is permeable to water and air. Prime farmland is not excessively erodible or saturated with water for a long period of time, and it either does not flood frequently or is protected from flooding. Prime farmland shall be determined by those general and specific criteria as defined in the National Soils Handbook, Soil Conservation Service, United States Department of Agriculture, Washington, D.C. and 7 CFR 2.62. Areas of prime farmland are identified in the most recent county soil survey maps prepared by the National Cooperative Soil Survey.

(m) "Proposed facility" means a facility which has not qualified for interim status under WAC 173-303-805 or for

which the department has not issued a final facility permit under WAC 173-303-806 prior to the effective date of this section.

(n) "Public gathering places" means a place such as a public or private health care or child care facility; an educational institution; a church; a government institution not associated with dangerous waste management; or a retail shopping center.

(o) "Residence" means any dwelling including, but not limited to, private homes, rental homes, boarding houses, apartments, motels, or hotels.

(p) "Significant expansion" means an expansion of an existing facility, operating under interim status or a final status permit, that is considered a class three modification as designated by 40 CFR Parts 270.41 and 270.42. Examples include, but are not limited to, a modification or addition of container units resulting in greater than a twenty-five percent increase in the facility's container storage capacity, storage of different wastes in containers that require additional or different management practices from those authorized under interim status or by a final status permit, and a modification or addition of tank units resulting in greater than twenty-five percent increase in the facility's capacity. For the purposes of this section, a single or cumulative increase of greater than twenty-five percent of the process design capacity as described in the facility's original Part A permit application shall be considered a significant expansion.

(q) "Slope and soil instability" means areas for which there is credible evidence of, or the potential for, landslides, slumps, avalanches, earth or mud flows, or other unsuitable slope conditions.

(r) "Subsidence" means areas for which there is credible evidence of, or potential for, sinking of the land surface. Areas of subsurface mines, caves, cavernous materials, or where there has been significant removal of fluids may provide credible evidence of subsidence.

(s) "Wetland" means land transitional between terrestrial and aquatic systems where the water table is usually at or near the surface or the land is covered by shallow water. For purposes of this classification a wetland must have one or more of the following three attributes: (i) At least periodically, the land supports predominantly hydrophytes; (ii) the substrate is predominantly undrained hydric soil; and (iii) the substrate is nonsoil and is saturated with water or covered by shallow water at some time during the growing season of each year. The *Joint Federal Methodology for Identifying and Delineating Wetlands* shall be used for defining the upland boundary of wetlands.

(4) Implementation.

(a) Submittal of information to demonstrate compliance. Documentation that a proposed facility or expansion site meets the siting criteria shall be submitted to the department:

(i) In the notice of intent for those facilities for which a notice of intent is filed after the effective date of this section; or

(ii) Within ninety days of the effective date of this section for proposed facilities for which a notice of intent or an application for a Part B permit has been submitted to the department prior to the effective date of this section.

(b) Consultation by department. The department shall consult with the lead local government as defined in WAC 173-303-902 (4)(h) and consider those local land use,

building, fire, air quality, and transportation standards to the extent they add to and do not conflict with the requirements of this section. Such consultation and consideration shall be made prior to the department's rendering of a tentative decision under subsection (4)(c) of this section.

(c) Response by department. Within sixty days of receipt of a demonstration of compliance, the department shall undertake one of the following actions:

(i) Return the demonstration of compliance as incomplete with written comments identifying the need for additional information. The owner or operator may resubmit the demonstration of compliance with complete information; or

(ii) Render a written tentative decision to approve or deny the demonstration of compliance.

(d) Public notice and hearing process. The department in making a tentative decision to approve or deny a demonstration of compliance with this section shall take the following actions:

(i) For land-based facilities and incinerators:

(A) The department shall publish a notice of its tentative decision in a daily or weekly newspaper of general circulation in the potentially affected area, and shall give notice by other reasonable methods to persons potentially affected.

(B) The department shall hold a public hearing at a location convenient to the public in the potentially affected area. Notice of the date, time, purpose, and place of the hearing shall be provided in the publication of notice.

(C) The department shall accept comments on its tentative decision for a minimum of forty-five days.

(D) After evaluating all public comments the department will make a final decision in accordance with chapter 34.05 RCW. The department will either approve or deny the owner/operator's demonstration of compliance.

(ii) For nonland-based facilities, excluding incinerators:

(A) The department shall publish a notice of its tentative decision in a daily or weekly newspaper of general circulation in the potentially affected area, and shall give notice by other reasonable methods to persons potentially affected.

(B) Upon the written request of any interested person, the department may hold a public hearing to consider public comments on the owner or operator's demonstration of compliance. A person requesting the hearing shall state the issues to be raised and explain why written comments would not suffice. In any case, if ten or more persons request a public hearing on the subject of the department's tentative decision, the department shall hold a public hearing for the purpose of receiving comments.

(C) The department shall accept comments on its tentative decision for a minimum of forty-five days.

(D) After evaluating all public comments the department will make a final decision in accordance with chapter 34.05 RCW. The department will either approve or deny the owner or operator's demonstration of compliance.

(5) **Appeal of a department decision.** Any person who is adversely affected by a decision of the department under this section may appeal the decision to the pollution control hearings board pursuant to the authority of WAC 173-303-845.

(6) **Criteria for elements of the natural environment.** The following siting criteria establish locations from which facilities are excluded and establish minimum setback

distances from identified resources. Unless otherwise stated, setback distances are measured horizontally from the dangerous waste management unit boundary to the identified resource.

These criteria shall be used as an initial screening tool in the selection of sites which may be considered by the department for the purpose of managing dangerous waste. A more comprehensive evaluation of locational factors will occur during the department's review of a permit application. The department may deny a permit or impose additional setback distances or other permit requirements if necessary to protect human health and the environment.

(a) Earth. The intent of this subsection is to reduce the potential for the release of dangerous waste into the environment because of structural damage to facilities subject to the hazards identified below. The owner/operator shall provide supportive geologic, geotechnical, and soils information.

(i) Seismic risk. All dangerous waste management facilities shall be located such that the dangerous waste management unit boundary is located at least five hundred feet from a fault which has had displacement in Holocene times.

(ii) Subsidence. No dangerous waste management facility shall be located such that the dangerous waste management unit is within an area of subsidence.

(iii) Slope or soil instability. No dangerous waste management facility shall be located such that the dangerous waste management unit is within an area of slope or soil instability, nor in the areas affected by unstable slope or soil conditions.

(b) Air. The intent of this subsection is to reduce the potential for further degradation of air quality in areas currently experiencing air quality impacts.

(i) Incineration facilities shall not be located in a Class I Prevention of Significant Deterioration Air Quality Zone designated under the Federal Clean Air Act.

(ii) Incineration facilities shall not be located in a nonattainment area designated by the department unless compensating emission offset can be achieved.

(iii) Proposed incineration facilities shall comply with WAC 173-303-806 (4)(a)(xxii) during the permitting process.

(c) Water. The intent of this subsection is to reduce the potential for contaminating waters of the state in the event of a release of dangerous wastes.

(i) Surface water.

(A) Flood, seiche, and tsunami protection.

(I) No dangerous waste management facility shall be located within the one hundred-year flood plain as indicated in the most current Federal Emergency Management Agency maps.

(II) The owner/operator of a nonland-based facility shall identify whether the facility is intended to be located within the five hundred-year flood plain, as indicated in the most current Federal Emergency Management Agency maps. Nonland-based facilities will require special design features so as to prevent flooding of the dangerous waste management unit in the event of a five hundred-year flood.

(III) Land-based facilities shall not be located within the five hundred-year flood plain as indicated in the most current Federal Emergency Management Agency maps.

(IV) Dangerous waste management facilities shall not be located in areas subject to seiches, or coastal flooding

including tsunamis or storm surges as indicated in the most current maps of the National Flood Insurance Program of the Federal Emergency Management Agency.

(B) Perennial surface water bodies.

(I) Nonland-based facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from a perennial surface water body.

(II) Land-based facilities shall be located such that the dangerous waste management unit boundary is at least one-quarter mile from a perennial surface water body.

(C) Surface water supply.

(I) No dangerous waste management facility shall be located in a watershed identified in the report submitted to, and approved by, the department of health under the authority of WAC 248-54-225(3), Watershed control.

(II) Nonland-based facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from the nearest surface water intake for domestic water.

(III) Land-based facilities shall be located such that the dangerous waste management unit boundary is at least one-quarter mile from the nearest surface water intake for domestic water.

(ii) Ground water. To the extent feasible, proponents of land-based facilities should seek sites with natural site characteristics which are capable of providing protection of ground water resources. Natural features such as low permeability soils and substrata, relatively simple geologic formations, and high rates of evapotranspiration [evapotranspiration] in relation to the seasonal occurrence of precipitation are preferable for the locations of land-based facilities. Proposed land-based facilities shall comply with the contingent ground water protection program, WAC 173-303-806 (4)(a)(xxi), during the permitting process.

(A) Depth to ground water.

(I) Nonland-based facilities shall not be located in areas where there is less than ten feet vertical separation between the lowest point of the dangerous waste management unit and the seasonal high water level of the uppermost aquifer of beneficial use.

(II) Land-based facilities shall not be located in areas where there is less than fifty feet vertical separation between the lowest point of the dangerous waste management unit and the seasonal highwater level of the uppermost aquifer of beneficial use.

(B) Sole source aquifer. No land-based facilities shall be located over an area designated as a sole source aquifer under section 1424(e) of the Federal Safe Drinking Water Act (P.L. 93-523).

(C) Ground water management areas. Owners/operators of facilities shall identify whether the proposed facility location is within a ground water management area, as proposed or certified pursuant to RCW 90.44.130. In order to maintain consistency with the purpose and substantive requirements of certified ground water management area plans, the department may require additional protective measures or reject inconsistent projects.

(D) Ground water intakes.

(I) Nonland-based facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from the nearest ground water intake for domestic water.

(II) Land-based facilities shall be located such that the dangerous waste management unit boundary is at least one-quarter mile from the nearest ground water intake for domestic water.

(E) Special protection areas. Land-based facilities shall not be located within ground water special protection areas designated by ecology under the authority of chapter 90.48 RCW.

(d) Plants and animals: Intent. To reduce the potential for dangerous waste contaminating plant and animal habitat in the event of a release of dangerous wastes.

(i) Nonland-based facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from the following areas:

(A) Wetlands;

(B) Designated critical habitat, for federally listed threatened or endangered species, as defined by the Endangered Species Act of 1973 (P.L. 93-205);

(C) Habitat designated by the Washington department of wildlife as habitat essential to the maintenance or recovery of any state listed threatened or endangered wildlife species;

(D) Natural areas which are acquired or voluntarily registered or dedicated by the owner under chapter 79.70 RCW, Natural area preserves; and

(E) State or federally designated wildlife refuge, preserve, or bald eagle protection area.

(ii) Land-based facilities shall be located such that the dangerous waste management unit boundary is at least one-quarter mile from those areas specified in item (i) above.

(e) Precipitation. The intent of this subsection is to reduce the potential for contaminating waters and soils of the state in the event of a release of dangerous wastes.

Land-based facilities shall not be located in areas having a mean annual precipitation level of greater than one hundred inches. The mean annual precipitation map in the U.S. Geological Survey Water-Resources Investigations Report 84-4279 shall be used to determine whether a land-based facility is proposed to be located in such an area.

(7) Criteria for elements of the built environment. The following siting criteria establish locations from which facilities are excluded or which require separation from identified land uses. Unless otherwise stated, setback distances are measured horizontally from the dangerous waste management unit boundary to the identified land use.

These criteria shall be used as an initial screening tool in the selection of sites which may be considered by the department for the purpose of managing dangerous waste. A more comprehensive evaluation of locational factors will occur during the department's review of a permit application. The department may deny a permit or impose additional setback distances or other permit requirements if necessary to protect human health and the environment.

(a) Adjacent land use.

(i) Nonland-based facilities shall be located such that the dangerous waste management unit boundary is at least two hundred feet from the nearest point of the facility property line.

(ii) Land-based facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from the nearest point of the facility property line.

(b) Special land uses.

(i) Wild and scenic rivers. Dangerous waste management facilities shall not be located within the viewshed of users on wild and scenic rivers designated by the state or federal government.

(ii) Nonland-based facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from the following:

(A) State or federally designated park, recreation area, or national monument;

(B) Wilderness area as defined by the Wilderness Act of 1964 (P.L. 88-577); and

(C) Land identified as prime farmland at the time a notice of intent is submitted to the department.

(iii) Land-based facilities shall be located such that the dangerous waste management unit boundary is at least one-quarter mile from those land uses specified in item (ii) above.

(c) Residences and public gathering places.

(i) Nonland-based facilities with the exception of incineration facilities shall be located such that the dangerous waste management unit boundary is at least five hundred feet from residences or public gathering places.

(ii) Incineration and land-based facilities shall be located such that the dangerous waste management unit boundary is at least one-quarter mile from residences or public gathering places.

(d) Land use compatibility. Owners/operators of nonpreempted facilities shall conform with local land use zoning designation requirements, as approved by the department under chapter 70.105 RCW.

(e) Archeological sites and historic sites. No dangerous waste management facility shall be located in an archeological site or historic site designated by the state or federal government.

[Statutory Authority: RCW 43.21A.080 and 70.105.210, et seq. 90-20-016, § 173-303-282, filed 9/21/90, effective 10/22/90.]

WAC 173-303-283 Performance standards. (1) Purpose. This section provides general performance standards for designing, constructing, operating, and maintaining dangerous waste facilities.

(2) Applicability. This section applies to all dangerous waste facilities permitted under WAC 173-303-800 through 173-303-840. These general performance standards shall be used to determine whether more stringent facility standards should be applied than those spelled out in WAC 173-303-280, 173-303-290 through 173-303-400 and 173-303-600 through 173-303-670.

(3) Performance standards. Unless authorized by state, local, or federal laws, or unless otherwise authorized in this regulation, the owner/operator shall design, construct, operate, or maintain a dangerous waste facility that to the maximum extent practical given the limits of technology prevents:

(a) Degradation of ground water quality;

(b) Degradation of air quality by open burning or other activities;

(c) Degradation of surface water quality;

(d) Destruction or impairment of flora and fauna outside the active portion of the facility;

(e) Excessive noise;

(f) Conditions that constitute a negative aesthetic impact for the public using rights of ways, or public lands, or for landowners of adjacent properties;

(g) Unstable hillsides or soils as a result of trenches, impoundments, excavations, etc.;

(h) The use of processes that do not treat, detoxify, recycle, reclaim, and recover waste material to the extent economically feasible; and

(i) Endangerment of the health of employees, or the public near the facility.

[Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-283, filed 9/6/88.]

WAC 173-303-290 Required notices. (1) The facility owner or operator who is receiving dangerous waste from a foreign source shall notify the department in writing at least four weeks in advance of the date the waste is expected to arrive at the facility. Notice of subsequent shipments of the same waste from the same foreign source is not required.

(2) Before transferring ownership or operation of a facility during its active life or post-closure care period, the owner or operator shall notify the new owner or operator in writing of the requirements of this chapter 173-303 WAC.

(3) The owner or operator of a facility that receives dangerous waste from an off-site source (except where the owner or operator is also the generator) must inform the generator in writing that he has the appropriate permit(s) for, and will accept, the waste the generator is shipping. The owner or operator must keep a copy of this written notice as part of the operating record required under WAC 173-303-380(1).

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-290, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-290, filed 2/10/82.]

WAC 173-303-300 General waste analysis. (1) Purpose. This section requires the facility owner or operator to confirm his knowledge about a dangerous waste before he stores, treats, or disposes of it. The purpose for the analysis is to insure that a dangerous waste is managed properly.

(2) The owner or operator shall obtain a detailed chemical, physical, and/or biological analysis of a dangerous waste before he stores, treats, or disposes of it. This analysis must contain the information necessary to manage the waste in accordance with the requirements of this chapter 173-303 WAC. The analysis may include or consist of existing published or documented data on the dangerous waste, or on waste generated from similar processes, or data obtained by testing, if necessary.

(3) The owner or operator of an off-site facility shall confirm, by analysis if necessary, that each dangerous waste received at the facility matches the identity of the waste specified on the accompanying manifest or shipping paper.

(4) Analysis shall be repeated as necessary to ensure that it is accurate and current. At a minimum, analysis must be repeated:

(a) When the owner or operator has been notified, or has reason to believe, that the process or operation generating the dangerous waste has significantly changed; and

(b) When a dangerous waste received at an off-site facility does not match the identity of the waste specified on the manifest or the shipping paper.

(5) Waste analysis plan. The owner or operator shall develop and follow a written waste analysis plan which describes the procedures he will use to comply with the waste analysis requirements of subsections (1), (2), (3), and (4) of this section. He must keep this plan at the facility, and the plan must contain at least:

(a) The parameters for which each dangerous waste will be analyzed, and the rationale for selecting these parameters;

(b) The methods of obtaining or testing for these parameters;

(c) The methods for obtaining representative samples of wastes for analysis (representative sampling methods are discussed in WAC 173-303-110(2));

(d) The frequency with which analysis of a waste will be reviewed or repeated to ensure that the analysis is accurate and current;

(e) The waste analyses which generators have agreed to supply;

(f) Where applicable, the methods for meeting the additional waste analysis requirements for specific waste management methods as specified in 40 CFR Part 265 Subparts F through R for interim status facilities and in WAC 173-303-630 through 173-303-670 for final status facilities; and

(g) For off-site facilities, the procedures for confirming that each dangerous waste received matches the identity of the waste specified on the accompanying manifest or shipping paper. This includes at least:

(i) The procedures for identifying each waste movement at the facility; and

(ii) The method for obtaining a representative sample of the waste to be identified, if the identification method includes sampling.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-300, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-300, filed 2/10/82.]

WAC 173-303-310 Security. (1) The owner or operator shall comply with the requirements of this section, unless he can demonstrate to the department that:

(a) Physical contact with wastes or equipment within the active portion of the facility will not injure persons or livestock; and

(b) Disturbance of the wastes or equipment within the active portion of the facility by persons or livestock will not result in violations of this chapter 173-303 WAC.

(2) A facility must have:

(a) Signs posted at each entrance to the active portion, and at other locations, in sufficient numbers to be seen from any approach to the active portion. Signs must bear the legend, "Danger-unauthorized personnel keep out," or an equivalent legend, written in English, and must be legible from a distance of twenty-five feet or more; and either

(b) A 24-hour surveillance system which continuously monitors and controls entry onto the active portion of the facility; or

(c) An artificial or natural barrier, or a combination of both, which completely surrounds the active portion of the

facility, with a means to control access through gates or other entrances to the active portion of the facility at all times.

(3) In lieu of WAC 173-303-310(2), above, the owner or operator of a totally enclosed treatment facility or an elementary neutralization or wastewater treatment unit (as defined in WAC 173-303-040) must prevent the unknowing entry, and minimize the possibility for the unauthorized entry, of persons or livestock into or onto the totally enclosed treatment facility or the elementary neutralization or wastewater treatment unit.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-310, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-310, filed 2/10/82. Formerly WAC 173-302-290.]

WAC 173-303-320 General inspection. (1) The owner or operator shall inspect his facility to prevent malfunctions and deterioration, operator errors, and discharges which may cause or lead to the release of dangerous waste constituents to the environment, or a threat to human health. The owner or operator must conduct these inspections often enough to identify problems in time to correct them before they harm human health or the environment.

(2) The owner or operator shall develop and follow a written schedule for inspecting all monitoring equipment, safety and emergency equipment, security devices, and operating and structural equipment that help prevent, detect, or respond to hazards to the public health or the environment. In addition:

(a) He must keep the schedule at the facility;

(b) The schedule must identify the types of problems which are to be looked for during inspections;

(c) The schedule shall indicate the frequency of inspection for specific items. The frequency should be based on the rate of possible deterioration of equipment, and the probability of an environmental or human health incident. Areas subject to spills must be inspected daily when in use. The inspection schedule shall also include the applicable items and frequencies required for the specific waste management methods described in 40 CFR Part 265 Subparts F through R for interim status facilities and in WAC 173-303-630 through 173-303-680 for final status facilities; and

(d) The owner or operator shall keep an inspection log or summary, including at least the date and time of the inspection, the printed name and the handwritten signature of the inspector, a notation of the observations made, an account of spills or discharges in accordance with WAC 173-303-145, and the date and nature of any repairs or remedial actions taken. The log or summary must be kept at the facility for at least five years from the date of inspection.

(3) The owner or operator shall remedy any problems revealed by the inspection, on a schedule which prevents hazards to the public health and environment. Where a hazard is imminent or has already occurred, remedial action must be taken immediately.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-320, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-320, filed 4/18/84.]

Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-320, filed 2/10/82.]

WAC 173-303-330 Personnel training. (1) Training program. The facility owner or operator shall provide a program of classroom instruction or on-the-job training for facility personnel. This program must teach personnel to perform their duties in a way that ensures the facility's compliance with this chapter 173-303 WAC, must teach facility personnel dangerous waste management procedures (including contingency plan implementation) relevant to the positions in which they are employed, must ensure that facility personnel are able to respond effectively to emergencies, and shall include those elements set forth in the training plan required in subsection (2) of this section. In addition:

(a) The training program shall be directed by a person knowledgeable in dangerous waste management procedures, and must include training relevant to the positions in which the facility personnel are employed;

(b) Facility personnel must participate in an annual review of the training provided in the training program;

(c) This program must be successfully completed by the facility personnel:

(i) Within six months after these regulations become effective; or

(ii) Within six months after their employment at or assignment to the facility, or to a new position at the facility, whichever is later.

Employees hired after the effective date of these regulations must be supervised until they complete the training program; and

(d) At a minimum, the training program shall familiarize facility personnel with emergency equipment and systems, and emergency procedures. The program shall include other parameters as set forth by the department, but at a minimum shall include, where applicable:

(i) Procedures for using, inspecting, repairing, and replacing facility emergency and monitoring equipment;

(ii) Key parameters for automatic waste feed cut-off systems;

(iii) Communications or alarm systems;

(iv) Response to fires or explosions;

(v) Response to ground-water contamination incidents; and

(vi) Shutdown of operations.

(2) Written training plan. The owner or operator shall develop a written training plan which must be kept at the facility and which must include the following documents and records:

(a) For each position related to dangerous waste management at the facility, the job title, the job description, and the name of the employee filling each job. The job description must include the requisite skills, education, other qualifications, and duties for each position;

(b) A written description of the type and amount of both introductory and continuing training required for each position; and

(c) Records documenting that facility personnel have received and completed the training required by this section.

(3) Training records. Training records on current personnel must be kept until closure of the facility. Training records on former employees must be kept for at least three

years from the date the employee last worked at the facility. Personnel training records may accompany personnel transferred within the same company.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-330, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-330, filed 2/10/82. Formerly WAC 173-302-320.]

WAC 173-303-340 Preparedness and prevention.

Facilities shall be designed, constructed, maintained and operated to minimize the possibility of fire, explosion, or any unplanned sudden or nonsudden release of dangerous waste or dangerous waste constituents to air, soil, or surface or ground water which could threaten the public health or the environment. This section describes preparations and preventive measures which help avoid or mitigate such situations.

(1) Required equipment. All facilities must be equipped with the following, unless it can be demonstrated to the department that none of the hazards posed by waste handled at the facility could require a particular kind of equipment specified below:

(a) An internal communications or alarm system capable of providing immediate emergency instruction to facility personnel;

(b) A device, such as a telephone or a hand-held, two-way radio, capable of summoning emergency assistance from local police departments, fire departments, or state or local emergency response teams;

(c) Portable fire extinguishers, fire control equipment, spill control equipment, and decontamination equipment; and

(d) Water at adequate volume and pressure to supply water hose streams, foam producing equipment, automatic sprinklers, or water spray systems.

All facility communications or alarm systems, fire protection equipment, spill control equipment, and decontamination equipment, where required, must be tested and maintained as necessary to assure its proper operation in time of emergency.

(2) Access to communications or alarms. Personnel must have immediate access to the signalling devices described in the situations below:

(a) Whenever dangerous waste is being poured, mixed, spread, or otherwise handled, all personnel involved must have immediate access to an internal alarm or emergency communication device, either directly or through visual or voice contact with another employee, unless such a device is not required in subsection (1) of this section;

(b) If there is ever just one employee on the premises while the facility is operating, he must have immediate access to a device, such as a telephone or a hand-held, two-way radio, capable of summoning external emergency assistance, unless such a device is not required in subsection (1) of this section.

(3) Aisle space. The owner or operator must maintain aisle space to allow the unobstructed movement of personnel, fire protection equipment, spill control equipment, and decontamination equipment to any area of facility operation in an emergency, unless it can be demonstrated to the department that aisle space is not needed for any of these purposes.

(4) Arrangements with local authorities. The owner or operator shall attempt to make the following arrangements, as appropriate for the type of waste handled at his facility and the potential need for the services of these organizations, unless the hazards posed by wastes handled at the facility would not require these arrangements:

(a) Arrangements to familiarize police, fire departments, and emergency response teams with the layout of the facility, properties of dangerous waste handled at the facility and associated hazards, places where facility personnel would normally be working, entrances to and roads inside the facility, and possible evacuation routes;

(b) Arrangements to familiarize local hospitals with the properties of dangerous waste handled at the facility and the types of injuries or illnesses which could result from fires, explosions, or releases at the facility;

(c) Agreements with state emergency response teams, emergency response contractors, and equipment suppliers; and

(d) Where more than one party might respond to an emergency, agreements designating primary emergency authority and agreements with any others to provide support to the primary emergency authority.

(5) Where state or local authorities decline to enter into such arrangements, the owner or operator must document the refusal in the operating record.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-340, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-340, filed 2/10/82.]

WAC 173-303-350 Contingency plan and emergency procedures. (1) Purpose. The purpose of this section and WAC 173-303-360 is to lessen the potential impact on the public health and the environment in the event of an emergency circumstance, including a fire, explosion, or unplanned sudden or nonsudden release of dangerous waste or dangerous waste constituents to air, soil, surface water, or ground water by a facility. A contingency plan must be developed to lessen the potential impacts of such emergency circumstances, and the plan shall be implemented immediately in such emergency circumstances.

(2) Contingency plan. Each owner or operator must have a contingency plan at his facility for use in emergencies or sudden or nonsudden releases which threaten the public health and the environment. If the owner or operator has already prepared a spill prevention control and countermeasures (SPCC) plan in accordance with Part 112 of Title 40 CFR or Part 1510 of chapter V, or some other emergency or contingency plan, he need only amend that plan to incorporate dangerous waste management provisions that are sufficient to comply with the requirements of this section and WAC 173-303-360.

(3) The contingency plan must contain the following:

(a) A description of the actions which facility personnel must take to comply with this section and WAC 173-303-360;

(b) A description of the actions which shall be taken in the event that a dangerous waste shipment, which is damaged or otherwise presents a hazard to the public health and the environment, arrives at the facility, and is not acceptable to the owner or operator, but cannot be transported, pursuant

to the requirements of WAC 173-303-370(5), Manifest system, reasons for not accepting dangerous waste shipments;

(c) A description of the arrangements agreed to by local police departments, fire departments, hospitals, contractors, and state and local emergency response teams to coordinate emergency services;

(d) A current list of names, addresses, and phone numbers (office and home) of all persons qualified to act as the emergency coordinator required under WAC 173-303-360(1). Where more than one person is listed, one must be named as primary emergency coordinator, and others must be listed in the order in which they will assume responsibility as alternates. For new facilities only, this list may be provided to the department at the time of facility certification (as required by WAC 173-303-810 (14)(a)(i)), rather than as part of the permit application;

(e) A list of all emergency equipment at the facility (such as fire extinguishing systems, spill control equipment, communications and alarm systems, and decontamination equipment), where this equipment is required. This list must be kept up to date. In addition, the plan must include the location and a physical description of each item on the list, and a brief outline of its capabilities; and

(f) An evacuation plan for facility personnel where there is a possibility that evacuation could be necessary. This plan must describe the signal(s) to be used to begin evacuation, evacuation routes, and alternate evacuation routes.

(4) Copies of contingency plan. A copy of the contingency plan and all revisions to the plan shall be:

(a) Maintained at the facility; and

(b) Submitted to all local police departments, fire departments, hospitals, and state and local emergency response teams that may be called upon to provide emergency services.

(5) Amendments. The owner or operator shall review and immediately amend the contingency plan, if necessary, whenever:

(a) Applicable regulations or the facility permit are revised;

(b) The plan fails in an emergency;

(c) The facility changes (in its design, construction, operation, maintenance, or other circumstances) in a way that materially increases the potential for fires, explosions, or releases of dangerous waste or dangerous waste constituents, or in a way that changes the response necessary in an emergency;

(d) The list of emergency coordinators changes; or

(e) The list of emergency equipment changes.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-350, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-350, filed 2/10/82. Formerly chapter 173-302 WAC.]

WAC 173-303-355 Superfund Amendments and Reauthorization Act Title III coordination. (1) Owners or operators shall coordinate preparedness and prevention planning and contingency planning efforts, conducted under WAC 173-303-340 and 173-303-350, with local emergency planning committees established pursuant to Title III of the 1986 Superfund Amendments and Reauthorization Act.

(2) Appropriate and generally accepted computer models should be utilized to determine the impacts of a potential catastrophic air release due to fire, explosion, or other accidental releases of hazardous constituents. Evacuation plans prepared pursuant to WAC 173-303-350 (3)(d) shall include those effected persons and areas identified through these modelling efforts.

[Statutory Authority: RCW 43.21A.080 and 70.105.210, et seq. 90-20-016, § 173-303-355, filed 9/21/90, effective 10/22/90.]

WAC 173-303-360 Emergencies. (1) Emergency coordinator. At all times, there must be at least one employee either on the facility premises or on call with the responsibility for coordinating all emergency response measures. This emergency coordinator must be thoroughly familiar with all aspects of the facility's contingency plan, required by WAC 173-303-350(2), all operations and activities at the facility, the location and properties of all wastes handled, the location of all records within the facility, and the facility layout. In addition, this person must have the authority to commit the resources needed to carry out the contingency plan.

(2) Emergency procedures. The following procedures shall be implemented in the event of an emergency.

(a) Whenever there is an imminent or actual emergency situation, the emergency coordinator (or his designee when the emergency coordinator is on call) must immediately:

(i) Activate internal facility alarms or communication systems, where applicable, to notify all facility personnel; and

(ii) Notify appropriate state or local agencies with designated response roles if their help is needed.

(b) Whenever there is a release, fire, or explosion, the emergency coordinator must immediately identify the character, exact source, amount, and areal extent of any released materials.

(c) Concurrently, the emergency coordinator shall assess possible hazards to human health and the environment (considering direct, indirect, immediate, and long-term effects) that may result from the release, fire, or explosion.

(d) If the emergency coordinator determines that the facility has had a release, fire, or explosion which could threaten human health or the environment, he must report his findings as follows:

(i) If his assessment indicates that evacuation of local areas may be advisable, he must immediately notify appropriate local authorities. He must be available to help appropriate officials decide whether local areas should be evacuated; and

(ii) He must immediately notify the department and either the government official designated as the on-scene coordinator, or the National Response Center (using their 24-hour toll free number (800) 424-8802).

(e) His assessment report must include:

(i) Name and telephone number of reporter;

(ii) Name and address of facility;

(iii) Time and type of incident (e.g., release, fire);

(iv) Name and quantity of material(s) involved, to the extent known;

(v) The extent of injuries, if any; and

(vi) The possible hazards to human health or the environment outside the facility.

(f) During an emergency, the emergency coordinator must take all reasonable measures necessary to ensure that fires, explosions, and releases do not occur, recur, or spread to other dangerous waste at the facility. These measures must include, where applicable, stopping processes and operations, collecting and containing released waste, and removing or isolating containers.

(g) If the facility stops operations in response to a fire, explosion, or release, the emergency coordinator must monitor for leaks, pressure buildup, gas generation, or ruptures in valves, pipes, or other equipment, wherever this is appropriate.

(h) Immediately after an emergency, the emergency coordinator must provide for treating, storing, or disposing of recovered waste, contaminated soil or surface water, or any other material that results from a release, fire, or explosion at the facility.

(i) The emergency coordinator must ensure that, in the affected area(s) of the facility:

(i) No waste that may be incompatible with the released material is treated, stored, or disposed of until cleanup procedures are completed; and

(ii) All emergency equipment listed in the contingency plan is cleaned and fit for its intended use before operations are resumed.

(j) The owner or operator must notify the department, and appropriate local authorities, that the facility is in compliance with (i) of this subsection before operations are resumed in the affected area(s) of the facility.

(k) The owner or operator must note in the operating record the time, date, and details of any incident that requires implementing the contingency plan. Within fifteen days after the incident, he must submit a written report on the incident to the department. The report must include:

(i) Name, address, and telephone number of the owner or operator;

(ii) Name, address, and telephone number of the facility;

(iii) Date, time, and type of incident (e.g., fire, explosion);

(iv) Name and quantity of material(s) involved;

(v) The extent of injuries, if any;

(vi) An assessment of actual or potential hazards to human health or the environment, where this is applicable;

(vii) Estimated quantity and disposition of recovered material that resulted from the incident;

(viii) Cause of incident; and

(ix) Description of corrective action taken to prevent reoccurrence of the incident.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-360, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-360, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-360, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-360, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-360, filed 2/10/82. Formerly chapter 173-302 WAC.]

WAC 173-303-370 Manifest system. (1) Applicability. The requirements of this section apply to owners and operators who receive dangerous waste from off-site sources.

(2) If a facility receives dangerous waste accompanied by a manifest, the owner or operator, or his agent, must:

(a) Sign and date each copy of the manifest to certify that the dangerous waste covered by the manifest was received;

(b) Note any significant discrepancies in the manifest, as described in subsection (4) of this section, on each copy of the manifest;

(c) Immediately give the transporter at least one copy of the signed manifest;

(d) Within thirty days after the delivery, send a copy of the manifest to the generator; and

(e) Retain at the facility a copy of each manifest for at least three years from the date of delivery.

(3) If a facility receives, from a rail or water (bulk shipment) transporter, dangerous waste which is accompanied by a manifest or shipping paper containing all the information required on the manifest (excluding the EPA/state identification numbers, generator's certification, and signatures), the owner or operator, or his agent, must:

(a) Sign and date each copy of the manifest or shipping paper to certify that the dangerous waste covered by the manifest or shipping paper was received;

(b) Note any significant discrepancies in the manifest or shipping paper, as described in subsection (4) of this section, on each copy of the manifest or shipping paper;

(c) Immediately give the rail or water (bulk shipment) transporter at least one copy of the manifest or shipping paper;

(d) Within thirty days after the delivery, send a copy of the signed and dated manifest or shipping paper to the generator. However, if the manifest is not received within thirty days after the delivery, the owner or operator, or his agent, must send a copy of the signed and dated shipping paper to the generator; and

(e) Retain at the facility a copy of each shipping paper and manifest for at least three years from the date of delivery.

(4) Manifest discrepancies.

(a) Manifest discrepancies are significant discrepancies between the quantity or type of dangerous waste designated on the manifest or shipping paper and the quantity or type of dangerous waste a facility actually receives. Significant discrepancies in quantity are variations greater than ten percent in weight for bulk quantities (e.g., tanker trucks, railroad tank cars, etc.), or any variations in piece count for nonbulk quantities (i.e., any missing container or package would be a significant discrepancy). Significant discrepancies in type are obvious physical or chemical differences which can be discovered by inspection or waste analysis (e.g., waste solvent substituted for waste acid).

(b) Upon discovering a significant discrepancy, the owner or operator must attempt to reconcile the discrepancy with the waste generator or transporter. If the discrepancy is not resolved within fifteen days after receiving the waste, the owner or operator must immediately submit to the department a letter describing the discrepancy and attempts to reconcile it, and a copy of the manifest or shipping paper at issue.

(5) Reasons for not accepting dangerous waste shipments. The owner or operator may decide that a dangerous shipment should not be accepted by his facility.

(a) The following shall be acceptable reasons for denying receipt of a dangerous waste shipment:

(i) The facility is not capable of properly managing the type(s) of dangerous waste in the shipment;

(ii) There is a significant discrepancy (as described in subsection (4) of this section) between the shipment and the wastes listed on the manifest or shipping paper; or

(iii) The shipment has arrived in a condition which the owner or operator believes would present an unreasonable hazard to facility operations, or to facility personnel handling the dangerous waste(s) (including, but not limited to, leaking or damaged containers, and improperly labeled containers).

(b) The owner or operator may send the shipment on to the alternate facility designated on the manifest or shipping paper, or contact the generator to identify another facility capable of handling the waste and provide for its delivery to that other facility, unless, the containers are damaged to such an extent, or the dangerous waste is in such a condition as to present a hazard to the public health or the environment in the process of further transportation.

(c) If the dangerous waste shipment cannot leave the facility for the reasons described in (b) of this subsection, then the owner or operator shall take those actions described in the contingency plan, WAC 173-303-350 (3)(b).

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-370, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-370, filed 2/10/82. Formerly chapter 173-302 WAC.]

WAC 173-303-380 Facility recordkeeping. (1) Operating record. The owner or operator of a facility shall keep a written operating record at his facility. The following information shall be recorded, as it becomes available, and maintained in the operating record until closure of the facility:

(a) A description of and the quantity of each dangerous waste received or managed on-site, and the method(s) and date(s) of its treatment, storage, or disposal at the facility as required by subsection (2) of this section, recordkeeping instructions;

(b) The location of each dangerous waste within the facility and the quantity at each location. For disposal facilities, the location and quantity of each dangerous waste must be recorded on a map or diagram of each cell or disposal area. For all facilities, this information must include cross-references to specific manifest document numbers, if the waste was accompanied by a manifest;

(c) Records and results of waste analyses required by WAC 173-303-300, General waste analysis;

(d) Summary reports and details of all incidents that require implementing the contingency plan, as specified in WAC 173-303-360 (2)(k);

(e) Records and results of inspections as required by WAC 173-303-320 (2)(d), General inspection (except such information need be kept only for five years);

(f) Monitoring, testing, or analytical data, and corrective action where required by 40 CFR Part 265 Subparts F through R for interim status facilities, and by WAC 173-303-630 through 173-303-680 for final status facilities;

(g) All closure and post-closure cost estimates required for the facility; and

(h) For off-site facilities, copies of notices to generators informing them that the facility has all appropriate permits, as required by WAC 173-303-290, Required notices.

(2) Recordkeeping instructions. This paragraph provides instructions for recording the portions of the operating record which are related to describing the types, quantities, and management of dangerous wastes at the facility. This information shall be kept in the operating record, as follows:

(a) Each dangerous waste received or managed shall be described by its common name and by its dangerous waste number(s) from WAC 173-303-080 through 173-303-104. Where a dangerous waste contains more than one process waste or waste constituent the waste description must include all applicable dangerous waste numbers. If the dangerous waste number is not listed then the waste description shall include the process which generated the waste;

(b) The waste description shall include the waste's physical form (i.e., liquid, solid, sludge, or gas);

(c) The weight, or volume and density, of the dangerous waste shall be recorded, using one of the units of measure specified in Table 1, below;

TABLE 1

Unit of Measure	Symbol	Density
Pounds	P	
Short tons (2000 lbs)	T	
Gallons (U.S.)	G	P/G
Cubic yards	Y	T/Y
Kilograms	K	
Tonnes (1000 kg)	M	
Liters	L	K/L
Cubic meters	C	M/C

(d) And, the date(s) and method(s) of management for each dangerous waste received or managed (treated, recycled, stored, or disposed of) shall be recorded, using the handling code(s) specified in Table 2, below.

TABLE 2

1. Storage
 - S01 Container (barrel, drum, etc.)
 - S02 Tank
 - S03 Waste pile
 - S04 Surface impoundment
 - S05 Other (specify)
2. Treatment
 - (a) Thermal treatment
 - T06 Liquid injection incinerator
 - T07 Rotary kiln incinerator
 - T08 Fluidized bed incinerator
 - T09 Multiple hearth incinerator
 - T10 Infrared furnace incinerator
 - T11 Molten salt destructor
 - T12 Pyrolysis
 - T13 Wet air oxidation
 - T14 Calcination
 - T15 Microwave discharge
 - T16 Cement kiln
 - T17 Lime kiln
 - T18 Other (specify)

- (b) Chemical treatment
 - T19 Absorption mound
 - T20 Absorption field
 - T21 Chemical fixation
 - T22 Chemical oxidation
 - T23 Chemical precipitation
 - T24 Chemical reduction
 - T25 Chlorination
 - T26 Chlorinolysis
 - T27 Cyanide destruction
 - T28 Degradation
 - T29 Detoxification
 - T30 Ion exchange
 - T31 Neutralization
 - T32 Ozonation
 - T33 Photolysis
 - T34 Other (specify)

- (c) Physical treatment
 - (i) Separation of components

- T35 Centrifugation
- T36 Clarification
- T37 Coagulation
- T38 Decanting
- T39 Encapsulation
- T40 Filtration
- T41 Flocculation
- T42 Flotation
- T43 Foaming
- T44 Sedimentation
- T45 Thickening
- T46 Ultrafiltration
- T47 Other (specify)

- (ii) Removal of specific components

- T48 Absorption-molecular sieve
- T49 Activated carbon
- T50 Blending
- T51 Catalysis
- T52 Crystallization
- T53 Dialysis
- T54 Distillation
- T55 Electrodialysis
- T56 Electrolysis
- T57 Evaporation
- T58 High gradient magnetic separation
- T59 Leaching
- T60 Liquid ion exchange
- T61 Liquid-liquid extraction
- T62 Reverse osmosis
- T63 Solvent recovery
- T64 Stripping
- T65 Sand filter
- T66 Other (specify)

- (d) Biological treatment

- T67 Activated sludge
- T68 Aerobic lagoon
- T69 Aerobic tank
- T70 Anaerobic lagoon or tank
- T71 Composting
- T72 Septic tank
- T73 Spray irrigation
- T74 Thickening filter
- T75 Trickling filter

T76 Waste stabilization pond
 T77 Other (specify)
 T78-79 (Reserved)

3. Disposal

D80 Underground injection
 D81 Landfill
 D82 Land treatment
 D83 Ocean disposal
 D84 Surface impoundment
 (to be closed as a landfill)
 D85 Other (specify)

(3) Availability, retention and disposition of records.

(a) All facility records, including plans, required by this chapter must be furnished upon request, and made available at all reasonable times for inspection, by any officer, employee, or representative of the department who is designated by the director.

(b) The retention period for all facility records required under this chapter is extended automatically during the course of any unresolved enforcement action regarding the facility or as requested by the director.

(c) A copy of records of waste disposal locations and quantities under this section must be submitted to the United States EPA regional administrator, the department, and the local land use and planning authority upon closure of the facility.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-380, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW, 86-12-057 (Order DE-85-10), § 173-303-380, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-380, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-380, filed 2/10/82. Formerly chapter 173-302 WAC.]

WAC 173-303-390 Facility reporting. The owner or operator of a facility is responsible for preparing and submitting the reports described in this section.

(1) Unmanifested waste reports. If a facility accepts any dangerous waste from an off-site source without an accompanying manifest or shipping paper, and if the waste is not excluded from the manifest requirements of this chapter 173-303 WAC, then the owner or operator must prepare and submit a single copy of a report to the department within fifteen days after receiving the waste. The report form and instructions in the Unmanifested Dangerous Waste Report - Form 6 (which may be obtained from the department) must be used for this report. The report must include at least the following information:

- (a) The EPA/state identification number, name, and address of the facility;
- (b) The date the facility received the waste;
- (c) The EPA/state identification number, name, and address of the generator and the transporter, if available;
- (d) A description and the quantity of each unmanifested dangerous waste the facility received;
- (e) The method of management for each dangerous waste;
- (f) The certification signed by the owner or operator of the facility or his authorized representative; and
- (g) A brief explanation of why the waste was unmanifested, if known.

(2) Annual reports. The owner or operator of a facility that holds an active EPA/state identification number shall prepare and submit a single copy of an annual report to the department by March 1 of each year. The report form and instructions in the TSD Facility Annual Dangerous Waste Report - Form 5 (which may be obtained from the department) must be used for this report. In addition, any facility which ships dangerous waste off-site must comply with the annual reporting requirements of WAC 173-303-220. The annual report must cover facility activities during the previous calendar year and must include, but is not limited to the following information:

- (a) The EPA/state identification number, name, and address of the facility;
- (b) The calendar year covered by the report;
- (c) For off-site facilities, the EPA/state identification number of each dangerous waste generator from which the facility received a dangerous waste during the year. For imported shipments, the report must give the name and address of the foreign generator;
- (d) A description and the quantity of each dangerous waste the facility received during the year. For off-site facilities, this information must be listed by EPA/state identification number of each generator;
- (e) The method of treatment, storage, or disposal for each dangerous waste;
- (f) The most recent closure cost estimate under WAC 173-303-620(3) (or 40 CFR 265.142 for interim status facilities), and for disposal facilities, the most recent post-closure cost estimate under WAC 173-303-620(5) (or 40 CFR 265.144 for interim status facilities); and
- (g) The certification signed in accordance with the requirements of WAC 173-303-810(12).

(3) Additional reports. The owner or operator shall also report to the department releases of dangerous wastes, fires, and explosions as specified in WAC 173-303-360 (2)(k) and interim status groundwater monitoring data, as specified in 40 CFR 265.94 (a)(2) and (b)(2).

In addition, the owner or operator shall submit any other reports (including engineering reports, plans, and specifications) required by the department.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-390, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW, 86-12-057 (Order DE-85-10), § 173-303-390, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-390, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-390, filed 2/10/82.]

WAC 173-303-395 Other general requirements. (1) Precautions for ignitable, reactive, or incompatible wastes.

(a) The owner or operator must take precautions to prevent accidental ignition or reaction of ignitable or reactive waste. This waste must be separated and protected from sources of ignition or reaction including, but not limited to, open flames, smoking, cutting and welding, hot surfaces, frictional heat, sparks (static, electrical, or mechanical), spontaneous ignition (e.g., from heat-producing chemical reactions), and radiant heat. While ignitable or reactive waste is being handled, the owner or operator must confine smoking and open flame to specially designated locations.

"No smoking" signs must be conspicuously placed wherever there is a hazard from ignitable or reactive waste.

(b) Where specifically required by other sections of this chapter 173-303 WAC, the treatment, storage, or disposal of ignitable or reactive waste, and the mixture or commingling of incompatible wastes, or incompatible wastes and materials, must be conducted so that it does not:

- (i) Generate extreme heat or pressure, fire or explosion, or violent reaction;
- (ii) Produce uncontrolled toxic mists, fumes, dusts, or gases in sufficient quantities to threaten human health or the environment;
- (iii) Produce uncontrolled flammable fumes or gases in sufficient quantities to pose a risk of fire or explosions;
- (iv) Damage the structural integrity of the facility or device containing the waste; or
- (v) Through other like means, threaten human health or the environment.

(c) When required to comply with (a) and (b) of this subsection, the owner or operator must document that compliance in the operating record required under WAC 173-303-380(1). This documentation may be based on references to published scientific or engineering literature, data from trial tests, waste analyses, or the results of the treatment of similar wastes by similar treatment processes and under similar operating conditions.

(d) At least yearly, the owner or operator shall inspect those areas of his facility where ignitable or reactive wastes are stored. This inspection shall be performed in the presence of a professional person who is familiar with the Uniform Fire Code, or in the presence of the local, state, or federal fire marshal. The owner or operator shall enter the following information in his inspection log or operating record as a result of this inspection:

- (i) The date and time of the inspection;
- (ii) The name of the professional inspector or fire marshal;
- (iii) A notation of the observations made; and
- (iv) Any remedial actions which were taken as a result of the inspection.

(2) Compliance with other environmental protection laws and regulations. In receiving, storing, handling, treating, processing, or disposing of dangerous wastes, the owner/operator shall design, maintain and operate his dangerous waste facility in compliance with all applicable federal, state and local laws and regulations (e.g., control of stormwater or sanitary water discharge, control of volatile air emissions, etc.).

(3) Asbestos dangerous waste disposal requirements. All asbestos containing waste material shall be disposed of at waste disposal sites which are operated in accordance with 40 CFR Part 61 Subpart M. Such sites will not need to comply with any other standards of chapter 173-303 WAC, if they comply with 40 CFR Part 61.

(4) Loading and unloading areas. TSD facilities which receive or ship manifested shipments of liquid dangerous waste for treatment, storage or disposal must provide for and use an area (or areas) for loading and unloading waste shipments. The loading and unloading area(s) must be designed, constructed, operated and maintained to:

- (a) Contain spills and leaks that might occur during loading or unloading;

- (b) Prevent release of dangerous waste or dangerous waste constituents to ground or surface waters;

- (c) Contain wash waters (if any) resulting from the cleaning of contaminated transport vehicles and load/unload equipment; and

- (d) Allow for removal, as soon as possible, of collected wastes resulting from spills, leaks and equipment cleaning (if any) in a manner which assures compliance with (b) of this subsection.

- (5) Storage time limit for impoundments and piles.

(a) Except as provided in (b) or (c) of this subsection, dangerous waste shall not be stored in a surface impoundment or waste pile for more than five years after the waste was first placed in the impoundment or pile. For the purposes of this requirement, the five-year limit, for waste regulated under this chapter and being stored in impoundments or piles on the effective date of this requirement, will begin on August 1, 1984. The age of stored wastes must be determined on a monthly basis.

The owner/operator of a surface impoundment or waste pile used for storing dangerous waste must develop a written plan, to be kept at the facility, for complying with the five-year storage limit. The plan must describe the operating conditions, waste identification procedures (for keeping track of the age of the wastes), and a waste removal schedule, and at a minimum the plan must include the following elements:

- (i) Methods for identifying the age of dangerous wastes placed in the impoundment or pile;

- (ii) Where practical, procedures for segregating wastes of different ages. If the wastes cannot be practically segregated, then the age of all wastes placed in the impoundment or pile shall be deemed the same age as the oldest waste in the impoundment or pile;

- (iii) A schedule for removing dangerous waste from the impoundment or pile, or for disposing of them in a timely manner to assure compliance with the five-year limit;

- (iv) A description of the actions to be taken according to the schedule required by (a)(iii) of this subsection;

- (v) Procedures for noting in the operating record required by WAC 173-303-380(1) that the requirements of this subsection have been satisfied; and

- (vi) Such other requirements as the department specifies.

(b) If the owner/operator of a surface impoundment or waste pile can develop a written plan and schedule for developing and implementing a recycling or treatment process for the wastes stored in his impoundment or pile, then the department may grant an extension to the storage time limit required in (a) of this subsection. Such extension will be granted only once, will only apply to those dangerous wastes covered by the recycling or treatment plan and which are less than five years old on the date that the plan is approved by the department, and will not exceed five years: *Provided*, That on a case-by-case basis the department may grant an extension of longer than five years, but in no case will any extension be granted for longer than ten years, if the owner/operator of the impoundment or pile can demonstrate to the department's satisfaction that an extension of more than five years will not pose a threat to public health or the environment, and is necessary because: Other treatment or recycling options of shorter durations are not available; the treatment or recycling plan developed by the owner/operator cannot be implemented within five years due

to technological circumstances; or, such other reasons as are determined acceptable by the department. Until the department grants the extension by approving the recycling or treatment plan, the owner/operator must continue to comply with the requirements of (a) of this subsection. The recycling or treatment plan and schedule, at a minimum, must:

(i) Specify the wastes which will be recycled or treated in accordance with the plan;

(ii) Describe in detail the recycling or treatment which the owner/operator intends to perform. If the recycling or treatment will involve physical changes to the owner's/operator's facility, the plan must include descriptions of all necessary equipment, processes to be used, site plans, and maps to show any new structures, pipes, channels, waste handling areas, roads, etc.;

(iii) Discuss any permit actions (including issuance or modification) necessary under this chapter, and any other permits which will be required under other federal, state or local laws;

(iv) Establish a schedule for complying with the plan. The schedule must, at a minimum, cover:

(A) The rate at which wastes will be recycled or treated in order to comply with the extension granted by the department;

(B) Construction and equipment installation times as appropriate;

(C) Timing for complying with all required permit actions; and

(D) Such other elements as the department might require;

(v) Describe how the owner/operator will continue to comply with the requirements of (a) of this subsection for all wastes not specified in (b)(i) of this subsection;

(vi) Identify any future occurrences or situations which the owner/operator could reasonably expect to occur and which might cause him to fail to comply with his recycling or treatment plan. The owner/operator must also describe what actions he would take in the event that such occurrences or situations happen;

(vii) Be approved by the department. The plan shall not be implemented until it is approved by the department including, if necessary, issuance or modification of a facility permit as required by this chapter. Any extension granted by the department will begin on the date that the plan is approved, or the date five years after the effective date of this subsection, whichever is later; and

(viii) Include any other elements that the department might require.

(c) The owner/operator of a surface impoundment or waste pile is exempted from the requirements of (a) and (b) of this subsection if:

(i) The owner/operator of a surface impoundment or waste pile can demonstrate to the department's satisfaction that the impoundment or pile is not used primarily for storage, but that it is primarily used to actively and effectively neutralize, detoxify, or otherwise treat dangerous waste; or

(ii) The owner/operator of a surface impoundment or waste pile can demonstrate to the department's satisfaction that dangerous waste is removed on a frequent basis (at least four times a year) for treatment, recycling or disposal, provided that the amount of waste removed during any five-

year period must equal or exceed the amount of waste placed in the impoundment or pile during that five-year period. However, this exemption does not apply to waste removal which is being performed pursuant to a recycling or treatment plan developed and approved under (b) of this subsection; or

(iii) The owner/operator of a surface impoundment or waste pile has demonstrated, through his permit, closure plan or other instrument, that the impoundment or pile is being operated as a land disposal unit and that it will be closed as a landfill.

(6) Labeling for containers and tanks. The owner or operator must label containers and tanks in a manner which adequately identifies the major risk(s) associated with the contents for employees, emergency response personnel and the public (Note—If there is already a system in use that performs this function in accordance with local, state or federal regulations, then such system will be adequate). The owner or operator must ensure that labels are not obscured, removed, or otherwise unreadable in the course of inspection required under WAC 173-303-320. For tanks, the label or sign shall be legible at a distance of at least fifty feet. For containers, the owner or operator must affix labels upon transfer of dangerous waste from one container to another. The owner or operator must destroy or otherwise remove labels from the emptied container, unless the container will continue to be used for storing dangerous waste at the facility.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-395, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-395, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-395, filed 2/10/82.]

WAC 173-303-400 Interim status facility standards.

(1) Purpose. The purpose of WAC 173-303-400 is to establish standards which define the acceptable management of dangerous waste during the period of interim status and until certification of final closure or, if the facility is subject to post-closure requirements, until post-closure responsibilities are fulfilled.

(2) Applicability.

(a) The interim status standards apply to owners and operators of facilities which treat, store, transfer, and/or dispose of dangerous waste. For purposes of this section, interim status shall apply to all facilities which comply fully with the requirements for interim status under Section 3005(e) of the Federal Resource Conservation and Recovery Act or WAC 173-303-805. The interim status standards shall also apply to those owners and operators of facilities in existence on November 19, 1980, for RCRA wastes and those facilities in existence on August 9, 1982, for state only wastes who have failed to provide the required notification pursuant to WAC 173-303-060 or failed to file Part A of the permit application pursuant to WAC 173-303-805 (4) and (5). Interim status shall end after final administrative disposition of the Part B permit application is completed, or may be terminated for the causes described in WAC 173-303-805(7).

(b) Interim status facilities must meet the interim status standards by November 19, 1980, except that:

(i) Interim status facilities which handle only state designated wastes (i.e., not designated by 40 CFR Part 261)

must meet the interim status standards by August 9, 1982; and

(ii) Interim status facilities must comply with the additional state interim status requirements specified in subsection (3)(c)(ii), (iii) and (v), of this section, by August 9, 1982.

(c) The requirements of the interim status standards do not apply to:

(i) Persons disposing of dangerous waste subject to a permit issued under the Marine Protection, Research and Sanctuaries Act;

(ii) Persons disposing of dangerous waste by underground injection which is permitted under the Safe Drinking Water Act;

(iii) The owner or operator of a POTW who treats, stores, or disposes of dangerous wastes, provided that he has a permit by rule pursuant to the requirements of WAC 173-303-802(4);

(iv) The owner or operator of a totally enclosed treatment facility or elementary neutralization or wastewater treatment units as defined in WAC 173-303-040, provided that he has a permit by rule pursuant to the requirements of WAC 173-303-802(5);

(v) Generators accumulating waste for less than ninety days except to the extent WAC 173-303-200 provides otherwise; and

(vi) The addition, by a generator, of absorbent material to waste in a container, or of waste to absorbent material in a container, provided that these actions occur at the time the waste is first placed in containers and the generator complies with WAC 173-303-200 (1)(b) and 173-303-395 (1)(a) and (b).

(d) The owner or operator of an interim status facility which manages special waste may comply with the special requirements selected under WAC 173-303-550 through 173-303-560 in lieu of the interim status facility standards of this section, but only for those special wastes which he manages and only after the owner or operator has requested and the department has issued a notice of interim status modification.

(3) Standards.

(a) Interim status standards shall be standards set forth by the Environmental Protection Agency in 40 CFR Part 265 Subparts F through R which are incorporated by reference into this regulation (including, by reference, any EPA requirements specified in those subparts which are not otherwise explicitly described in this chapter), and:

(i) The land disposal restrictions of WAC 173-303-140 and the facility requirements of WAC 173-303-280 through 173-303-440;

(ii) WAC 173-303-630(3), for containers. In addition, for container storage, the department may require that the storage area include secondary containment in accordance with WAC 173-303-630(7), if the department determines that there is a potential threat to public health or the environment due to the nature of the wastes being stored, or due to a history of spills or releases from stored containers. Any new container storage areas constructed or installed after September 30, 1986, must comply with the provisions of WAC 173-303-630(7).

(iii) WAC 173-303-640 (5)(d), for tanks; and

(iv) WAC 173-303-805.

(b) For purposes of applying the interim status standards of 40 CFR Part 265 Subparts F through R to the state of Washington facilities, the federal terms shall have (and in the case of the wording used in the financial instruments referenced in Subpart H of Part 265, shall be replaced with) the following state of Washington meanings:

(i) "Regional administrator" shall mean the "department";

(ii) "Hazardous" shall mean "dangerous"; and

(iii) "Compliance procedure" shall have the meaning set forth in WAC 173-303-040, Definitions.

(c) In addition to the changes described in (b) of this subsection, the following modifications shall be made to interim status standards of 40 CFR Part 265 Subparts F through R:

(i) The words "the effective date of these regulations" shall mean:

(A) November 19, 1980, for facilities which manage any wastes designated by 40 CFR Part 261;

(B) For wastes which become designated by 40 CFR Part 261 subsequent to November 19, 1980, the effective date shall be the date on which the wastes become regulated;

(C) March 12, 1982, for facilities which manage wastes designated only by WAC 173-303-080 through 173-303-103 and not designated by 40 CFR Part 261;

(D) For wastes which become designated only by WAC 173-303-080 through 173-303-103 and not designated by 40 CFR Part 261 subsequent to March 12, 1982, the effective date shall be the date on which the wastes become regulated.

(ii) "Subpart N - landfills" shall have an additional section added which reads: "An owner/operator shall not landfill an organic carcinogen or an EHW, as defined by WAC 173-303-080 to 173-303-103, except at the EHW facility at Hanford";

(iii) "Subpart R - underground injection" shall have an additional section which reads: "Owners and operators of wells are prohibited from disposing of EHW or an organic carcinogen designated under WAC 173-303-080 through 173-303-103";

(iv) "Subpart M - land treatment," section 265.273(b) shall be modified to replace the words "Part 261, Subpart D of this chapter" with "WAC 173-303-080";

(v) "Subpart F - ground water monitoring," section 265.91(c) shall include the requirement that: "Groundwater monitoring wells shall be designed, constructed, and operated so as to prevent groundwater contamination. Chapter 173-160 WAC may be used as guidance in the installation of wells";

(vi) "Subpart H - financial requirements" shall have an additional section which reads: "Any owner or operator who can provide financial assurances and instruments which satisfy the requirements of WAC 173-303-620 will be deemed to be in compliance with 40 CFR Part 265 Subpart H"; and

(vii) "Subpart J - tank systems" section 265.193(a) shall be modified so that the dates by which secondary containment (which meets the requirements of that section) must be provided are the same as the dates in WAC 173-303-640 (4)(a).

(viii) "Subpart J - tank systems" section 265.191(a) shall be modified so that the date by which an assessment of a

tank system's integrity must be completed is January 12, 1990.

(ix) "Subpart G - closure and post-closure" section 265.115 shall be modified to read "Within 60 days of completion of closure of each dangerous waste management unit (including tank systems and container storage areas) and within 60 days of completion of final closure..."

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-400, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-400, filed 1/4/89; 88-02-057 (Order DE 83-36), § 173-303-400, filed 1/5/88, effective 2/5/88; 87-14-029 (Order DE-87-4), § 173-303-400, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-400, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-400, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-400, filed 2/10/82.]

WAC 173-303-430 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 88-07-039 (Order 87-37), § 173-303-430, filed 3/11/88; 84-09-088 (Order DE 83-36), § 173-303-430, filed 4/18/84.]

WAC 173-303-440 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 88-07-039 (Order 87-37), § 173-303-440, filed 3/11/88; 84-09-088 (Order DE 83-36), § 173-303-440, filed 4/18/84.]

WAC 173-303-500 Recycling requirements for state-only dangerous waste. (1) Applicability. This section applies to the recycling of state-only dangerous waste that are not regulated as hazardous wastes (defined in WAC 173-303-040) by EPA.

(2) Standards.

(a) If state-only dangerous wastes are recycled in any of the ways described in WAC 173-303-505 through 173-303-525, then such recycling is subject to the respective requirements of WAC 173-303-505 through 173-303-525, except as provided in (c) of this subsection.

(b) If state-only dangerous wastes are recycled in any way not specifically described in WAC 173-303-505 through 173-303-525, then such recycling is subject to the requirements of WAC 173-303-120(4), except as provided in (c) of this subsection.

(c) Recyclers who receive state-only dangerous wastes from off-site and who store the wastes in containers or tanks may, in lieu of the provisions for storing dangerous wastes prior to recycling, comply with:

(i) WAC 173-303-060;

(ii) WAC 173-303-370 (if the dangerous waste received must be accompanied by a manifest); and

(iii) The following requirements, provided that the dangerous waste is recycled within ninety days of the date it is received by the recycler:

(A) WAC 173-303-330 through 173-303-360;

(B) WAC 173-303-630 (2), (3), (4), (5), (6), (8) and (9), for containers;

(C) WAC 173-303-640 (3), (4), (5), (6) and (7), for tanks; and

(D) WAC 173-303-630(7) for new container areas installed after September 30, 1986, and WAC 173-303-640(2) for new tanks installed after September 30, 1986.

(d) The department may require a recycler who is storing his waste under the provisions of (c) of this subsection to comply with the provisions for storing dangerous waste prior to recycling specified in WAC 173-303-505 through 173-303-525 and 173-303-120(4) if:

(i) The recycler fails to comply with the requirements of (c) of this subsection; or

(ii) The department determines, on a case-by-case basis, that the requirements of (c) of this subsection do not adequately protect public health or the environment.

(3) Relief from standards. The owner/operator of a facility recycling dangerous wastes under the provisions of this section may ask the department to provide relief from any of the applicable requirements of this section. Requests for relief must be submitted as described in (a) of this subsection. Requests for relief will be approved or denied as described in (b) of this subsection.

(a) A request for relief must be submitted by the recycler to the department in writing and must describe the standards from which the recycler is seeking relief. The request must include:

(i) The facility name, EPA/state identification number, address, telephone number, and a contact person at the facility;

(ii) The waste(s) managed at the facility and the type(s) recycling;

(iii) The specific standards from which the owner/operator seeks relief;

(iv) A description, for each standard, demonstrating:

(A) Why the owner/operator believes the standard to be unnecessary;

(B) How public health and the environment will continue to be protected if the standard is not applied to the facility; and

(C) Any evidence supporting the contention that public health and the environment will be adequately protected if the standard is not applied (e.g., test data, diagrams, experiences at similar facilities, records, reports, etc.); and

(v) The following certification, signed and dated by a person who would be authorized to sign a report under WAC 173-303-810 (12)(b):

"I certify under penalty of law that I have personally examined and am familiar with the information submitted in this request and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment."

The department may ask for any additional information it deems necessary, and will not consider approval of the owner's/operator's request until all necessary information has been submitted. Failure to provide any of the information required may result in the department's denying the owner's/operator's request.

(b) The department will review any requests submitted pursuant to (a) of this subsection, and based on the adequacy of the information provided in the request will approve or deny all or any part of the request. The department will notify the recycler of its decision in writing. If the department decides to approve all or part of the request and the recycler agrees with the department's decision, then the

department will proceed to grant the approval as described below. No approval shall be effective until the procedures described below have been completed.

(i) For facilities which are required to have a final facility permit, the department shall follow the procedures for issuing (or, for facilities which already have a final facility permit, the procedures for modifying) a final facility permit, as described in WAC 173-303-806. The new or modified final facility permit shall include the standards the owner/operator must meet.

(ii) For all other types of recycling facilities, the department shall issue a notice of modification stating what standards will be applied. Before issuing the notice of modification, the department shall provide public notice of its intent, shall allow thirty days for public comment, and shall hold a public hearing if there is a significant degree of public interest or there is written notice of opposition and the department receives a request for a hearing during the comment period. Notice of a public hearing shall be provided at least fifteen days in advance, and the public comment period shall be extended to include the date of the hearing if it will occur after the initial thirty-day comment period. Within fifteen days of the end of the public comment period the department shall, based on comments received, issue, modify and issue, or deny the notice of modification.

(c) Failure to comply with the conditions and standards as stated in the permit or notice of modification issued under (b) of this subsection shall form a basis for modifying or revoking the permit or notice of modification.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-500, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-500, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-500, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-500, filed 2/10/82.]

WAC 173-303-505 Special requirements for recyclable materials used in a manner constituting disposal. (1) Applicability.

(a) This section applies to recyclable materials that are applied to or placed on the land:

(i) Without mixing with any other substance(s); or

(ii) After mixing or combining with any other substance(s). These materials will be referred to as "materials used in a manner that constitutes disposal."

(b) Products produced for the general public's use that are used in a manner that constitutes disposal and that contain recyclable materials are not presently subject to regulation if the recyclable materials have undergone a chemical reaction in the course of producing the product so as to become inseparable by physical means. Commercial fertilizers that are produced for the general public's use that contain recyclable materials also are not presently subject to regulation.

(2) Recyclable materials used in a manner that constitutes disposal are dangerous wastes and are subject to the following requirements:

(a) For generators, WAC 173-303-170 through 173-303-230;

(b) For transporters, WAC 173-303-240 through 173-303-270; and

(c) For facilities that store or use dangerous wastes in a manner constituting disposal, the applicable requirements of WAC 173-303-280 through 173-303-840 (except that users of such products are not subject to these standards if the products meet the requirements of subsection (1)(b) of this section).

[Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-505, filed 1/4/89; 86-12-057 (Order DE-85-10), § 173-303-505, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-505, filed 4/18/84.]

WAC 173-303-510 Special requirements for dangerous wastes burned for energy recovery. (1) Applicability.

(a) This section applies to dangerous wastes that are burned for energy recovery in any boiler or industrial furnace that is not regulated under Subpart O of 40 CFR Part 265 or WAC 173-303-670, except as provided by (b) of this subsection. Such dangerous wastes burned for energy recovery are termed "dangerous waste fuel." Fuel produced from dangerous waste by processing, blending, or other treatment is also dangerous waste fuel. (These regulations do not apply, however, to gas recovered from dangerous waste management activities when such gas is burned for energy recovery.)

(b) The following dangerous wastes are not subject to regulation under this section:

(i) Used oil burned for energy recovery if it is a dangerous waste because it:

(A) Exhibits a characteristic of dangerous waste identified in WAC 173-303-090; or

(B) Is designated as DW only through the criteria of WAC 173-303-101 through 173-303-103; or

(C) Is a dangerous waste designated solely as W001.

Such used oil is subject to regulation under WAC 173-303-515 rather than this section.

Note: Used oil burned for energy recovery containing a listed waste (unless such listed waste is only state source W001) or a waste designated as EHW through the criteria of WAC 173-303-101 through 173-303-103 is subject to this section.

(ii) (Reserved.)

(2) Prohibitions.

(a) A person may market dangerous waste fuel only:

(i) To persons who have notified the department of their dangerous waste fuel activities under WAC 173-303-060 and have an EPA/state identification number; and

(ii) If the fuel is burned, to persons who burn the fuel in boilers or industrial furnaces identified in (b) of this subsection.

(b) Dangerous waste fuel may be burned for energy recovery in only the following devices;

(i) Industrial furnaces identified in WAC 173-303-040;

(ii) Boilers, as defined in WAC 173-303-040, that are identified as follows:

(A) Industrial boilers located on the site of a facility engaged in a manufacturing process where substances are transformed into new products, including the component parts of products, by mechanical or chemical processes; or

(B) Utility boilers used to produce electric power, steam, or heated or cooled air or other gases or fluids for sale.

(c) No fuel which contains any dangerous waste may be burned in any cement kiln which is located within the boundaries of any incorporated municipality with a population greater than five hundred thousand (based on the most recent census statistics) unless such kiln fully complies with regulations under this chapter that are applicable to incinerators.

(3) Standards applicable to generators of dangerous waste fuel.

(a) Generators of dangerous waste that is used as a fuel or used to produce a fuel are subject to WAC 173-303-170 through 173-303-230.

(b) Generators who market dangerous waste fuel to a burner also are subject to subsection (5) of this section.

(c) Generators who are burners also are subject to subsection (6) of this section.

(4) Standards applicable to transporters of dangerous waste fuel. Transporters of dangerous waste fuel (and dangerous waste that is used to produce a fuel) are subject to the requirements of WAC 173-303-240 through 173-303-270.

(5) Standards applicable to marketers of dangerous waste fuel.

Persons who market dangerous waste fuel are termed "marketers," and are subject to the following requirements. Marketers include generators who market dangerous waste fuel directly to a burner, persons who receive dangerous waste from generators and produce, process, or blend dangerous waste fuel from these dangerous wastes, and persons who distribute but do not process or blend dangerous waste fuel.

(a) Prohibitions. The prohibitions under subsection (2) of this section;

(b) Notification. Notification requirements under WAC 173-303-060 for dangerous waste fuel activities. Even if a marketer has previously notified the department of his dangerous waste management activities and obtained an EPA/state identification number, he must renotify to identify his dangerous waste fuel activities.

(c) Storage.

(i) For short term accumulation by generators who are marketers of dangerous waste fuel, the applicable provisions of WAC 173-303-200 or 173-303-201;

(ii) For all marketers who store dangerous waste fuel, the applicable storage provisions of:

(A) WAC 173-303-280 through 173-303-395;

(B) WAC 173-303-420; and

(C) WAC 173-303-800 through 173-303-840;

(iii) For marketers with interim status permits who store dangerous waste fuel, the applicable storage provisions of WAC 173-303-400 including Subparts F through L of 40 CFR Part 265;

(iv) For marketers with final status permits who store dangerous waste fuel, the applicable storage provisions of:

(A) WAC 173-303-600 through 173-303-650; and

(B) WAC 173-303-660.

(d) Off-site shipment. The standards for generators in WAC 173-303-170 through 173-303-230 when a marketer initiates a shipment of dangerous waste fuel;

(e) Required notices.

(i) Before a marketer initiates the first shipment of dangerous waste fuel to a burner or another marketer, he must obtain a one-time written and signed notice from the burner or marketer certifying that:

(A) The burner or marketer has notified the department under WAC 173-303-060 and identified his waste-as-fuel activities; and

(B) If the recipient is a burner, the burner will burn the dangerous waste fuel only in an industrial furnace or boiler identified in subsection (2)(b) of this section.

(ii) Before a marketer accepts the first shipment of dangerous waste fuel from another marketer, he must provide the other marketer with a one-time written and signed certification that he has notified the department under WAC 173-303-060 and identified his dangerous waste fuel activities; and

(f) Recordkeeping. In addition to the applicable recordkeeping requirements of WAC 173-303-210 and 173-303-380, a marketer must keep a copy of each certification notice he receives or sends for three years from the date he last engages in a dangerous waste fuel marketing transaction with the person who sends or receives the certification notice.

(6) Standards applicable to burners of dangerous waste fuel.

Owners and operators of industrial furnaces and boilers identified in subsection (2)(b) of this section that burn dangerous fuel are "burners" and are subject to the following requirements:

(a) Prohibitions. The prohibitions under subsection (2)(b) of this section;

(b) Notification. Notification requirements under WAC 173-303-060 for dangerous waste fuel activities. Even if a burner has previously notified the department of his dangerous waste management activities and obtained an EPA/state identification number, he must renotify to identify his dangerous waste fuel activities.

(c) Storage.

(i) For short term accumulation by generators who burn their dangerous waste fuel on site, the applicable provisions of WAC 173-303-200 or 173-303-201.

(ii) For all burners who store dangerous waste fuel, the applicable provisions of:

(A) WAC 173-303-280 through 173-303-395;

(B) WAC 173-303-420; and

(C) WAC 173-303-800 through 173-303-840;

(iii) For burners under interim status permits, the applicable storage provisions of WAC 173-303-400 including Subparts F through L of 40 CFR Part 265;

(iv) For burners with final facility permits, the applicable storage provisions of:

(A) WAC 173-303-600 through 173-303-650; and

(B) WAC 173-303-660.

(d) Required notices. Before a burner accepts the first shipment of dangerous waste fuel from a marketer, he must provide the marketer a one-time written and signed notice certifying that:

(i) He has notified the department under WAC 173-303-060 and identified his waste-as-fuel activities; and

(ii) He will burn the fuel only in a boiler or furnace identified in subsection (2)(b) of this section.

(e) Recordkeeping. In addition to the applicable recordkeeping requirements of WAC 173-303-380, a burner must keep a copy of each certification notice that he sends to a marketer for three years from the date he last receives dangerous waste fuel from that marketer.

(f) Local requirements. Any person who burns dangerous waste for energy recovery must comply with air emission requirements of the local air pollution control authority (or department of ecology if no local authority with jurisdiction exists).

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-510, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-510, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-510, filed 3/11/88; 86-12-057 (Order DE-85-10), § 173-303-510, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-510, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-510, filed 2/10/82.]

WAC 173-303-515 Special requirements for used oil burned for energy recovery. (1) Applicability.

(a) This section applies to used oil that is burned for energy recovery in any boiler or industrial furnace that is not regulated under Subpart O of 40 CFR Part 265 or WAC 173-303-670, if such used oil:

(i) Exhibits any characteristic of a dangerous waste identified in WAC 173-303-090; or

(ii) Is designated as DW solely through WAC 173-303-084 or 173-303-101 through 173-303-103; or

(iii) Is designated solely as W001.

(b)(i) This section does not apply to used oil burned for energy recovery that is mixed with a listed waste (except as provided in (a)(iii) of this subsection) or that is designated as EHW through WAC 173-303-084 or 173-303-101 through 173-303-103. Such used oil is subject to the requirements of WAC 173-303-510.

(ii) Used oil containing more than 1000 ppm of total halogens is presumed to be a dangerous waste because it has been mixed with halogenated dangerous waste listed in WAC 173-303-9903 or 173-303-9904. Such dangerous wastes are subject to the requirements of WAC 173-303-510. Persons may rebut this presumption by demonstrating that the used oil does not contain dangerous waste (for example, by showing that the used oil does not contain significant concentrations of halogenated dangerous constituents listed in WAC 173-303-9905).

(iii) This section does not apply to used oil that is designated for any reason other than being listed as W001 if such used oil is burned for energy recovery by the generator of the used oil in his own marine or diesel engines.

(c) If a used oil subject to this section does not exceed any of the specifications of Table 1, it is subject only to the analysis and recordkeeping requirements under subsection (4)(b)(i) and (vi) of this section; otherwise, it is subject to all applicable provisions of this section.

(d) For the purposes of this chapter:

(i) "Used oil" means any oil that has been refined from crude oil, used, and, as a result of such use, is contaminated by physical or chemical impurities;

(ii) Used oil fuel includes any fuel produced from used oil by processing, blending, or other treatments;

(iii) Used oil fuel that exceeds any specification level (described in Table 1) is termed "off-specification used oil fuel."

TABLE 1
USED OIL EXCEEDING ANY SPECIFICATION LEVEL IS SUBJECT TO THIS SECTION WHEN BURNED FOR ENERGY RECOVERY

Constituent/property	Allowable level
Arsenic	5 ppm maximum
Cadmium	2 ppm maximum
Chromium	10 ppm maximum
Lead	100 ppm maximum
Flash point	100° F minimum
Total halogens	4,000 ppm maximum*
Polychlorinated Biphenyls	2 ppm maximum

* Used oil containing more than 1,000 ppm total halogens is presumed to be a dangerous waste under the rebuttable presumption provided under (b)(ii) of this subsection. Such used oil is subject to WAC 173-303-510 rather than this section when burned for energy recovery unless the presumption of mixing can be successfully rebutted.

(2) Prohibitions.

(a) A person may market off-specification used oil for energy recovery only:

(i) To burners or other marketers who have notified the department of their used oil management activities stating the location and general description of such activities, and who have an EPA/state identification number; and

(ii) To burners who burn the used oil in an industrial furnace or boiler identified in (b) of this subsection.

(b) Off-specification used oil may be burned for energy recovery in only the following devices:

(i) Industrial furnaces identified in WAC 173-303-040; or

(ii) Boilers, as defined in WAC 173-303-040 that are identified as follows:

(A) Industrial boilers located on the site of a facility engaged in a manufacturing process where substances are transformed into new products, including the component parts of products, by mechanical or chemical processes;

(B) Utility boilers used to produce electric power, steam, or heated or cooled air or other gases or fluids for sale; or

(C) Used oil-fired space heaters provided that:

(I) The heater burns only used oil that the owner or operator generates or used oil received from do-it-yourself oil changers who generate used oil as household waste;

(II) The heater is designed to have a maximum capacity of not more than 0.5 million Btu per hour; and

(III) The combustion gases from the heater are vented to the ambient air.

(3) Standards applicable to generators of used oil burned for energy recovery.

(a) Except as provided in (b) and (c) of this subsection generators of used oil are not subject to this section.

(b) Generators who market used oil directly to a burner are subject to subsection (4) of this section.

(c) Generators who burn used oil are subject to subsection (5) of this section.

(4) Standards applicable to marketers of used oil burned for energy recovery.

(a) Persons who market used oil fuel are termed "marketers." However, the following persons are not marketers subject to this section:

(i) Used oil generators, and collectors who transport used oil received only from generators, unless the generator or collector markets the used oil directly to a person who burns it for energy recovery. However, persons who burn some used oil fuel for purposes of processing or other treatment to produce used oil fuel for marketing are considered to be burning incidentally to processing. Thus, generators and collectors who market to such incidental burners are not marketers subject to this section;

(ii) Persons who market only used oil fuel that meets the specification under Table 1 of subsection (1) of this section and who are not the first person to claim the oil meets the specification (i.e., marketers who do not receive used oil from generators or initial transporters and marketers who neither receive nor market off-specification used oil fuel).

(b) Marketers are subject to the following requirements:

(i) Analysis of used oil fuel. Used oil fuel is subject to regulation under this section unless the marketer obtains analyses or other information documenting that the used oil fuel meets the specification provided under Table 1 of subsection (1) of this section.

(ii) Prohibitions. The prohibitions under subsection (2)(a) of this section;

(iii) Notification. Notification to the department stating the location and general description of used oil management activities. Even if a marketer has previously notified the department of his dangerous waste management activities under WAC 173-303-060 and obtained an EPA/state identification number, he must renotify to identify his used oil management activities.

(iv) Invoice system. When a marketer initiates a shipment of off-specification used oil, he must prepare and send the receiving facility an invoice containing the following information:

(A) An invoice number;

(B) His own EPA/state identification number and the EPA/state identification number of the receiving facility;

(C) The names and addresses of the shipping and receiving facilities;

(D) The quantity of off-specification used oil to be delivered;

(E) The date(s) of shipment or delivery; and

(F) The following statement: "This used oil subject to Washington state department of ecology regulation under WAC 173-303-515;

Note: Used oil that meets the definition of combustible liquid (flash point below 200°F but at or greater than 100°F) or flammable liquid (flash point below 100°F) is subject to Department of Transportation Hazardous Materials Regulations at 49 CFR Parts 100-177.

(v) Required notices.

(A) Before a marketer initiates the first shipment of off-specification used oil to a burner or other marketer, he must obtain a one-time written and signed notice from the burner or marketer certifying that:

(I) The burner or marketer has notified the department stating the location and general description of his used oil management activities; and

(II) If the recipient is a burner, the burner will burn the off-specification used oil only in an industrial furnace or boiler identified in subsection (2)(b) of this section; and

(B) Before a marketer accepts the first shipment of off-specification used oil from another marketer subject to the requirements of this subsection, he must provide the marketer with a one-time written and signed notice certifying that he has notified the department of his used oil management activities; and

(vi) Recordkeeping.

(A) Used oil fuel that meets the specification. A marketer who first claims under (b)(i) of this subsection that used oil fuel meets the specification must keep copies of analysis (or other information used to make the determination) of used oil for three years. Such marketers must also record in an operating log and keep for three years the following information on each shipment of used oil fuel that meets the specification. Such used oil fuel is not subject to further regulation, unless it is subsequently mixed with dangerous waste or unless it is mixed with used oil so that it no longer meets the specification.

(I) The name and address of the facility receiving the shipment;

(II) The quantity of used oil fuel delivered;

(III) The date of shipment or delivery; and

(IV) A cross-reference to the record of used oil analysis (or other information used to make the determination that the oil meets the specification) required under (b)(vi)(A) of this subsection.

(B) Off-specification used oil fuel. A marketer who receives or initiates an invoice under the requirements of this section must keep a copy of each invoice for three years from the date the invoice is received or prepared. In addition, a marketer must keep a copy of each certification notice that he receives or sends for three years from the date he last engages in an off-specification used oil fuel marketing transaction with the person who sends or receives the certification notice.

(5) Standards applicable to burners of used oil burned for energy recovery.

Owners and operators of facilities that burn used oil fuel are "burners" and are subject to the following requirements:

(a) Prohibition. The prohibition under subsection (2)(b) of this section;

(b) Notification. Burners of off-specification used oil fuel must notify the department stating the location and general description of used oil management activities, except that owners and operators of used oil-fired space heaters that burn used oil fuel under the provisions of subsection (2)(b)(ii) of this section are exempt from these notification requirements. Even if a burner has previously notified the department of his dangerous waste management activities under WAC 173-303-060 and obtained an identification number, he must renotify to identify his used oil management activities.

(c) Required notices. Before a burner accepts the first shipment of off-specification used oil fuel from a marketer, he must provide the marketer a one-time written and signed notice certifying that:

(i) He has notified the department stating the location and general description of his used oil management activities; and

(ii) He will burn the used oil only in an industrial furnace or boiler identified in subsection (2)(b) of this section; and

(d) Used oil fuel analysis.

(i) Used oil fuel burned by the generator is subject to regulation under this section unless the burner obtains analysis (or other information) documenting that the used oil meets the specification provided under Table 1 of subsection (1) of this section.

(ii) Burners who treat off-specification used oil fuel by processing, blending, or other treatment to meet the specification provided under Table 1 of subsection (1) of this section must obtain analyses (or other information) documenting that the used oil meets the specification.

(e) Recordkeeping. A burner who receives an invoice under the requirements of this section must keep a copy of each invoice for three years from the date the invoice is received. Burners must also keep for three years copies of analyses of used oil fuel as may be required by (d) of this subsection. In addition, he must keep a copy of each certification notice that he sends to a marketer for three years from the date he last receives off-specification used oil from that marketer.

(f) Local requirements. Any person who burns used oil for energy recovery, except for burning in used oil-fired space heaters that meet the provisions of subsection (2)(b)(ii) of this section, must comply with the air emission requirements of the local air pollution control authority (or department of ecology if no local authority with jurisdiction exists).

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-515, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-515, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-515, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-515, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-515, filed 6/27/84.]

WAC 173-303-520 Special requirements for reclaiming spent lead acid battery wastes. This section applies to persons who reclaim spent lead-acid batteries that are recyclable materials ("spent batteries").

(1) Persons who generate, transport, or who store spent batteries but do not reclaim them are subject only to the requirements of WAC 173-303-050, 173-303-145 and 173-303-960 if such spent batteries are going to a battery reclaimer.

(2) Owners and operators of battery reclaiming facilities that store spent lead acid batteries prior to reclaiming them are subject to the following requirements:

(a) For all reclaimers, the applicable storage provisions of:

- (i) WAC 173-303-280 (2) and (3);
- (ii) WAC 173-303-283;
- (iii) WAC 173-303-290;
- (iv) WAC 173-303-310 through 173-303-360;
- (v) WAC 173-303-380;
- (vi) WAC 173-303-390 (2) and (3);
- (vii) WAC 173-303-395;

(viii) WAC 173-303-420; and

(ix) WAC 173-303-800 through 173-303-840.

(b) For reclaimers with interim status permits, the applicable storage provisions of WAC 173-303-400 including Subparts F through L of 40 CFR Part 265;

(c) For reclaimers with final facility permits, the applicable storage provisions of:

(i) WAC 173-303-600 through 173-303-650; and

(ii) WAC 173-303-660.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-520, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-520, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-520, filed 3/11/88; 86-12-057 (Order DE-85-10), § 173-303-520, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-520, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-520, filed 2/10/82.]

WAC 173-303-525 Special requirements for recyclable material utilized for precious metal recovery. (1) Applicability and requirements.

(a) This section applies to recyclable materials that are reclaimed to recover economically significant amounts of gold, silver, platinum, palladium, iridium, osmium, rhodium, ruthenium, or any combination of these.

(b) Persons who generate, transport, or store recyclable materials that are regulated under this section are subject to the following requirements:

(i) Notification requirements under WAC 173-303-060;

(ii) WAC 173-303-180 (for generators), 173-303-250 (for transporters), and 173-303-370 (for persons who store).

(c) Persons who store recycled materials that are regulated under this section must keep the following records to document that they are not accumulating these materials speculatively (as defined in WAC 173-303-016 (5)(d)(ii));

(i) Records showing the volume of these materials stored at the beginning of the calendar year;

(ii) The amount of these materials generated or received during the calendar year; and

(iii) The amount of materials remaining at the end of the calendar year.

(d) Recyclable materials that are regulated under this section that are accumulated speculatively (as defined in WAC 173-303-016 (5)(d)(ii)) are dangerous wastes and are subject to all applicable provisions of this chapter.

(2) Additional regulation of recyclable materials utilized for precious metal recovery on a case-by-case basis.

The department may decide on a case-by-case basis that persons accumulating or storing recyclable materials utilized for precious metal recovery should be regulated under WAC 173-303-120(4). The basis for this decision is that the materials are being accumulated or stored in a manner that does not protect human health and the environment because the materials or their toxic constituents have not been adequately contained, or because the materials being accumulated or stored together are incompatible. In making this decision, the department will consider the following factors:

(a) The types of materials accumulated or stored and the amounts accumulated or stored;

(b) The method of accumulation or storage;

(c) The length of time the materials have been accumulated or stored before being reclaimed;

(d) Whether any contaminants are being released into the environment, or are likely to be so released; and
 (e) Other relevant factors.

The procedures for this decision are set forth in subsection (3) of this section.

(3) Procedures for case-by-case regulation of recyclable materials utilized for precious metal recovery.

The department will use the following procedures when determining whether to regulate recyclable materials utilized for precious metal recovery under the provisions of WAC 173-303-120(4), rather than under the provisions of subsection (1) of this section.

(a) If a generator is accumulating the waste, the department will issue a notice setting forth the factual basis for the decision and stating that the person must comply with the applicable requirements of WAC 173-303-170 and 173-303-190 through 173-303-230. The notice will become final within thirty days, unless the person served requests a public hearing to challenge the decision. Upon receiving such a request, the department will hold a public hearing. The department will provide notice of the hearing to the public and allow public participation at the hearing. The department will issue a final order after the hearing stating whether or not compliance with WAC 173-303-170 and 173-303-190 through 173-303-230 is required. The order becomes effective thirty days after service of the decision unless the department specifies a later date or unless review by the department is requested. The order may be appealed to the pollution control hearings board, in accordance with WAC 173-303-845, by any person who participated in the public hearing.

(b) If the person is accumulating the recyclable material as a storage facility, the notice will state that the person must obtain a permit in accordance with all applicable provisions of WAC 173-303-800 through 173-303-840. The owner or operator of the facility must apply for a permit within no less than sixty days and no more than six months of notice, as specified in the notice. If the owner or operator of the facility wishes to challenge the department's decision he may do so in his permit application, in a public hearing held on the draft permit, or in comments filed on the draft permit or on the notice of intent to deny the permit. The fact sheet accompanying the permit will specify the reasons for the department's determination. The question of whether the department's decision was proper will remain open for consideration during the public comment period discussed under WAC 173-303-840 (4)(d) and in any subsequent hearing.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-525, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-525, filed 6/3/86.]

WAC 173-303-550 Special requirements for facilities managing special waste. (1) Purpose. Special wastes (as defined in WAC 173-303-040) pose less risk to public health and the environment than do other dangerous wastes, therefore, they do not require as high a level of regulation. The purpose of WAC 173-303-550 through 173-303-560 is to set forth those mandatory standards which are minimally acceptable for managing special waste, and the criteria and

selective standards which will be applied based on the specific risks posed by such wastes.

(2) Applicability. The requirements of WAC 173-303-550 through 173-303-560 apply to owners and operators of facilities which manage special waste, and are only applicable to such special wastes as are being managed. Whenever a special waste is shipped from a facility, the owner or operator must comply with WAC 173-303-170 through 173-303-230, requirements for generators.

(3) Standards. The owner/operator of a facility managing special wastes must comply with all applicable standards of this chapter unless he requests (as described in subsection (4) of this section) and the department approves (as described in subsection (5) of this section) the application of less stringent standards to his facility. The owner/operator may request relief from any standards except those minimum standards specified in WAC 173-303-560. Failure to comply with an approval issued by the department pursuant to subsection (5) of this section, will be a violation of this chapter. Failure to comply with all applicable requirements of this chapter while the department is considering a request or after a request has been denied will be a violation of this chapter.

(4) Request. The owner/operator may request that less stringent standards be applied to his special waste management activities in any manner or form that he chooses. His request must be submitted in writing to the department, and must include:

(a) The facility name, EPA/state identification #, address, telephone number, and a contact person at the facility;

(b) The special waste(s) managed at the facility and the type(s) of management applied to them;

(c) The specific standards from which the owner/operator seeks relief;

(d) A description, for each standard, demonstrating:

(i) Why the owner/operator believes the standard to be unnecessary;

(ii) How public health and the environment will continue to be protected if the standard is not applied to the facility; and

(iii) Any evidence supporting the contention that public health and the environment will be adequately protected if the standard is not applied (e.g., test data, diagrams, experiences at similar facilities, records, reports, etc.); and

(e) The following certification, signed and dated by a person who would be authorized to sign a report under WAC 173-303-810 (12)(b):

"I certify under penalty of law that I have personally examined and am familiar with the information submitted in this request and all attachments and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment."

The department may ask for any additional information it deems necessary, and will not consider approval of the owner's/operator's request until all necessary information has been submitted. Failure to provide any of the information required by this subsection may result in the department's denying the owner's/operator's request.

(5) Approval or denial. The department will review any requests submitted pursuant to subsection (4) of this section, and based on the adequacy of the information provided in the request will approve or deny all or any part of the request. The department will notify the owner/operator of its decision in writing. Approval of a request will not be final until the permit has been modified or issued as described in (a) or (b) of this subsection. If the department decides to approve all or part of the request and the owner/operator agrees with the department's decision, then the department will proceed to grant such approval as follows:

(a) Interim status facilities. For a facility which qualifies for interim status (as described in WAC 173-303-805), the department shall issue a notice of interim status modification in accordance with WAC 173-303-805(9) stating what standards the owner/operator must meet;

(b) Final facilities.

(i) For facilities which are required to have a final facility permit, the department shall follow the procedures for issuing (or, for facilities which already have a final facility permit, the procedures for modifying) a final facility permit, as described in WAC 173-303-806. The new or modified final facility permit shall include the standards the owner/operator must meet.

(ii) The department may request that an applicant for a final facility permit submit his planned special waste demonstrations (prepared in accordance with subsection (4) of this section) a maximum of three months prior to submittal of his Part B application.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-550, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-550, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-550, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-550, filed 4/18/84.]

WAC 173-303-560 Minimum standards for facilities managing special waste. In no case will the department approve standards for facilities managing special waste which do not include, at a minimum, the following applicable requirements:

- (1) WAC 173-303-060;
- (2) WAC 173-303-283;
- (3) WAC 173-303-350;
- (4) WAC 173-303-360;
- (5) WAC 173-303-370;
- (6) WAC 173-303-380; and
- (7) WAC 173-303-390.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-560, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-560, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-560, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-560, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-560, filed 4/18/84.]

WAC 173-303-575 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-575, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-575, filed 2/10/82.]

WAC 173-303-600 Final facility standards. Purpose, scope, and applicability.

(1) The purpose of WAC 173-303-600 through 173-303-680, is to establish minimum state-wide standards which describe the acceptable management of dangerous waste. In addition to WAC 173-303-600 through 173-303-680, the final facility standards include WAC 173-303-280 through 173-303-395 and 173-303-420.

(2) The final facility standards apply to owners and operators of all facilities which treat, store or dispose of dangerous waste, and which are not exempted by subsection (3) of this section.

(3) The final facility standards do not apply to:

(a) Persons whose disposal activities are permitted under the Marine Protection, Research and Sanctuaries Act, except that storage, or treatment facilities where dangerous waste is loaded onto an ocean vessel for incineration or disposal at sea are subject to final facility standards;

(b) Persons whose disposal activities are permitted under the underground injection control program of the Safe Drinking Water Act, except that storage, or treatment facilities needed to handle dangerous wastes are subject to final facility standards;

(c) The owner or operator of a POTW which treats, stores, or disposes of dangerous waste provided he has a permit by rule pursuant to the requirements of WAC 173-303-802(4);

(d) A generator accumulating waste on site in compliance with WAC 173-303-200;

(e) The owner or operator of a facility which is permitted to manage solid waste pursuant to chapter 173-304 WAC, if the only dangerous waste the facility manages is excluded from regulation under this chapter by WAC 173-303-070(8);

(f) A farmer disposing of waste pesticides from his own use provided he complies with WAC 173-303-160 (2)(b);

(g) A transporter storing a manifested shipment of dangerous waste for ten days or less in accordance with WAC 173-303-240(5);

(h) Any person, other than an owner or operator who is already subject to the final facility standards, who is carrying out an immediate or emergency response to contain or treat a discharge or potential discharge of a dangerous waste or hazardous substance;

(i) The owner or operator of a facility which is in compliance with the interim status requirements of WAC 173-303-400 and 173-303-805, until final administrative disposition of his final facility permit;

(j) The owner or operator of a totally enclosed treatment facility or elementary neutralization or wastewater treatment unit as defined in WAC 173-303-040, provided that he has a permit by rule pursuant to the requirements of WAC 173-303-802(5); and

(k) The addition, by a generator, of absorbent material to waste in a container, or of waste to absorbent material in a container, provided that these actions occur at the time the waste is first placed in containers and the generator complies with WAC 173-303-200 (1)(b) and 173-303-395 (1)(a) and (b).

(4) The owner or operator of a final status TSD facility which manages special waste may comply with the special requirements selected under WAC 173-303-550 through 173-

303-560 in lieu of the final facility standards of WAC 173-303-600 through 173-303-670, but only for those special wastes which he manages and only after the department has issued or modified his final facility permit in accordance with WAC 173-303-800 through 173-303-840 to incorporate the special requirements.

(5) The owner or operator of a facility which recycles dangerous waste may, for such recycled wastes only, comply with the applicable recycling standards specified in WAC 173-303-120 and 173-303-500 through 173-303-525 in lieu of the final facility standards.

(6) The owner or operator must comply with the special land disposal restrictions for certain dangerous wastes in WAC 173-303-140.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-600, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-600, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-600, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-600, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-600, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-600, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-600, filed 2/10/82.]

WAC 173-303-610 Closure and postclosure. (1) Applicability.

(a) Subsections (2) through (6) of this section, (which concern closure), apply to the owners and operators of all dangerous waste facilities.

(b) Subsections (7) through (11) of this section, (which concern postclosure care), apply to the owners and operators of all regulated units (as defined in WAC 173-303-040) at which dangerous waste will remain after closure, to tank systems that are required under WAC 173-303-640(8) to meet the requirements of landfills, to surface impoundments, waste piles, and miscellaneous units as specified in WAC 173-303-650(6), 173-303-660(9), and 173-303-680(4), respectively and, unless otherwise authorized by the department, to the owners and operators of all facilities which, at closure, cannot meet the removal or decontamination limits specified in subsection (2)(b) of this section.

(c) For the purposes of the closure and postclosure requirements, any portion of a facility which closes is subject to the applicable closure and postclosure standards even if the rest of the facility does not close and continues to operate.

(2) Closure performance standard. The owner or operator must close the facility in a manner that:

(a)(i) Minimizes the need for further maintenance;

(ii) Controls, minimizes or eliminates to the extent necessary to protect human health and the environment, postclosure escape of dangerous waste, dangerous constituents, leachate, contaminated run-off, or dangerous waste decomposition products to the ground, surface water, ground water, or the atmosphere; and

(iii) Returns the land to the appearance and use of surrounding land areas to the degree possible given the nature of the previous dangerous waste activity.

(b) Where the closure requirements of this section, or of WAC 173-303-630(10), 173-303-640(8), 173-303-650(6), 173-303-655(8), 173-303-660(9), 173-303-670(8), or 173-303-680 (2) through (4) call for the removal or decontamination of dangerous wastes, waste residues, or equipment,

bases, liners, soils or other materials containing or contaminated with dangerous wastes or waste residue, then such removal or decontamination must assure that the levels of dangerous waste or dangerous waste constituents or residues do not exceed:

(i) Background environmental levels, for any dangerous waste, managed at the facility, which either is listed under WAC 173-303-081 or 173-303-082 or is designated by the characteristics of WAC 173-303-090; and

(ii) At least the designation limits of WAC 173-303-084, or 173-303-101 through 173-303-103 for any dangerous waste, managed at the facility, which is not listed under WAC 173-303-081 or 173-303-082 and is not designated by the characteristics of WAC 173-303-090. In addition to these limits, the department may specify in the closure plan for a facility any lower limits for removal or decontamination which the department deems appropriate.

(3) Closure plan; amendment of plan.

(a) The owner or operator of a dangerous waste management facility must have a written closure plan. In addition, certain surface impoundments and waste piles from which the owner or operator intends to remove or decontaminate the dangerous waste at partial or final closure are required by WAC 173-303-650(6) and 173-303-660(9) to have contingent closure plans. The plan must be submitted with the permit application, in accordance with WAC 173-303-806(4), and approved by the department as part of the permit issuance procedures under WAC 173-303-840. The approved closure plan will become a condition of any permit. The department's decision must assure that the approved closure plan is consistent with subsections (2), (3), (4), (5), and (6) of this section, and the applicable requirements of WAC 173-303-630(10), 173-303-640(8), 173-303-650(6), 173-303-655(8), 173-303-660(9), 173-303-665(6), 173-303-670(8), and 173-303-680(2). A copy of the approved plan and all revisions to the plan must be furnished to the department upon request, including request by mail until final closure is completed and certified in accordance with subsection (6) of this section. The plan must identify steps necessary to perform partial and/or final closure of the facility at any point during its active life. The closure plan must include at least:

(i) A description of how each dangerous waste management unit at the facility will be closed in accordance with subsection (2) of this section;

(ii) A description of how final closure of the facility will be conducted in accordance with subsection (2) of this section. The description must identify the maximum extent of the operation which will be unclosed during the active life of the facility;

(iii) An estimate of the maximum inventory of dangerous wastes ever on-site over the active life of the facility. (Any change in this estimate is a minor modification under WAC 173-303-830(4));

(iv) A detailed description of the methods to be used during partial closures and final closure, including, but not limited to, methods for removing, transporting, treating, storing, or disposing of all dangerous wastes, and identification of the type(s) of the off-site dangerous waste management units to be used, if applicable;

(v) A detailed description of the steps needed to remove or decontaminate all dangerous waste residues and contami-

nated containment system components, equipment, structures, and soils during partial and final closure, including, but not limited to, procedures for cleaning equipment and removing contaminated soils, methods for sampling and testing surrounding soils, and criteria for determining the extent of decontamination required to satisfy the closure performance standard;

(vi) A detailed description of other activities necessary during the closure period to ensure that all partial closures and final closure satisfy the closure performance standards, including, but not limited to, ground water monitoring, leachate collection, and run-on and run-off control; and

(vii) A schedule for closure of each dangerous waste management unit and for final closure of the facility. The schedule must include, at a minimum, the total time required to close each dangerous waste management unit and the time required for intervening closure activities which will allow tracking of the progress of partial and final closure. (For example, in the case of a landfill unit, estimates of the time required to treat or dispose of all dangerous waste inventory and of the time required to place a final cover must be included.) Additionally, for facilities that use trust funds to establish financial assurance under WAC 173-303-620 (4) or (6) and that are expected to close prior to the expiration of the permit, an estimate of the expected year of final closure.

(b) The owner or operator must submit a written notification of or request for a permit modification to authorize a change in operating plans, facility design, or the approved closure plan in accordance with the applicable procedures in WAC 173-303-800 through 173-303-840. The written notification or request must include a copy of the amended closure plan for review or approval by the department.

(i) The owner or operator may submit a written notification or request to the department for a permit modification to amend the closure plan at any time prior to the notification of partial or final closure of the facility.

(ii) The owner or operator must submit a written notification of or request for a permit modification to authorize a change in the approved closure plan whenever:

(A) Changes in operating plans or facility design affect the closure plan; or

(B) There is a change in the expected year of closure, if applicable; or

(C) In conducting partial or final closure activities, unexpected events require a modification of the approved closure plan.

(iii) The owner or operator must submit a written request for a permit modification including a copy of the amended closure plan for approval at least sixty days prior to the proposed change in facility design or operation, or no later than sixty days after an unexpected event has occurred which has affected the closure plan. If an unexpected event occurs during the partial or final closure period, the owner or operator must request a permit modification no later than thirty days after the unexpected event. An owner or operator of a surface impoundment or waste pile that intends to remove all dangerous waste at closure and is not otherwise required to prepare a contingent closure plan under WAC 173-303-650(6) or 173-303-660(9), must submit an amended closure plan to the department no later than sixty days from the date that the owner or operator or department determines

that the dangerous waste management unit must be closed as a landfill, subject to the requirements of WAC 173-303-665, or no later than thirty days from that date if the determination is made during partial or final closure. The department will approve, disapprove, or modify this amended plan in accordance with the procedures in WAC 173-303-800 through 173-303-840. The approved closure plan will become a condition of any permit issued.

(iv) The department may request modifications to the plan under the conditions described in (b)(ii) of this subsection. The owner or operator must submit the modified plan within sixty days of the department's request, or within thirty days if the change in facility conditions occurs during partial or final closure. Any modifications requested by the department will be approved in accordance with the procedures in WAC 173-303-800 through 173-303-840.

(c) Notification of partial closure and final closure.

(i) The owner or operator must notify the department in writing at least sixty days prior to the date on which he expects to begin closure of a surface impoundment, waste pile, land treatment, or landfill unit, or final closure of a facility with such a unit. The owner or operator must notify the department in writing at least forty-five days prior to the date on which he expects to begin final closure of a facility with only treatment or storage tanks, container storage, or incinerator units to be closed.

(ii)(A) The date when he "expects to begin closure" must be either no later than thirty days after the date on which any dangerous waste management unit receives the known final volume of dangerous wastes or, if there is a reasonable possibility that the dangerous waste management unit will receive additional dangerous wastes, no later than one year after the date on which the unit received the most recent volume of dangerous waste. If the owner or operator of a dangerous waste management unit can demonstrate to the department that the dangerous waste management unit or facility has the capacity to receive additional dangerous wastes and he has taken, and will continue to take, all steps to prevent threats to human health and the environment, including compliance with all applicable permit requirements, the department may approve an extension to this one-year limit.

(B) For units meeting the requirements of subsection (4)(d) of this section, no later than thirty days after the date on which the dangerous waste management unit receives the known final volume of nondangerous wastes, or if there is a reasonable possibility that the dangerous waste management unit will receive additional nondangerous wastes, no later than one year after the date on which the unit received the most recent volume of nondangerous wastes. If the owner or operator can demonstrate to the department that the dangerous waste management unit has the capacity to receive additional nondangerous wastes and he has taken, and will continue to take, all steps to prevent threats to human health and the environment, including compliance with all applicable permit requirements, the department may approve an extension to this one-year limit.

(ii) If the facility's permit is terminated, or if the facility is otherwise ordered, by judicial decree or final order to cease receiving dangerous wastes or to close, then the requirements of (c) of this subsection do not apply. However, the owner or operator must close the facility in accor-

dance with the deadlines established in subsection (4) of this section.

(iv) Removal of wastes and decontamination or dismantling of equipment. Nothing in this subsection shall preclude the owner or operator from removing dangerous wastes and decontaminating or dismantling equipment in accordance with the approved partial or final closure plan at any time before or after notification of partial or final closure.

(4) Closure; time allowed for closure.

(a) Within ninety days after receiving the final volume of dangerous wastes, or the final volume of nondangerous wastes if the owner or operator complies with all applicable requirements in (d) and (e) of this subsection, at a dangerous waste management unit or facility, the owner or operator must treat, remove from the unit or facility, or dispose of on site, all dangerous wastes in accordance with the approved closure plan. The department may approve a longer period if the owner or operator complies with all applicable requirements for requesting a modification to the permit and demonstrates that he has taken and will continue to take all steps to prevent threats to human health and the environment, including compliance with all applicable permit requirements, and either:

(i) The activities required to comply with this paragraph will, of necessity, take longer than ninety days to complete; or

(ii)(A) The dangerous waste management unit or facility has the capacity to receive additional dangerous wastes, or has the capacity to receive nondangerous wastes if the owner or operator complies with (d) and (e) of this subsection;

(B) There is a reasonable likelihood that he or another person will recommence operation of the dangerous waste management unit or the facility within one year; and

(C) Closure of the dangerous waste management unit or facility would be incompatible with continued operation of the site.

(b) The owner or operator must complete partial and final closure activities in accordance with the approved closure plan and within one hundred eighty days after receiving the final volume of dangerous wastes, or the final volume of nondangerous wastes if the owner or operator complies with all applicable requirements in (d) and (e) of this subsection, at the dangerous waste management unit or facility. The department may approve an extension to the closure period if the owner or operator complies with all applicable requirements for requesting a modification to the permit and demonstrates that he has taken and will continue to take all steps to prevent threats to human health and the environment from the unclosed but not operating dangerous waste management unit or facility, including compliance with all applicable permit requirements, and either:

(i) The partial or final closure activities will, of necessity, take longer than one hundred eighty days to complete; or

(ii)(A) The dangerous waste management unit or facility has the capacity to receive additional dangerous wastes, or has the capacity to receive nondangerous wastes if the owner or operator complies with (d) and (e) of this subsection;

(B) There is reasonable likelihood that he or another person will recommence operation of the dangerous waste management unit or the facility within one year; and

(C) Closure of the dangerous waste management unit or facility would be incompatible with continued operation of the site.

(c) The demonstrations referred to in (a) and (b) of this subsection must be made as follows: The demonstrations in (a) of this subsection must be made at least thirty days prior to the expiration of the specified ninety-day period; and the demonstration in (b) of this subsection must be made at least thirty days prior to the expiration of the specified one hundred eighty-day period unless the owner or operator is otherwise subject to the deadlines in (d) of this subsection.

(d) The department may allow an owner or operator to receive only nondangerous wastes in a landfill, land treatment, or surface impoundment unit after the final receipt of dangerous wastes at that unit if:

(i) The owner or operator requests a permit modification in compliance with all applicable requirements in WAC 173-303-830 and 40 CFR Part 124 and in the permit modification request demonstrates that:

(A) The unit has the existing design capacity as indicated on the part A application to receive nondangerous wastes; and

(B) There is a reasonable likelihood that the owner or operator or another person will receive nondangerous wastes in the unit within one year after the final receipt of dangerous wastes; and

(C) The nondangerous wastes will not be incompatible with any remaining wastes in the unit, or with the facility design and operating requirements of the unit or facility under this part; and

(D) Closure of the dangerous waste management unit would be incompatible with continued operation of the unit or facility; and

(E) The owner or operator is operating and will continue to operate in compliance with all applicable permit requirements; and

(ii) The request to modify the permit includes an amended wastes analysis plan, ground water monitoring and response program, human exposure assessment required under RCRA section 3019, and closure and postclosure plan, and updated cost estimates and demonstrations of financial assurance for closure and postclosure care as necessary and appropriate, to reflect any changes due to the presence of dangerous constituents in the nondangerous wastes, and changes in closure activities, including the expected year of closure if applicable under subsection (3)(a)(vii) of this section, as a result of the receipt of nondangerous wastes following the final receipt of dangerous wastes; and

(iii) The request to modify the permit includes revisions, as necessary and appropriate, to affected conditions of the permit to account for the receipt of nondangerous wastes following receipt of the final volume of dangerous wastes; and

(iv) The request to modify the permit and the demonstration referred to in (d)(i) and (ii) of this subsection are submitted to the department no later than one hundred twenty days prior to the date on which the owner or operator of the facility receives the known final volume of dangerous wastes at the unit, or no later than ninety days after the effective date of this rule in the state in which the unit is located, whichever is later.

(e) In addition to the requirements in (d) of this subsection, an owner or operator of a dangerous wastes surface impoundment that is not in compliance with the liner and leachate collection system requirements in 42 U.S.C. 3004 (o) (2) or (3) or 3005 (j) (2), (3), (4) or (13) must:

(i) Submit with the request to modify the permit:

(A) A contingent corrective measures plan, unless a corrective action plan has already been submitted under WAC 173-303-645(10); and

(B) A plan for removing dangerous wastes in compliance with (e)(ii) of this subsection; and

(ii) Remove all dangerous wastes from the unit by removing all dangerous liquids, and removing all dangerous sludges to the extent practicable without impairing the integrity of the liner(s), if any.

(iii) Removal of dangerous wastes must be completed no later than ninety days after the final receipt of dangerous wastes. The department may approve an extension to this deadline if the owner or operator demonstrates that the removal of dangerous wastes will, of necessity, take longer than the allotted period to complete and that an extension will not pose a threat to human health and the environment.

(iv) If a release that is a statistically significant increase (or decrease in the case of pH) over background values for detection monitoring parameters of constituents specified in the permit or that exceeds the facility's ground water protection standard at the point of compliance, if applicable, is detected in accordance with the requirements in subpart F of this part, the owner or operator of the unit:

(A) Must implement corrective measures in accordance with the approved contingent corrective measures plan required by (e)(i) of this subsection no later than one year after detection of the release, or approval of the contingent corrective measures plan, whichever is later;

(B) May continue to receive wastes at the unit following detection of the release only if the approved corrective measures plan includes a demonstration that continued receipt of wastes will not impede corrective action; and

(C) May be required by the department to implement corrective measures in less than one year or to cease the receipt of wastes until corrective measures have been implemented if necessary to protect human health and the environment.

(v) During the period of corrective action, the owner or operator shall provide semiannual reports to the department that describe the progress of the corrective action program, compile all ground water monitoring data, and evaluate the effect of the continued receipt of nondangerous wastes on the effectiveness of the corrective action.

(vi) The department may require the owner or operator to commence closure of the unit if the owner or operator fails to implement corrective action measures in accordance with the approved contingent corrective measures plan within one year as required in (e)(iv) of this subsection, or fails to make substantial progress in implementing corrective action and achieving the facility's ground water protection standard or background levels if the facility has not yet established a ground water protection standard.

(vii) If the owner or operator fails to implement corrective measures as required in (e)(iv) of this subsection or if the department determines that substantial progress has not

been made pursuant to (e)(vi) of this subsection the department shall:

(A) Notify the owner or operator in writing that the owner or operator must begin closure in accordance with the deadline in (a) and (b) of this subsection and provide a detailed statement of reasons for this determination; and

(B) Provide the owner or operator and the public, through a newspaper notice, the opportunity to submit written comments on the decision no later than twenty days after the date of the notice.

(C) If the department receives no written comments, the decision will become final five days after the close of the comment period. The department will notify the owner or operator that the decision is final, and that a revised closure plan, if necessary, must be submitted within fifteen days of the final notice and that closure must begin in accordance with the deadlines in (a) and (b) of this subsection.

(D) If the department receives written comments on the decision, it shall make a final decision within thirty days after the end of the comment period, and provide the owner or operator in writing and the public through a newspaper notice, a detailed statement of reasons for the final decision. If the department determines that substantial progress has not been made, closure must be initiated in accordance with the deadlines in (a) and (b) of this subsection.

(E) The final determinations made by the department under (e)(vii)(C) and (D) of this subsection are not subject to administrative appeal.

(5) Disposal or decontamination of equipment, structures and soils. During the partial and final closure periods, all contaminated equipment, structures and soils must be properly disposed of or decontaminated unless otherwise specified in WAC 173-303-640(8), 173-303-650(6), 173-303-655(8), 173-303-660(9), 173-303-665(6), or under the authority of WAC 173-303-680 (2) and (4). By removing any dangerous wastes or dangerous constituents during partial and final closure, the owner or operator may become a generator of dangerous waste and must handle that waste in accordance with all applicable requirements of WAC 173-303-170 through 173-303-230.

(6) Certification of closure. Within sixty days of completion of closure of each dangerous waste management unit (including tank systems and container storage areas), and within sixty days of the completion of final closure, the owner or operator must submit to the department by registered mail, a certification that the dangerous waste management unit or facility, as applicable, has been closed in accordance with the specifications in the approved closure plan. The certification must be signed by the owner or operator and by an independent registered professional engineer. Documentation supporting the independent registered professional engineer's certification must be furnished to the department upon request until it releases the owner or operator from the financial assurance requirements for closure under WAC 173-303-620(4).

(7) Postclosure care and use of property.

(a) Postclosure care for each dangerous waste management unit subject to postclosure requirements must begin after completion of closure of the unit and continue for thirty years after that date and must consist of at least the following:

(i) Ground water monitoring and reporting as applicable; and

(ii) Maintenance and monitoring of waste containment systems as applicable.

(b) Any time preceding partial closure of a dangerous waste management unit subject to postclosure care requirements or final closure, or any time during the postclosure period for a particular unit, the department may, in accordance with the permit modification procedures in WAC 173-303-800 through 173-303-840:

(i) Shorten the postclosure care period applicable to the dangerous waste management unit, or facility, if all disposal units have been closed, if it finds that the reduced period is sufficient to protect human health and the environment (e.g., leachate or ground water monitoring results, characteristics of the dangerous waste, application of advanced technology, or alternative disposal, treatment, or reuse techniques indicate that the dangerous waste management unit or facility is secure); or

(ii) Extend the postclosure care period applicable to the dangerous waste management unit or facility if it finds that the extended period is necessary to protect human health and the environment (e.g., leachate or ground water monitoring results indicate a potential for migration of dangerous waste at levels which may be harmful to human health and the environment).

(c) The department may require, at partial or final closure, continuation of any of the security requirements of WAC 173-303-310 during part or all of the postclosure period when:

(i) Dangerous wastes may remain exposed after completion of partial or final closure; or

(ii) Access by the public or domestic livestock may pose a hazard to human health.

(d) Postclosure use of property on or in which dangerous wastes remain after partial or final closure must never be allowed to disturb the integrity of the final cover, liner(s), or any other components of any containment system, or the function of the facility's monitoring systems, unless the department finds that the disturbance:

(i) Is necessary to the proposed use of the property, and will not increase the potential hazard to human health or the environment; or

(ii) Is necessary to reduce a threat to human health or the environment.

(e) All postclosure care activities must be in accordance with the provisions of the approved postclosure plan as specified in subsection (8) of this section.

(8) Postclosure plan; amendment of plan.

(a) The owner or operator of a dangerous waste disposal unit must have a written postclosure plan. In addition, certain surface impoundments and certain piles from which the owner or operator intends to remove or decontaminate the dangerous wastes at partial or final closure are required by WAC 173-303-650 and 173-303-660, respectively, to have written contingent postclosure plans. Owners or operators of surface impoundments and waste piles not otherwise required to prepare contingent postclosure plans under WAC 173-303-650 or 173-303-660 must submit a postclosure plan to the department within ninety days from the date that the owner or operator or department determines that the dangerous waste management unit must be closed as

a landfill, subject to the postclosure requirements. The plan must be submitted with the permit application, in accordance with WAC 173-303-806, and approved by the department as part of the permit issuance procedures under WAC 173-303-840. The approved postclosure plan will become a condition of any permit issued.

(b) For each dangerous waste management unit subject to the requirements of this subsection, the postclosure plan must identify the activities which will be carried on after closure and the frequency of these activities, and include at least:

(i) A description of the planned ground water monitoring activities and frequencies at which they will be performed;

(ii) A description of the planned maintenance activities, and frequencies at which they will be performed, to ensure:

(A) The integrity of the cap and final cover or other containment structures where applicable; and

(B) The function of the facility monitoring equipment;

(iii) And the name, address, and phone number of the person or office to contact about the dangerous waste disposal unit or facility during the postclosure care period.

(c) Until final closure of the facility, a copy of the approved postclosure plan must be furnished to the department upon request, including request by mail. After final closure has been certified, the person or office specified in (b)(iii) of this subsection must keep the approved postclosure plan during the remainder of the postclosure period.

(d) Amendment of plan. The owner or operator must submit a written notification of or request for a permit modification to authorize a change in the approved postclosure plan in accordance with the applicable requirements of WAC 173-303-800 through 173-303-840. The written notification or request must include a copy of the amended postclosure plan for review or approval by the department.

(i) The owner or operator may submit a written notification or request to the department for a permit modification to amend the postclosure plan at any time during the active life of the facility or during the postclosure care period.

(ii) The owner or operator must submit a written notification of or request for a permit modification to authorize a change in the approved postclosure plan whenever:

(A) Changes in operating plans or facility design affect the approved postclosure plan; or

(B) There is a change in the expected year of final closure, if applicable; or

(C) Events which occur during the active life of the facility, including partial and final closures, affect the approved postclosure plan.

(iii) The owner or operator must submit a written request for a permit modification at least sixty days prior to the proposed change in facility design or operation, or no later than sixty days after an unexpected event has occurred which has affected the postclosure plan. An owner or operator of a surface impoundment or waste pile that intends to remove all dangerous waste at closure and is not otherwise required to submit a contingent postclosure plan under WAC 173-303-650 or 173-303-660 must submit a postclosure plan to the department no later than ninety days after the date that the owner or operator or department

determines that the dangerous waste management unit must be closed as a landfill, subject to the requirements of WAC 173-303-665. The department will approve, disapprove, or modify this plan in accordance with the procedures in WAC 173-303-800 through 173-303-840. The approved postclosure plan will become a permit condition.

(iv) The department may request modifications to the plan under the conditions described in (d)(ii) of this subsection. The owner or operator must submit the modified plan no later than sixty days after the department's request, or no later than ninety days if the unit is a surface impoundment or waste pile not previously required to prepare a contingent postclosure plan. Any modifications requested by the department will be approved, disapproved, or modified in accordance with the procedures in WAC 173-303-800 through 173-303-840.

(9) Notice to local land authority. No later than the submission of the certification of closure of each dangerous waste disposal unit, the owner or operator of a disposal facility must submit to the local zoning authority or the authority with jurisdiction over local land use and to the department a survey plat indicating the location and dimensions of landfill cells or other dangerous waste disposal units with respect to permanently surveyed benchmarks. This plat must be prepared and certified by a professional land surveyor. The plat filed with the local zoning authority or the authority with jurisdiction over local land use must contain a note, prominently displayed, which states the owner's or operator's obligation to restrict disturbance of the dangerous waste disposal unit in accordance with the applicable requirements of this section. In addition, no later than sixty days after certification of closure of each dangerous waste disposal unit, the owner or operator must submit to the local zoning authority or the authority with jurisdiction over local land use and to the department, a record of the type, location, and quantity of dangerous wastes disposed of within each cell or other disposal unit of the facility. For wastes disposed of before November 19, 1980 (March 12, 1982, for facilities subject to this chapter but not subject to 40 CFR Part 264), the owner or operator must identify the type, location, and quantity of the dangerous wastes to the best of his knowledge and in accordance with any records he has kept.

(10) Notice in deed to property.

(a) No later than sixty days after certification of closure of each dangerous waste disposal unit, the owner or operator must submit to the local zoning authority, or the authority with jurisdiction over local land use, and to the department a record of the type, location, and quantity of dangerous wastes disposed of within each cell or other disposal unit of the facility. For hazardous wastes (as defined in WAC 173-303-040) disposed of before January 12, 1981, the owner or operator must identify the type, location, and quantity of the dangerous wastes to the best of his knowledge and in accordance with any records he has kept.

(b) Within sixty days of certification of closure of the first dangerous waste disposal unit and within sixty days of certification of closure of the last dangerous waste disposal unit, the owner or operator must:

(i) Record, in accordance with state law, a notation on the deed to the facility property, or on some other instrument

which is normally examined during title search, that will in perpetuity notify any potential purchaser of the property that:

(A) The land has been used to manage dangerous wastes;

(B) Its use is restricted under this section; and

(C) The survey plat and record of the type, location, and quantity of dangerous wastes disposed of within each cell or other dangerous waste disposal unit of the facility required in subsection (9) of this section have been filed with the local zoning authority, or the authority with jurisdiction over local land use, and with the department; and

(ii) Submit a certification, signed by the owner or operator, that he has recorded the notation specified in (b)(i) of this subsection, including a copy of the document in which the notation has been placed, to the department.

(c) If the owner or operator or any subsequent owner of the land upon which a dangerous waste facility was located wishes to remove dangerous wastes and dangerous waste residues, the liner, if any, or contaminated soils, he must request a modification to the postclosure permit in accordance with the applicable requirements in WAC 173-303-800 through 173-303-840. The owner or operator must demonstrate that the removal of dangerous wastes will satisfy the criteria of subsection (7)(d) of this section. By removing dangerous waste, the owner or operator may become a generator of dangerous waste and must manage it in accordance with all applicable requirements of this chapter. If he is granted a permit modification or otherwise granted approval to conduct such removal activities, the owner or operator may request that the department approve either:

(i) The removal of the notation on the deed to the facility property or other instrument normally examined during title search; or

(ii) The addition of a notation to the deed or instrument indicating the removal of the dangerous waste.

(11) Certification of completion of postclosure care. No later than sixty days after completion of the established postclosure care period for each dangerous waste disposal unit, the owner or operator must submit to the department, by registered mail, a certification that the postclosure care period for the dangerous waste disposal unit was performed in accordance with the specifications in the approved postclosure plan. The certification must be signed by the owner or operator and an independent registered professional engineer. Documentation supporting the independent registered professional engineer's certification must be furnished to the department upon request until he releases the owner or operator from the financial assurance requirements for postclosure care under WAC 173-303-620(6).

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-610, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-610, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-610, filed 6/26/87; 84-14-031 (Order DE 84-22), § 173-303-610, filed 6/27/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-610, filed 2/10/82.]

WAC 173-303-620 Financial requirements. (1) Applicability.

(a) The requirements of subsections (3), (4), (7), (8), (9), and (10) of this section, apply to owners and operators

of all dangerous waste facilities, except as provided otherwise in this section.

(b) The requirements of subsections (5) and (6) of this section apply only to owners and operators of dangerous waste disposal facilities, to tank systems that are required under WAC 173-303-640(8) to meet the requirements of landfills, to miscellaneous units as specified in WAC 173-303-680(4), and to piles and surface impoundments to the extent that WAC 173-303-650 and 173-303-660, respectively, require that such facilities comply with this section.

(c) States and the federal government are exempt from the requirements of this section, except that operators of facilities who are under contract with the state or federal government must meet the requirements of this section.

(2) Definitions. As used in this section, the following listed or referenced terms shall have the meanings given below:

(a) "Closure plan" means the plan for closure prepared in accordance with the requirements of WAC 173-303-610(3);

(b) "Current closure cost estimate" means the most recent of the estimates prepared in accordance with subsection (3) of this section;

(c) "Current postclosure cost estimate" means the most recent of the estimates prepared in accordance with subsection (5) of this section;

(d) "Parent corporation" means a corporation which directly owns at least fifty percent of the voting stock of the corporation which is the facility owner or operator; the latter corporation is deemed a "subsidiary" of the parent corporation;

(e) "Postclosure plan" means the plan for postclosure care prepared in accordance with the requirements of WAC 173-303-610 (7), (8), (9), and (10);

(f) "Regional administrator" means the department;

(g) "Hazardous waste" means dangerous waste; and

(h) The additional terms listed and defined in 40 CFR 264.141 (f), (g), and (h) are adopted by reference.

(3) Cost estimate for facility closure.

(a) The owner or operator must have a detailed written estimate, in current dollars, of the cost of closing the facility in accordance with the requirements in WAC 173-303-610 (2) through (6), and applicable closure requirements in WAC 173-303-630(10), 173-303-640(5), 173-303-650(6), 173-303-655(8), 173-303-660(9), 173-303-665(6), 173-303-670(8), and 173-303-680 (2) through (4). The closure cost estimate:

(i) Must equal the cost of closure at the point in the facility's operating life when the extent and manner of its operation would make closure the most expensive, as indicated by its closure plan (see WAC 173-303-610 (3)(a));

(ii) Must be based on the costs to the owner or operator of hiring a third party to close the facility. A third party is a party who is neither a parent nor a subsidiary of the owner or operator. (See definition of parent corporation in subsection (2)(d) of this section.) The owner or operator may use costs for on-site disposal if he can demonstrate that on-site disposal capacity will exist at all times over the life of the facility;

(iii) May not incorporate any salvage value that may be realized with the sale of dangerous wastes, or nondangerous wastes if applicable under WAC 173-303-610 (4)(d), facility

structures or equipment, land, or other assets associated with the facility at the time of partial or final closure; and

(iv) May not incorporate a zero cost for dangerous wastes, or nondangerous wastes if applicable under WAC 173-303-610 (4)(d), that might have economic value.

(b) During the active life of the facility, the owner or operator must revise the closure cost estimate no later than thirty days after the department has approved the request to modify the closure plan, if the change in the closure plan increases the cost of closure. The revised closure cost estimate must be adjusted for inflation as specified in (c)(i) and (ii) of this subsection.

(c) During the active life of the facility, the owner or operator must adjust the closure cost estimate for inflation within sixty days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with this section. For owners and operators using the financial test or corporate guarantee, the closure cost estimate must be updated for inflation within thirty days after the close of the firm's fiscal year and before submission of updated information to the department as specified in subsection (4) of this section. The adjustment may be made by recalculating the maximum costs of closure in current dollars, or by using an inflation factor derived from the most recent *Implicit Price Deflator for Gross National Product* as published by the United States Department of Commerce in its survey of current business. The inflation factor is the result of dividing the latest published annual deflator by the deflator for the previous year.

(i) The first adjustment is made by multiplying the closure cost estimate by the inflation factor. The result is the adjusted closure cost estimate.

(ii) Subsequent adjustments are made by multiplying the latest adjusted closure cost estimate by the latest inflation factor.

(d) During the operating life of the facility, the owner or operator must keep at the facility the latest closure cost estimate prepared in accordance with (a) and (b) of this subsection, and, when this estimate has been adjusted in accordance with (c) of this subsection, the latest adjusted closure cost estimate.

(4) Financial assurance for facility closure.

(a) An owner or operator of a TSD facility must establish financial assurance for closure of the facility. The owner or operator must choose from the following options or combination of options:

(i) Closure trust fund;

(ii) Surety bond guaranteeing payment into a closure trust fund;

(iii) Surety bond guaranteeing performance of closure;

(iv) Closure letter of credit;

(v) Closure insurance; or

(vi) Financial test and corporate guarantee for closure.

(b) In satisfying the requirements of financial assurance for facility closure in this subsection, the owner or operator shall meet all the requirements set forth in 40 CFR 264.143.

(5) Cost estimate for postclosure monitoring and maintenance.

(a) The owner or operator of a facility subject to postclosure monitoring or maintenance requirements must have a detailed written estimate, in current dollars, of the annual cost of postclosure monitoring and maintenance of

the facility in accordance with the applicable postclosure regulations in WAC 173-303-610 (7) through (10), 173-303-650(6), 173-303-655(8), 173-303-660(9), 173-303-665(6), and 173-303-680(4). The postclosure cost estimate must be based on the costs to the owner or operator of hiring a third party to conduct postclosure care activities. A third party is a party who is neither a parent nor a subsidiary of the owner or operator. (See definition of parent corporation in subsection (2)(d) of this section.) The postclosure cost estimate is calculated by multiplying the annual postclosure cost estimate by the number of years of postclosure care required by WAC 173-303-610.

(b) During the active life of the facility, the owner or operator must revise the postclosure cost estimate within thirty days after the department has approved the request to modify the postclosure plan, if the change in the postclosure plan increases the cost of postclosure care. The revised postclosure cost estimate must be adjusted for inflation as specified in (c)(i) and (ii) of this subsection.

(c) During the active life of the facility, the owner or operator must adjust the postclosure cost estimate for inflation within sixty days prior to the anniversary date of the establishment of the financial instrument(s) used to comply with subsection (6) of this section. For owners or operators using the financial test or corporate guarantee, the postclosure cost estimate must be updated for inflation within thirty days after the close of the firm's fiscal year and before the submission of updated information to the department as specified in subsection (6) of this section. The adjustment may be made by recalculating the postclosure cost estimate in current dollars or by using an inflation factor derived from the most recent Implicit Price Deflator for Gross National Product as published by the United States Department of Commerce in its Survey of Current Business. The inflation factor is the result of dividing the latest published annual deflator by the deflator for the previous year.

(i) The first adjustment is made by multiplying the postclosure cost estimate by the inflation factor. The result is the adjusted postclosure cost estimate.

(ii) Subsequent adjustments are made by multiplying the latest adjusted postclosure cost estimate by the latest inflation factor.

(d) During the operating life of the facility, the owner or operator must keep at the facility the latest postclosure cost estimate prepared in accordance with (a) and (b) of this subsection, and, when this estimate has been adjusted in accordance with (c) of this subsection, the latest adjusted postclosure cost estimate.

(6) Financial assurance for postclosure monitoring and maintenance.

(a) An owner or operator of a facility subject to postclosure monitoring or maintenance requirements must establish financial assurance for postclosure care in accordance with the approved postclosure care plan. He must choose from the following options or combination of options:

- (i) Postclosure trust fund;
- (ii) Surety bond guaranteeing payment into a postclosure trust fund;
- (iii) Surety bond guaranteeing performance of postclosure care;

- (iv) Postclosure letter of credit;
- (v) Postclosure insurance; or
- (vi) Financial test and corporate guarantee for postclosure care.

(b) In satisfying the requirements of financial assurance for facility postclosure care in this subsection, the owner or operator shall meet all the requirements set forth in 40 CFR 264.145.

(7) Use of a mechanism for financial assurance of both closure and postclosure care. An owner or operator may satisfy the requirements for financial assurance for both closure and postclosure care for one or more facilities by using a trust fund, surety bond, letter of credit, insurance, financial test, or corporate guarantee that meets the specifications for the mechanism in both 40 CFR 264.143 and 264.145. The amount of funds available through the mechanism must be no less than the sum of funds that would be available if a separate mechanism had been established and maintained for financial assurance of closure and of postclosure care.

(8) Liability requirements.

(a) An owner or operator of a TSD facility or a group of such facilities must demonstrate financial responsibility for bodily injury and property damages to third parties caused by sudden accidental occurrences arising from operations of the facility or group of facilities. The owner or operator must meet the requirements of 40 CFR 264.147(a).

(b) An owner or operator of a facility with a regulated unit or units (as defined in WAC 173-303-040) or a disposal miscellaneous unit or units used to manage dangerous waste or a group of such facilities must demonstrate financial responsibility for bodily injury and property damage to third parties caused by nonsudden accidental occurrences arising from operations of the facility or group of facilities. The owner or operator must meet the requirements of 40 CFR 264.147(b).

(c) Request for variance. If an owner or operator can demonstrate to the satisfaction of the department that the levels of financial responsibility required by (a) or (b) of this subsection are not consistent with the degree and duration of risk associated with treatment, storage, or disposal at the facility or group of facilities, the owner or operator may obtain a variance from the department. The request for a variance must be submitted to the department as part of the application under WAC 173-303-806(4) for a facility that does not have a permit, or pursuant to the procedures for permit modification under WAC 173-303-830 for a facility that has a permit. If granted, the variance will take the form of an adjusted level of required liability coverage, such level to be based on the department's assessment of the degree and duration of risk associated with the ownership or operation of the facility or group of facilities. The department may require an owner or operator who requests a variance to provide such technical and engineering information as is deemed necessary by the department to determine a level of financial responsibility other than that required by (a) or (b) of this subsection. Any request for a variance for a permitted facility will be treated as a request for a permit modification under WAC 173-303-830.

(d) Adjustments by the department. If the department determines that the levels of financial responsibility required

by (a) or (b) of this subsection are not consistent with the degree and duration of risk associated with treatment, storage, or disposal at the facility or group of facilities, the department may adjust the level of financial responsibility required under (a) or (b) of this subsection as may be necessary to protect human health and the environment. This adjusted level will be based on the department's assessment of the degree and duration of risk associated with the ownership or operation of the facility or group of facilities. In addition, if the department determines that there is a significant risk to human health and the environment from nonsudden accidental occurrences resulting from the operations of a facility that has no regulated units (as defined in WAC 173-303-040), it may require that the owner or operator of the facility comply with (b) of this subsection. An owner or operator must furnish to the department within a reasonable time, any information which the department requests to determine whether cause exists for such adjustments of level or type of coverage. Any adjustments of level or type of coverage for a facility that has a permit will be treated as a permit modification under WAC 173-303-830.

(e) Period of coverage. An owner or operator must continuously provide liability coverage for a facility as required by this subsection until certifications of closure of the facility, as specified in WAC 173-303-610(6), are received by the department.

(9) Incapacity of owners or operators, guarantor or financial institutions.

(a) An owner or operator must notify the department by certified mail of the commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), United States Code, naming the owner or operator as debtor, within ten days after commencement of the proceeding. A guarantor of a corporate guarantee as specified in 40 CFR 264.143(f) and 264.145(f) must make such a notification if he is named as debtor, as required under the terms of the corporate guarantee (40 CFR 264.151(h)).

(b) An owner or operator who fulfills the requirements of 40 CFR 264.143, 264.145, or 264.147 (a) or (b) by obtaining a trust fund, surety bond, letter of credit, or insurance policy will be deemed to be without the required financial assurance or liability coverage in the event of bankruptcy of the trustee or issuing institution, or a suspension or revocation of the authority of the trustee institution to act as trustee or of the institution issuing the surety bond, letter of credit, or insurance policy to issue such instruments. The owner or operator must establish other financial assurance or liability coverage within sixty days after such an event.

(10) Wording of the instruments. The financial instruments required by this section shall contain the wording specified by 40 CFR 264.151, except that:

(a) The words "regional administrator" and "environmental protection agency" must be replaced with the word "department";

(b) The words "hazardous waste" must be replaced with the words "dangerous waste"; and

(c) Any other words specified by the department shall be changed as necessary to assure financial responsibility of the facility in accordance with the requirements of this section.

Copies of the financial instruments with the appropriate word changes will be available from the department by June 30, 1984.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251), 91-07-005 (Order 90-42), § 173-303-620, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW, 89-02-059 (Order 88-24), § 173-303-620, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-620, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-620, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW, 82-05-023 (Order DE 81-33), § 173-303-620, filed 2/10/82. Formerly WAC 173-302-340.]

WAC 173-303-630 Use and management of containers. (1) Applicability. The regulations in this section apply to owners and operators of all dangerous waste facilities that store containers of dangerous waste.

(2) Condition of containers. If a container holding dangerous waste is not in good condition (e.g., severe rusting, apparent structural defects) or if it begins to leak, the owner or operator must transfer the dangerous waste from the container to a container that is in good condition or manage the waste in some other way that complies with the requirements of chapter 173-303 WAC. In addition, the owner or operator must address leaks and spills in accordance with the applicable provisions of WAC 173-303-145 and 173-303-360.

(3) Identification of containers. The owner or operator must label containers in a manner which adequately identifies the major risk(s) associated with the contents of the containers for employees, emergency response personnel and the public (Note—If there is already a system in use that performs this function in accordance with local, state or federal regulations, then such system will be adequate). The owner or operator must affix labels upon transfer of dangerous wastes from one container to another. The owner or operator must destroy or otherwise remove labels from the emptied container, unless the container will continue to be used for storing dangerous waste at the facility. The owner or operator must ensure that labels are not obscured, removed, or otherwise unreadable in the course of inspection required under WAC 173-303-320.

(4) Compatibility of waste with containers. The owner or operator must use a container made of or lined with materials which will not react with, and are otherwise compatible with, the dangerous waste to be stored, so that the ability of the container to contain the waste is not impaired.

(5) Management of containers.

(a) A container holding dangerous waste must always be closed, except when it is necessary to add or remove waste.

(b) A container holding dangerous waste must not be opened, handled, or stored in a manner which may rupture the container or cause it to leak.

(c) A minimum thirty-inch separation is required between aisles of containers holding dangerous waste(s). A row of drums must be no more than two drums wide.

(6) Inspections. At least weekly, the owner or operator must inspect areas where containers are stored, looking for leaking containers and for deterioration of containers and the containment system caused by corrosion, deterioration, or other factors.

(7) Containment.

(a) Container storage areas must have a containment system that is capable of collecting and holding spills and leaks. In addition to the necessary leak containment capacity, uncovered storage areas must be capable of holding the additional volume that would result from the precipitation of a maximum twenty-five year storm of twenty-four hours duration. The containment system must:

(i) Have a base underlying the containers which is free of cracks or gaps and is sufficiently impervious to contain leaks, spills, and accumulated rainfall until the collected material is detected and removed. The base must be sloped or the containment system must be otherwise designed and operated to drain and remove liquids resulting from leaks, spills, or precipitation, unless the containers are elevated or are otherwise protected from contact with accumulated liquids;

(ii) Be designed for positive drainage control (such as a locked drainage valve) to prevent release of contaminated liquids and so that uncontaminated precipitation can be drained promptly for convenience of operation. Spilled or leaked waste and accumulated precipitation must be removed from the containment system in as timely a manner as is necessary to prevent overflow; and

(iii) Have sufficient capacity to contain ten percent of the volume of all containers or the volume of the largest container, whichever is greater. Only containers holding free liquids, or holding wastes designated as F020, F021, F022, F023, F026, or F027 need to be considered in this determination.

(b) Run-on into the containment system must be prevented, unless the department waives this requirement in the permit after determining that the collection system has sufficient excess capacity in addition to that required in (a)(iii) of this subsection to accommodate any run-on which might enter the system.

(c) Storage areas that store containers holding only wastes that do not contain free liquids, do not exhibit either the characteristic of ignitability or reactivity as described in WAC 173-303-090 (5) or (7), and are not designated as F020, F021, F022, F023, F026, or F027, need not have a containment system as described in this subsection: *Provided, That:*

(i) The storage area is sloped or is otherwise designed and operated to drain and remove liquid resulting from precipitation; or

(ii) The containers are elevated or are otherwise protected from contact with accumulated liquids.

(d) EHW in containers must be protected from the elements by means of a building or other protective covering that otherwise allows adequate inspection under subsection (6) of this section.

(8) Special requirements for ignitable or reactive waste.

(a) Containers holding reactive waste exhibiting a characteristic specified in WAC 173-303-090 (7)(a)(vi), (vii) or (viii) must be stored in a manner equivalent to the Uniform Fire Code's *"American Table of Distances for Storage of Explosives,"* Table 77-201, 1979 edition.

(b) The owner or operator shall design, operate, and maintain ignitable waste and reactive waste (other than a reactive waste which must meet (a) of this subsection) container storage in a manner equivalent with the Uniform Fire Code. Where no specific standard or requirements are

specified in the Uniform Fire Code, or in existing state or local fire codes, applicable sections of the NFPA Pamphlet # 30, *"Flammable and Combustible Liquids Code,"* shall be used. The owner/operator shall also comply with the requirements of WAC 173-303-395 (1)(d).

(9) Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials must not be placed in the same container, unless WAC 173-303-395 (1)(b) is complied with.

(b) Dangerous waste must not be placed in an unwashed container that previously held an incompatible waste or material.

(c) A storage container holding a dangerous waste that is incompatible with any waste or other materials stored nearby in other containers, piles, open tanks, or surface impoundments must be separated from the other materials or protected from them by means of a dike, berm, wall, or other device. Containment systems for incompatible wastes shall be separate.

(10) Closure. At closure, all dangerous waste and dangerous waste residues must be removed from the containment system. Remaining containers, liners, bases, and soil containing or contaminated with dangerous waste or dangerous waste residues must be decontaminated or removed.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-630, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-630, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-630, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-630, filed 2/10/82.]

WAC 173-303-640 Tank systems. (1) Applicability.

(a) The regulations in WAC 173-303-640 apply to owners and operators of facilities that use tank systems to treat or store dangerous waste, except as (b) and (c) of this subsection provides otherwise.

(b) Tank systems that are used to store or treat dangerous waste which contain no free liquids and are situated inside a building with an impermeable floor are exempted from the requirements in subsection (4) of this section. To demonstrate the absence or presence of free liquids in the stored/treated waste, the test method described in WAC 173-303-110 (3)(c)(i) must be used.

(c) Tank systems, including sumps, as defined in WAC 173-303-040, that serve as part of a secondary containment system to collect or contain releases of dangerous wastes are exempted from the requirements in subsection (4)(a) of this section.

(2) Assessment of existing tank system's integrity.

(a) For each existing tank system, the owner or operator must determine that the tank system is not leaking or is unfit for use. Except as provided in (b) of this subsection, the owner or operator must obtain and keep on file at the facility a written assessment reviewed and certified by an independent, qualified registered professional engineer, in accordance with WAC 173-303-810 (13)(a), that attests to the tank system's integrity by January 12, 1988, for underground tanks that do not meet the requirements of subsection (4) of this section and that cannot be entered for inspection, or by January 12, 1990, for all other tank systems.

(b) Tank systems that store or treat materials that become dangerous wastes subsequent to January 12, 1989, must conduct this assessment within twelve months after the date that the waste becomes a dangerous waste.

(c) This assessment must determine that the tank system is adequately designed and has sufficient structural strength and compatibility with the waste(s) to be stored or treated, to ensure that it will not collapse, rupture, or fail. At a minimum, this assessment must consider the following:

(i) Design standard(s), if available, according to which the tank system was constructed;

(ii) Dangerous characteristics of the waste(s) that have been and will be handled;

(iii) Existing corrosion protection measures;

(iv) Documented age of the tank system, if available (otherwise, an estimate of the age); and

(v) Results of a leak test, internal inspection, or other tank system integrity examination such that:

(A) For nonenterable underground tanks, the assessment must include a leak test that is capable of taking into account the effects of temperature variations, tank end deflection, vapor pockets, and high water table effects; and

(B) For other than nonenterable underground tanks and for ancillary equipment, this assessment must include either a leak test, as described above, or other integrity examination, that is certified by an independent, qualified, registered professional engineer, in accordance with WAC 173-303-810 (13)(a), that addresses cracks, leaks, corrosion, and erosion.

Note: The practices described in the American Petroleum Institute (API) Publication, Guide for Inspection of Refinery Equipment, Chapter XIII, "Atmospheric and Low-Pressure Storage Tanks," 4th edition, 1981, may be used, where applicable, as guidelines in conducting other than a leak test.

(d) If, as a result of the assessment conducted in accordance with (a) of this subsection, a tank system is found to be leaking or unfit for use, the owner or operator must comply with the requirements of subsection (7) of this section.

(e) The owner or operator must develop a schedule for conducting integrity assessments over the life of the tank to ensure that the tank retains its structural integrity and will not collapse, rupture, or fail. The schedule must be based on the results of past integrity assessments, age of the tank system, materials of construction, characteristics of the waste, and any other relevant factors.

(3) Design and installation of new tank systems or components.

(a) Owners or operators of new tank systems or components must obtain (and for facilities that are pursuing or have obtained a final status permit, submit to the department, at time of submittal of Part B information) a written assessment, reviewed and certified by an independent, qualified registered professional engineer, in accordance with WAC 173-303-810 (13)(a), attesting that the tank system has sufficient structural integrity and is acceptable for the storing and treating of dangerous waste. The assessment must show that the foundation, structural support, seams, connections, and pressure controls (if applicable) are adequately designed and that the tank system has sufficient structural strength, compatibility with the waste(s) to be stored or treated, and corrosion protection to ensure that it will not collapse, rupture, or fail. This assessment (which will be used by the

department to review and approve or disapprove the acceptability of the tank system design at facilities which are pursuing or have obtained a final status permit) must include, at a minimum, the following information:

(i) Design standard(s) according to which tank system(s) are constructed;

(ii) Dangerous characteristics of the waste(s) to be handled;

(iii) For new tank systems or components in which the external shell of a metal tank or any external metal component of the tank system will be in contact with the soil or with water, a determination by a corrosion expert of:

(A) Factors affecting the potential for corrosion, including but not limited to:

(I) Soil moisture content;

(II) Soil pH;

(III) Soil sulfides level;

(IV) Soil resistivity;

(V) Structure to soil potential;

(VI) Influence of nearby underground metal structures (e.g., piping);

(VII) Existence of stray electric current;

(VIII) Existing corrosion-protection measures (e.g., coating, cathodic protection); and

(B) The type and degree of external corrosion protection that are needed to ensure the integrity of the tank system during the use of the tank system or component, consisting of one or more of the following:

(I) Corrosion-resistant materials of construction such as special alloys, fiberglass reinforced plastic, etc.;

(II) Corrosion-resistant coating (such as epoxy, fiberglass, etc.) with cathodic protection (e.g., impressed current or sacrificial anodes); and

(III) Electrical isolation devices such as insulating joints, flanges, etc.

Note: The practices described in the National Association of Corrosion Engineers (NACE) standard, "Recommended Practice (RP-02-85)—Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and the American Petroleum Institute (API) Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems," may be used, where applicable, as guidelines in providing corrosion protection for tank systems.

(iv) For underground tank system components that are likely to be adversely affected by vehicular traffic, a determination of design or operational measures that will protect the tank system against potential damage; and

(v) Design considerations to ensure that:

(A) Tank foundations will maintain the load of a full tank;

(B) Tank systems will be anchored to prevent flotation or dislodgment where the tank system is placed in a saturated zone, or is located within a seismic fault zone subject to the standards of WAC 173-303-420(3); and

(C) Tank systems will withstand the effects of frost heave.

(b) The owner or operator must develop a schedule for conducting integrity assessments over the life of the tank to ensure that the tank retains its structural integrity and will not collapse, rupture or fail. The schedule must be based on the results of past integrity assessments, age of the tank

system, materials of construction, characteristics of the waste, and any other relevant factors.

(c) The owner or operator of a new tank system must ensure that proper handling procedures are adhered to in order to prevent damage to the system during installation. Prior to covering, enclosing, or placing a new tank system or component in use, an independent, qualified installation inspector or an independent, qualified, registered professional engineer, either of whom is trained and experienced in the proper installation of tank systems or components, must inspect the system for the presence of any of the following items:

- (i) Weld breaks;
- (ii) Punctures;
- (iii) Scrapes of protective coatings;
- (iv) Cracks;
- (v) Corrosion;
- (vi) Other structural damage or inadequate construction/installation. All discrepancies must be remedied before the tank system is covered, enclosed, or placed in use.

(d) New tank systems or components that are placed underground and that are backfilled must be provided with a backfill material that is a noncorrosive, porous, homogeneous substance and that is installed so that the backfill is placed completely around the tank and compacted to ensure that the tank and piping are fully and uniformly supported.

(e) All new tanks and ancillary equipment must be tested for tightness prior to being covered, enclosed, or placed in use. If a tank system is found not to be tight, all repairs necessary to remedy the leak(s) in the system must be performed prior to the tank system being covered, enclosed, or placed into use.

(f) Ancillary equipment must be supported and protected against physical damage and excessive stress due to settlement, vibration, expansion, or contraction.

Note: The piping system installation procedures described in American Petroleum Institute (API) Publication 1615 (November 1979), "Installation of Underground Petroleum Storage Systems," or ANSI Standard B31.3, "Petroleum Refinery Piping," and ANSI Standard B31.4 "Liquid Petroleum Transportation Piping System," may be used, where applicable, as guidelines for proper installation of piping systems.

(g) The owner or operator must provide the type and degree of corrosion protection recommended by an independent corrosion expert, based on the information provided under (a)(iii) of this subsection, or other corrosion protection if the department believes other corrosion protection is necessary to ensure the integrity of the tank system during use of the tank system. The installation of a corrosion protection system that is field fabricated must be supervised by an independent corrosion expert to ensure proper installation.

(h) The owner or operator must obtain and keep on file at the facility written statements by those persons required to certify the design of the tank system and supervise the installation of the tank system in accordance with the requirements of (b) through (g) of this subsection, that attest that the tank system was properly designed and installed and that repairs, pursuant to (c) and (e) of this subsection, were performed. These written statements must also include the certification statement as required in WAC 173-303-810 (13)(a).

(4) Containment and detection of releases.

(a) In order to prevent the release of dangerous waste or dangerous constituents to the environment, secondary containment that meets the requirements of this subsection must be provided (except as provided in (f) and (g) of this subsection):

(i) For all new tank systems or components, prior to their being put into service;

(ii) For all existing tank systems used to store or treat Dangerous Waste Nos. F020, F021, F022, F023, F026, and F027, within two years after January 12, 1989;

(iii) For those existing tank systems of known and documented age, within two years after January 12, 1989, or when the tank system has reached fifteen years of age, whichever comes later;

(iv) For those existing tank systems for which the age cannot be documented, within eight years of January 12, 1989; but if the age of the facility is greater than seven years, secondary containment must be provided by the time the facility reaches fifteen years of age, or within two years of January 12, 1989, whichever comes later; and

(v) For tank systems that store or treat materials that become dangerous wastes subsequent to January 12, 1989, within the time intervals required in (a)(i) through (iv) of this subsection, except that the date that a material becomes a dangerous waste must be used in place of January 12, 1989.

(b) Secondary containment systems must be:

(i) Designed, installed, and operated to prevent any migration of wastes or accumulated liquid out of the system to the soil, ground water, or surface water at any time during the use of the tank system; and

(ii) Capable of detecting and collecting releases and accumulated liquids until the collected material is removed.

(c) To meet the requirements of (b) of this subsection, secondary containment systems must be at a minimum:

(i) Constructed of or lined with materials that are compatible with the waste(s) to be placed in the tank system and must have sufficient strength and thickness to prevent failure owing to pressure gradients (including static head and external hydrological forces), physical contact with the waste to which it is exposed, climatic conditions, and the stress of daily operations (including stresses from nearby vehicular traffic);

(ii) Placed on a foundation or base capable of providing support to the secondary containment system, resistance to pressure gradients above and below the system, and capable of preventing failure due to settlement, compression, or uplift;

(iii) Provided with a leak-detection system that is designed and operated so that it will detect the failure of either the primary or secondary containment structure or the presence of any release of dangerous waste or accumulated liquid in the secondary containment system within twenty-four hours, or at the earliest practicable time if the owner or operator can demonstrate to the department that existing detection technologies or site conditions will not allow detection of a release within twenty-four hours; and

(iv) Sloped or otherwise designed or operated to drain and remove liquids resulting from leaks, spills, or precipitation. Spilled or leaked waste and accumulated precipitation must be removed from the secondary containment system

within twenty-four hours, or in as timely a manner as is possible to prevent harm to human health and the environment, if the owner or operator can demonstrate to the department that removal of the released waste or accumulated precipitation cannot be accomplished within twenty-four hours.

(d) Secondary containment for tanks must include one or more of the following devices:

- (i) A liner (external to the tank);
- (ii) A vault;
- (iii) A double-walled tank; or
- (iv) An equivalent device as approved by the department.

(e) In addition to the requirements of (b), (c), and (d) of this subsection, secondary containment systems must satisfy the following requirements:

(i) External liner systems must be:

(A) Designed or operated to contain one hundred percent of the capacity of the largest tank within its boundary;

(B) Designed or operated to prevent run-on or infiltration of precipitation into the secondary containment system unless the collection system has sufficient excess capacity to contain run-on or infiltration. Such additional capacity must be sufficient to contain precipitation from a twenty-five-year, twenty-four-hour rainfall event.

(C) Free of cracks or gaps; and

(D) Designed and installed to surround the tank completely and to cover all surrounding earth likely to come into contact with the waste if the waste is released from the tank(s) (i.e., capable of preventing lateral as well as vertical migration of the waste).

(ii) Vault systems must be:

(A) Designed or operated to contain one hundred percent of the capacity of the largest tank within its boundary;

(B) Designed or operated to prevent run-on or infiltration of precipitation into the secondary containment system unless the collection system has sufficient excess capacity to contain run-on or infiltration. Such additional capacity must be sufficient to contain precipitation from a twenty-five-year, twenty-four-hour rainfall event;

(C) Constructed with chemical-resistant water stops in place at all joints (if any);

(D) Provided with an impermeable interior coating or lining that is compatible with the stored waste and that will prevent migration of waste into the concrete;

(E) Provided with a means to protect against the formation of and ignition of vapors within the vault, if the waste being stored or treated:

(I) Meets the definition of ignitable waste under WAC 173-303-090(5); or

(II) Meets the definition of reactive waste under WAC 173-303-090(7), and may form an ignitable or explosive vapor.

(F) Provided with an exterior moisture barrier or be otherwise designed or operated to prevent migration of moisture into the vault if the vault is subject to hydraulic pressure.

(iii) Double-walled tanks must be:

(A) Designed as an integral structure (i.e., an inner tank completely enveloped within an outer shell) so that any release from the inner tank is contained by the outer shell;

(B) Protected, if constructed of metal, from both corrosion of the primary tank interior and of the external surface of the outer shell; and

(C) Provided with a built-in continuous leak detection system capable of detecting a release within twenty-four hours, or at the earliest practicable time, if the owner or operator can demonstrate to the department, and the department concludes, that the existing detection technology or site conditions would not allow detection of a release within twenty-four hours.

Note: The provisions outlined in the Steel Tank Institute's (STI) "Standard for Dual Wall Underground Steel Storage Tanks" may be used as guidelines for aspects of the design of underground steel double-walled tanks.

(f) Ancillary equipment must be provided with secondary containment (e.g., trench, jacketing, double-walled piping) that meets the requirements of (b) and (c) of this subsection except for:

(i) Aboveground piping (exclusive of flanges, joints, valves, and other connections) that are visually inspected for leaks on a daily basis;

(ii) Welded flanges, welded joints, and welded connections, that are visually inspected for leaks on a daily basis;

(iii) Sealless or magnetic coupling pumps and sealless valves, that are visually inspected for leaks on a daily basis; and

(iv) Pressurized aboveground piping systems with automatic shut-off devices (e.g., excess flow check valves, flow metering shutdown devices, loss of pressure actuated shut-off devices) that are visually inspected for leaks on a daily basis.

(g) The owner or operator may obtain a variance from the requirements of this subsection if the department finds, as a result of a demonstration by the owner or operator that alternative design and operating practices, together with location characteristics, will prevent the migration of any dangerous waste or dangerous constituents into the ground water, or surface water at least as effectively as secondary containment during the active life of the tank system or that in the event of a release that does migrate to ground water or surface water, no substantial present or potential hazard will be posed to human health or the environment. New underground tank systems may not, per a demonstration in accordance with (g)(ii) of this subsection, be exempted from the secondary containment requirements of this section.

(i) In deciding whether to grant a variance based on a demonstration of equivalent protection of ground water and surface water, the department will consider:

(A) The nature and quantity of the wastes;

(B) The proposed alternate design and operation;

(C) The hydrogeologic setting of the facility, including the thickness of soils present between the tank system and ground water; and

(D) All other factors that would influence the quality and mobility of the dangerous constituents and the potential for them to migrate to ground water or surface water.

(ii) In deciding whether to grant a variance based on a demonstration of no substantial present or potential hazard, the department will consider:

(A) The potential adverse effects on ground water, surface water, and land quality taking into account:

(I) The physical and chemical characteristics of the waste in the tank system, including its potential for migration;

(II) The hydrogeological characteristics of the facility and surrounding land;

(III) The potential for health risks caused by human exposure to waste constituents;

(IV) The potential for damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents; and

(V) The persistence and permanence of the potential adverse effects.

(B) The potential adverse effects of a release on ground-water quality, taking into account:

(I) The quantity and quality of ground water and the direction of ground-water flow;

(II) The proximity and withdrawal rates of ground-water users;

(III) The current and future uses of ground water in the area; and

(IV) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground-water quality.

(C) The potential adverse effects of a release on surface water quality, taking into account:

(I) The quantity and quality of ground water and the direction of ground-water flow;

(II) The patterns of rainfall in the region;

(III) The proximity of the tank system to surface waters;

(IV) The current and future uses of surface waters in the area and any water quality standards established for those surface waters; and

(V) The existing quality of surface water, including other sources of contamination and the cumulative impact on surface-water quality.

(D) The potential adverse effects of a release on the land surrounding the tank system, taking into account:

(I) The patterns of rainfall in the region; and

(II) The current and future uses of the surrounding land.

(iii) The owner or operator of a tank system, for which a variance from secondary containment had been granted in accordance with the requirements of (g)(i) of this subsection, at which a release of dangerous waste has occurred from the primary tank system but has not migrated beyond the zone of engineering control (as established in the variance), must:

(A) Comply with the requirements of subsection (7) of this section, except subsection (7)(d) of this section; and

(B) Decontaminate or remove contaminated soil to the extent necessary to:

(I) Enable the tank system for which the variance was granted to resume operation with the capability for the detection of releases at least equivalent to the capability it had prior to the release; and

(II) Prevent the migration of dangerous waste or dangerous constituents to ground water or surface water.

(C) If contaminated soil cannot be removed or decontaminated in accordance with (g)(iii)(B) of this subsection,

comply with the requirements of subsection (8) of this section.

(iv) The owner or operator of a tank system, for which a variance from secondary containment had been granted in accordance with the requirements of (g)(i) of this subsection, at which a release of dangerous waste has occurred from the primary tank system and has migrated beyond the zone of engineering control (as established in the variance), must:

(A) Comply with the requirements of subsection (7)(a), (b), (c), and (d) of this section; and

(B) Prevent the migration of dangerous waste or dangerous constituents to ground water or surface water, if possible, and decontaminate or remove contaminated soil. If contaminated soil cannot be decontaminated or removed or if ground water has been contaminated, the owner or operator must comply with the requirements of subsection (8)(b) of this section; and

(C) If repairing, replacing, or reinstalling the tank system, provide secondary containment in accordance with the requirements of (a) through (f) of this subsection or reapply for a variance from secondary containment and meet the requirements for new tank systems in subsection (3) of this section if the tank system is replaced. The owner or operator must comply with these requirements even if contaminated soil can be decontaminated or removed and ground water or surface water has not been contaminated.

(h) The following procedures must be followed in order to request a variance from secondary containment:

(i) The department must be notified in writing by the owner or operator that he intends to conduct and submit a demonstration for a variance from secondary containment as allowed in (g) of this subsection according to the following schedule:

(A) For existing tank systems, at least twenty-four months prior to the date that secondary containment must be provided in accordance with (a) of this subsection.

(B) For new tank systems, at least thirty days prior to entering into a contract for installation.

(ii) As part of the notification, the owner or operator must also submit to the department a description of the steps necessary to conduct the demonstration and a timetable for completing each of the steps. The demonstration must address each of the factors listed in (g)(i) or (ii) of this subsection;

(iii) The demonstration for a variance must be completed within one hundred eighty days after notifying the department of an intent to conduct the demonstration; and

(iv) If a variance is granted under this subsection, the department will require the permittee to construct and operate the tank system in the manner that was demonstrated to meet the requirements for the variance.

(i) All tank systems, until such time as secondary containment that meets the requirements of this section is provided, must comply with the following:

(A) For nonenterable underground tanks, a leak test that meets the requirements of subsection (2)(c)(v) of this section or other tank integrity method, as approved or required by the department, must be conducted at least annually.

(B) For other than nonenterable underground tanks, the owner or operator must either conduct a leak test as in (i)(A) of this subsection or develop a schedule and procedure for an assessment of the overall condition of the tank system by

an independent, qualified registered professional engineer. The schedule and procedure must be adequate to detect obvious cracks, leaks, and corrosion or erosion that may lead to cracks and leaks. The owner or operator must remove the stored waste from the tank, if necessary, to allow the condition of all internal tank surfaces to be assessed. The frequency of these assessments must be based on the material of construction of the tank and its ancillary equipment, the age of the system, the type of corrosion or erosion protection used, the rate of corrosion or erosion observed during the previous inspection, and the characteristics of the waste being stored or treated.

(C) For ancillary equipment, a leak test or other integrity assessment as approved by the department must be conducted at least annually.

Note: The practices described in the American Petroleum Institute (API) Publication Guide for Inspection of Refinery Equipment, Chapter XIII, "Atmospheric and Low-Pressure Storage Tanks," 4th edition, 1981, may be used, where applicable, as guidelines for assessing the overall condition of the tank system.

(D) The owner or operator must maintain on file at the facility a record of the results of the assessments conducted in accordance with (h)(iv)(A) through (C) of this subsection.

(E) If a tank system or component is found to be leaking or unfit for use as a result of the leak test or assessment in (h)(iv)(A) through (C) of this subsection, the owner or operator must comply with the requirements of subsection (7) of this section.

(5) General operating requirements.

(a) Dangerous wastes or treatment reagents must not be placed in a tank system if they could cause the tank, its ancillary equipment, or the containment system to rupture, leak, corrode, or otherwise fail.

(b) The owner or operator must use appropriate controls and practices to prevent spills and overflows from tank or containment systems. These include at a minimum:

(i) Spill prevention controls (e.g., check valves, dry disconnect couplings);

(ii) Overfill prevention controls (e.g., level sensing devices, high level alarms, automatic feed cutoff, or bypass to a standby tank); and

(iii) Maintenance of sufficient freeboard in uncovered tanks to prevent overtopping by wave or wind action or by precipitation.

(c) The owner or operator must comply with the requirements of subsection (7) of this section if a leak or spill occurs in the tank system.

(d) All tank systems holding dangerous waste shall be marked with labels or signs to identify the waste contained in the tank. The label or sign shall be legible at a distance of at least fifty feet, and shall bear a legend which identifies the waste in a manner which adequately warns employees, emergency response personnel, and the public of the major risk(s) associated with the waste being stored or treated in the tank system(s). (Note—If there already is a system in use that performs this function in accordance with local, state or federal regulations, then such system will be adequate.)

(e) All tank systems holding EHW which is acutely or chronically toxic by inhalation must be designed to prevent escape of vapors, fumes, or other emissions into the air.

(6) Inspections.

(a) The owner or operator must develop and follow a schedule and procedure for inspecting overfill controls.

(b) The owner or operator must inspect at least once each operating day:

(i) Aboveground portions of the tank system, if any, to detect corrosion or releases of waste;

(ii) Data gathered from monitoring any leak detection equipment (e.g., pressure or temperature gauges, monitoring wells) to ensure that the tank system is being operated according to its design; and

(iii) The construction materials and the area immediately surrounding the externally accessible portion of the tank system, including the secondary containment system (e.g., dikes) to detect erosion or signs of releases of dangerous waste (e.g., wet spots, dead vegetation).

Note: WAC 173-303-320 requires the owner or operator to remedy any deterioration or malfunction he finds. Subsection (7) of this section requires the owner or operator to notify the department within twenty-four hours of confirming a leak. Also, 40 CFR Part 302 may require the owner or operator to notify the National Response Center of a release.

(c) The owner or operator must inspect cathodic protection systems, if present, according to, at a minimum, the following schedule to ensure that they are functioning properly:

(i) The proper operation of the cathodic protection system must be confirmed within six months after initial installation and annually thereafter; and

(ii) All sources of impressed current must be inspected and/or tested, as appropriate, at least bimonthly (i.e., every other month).

Note: The practices described in the National Association of Corrosion Engineers (NACE) standard, "Recommended Practice (RP-02-85)—Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and the American Petroleum Institute (API) Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems," may be used, where applicable, as guidelines in maintaining and inspecting cathodic protection systems.

(d) The owner or operator must document in the operating record of the facility an inspection of those items in (a) through (c) of this subsection.

(7) Response to leaks or spills and disposition of leaking or unfit-for-use tank systems.

A tank system or secondary containment system from which there has been a leak or spill, or which is unfit for use, must be removed from service immediately, and the owner or operator must satisfy the following requirements:

(a) Cessation of use; prevent flow or addition of wastes. The owner or operator must immediately stop the flow of dangerous waste into the tank system or secondary containment system and inspect the system to determine the cause of the release.

(b) Removal of waste from tank system or secondary containment system.

(i) If the release was from the tank system, the owner/operator must, within twenty-four hours after detection of the leak or, if the owner/operator demonstrates that it is not possible, at the earliest practicable time, remove as much of the waste as is necessary to prevent further release of dangerous waste to the environment and to allow inspection and repair of the tank system to be performed.

(ii) If the material released was to a secondary containment system, all released materials must be removed within twenty-four hours or in as timely a manner as is possible to prevent harm to human health and the environment.

(c) Containment of visible releases to the environment. The owner/operator must immediately conduct a visual inspection of the release and, based upon that inspection:

(i) Prevent further migration of the leak or spill to soils or surface water; and

(ii) Remove, and properly dispose of, any visible contamination of the soil or surface water.

(d) Notifications, reports.

(i) Any release to the environment, except as provided in (d)(ii) of this subsection, must be reported to the department within twenty-four hours of its detection. Any release above the "reportable quantity" must also be reported to the National Response Center pursuant to 40 CFR Part 302.

(ii) A leak or spill of dangerous waste is exempted from the requirements of (d) of this subsection if it is:

(A) Less than or equal to a quantity of one pound, or the "Reportable Quantity" (RQ) established in 40 CFR Part 302, whichever is less; and

(B) Immediately contained and cleaned-up.

(iii) Within thirty days of detection of a release to the environment, a report containing the following information must be submitted to the department:

(A) Likely route of migration of the release;

(B) Characteristics of the surrounding soil (soil composition, geology, hydrogeology, climate);

(C) Results of any monitoring or sampling conducted in connection with the release (if available). If sampling or monitoring data relating to the release are not available within thirty days, these data must be submitted to the department as soon as they become available;

(D) Proximity to downgradient drinking water, surface water, and populated areas; and

(E) Description of response actions taken or planned.

(e) Provision of secondary containment, repair, or closure.

(i) Unless the owner/operator satisfies the requirements of (e)(ii) through (iv) of this subsection, the tank system must be closed in accordance with subsection (8) of this section.

(ii) If the cause of the release was a spill that has not damaged the integrity of the system, the owner/operator may return the system to service as soon as the released waste is removed and repairs, if necessary, are made.

(iii) If the cause of the release was a leak from the primary tank system into the secondary containment system, the system must be repaired prior to returning the tank system to service.

(iv) If the source of the release was a leak to the environment from a component of a tank system without secondary containment, the owner/operator must provide the component of the system from which the leak occurred with secondary containment that satisfies the requirements of subsection (4) of this section before it can be returned to service, unless the source of the leak is an aboveground portion of a tank system that can be inspected visually. If the source is an aboveground component that can be inspected visually, the component must be repaired and may be returned to service without secondary containment as long as

the requirements of (f) of this subsection are satisfied. If a component is replaced to comply with the requirements of this subitem, that component must satisfy the requirements for new tank systems or components in subsections (3) and (4) of this section. Additionally, if a leak has occurred in any portion of a tank system component that is not readily accessible for visual inspection (e.g., the bottom of an inground or onground tank), the entire component must be provided with secondary containment in accordance with subsection (4) of this section prior to being returned to use.

(f) Certification of major repairs. If the owner/operator has repaired a tank system in accordance with (e) of this subsection, and the repair has been extensive (e.g., installation of an internal liner; repair of a ruptured primary containment or secondary containment vessel), the tank system must not be returned to service unless the owner/operator has obtained a certification by an independent, qualified, registered, professional engineer in accordance with WAC 173-303-810 (13)(a) that the repaired system is capable of handling dangerous wastes without release for the intended life of the system. This certification must be submitted to the department within seven days after returning the tank system to use.

Note: See WAC 173-303-320 for the requirements necessary to remedy a failure. Also, 40 CFR Part 302 may require the owner or operator to notify the National Response Center of certain releases.

(8) Closure and post-closure care.

(a) At closure of a tank system, the owner or operator must remove or decontaminate all waste residues, contaminated containment system components (liners, etc.), contaminated soils, and structures and equipment contaminated with waste, and manage them as dangerous waste, unless WAC 173-303-070 (2)(a) applies. The closure plan, closure activities, cost estimates for closure, and financial responsibility for tank systems must meet all of the requirements specified in WAC 173-303-610 and 173-303-620.

(b) If the owner or operator demonstrates that not all contaminated soils can be practicably removed or decontaminated as required in (a) of this subsection, then the owner or operator must close the tank system and perform post-closure care in accordance with the closure and post-closure care requirements that apply to landfills (see WAC 173-303-665(6)). In addition, for the purposes of closure, post-closure, and financial responsibility, such a tank system is then considered to be a landfill, and the owner or operator must meet all of the requirements for landfills specified in WAC 173-303-610 and 173-303-620.

(c) If an owner or operator has a tank system that does not have secondary containment that meets the requirements of subsection (4)(b) through (f) of this section and is not exempt from the secondary containment requirements in accordance with subsection (4)(g) of this section, then:

(i) The closure plan for the tank system must include both a plan for complying with (a) of this subsection and a contingent plan for complying with (b) of this subsection.

(ii) A contingent post-closure plan for complying with (b) of this subsection must be prepared and submitted as part of the permit application.

(iii) The cost estimates calculated for closure and post-closure care must reflect the costs of complying with the

contingent closure plan and the contingent post-closure plan, if those costs are greater than the costs of complying with the closure plan prepared for the expected closure under (a) of this subsection.

(iv) Financial assurance must be based on the cost estimates in (c)(iii) of this subsection.

(v) For the purposes of the contingent closure and post-closure plans, such a tank system is considered to be a landfill, and the contingent plans must meet all of the closure, post-closure, and financial responsibility requirements for landfills under this chapter (WAC 173-303-610 and 173-303-620).

(9) Special requirements for ignitable or reactive wastes.

(a) Ignitable or reactive waste must not be placed in tank systems unless:

(i) The waste is treated, rendered, or mixed before or immediately after placement in the tank system so that the resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under WAC 173-303-090, and 173-303-395 (1)(b) is complied with; or

(ii) The waste is stored or treated in such a way that it is protected from any material or conditions which may cause the waste to ignite or react; or

(iii) The tank system is used solely for emergencies.

(b) The owner or operator of a facility which treats or stores ignitable or reactive waste in covered tanks must locate the tanks in a manner equivalent to the National Fire Protection Association's buffer zone requirements for tanks, contained in Tables 2-1 through 2-6 of the NFPA-30 *Flammable and Combustible Liquids Code* - 1981, or as required by state and local fire codes when such codes are more stringent. The owner or operator shall also comply with the requirements of WAC 173-303-395 (1)(d).

(10) Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials, must not be placed in the same tank system, unless WAC 173-303-395 (1)(b) is complied with.

(b) Dangerous waste must not be placed in a tank system that has not been decontaminated and that previously held an incompatible waste or material, unless WAC 173-303-395 (1)(b) is complied with.

(11) Special requirements for dangerous wastes F020, F021, F022, F023, F026, and F027.

In addition to the other requirements of this section and until the requirements of subsections (2), (3) and (4) of this section are fully effective, the following requirements apply to tanks storing or treating dangerous wastes F020, F021, F022, F023, F026, or F027.

(a) Tanks must have systems designed and operated to detect and adequately contain spills or leaks. The design and operation of any containment system must reflect consideration of all relevant factors, including:

(i) Capacity of the tank;

(ii) Volumes and characteristics of wastes stored or treated in the tank;

(iii) Method of collection of spills or leaks;

(iv) The design and construction materials of the tank and containment system; and

(v) The need to prevent precipitation and run-on from entering into the system.

(b) As part of the contingency plan required by WAC 173-303-350, the owner or operator must specify such procedures for responding to a spill or leak from the tank into the containment system as may be necessary to protect human health and the environment. These procedures shall include measures for immediate removal of the waste from the system and replacement or repair of the leaking tank.

[Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-640, filed 1/4/89; 86-12-057 (Order DE-85-10), § 173-303-640, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-640, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-640, filed 2/10/82. Formerly chapter 173-302 WAC.]

WAC 173-303-645 Releases from solid waste management units. (1) Applicability.

(a)(i) Except as provided in (b) of this subsection, the regulations in this section apply to owners and operators of facilities that treat, store, or dispose of dangerous waste. The owner or operator must satisfy the requirements identified in (a)(ii) of this subsection for all wastes (or constituents thereof) contained in solid waste management units at the facility, regardless of the time at which waste was placed in such units.

(ii) All solid waste management units must comply with the requirements in subsection (12) of this section. Regulated units (as defined in WAC 173-303-040) must comply with the requirements of subsections (2) through (11) of this section, in lieu of subsection (12) of this section, for purposes of detecting, characterizing, and responding to releases to the uppermost aquifer. The financial responsibility requirements of subsection (12) of this section apply to regulated units.

(b) The owner or operator's regulated unit or units are not subject to regulation for releases into the uppermost aquifer under this section if:

(i) The owner or operator is exempted under WAC 173-303-600; or

(ii) He operates a unit which the department finds:

(A) Is an engineered structure;

(B) Does not receive or contain liquid waste or waste containing free liquids;

(C) Is designed and operated to exclude liquid, precipitation, and other run-on and run-off;

(D) Has both inner and outer layers of containment enclosing the waste;

(E) Has a leak detection system built into each containment layer;

(F) The owner or operator will provide continuing operation and maintenance of these leak detection systems during the active life of the unit and the closure and post-closure care periods; and

(G) To a reasonable degree of certainty, will not allow dangerous constituents to migrate beyond the outer containment layer prior to the end of the post-closure care period.

(iii) The department finds, pursuant to WAC 173-303-655 (8)(d), that the treatment zone of a land treatment unit does not contain levels of dangerous constituents that are above background levels of those constituents by an amount that is statistically significant, and if an unsaturated zone monitoring program meeting the requirements of WAC 173-303-655(6) has not shown a statistically significant increase

in dangerous constituents below the treatment zone during the operating life of the unit. An exemption under this subsection can only relieve an owner or operator of responsibility to meet the requirements of this section during the post-closure care period; or

(iv) The department finds that there is no potential for migration of liquid from a regulated unit to the uppermost aquifer during the active life of the regulated unit (including the closure period) and the postclosure care period. This demonstration must be certified by a qualified geologist or geotechnical engineer. In order to provide an adequate margin of safety in the prediction of potential migration of liquid, the owner or operator must base any predictions made under this subsection on assumptions that maximize the rate of liquid migration.

(c) The regulations under this section apply during the active life of the regulated unit (including the closure period). After closure of the regulated unit, the regulations in this section:

(i) Do not apply if all waste, waste residues, contaminated containment system components, and contaminated subsoils are removed or decontaminated at closure in accordance with the removal or decontamination limits specified in WAC 173-303-610 (2)(b);

(ii) Apply during the postclosure care period if the owner or operator is conducting a detection monitoring program under subsection (9) of this section; and

(iii) Apply during the compliance period under subsection (7) of this section, if the owner or operator is conducting a compliance monitoring program under subsection (10) of this section, or a corrective action program under subsection (11) of this section.

(d) Regulations in this section may apply to miscellaneous units when necessary to comply with WAC 173-303-680 (2) through (4).

(2) Required programs.

(a) Owners and operators subject to this section must conduct a monitoring and response program as follows:

(i) Whenever dangerous constituents under subsection (4) of this section, from a regulated unit are detected at the compliance point under subsection (6) of this section, the owner or operator must institute a compliance monitoring program under subsection (10) of this section. Detected is defined as statistically significant evidence of contamination as described in subsection (9)(g) of this section;

(ii) Whenever the ground water protection standard under subsection (3) of this section, is exceeded, the owner or operator must institute a corrective action program under subsection (11) of this section. Exceeded is defined as statistically significant evidence of increased contamination as described in subsection (10)(h) of this section;

(iii) Whenever dangerous constituents under subsection (4) of this section, from a regulated unit exceed concentration limits under subsection (5) of this section, in ground water between the compliance point under subsection (6) of this section and the downgradient facility property boundary, the owner or operator must institute a corrective action program under subsection (11) of this section; and

(iv) In all other cases, the owner or operator must institute a detection monitoring program under subsection (9) of this section.

(b) The department will specify in the facility permit the specific elements of the monitoring and response program. The department may include one or more of the programs identified in (a) of this subsection, in the facility permit as may be necessary to protect human health and the environment and will specify the circumstances under which each of the programs will be required. In deciding whether to require the owner or operator to be prepared to institute a particular program, the department will consider the potential adverse effects on human health and the environment that might occur before final administrative action on a permit modification application to incorporate such a program could be taken.

(3) Ground water protection standard. The owner or operator must comply with conditions specified in the facility permit that are designed to ensure that dangerous constituents under subsection (4) of this section, detected in the ground water from a regulated unit do not exceed the concentration limits under subsection (5) of this section, in the uppermost aquifer underlying the waste management area beyond the point of compliance under subsection (6) of this section, during the compliance period under subsection (7) of this section. To the extent practical, the department will establish this ground water protection standard in the facility permit at the time the permit is issued. If the department determines that an established standard is not protective enough, or if the department decides that it is not practical to establish standards at the time of permit issuance, the department will establish the groundwater protection standard in the facility permit when dangerous constituents have been detected in the groundwater from a regulated unit.

(4) Dangerous constituents.

(a) The department will specify in the facility permit the dangerous constituents to which the ground water protection standard of subsection (3) of this section, applies. Dangerous constituents are constituents identified in 40 CFR Part 264 Appendix IX (this list is available from the department upon request), and any other constituents not listed there which have caused a waste to be regulated under this chapter, that may be or have been detected in ground water in the uppermost aquifer underlying a regulated unit and that are reasonably expected to be in or derived from waste contained in a regulated unit, unless the department has excluded them under (b) of this subsection.

The department may also specify in the permit indicator parameters (e.g., specific conductance, pH, total organic carbon (TOC), total organic halogen (TOX), or heavy metals), waste constituents or reaction products as identified in the detection monitoring program under subsection (9)(a) of this section, that provide a reliable indication of the presence of dangerous constituents in the ground water.

(b) The department will exclude a 40 CFR Part 264 Appendix IX, or other identified constituent from the list of dangerous constituents specified in the facility permit if it finds that the constituent is not capable of posing a substantial present or potential hazard to human health or the environment. In deciding whether to grant an exemption, the department will consider the following:

(i) Potential adverse effects on ground water quality, considering:

- (A) The physical and chemical characteristics of the waste in the regulated unit, including its potential for migration;
- (B) The hydrogeological characteristics of the facility and surrounding land;
- (C) The quantity of ground water and the direction of ground water flow;
- (D) The proximity and withdrawal rates of ground water users;
- (E) The current and future uses of ground water in the area;
- (F) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground water quality;
- (G) The potential for health risks caused by human exposure to waste constituents;
- (H) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents; and
- (I) The persistence and permanence of the potential adverse effects;
 - (ii) Potential adverse effects on hydraulically-connected surface water quality, considering:
 - (A) The volume and physical and chemical characteristics of the waste in the regulated unit;
 - (B) The hydrogeological characteristics of the facility and surrounding land;
 - (C) The quantity and quality of ground water, and the direction of ground water flow;
 - (D) The patterns of rainfall in the region;
 - (E) The proximity of the regulated unit to surface waters;
 - (F) The current and future uses of surface waters in the area and any water quality standards established for those surface waters;
 - (G) The existing quality of surface water, including other sources of contamination and the cumulative impact on surface water quality;
 - (H) The potential for health risks caused by human exposure to waste constituents;
 - (I) The potential damage to wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents; and
 - (J) The persistence and permanence of the potential adverse effects; and
 - (iii) Any identification of underground sources of drinking water and exempted aquifers made pursuant to chapter 90.48 RCW, chapter 270, Laws of 1983, and other applicable state laws and regulations.

(5) Concentration limits.

- (a) The department will specify in the facility permit concentration limits in the ground water for dangerous constituents established under subsection (4) of this section. The concentration of a dangerous constituent:
 - (i) Must not exceed the background level of that constituent in the ground water at the time that limit is specified in the permit; or
 - (ii) For any of the constituents listed in Table 1 of this subsection, must not exceed the respective value given in that table if the background level of the constituent is below the value given in Table 1; or
 - (iii) Must not exceed an alternate limit established by the department under (b) of this subsection.

Table 1.
Maximum Concentration of Constituents
for Ground Water Protection

Constituent	Maximum Concentration ¹
Arsenic	0.05
Barium	1.0
Cadmium	0.01
Chromium	0.05
Lead	0.05
Mercury	0.002
Selenium	0.01
Silver	0.05
Endrin	0.0002
Lindane	0.004
Methoxychlor	0.1
Toxaphene	0.005
2,4-D	0.1m
2,4,5-TP Silvex	0.01

¹ Milligrams per liter.

(b) The department will establish an alternate concentration limit for a dangerous constituent if it finds that the constituent will not pose a substantial present or potential hazard to human health or the environment as long as the alternate concentration limit is not exceeded. In establishing alternate concentration limits, the department will consider the same factors listed in subsection (4)(b) (i) through (iii) of this section.

(6) Point of compliance.

(a) The department will specify in the facility permit the point of compliance at which the ground water protection standard of subsection (3) of this section, applies and at which monitoring must be conducted. The point of compliance is a vertical surface located at the hydraulically downgradient limit of the waste management area that extends down into the uppermost aquifer underlying the regulated units. Alternatively, the point of compliance may be any closer points identified by the department at the time the permit is issued, considering the risks of the facility, the wastes and constituents managed there, the potential for waste constituents to have already migrated past the alternate compliance point, and the potential threats to ground and surface waters.

(b) The waste management area is the limit projected in the horizontal plane of the area on which waste will be placed during the active life of a regulated unit. The waste management area includes horizontal space taken up by any liner, dike, or other barrier designed to contain waste in a regulated unit. If the facility contains more than one regulated unit, the waste management area is described by an imaginary line circumscribing the several regulated units.

(7) Compliance period.

(a) The department will specify in the facility permit the compliance period during which the ground water protection standard of subsection (3) of this section applies. The compliance period is the number of years equal to the active life of the waste management area (including any waste

management activity prior to permitting, and the closure period).

(b) The compliance period begins when the owner or operator initiates a compliance monitoring program meeting the requirements of subsection (10) of this section.

(c) If the owner or operator is engaged in a corrective action program at the end of the compliance period specified in (a) of this subsection, the compliance period is extended until the owner or operator can demonstrate that the ground water protection standard of subsection (3) of this section, has not been exceeded for a period of three consecutive years.

(8) General ground water monitoring requirements.

The owner or operator must comply with the requirements of this subsection for any ground water monitoring program developed to satisfy subsections (9), (10), or (11) of this section.

(a) The ground water monitoring system must consist of a sufficient number of wells, installed at appropriate locations and depths to yield ground water samples from the uppermost aquifer that:

(i) Represent the quality of background water that has not been affected by leakage from a regulated unit;

(A) A determination of background quality may include sampling of wells that are not hydraulically upgradient of the waste management area where:

(I) Hydrogeologic conditions do not allow the owner or operator to determine what wells are hydraulically upgradient; and

(II) Sampling at other wells will provide an indication of background ground water quality that is representative or more representative than that provided by the upgradient wells; and

(ii) Represent the quality of ground water passing the point of compliance.

(iii) Allow for the detection of contamination when dangerous waste or dangerous constituents have migrated from the waste management area to the uppermost aquifer.

(b) If a facility contains more than one regulated unit, separate ground water monitoring systems are not required for each regulated unit, provided that provisions for sampling the ground water in the uppermost aquifer will enable detection and measurement at the compliance point of dangerous constituents from the regulated units that have entered the ground water in the uppermost aquifer.

(c) All monitoring wells must be cased in a manner that maintains the integrity of the monitoring well bore hole. This casing must allow collection of representative ground water samples. Wells must be constructed in such a manner as to prevent contamination of the samples, the sampled strata, and between aquifers and water bearing strata. Wells must meet the requirements set forth in Parts 1 and 3 of chapter 173-160 WAC, "Minimum standards for construction and maintenance of wells."

(d) The ground water monitoring program must include at a minimum, procedures and techniques for:

(i) Decontamination of drilling and sampling equipment;

(ii) Sample collection;

(iii) Sample preservation and shipment;

(iv) Analytical procedures and quality assurance; and

(v) Chain of custody control.

(e) The ground water monitoring program must include consistent sampling and analytical methods that ensure reliable ground water sampling, accurately measure dangerous constituents and indicator parameters in ground water samples, and provide a reliable indication of groundwater quality below the waste management area.

(f) The ground water monitoring program must include a determination of the ground water surface elevation each time ground water is sampled.

(g) In detection monitoring or where appropriate in compliance monitoring, data on each dangerous constituent specified in the permit will be collected from background wells and wells at the compliance point(s). The number and kinds of samples collected to establish background shall be appropriate for the form of statistical test employed, following generally accepted statistical principles. The sample size shall be as large as necessary to ensure with reasonable confidence that a contaminant release to ground water from a facility will be detected. The owner or operator will determine an appropriate sampling procedure and interval for each hazardous constituent listed in the facility permit which shall be specified in the unit permit upon approval by the department. This sampling procedure shall be:

(i) A sequence of at least four samples, taken at an interval that assures, to the greatest extent technically feasible, that an independent sample is obtained, by reference to the uppermost aquifer's effective porosity, hydraulic conductivity and hydraulic gradient, and the fate and transport characteristics of the potential contaminants; or

(ii) An alternate sampling procedure proposed by the owner or operator and approved by the department.

(h) The owner or operator will specify one of the following statistical methods to be used in evaluating ground water monitoring data for each hazardous constituent which, upon approval by the department, will be specified in the unit permit. The statistical test chosen shall be conducted separately for each dangerous constituent in each well. Where practical quantification limits (pql's) are used in any of the following statistical procedures to comply with (i)(v) of this subsection, the pql must be proposed by the owner or operator and approved by the department. Use of any of the following statistical methods must be protective of human health and the environment and must comply with the performance standards outlined in (i) of this subsection.

(i) A parametric analysis of variance (ANOVA) followed by multiple comparisons procedures to identify statistically significant evidence of contamination. The method must include estimation and testing of the contrasts between each compliance well's mean and the background mean levels for each constituent.

(ii) An analysis of variance (ANOVA) based on ranks followed by multiple comparisons procedures to identify statistically significant evidence of contamination. The method must include estimation and testing of the contrasts between each compliance well's median and the background median levels for each constituent.

(iii) A tolerance or prediction interval procedure in which an interval for each constituent is established from the distribution of the background data, and the level of each constituent in each compliance well is compared to the upper tolerance or prediction limit.

(iv) A control chart approach that gives control limits for each constituent.

(v) Another statistical test method submitted by the owner or operator and approved by the department.

(i) Any statistical method chosen under (h) of this subsection for specification in the unit permit shall comply with the following performance standards, as appropriate:

(i) The statistical method used to evaluate ground water monitoring data shall be appropriate for the distribution of chemical parameters or dangerous constituents. If the distribution of the chemical parameters or dangerous constituents is shown by the owner or operator to be inappropriate for a normal theory test, then the data should be transformed or a distribution-free theory test should be used. If the distributions for the constituents differ, more than one statistical method may be needed.

(ii) If an individual well comparison procedure is used to compare an individual compliance well constituent concentration with background constituent concentrations or a ground water protection standard, the test shall be done at a Type I error level no less than 0.01 for each testing period. If a multiple comparisons procedure is used, the Type I experimentwise error rate for each testing period shall be no less than 0.05; however, the Type I error of no less than 0.01 for individual well comparisons must be maintained. This performance standard does not apply to tolerance intervals, prediction intervals, or control charts.

(iii) If a control chart approach is used to evaluate ground water monitoring data, the specific type of control chart and its associated parameter values shall be proposed by the owner or operator and approved by the department if it is protective of human health and the environment.

(iv) If a tolerance interval or a prediction interval is used to evaluate ground water monitoring data, the levels of confidence and, for tolerance intervals, the percentage of the population that the interval must contain, shall be proposed by the owner or operator and approved by the department if it finds these parameters to be protective of human health and the environment. These parameters will be determined after considering the number of samples in the background data base, the data distribution, and the range of the concentration values for each constituent of concern.

(v) The statistical method shall account for data below the limit of detection with one or more statistical procedures that are protective of human health and the environment. Any practical quantification limit (pql) approved by the department under (h) of this subsection that is used in the statistical method shall be the lowest concentration level that can be reliably achieved within specified limits of precision and accuracy during routine laboratory operating conditions that are available to the facility.

(vi) If necessary, the statistical method shall include procedures to control or correct for seasonal and spatial variability as well as temporal correlation in the data.

(j) Ground water monitoring data collected in accordance with (g) of this subsection including actual levels of constituents must be maintained in the facility operating record. The department will specify in the permit when the data must be submitted for review.

(9) Detection monitoring program. An owner or operator required to establish a detection monitoring program

under this subsection must, at a minimum, discharge the responsibilities described in this subsection.

(a) The owner or operator must monitor for indicator parameters (e.g., pH, specific conductance, total organic carbon (TOC), total organic halogen (TOX), or heavy metals), waste constituents, or reaction products that provide a reliable indication of the presence of dangerous constituents in ground water. The department will specify the parameters or constituents to be monitored in the facility permit, after considering the following factors:

(i) The types, quantities, and concentrations of constituents in wastes managed at the regulated unit;

(ii) The mobility, stability, and persistence of waste constituents or their reaction products in the unsaturated zone beneath the waste management area;

(iii) The detectability of indicator parameters, waste constituents, and reaction products in ground water; and

(iv) The concentrations or values and coefficients of variation of proposed monitoring parameters or constituents in the ground water background.

(b) The owner or operator must install a ground water monitoring system at the compliance point, as specified under subsection (6) of this section. The ground water monitoring system must comply with subsection (8)(a)(ii), (b), and (c) of this section.

(c) The owner or operator must conduct a ground water monitoring program for each chemical parameter and dangerous constituent specified in the permit pursuant to (a) of this subsection in accordance with subsection (8)(g) of this section. The owner or operator must maintain a record of ground water analytical data as measured and in a form necessary for the determination of statistical significance under subsection (8)(h) of this section.

(d) The department will specify the frequencies for collecting samples and conducting statistical tests to determine whether there is statistically significant evidence of contamination for any parameter or dangerous constituent specified in the permit under (a) of this subsection in accordance with subsection (8)(g) of this section. A sequence of at least four samples from each well (background and compliance wells) must be collected at least semiannually during detection monitoring.

(e) The owner or operator must determine the ground water flow rate and direction in the uppermost aquifer at least annually.

(f) The owner or operator must determine whether there is statistically significant evidence of contamination for any chemical parameter or dangerous constituent specified in the permit pursuant to (a) of this subsection at a frequency specified under (d) of this subsection.

(i) In determining whether statistically significant evidence of contamination exists, the owner or operator must use the method(s) specified in the permit under subsection (8)(h) of this section. These method(s) must compare data collected at the compliance point(s) to the background ground water quality data.

(ii) The owner or operator must determine whether there is statistically significant evidence of contamination at each monitoring well as the compliance point within a reasonable period of time after completion of sampling. The department will specify in the facility permit what period of time is reasonable after considering the complexity of the statisti-

cal test and the availability of laboratory facilities to perform the analysis of ground water samples.

(g) If the owner or operator determines pursuant to (f) of this subsection that there is statistically significant evidence of contamination for chemical parameters or dangerous constituents specified pursuant to (a) of this subsection at any monitoring well at the compliance point, he or she must:

(i) Notify the department of this finding in writing within seven days. The notification must indicate what chemical parameters or dangerous constituents have shown statistically significant evidence of contamination:

(ii) Immediately sample the ground water in all monitoring wells and determine whether constituents in the list of Appendix IX of Part 264 are present, and if so, in what concentration.

(iii) For any Appendix IX compounds found in the analysis pursuant to (g)(ii) of this subsection, the owner or operator may resample within one month and repeat the analysis for those compounds detected. If the results of the second analysis confirm the initial results, then these constituents will form the basis for compliance monitoring. If the owner or operator does not resample for the compounds found pursuant to (g)(ii) of this subsection, the dangerous constituents found during this initial Appendix IX analysis will form the basis for compliance monitoring.

(iv) Within ninety days, submit to the department an application for a permit modification to establish a compliance monitoring program meeting the requirements of subsection (10) of this section. The application must include the following information:

(A) An identification of the concentration or any Appendix IX constituent detected in the ground water at each monitoring well at the compliance point;

(B) Any proposed changes to the ground water monitoring system at the facility necessary to meet the requirements of subsection (10) of this section;

(C) Any proposed additions or changes to the monitoring frequency, sampling and analysis procedures or methods, or statistical methods used at the facility necessary to meet the requirements of subsection (10) of this section;

(D) For each dangerous constituent detected at the compliance point, a proposed concentration limit under subsection (5)(a)(i) or (ii) of this section, or a notice of intent to seek an alternate concentration limit under subsection (5)(b) of this section; and

(v) Within one hundred eighty days, submit to the department:

(A) All data necessary to justify and [an] alternate concentration limit sought under subsection (5)(b) of this section; and

(B) An engineering feasibility plan for a corrective action program necessary to meet the requirement of subsection (11) of this section unless:

(I) All dangerous constituents identified under (g)(ii) of this subsection are listed in Table I of subsection (5) of this section and their concentrations do not exceed the respective values given in that Table; or

(II) The owner or operator has sought an alternate concentration limit under subsection (5)(b) of this section for every dangerous constituent identified under (g)(ii) of this subsection.

(vi) If the owner or operator determines, pursuant to (f) of this subsection, that there is a statistically significant difference for chemical parameters or dangerous constituents specified pursuant to (a) of this subsection at any monitoring well at the compliance point, he or she may demonstrate that a source other than a regulated unit caused the contamination or that the detection is an artifact caused by an error in sampling, analysis, or statistical evaluation or natural variation in the ground water. The owner operator may make a demonstration under this subsection in addition to, or in lieu of, submitting a permit modification application under (g)(iv) of this subsection; however, the owner or operator is not relieved of the requirement to submit a permit modification application within the time specified in (g)(iv) of this subsection unless the demonstration made under this subsection successfully shows that a source other than a regulated unit caused the increase, or that the increase resulted from error in sampling, analysis, or evaluation. In making a demonstration under this subsection, the owner or operator must:

(A) Notify the department in writing within seven days of determining statistically significant evidence of contamination at the compliance point that he intends to make a demonstration under this subsection;

(B) Within ninety days, submit a report to the department which demonstrates that a source other than a regulated unit caused the contamination or that the contamination resulted from error in sampling, analysis, or evaluation;

(C) Within ninety days, submit to the department an application for a permit modification to make any appropriate changes to the detection monitoring program facility; and

(D) Continue to monitor in accordance with the detection monitoring program established under this section.

(h) If the owner or operator determines that the detection monitoring program no longer satisfies the requirements of this section, he or she must, within ninety days, submit an application for a permit modification to make any appropriate changes to the program.

(10) Compliance monitoring program. An owner or operator required to establish a compliance monitoring program under this section must, at a minimum, discharge the responsibilities described in this subsection.

(a) The owner or operator must monitor the ground water to determine whether regulated units are in compliance with the ground water protection standard under subsection (3) of this section. The department will specify the ground water protection standard in the facility permit, including:

(i) A list of the dangerous constituents and parameters identified under subsection (4) of this section;

(ii) Concentration limits under subsection (5) of this section for each of those dangerous constituents and parameters;

(iii) The compliance point under subsection (6) of this section; and

(iv) The compliance period under subsection (7) of this section.

(b) The owner or operator must install a ground water monitoring system at the compliance point as specified under subsection (6) of this section. The ground water monitoring system must comply with subsection (8)(a)(ii), (b), and (c) of this section.

(c) The department will specify the sampling procedures and statistical methods appropriate for the constituents and the facility, consistent with subsection (8)(g) and (h) of this section.

(i) The owner or operator must conduct a sampling program for each chemical parameter or dangerous constituent in accordance with subsection (8) (g) of this section.

(ii) The owner or operator must record ground water analytical data as measured and in form necessary for the determination of statistical significance under subsection (8)(h) of this section for the compliance period of the facility.

(d) The owner or operator must determine whether there is statistically significant evidence of increased contamination for any chemical parameter or dangerous constituent specified in the permit, pursuant to (a) of this subsection, at a frequency specified under (f) of this subsection.

(i) In determining whether statistically significant evidence of increased contamination exists, the owner or operator must use the method(s) specified in the permit under subsection (8)(h) of this section. The method(s) must compare data collected at the compliance point(s) to a concentration limit developed in accordance with subsection (5) of this section.

(ii) The owner or operator must determine whether there is statistically significant evidence of increased contamination at each monitoring well at the compliance point within a reasonable time period after completion of sampling. The department will specify that time period in the facility permit, after considering the complexity of the statistical test and the availability of laboratory facilities to perform the analysis of ground water samples.

(e) The owner or operator must determine the rate and direction of ground water flow in the uppermost aquifer at least annually.

(f) The department will specify the frequencies for collecting samples and conducting statistical tests to determine statistically significant evidence of increased contamination in accordance with subsection (8)(g) of this section. A sequence of at least four samples from each well (background and compliance wells) must be collected at least semiannually during the compliance period of the facility.

(g) The owner or operator must analyze samples from all monitoring wells at the compliance point for all constituents contained in Appendix IX of Part 264 at least annually to determine whether additional dangerous constituents are present in the uppermost aquifer and, if so, at what concentration, pursuant to procedures in (f) of this subsection. If the owner or operator finds Appendix IX constituents in the ground water that are not already identified in the permit as monitoring constituents, the owner or operator may resample within one month and repeat the Appendix IX analysis. If the second analysis confirms the presence of new constituents, the owner or operator must report the concentration of these additional constituents to the department within seven days after the completion of the second analysis and add them to the monitoring list. If the owner or operator chooses not to resample, then he or she must report the concentrations of these additional constituents to the department within seven days after completion of the initial analysis and add them to the monitoring list. If the owner or operator determines, pursuant to (d) of this

subsection, that any concentration limits under subsection (5) of this section are being exceeded at any monitoring well at the point of compliance, he must:

(i) Notify the department of this finding in writing within seven days. The notification must indicate what concentration limits have been exceeded;

(ii) Submit to the department an application for a permit modification to establish a corrective action program meeting the requirements of subsection (11) of this section, within ninety days, or within sixty days if an engineering feasibility study has been previously submitted to the department under subsection (9)(h)(v) of this section. For regulated units managing EHW, time frames of sixty days and forty-five days, respectively will apply. However, if the department finds that the full extent of the ninety/sixty-day or the sixty/forty-five-day time periods will increase the likelihood to cause a threat to public health, or the environment, it can at its discretion reduce their duration. In specifying shorter limits, the department will consider the following factors:

(A) The physical and chemical characteristics of the dangerous constituents and parameters in the ground water;

(B) The hydrogeological characteristics of the facility and of the surrounding land;

(C) The rate of movement and direction of flow of the affected ground water;

(D) The proximity to and withdrawal rates of ground water users downgradient; and

(E) The current and future uses of ground water in the concerned area; and

(iii) The application must at a minimum include the following information:

(A) A detailed description of corrective actions that will achieve compliance with the ground water protection standard specified in the permit; and

(B) A plan for a ground water monitoring program that will demonstrate the effectiveness of the corrective action.

(i) If the owner or operator determines, pursuant to (d) of this subsection, that the ground water concentration limits under this section are being exceeded at any monitoring well at the point of compliance, he may demonstrate that a source other than a regulated unit caused the contamination or that the detection is an artifact caused by an error in sampling, analysis, or statistical evaluation or natural variation in the ground water. In making a demonstration under this subsection, the owner or operator must:

(i) Notify the department in writing within seven days that he intends to make a demonstration under this subsection;

(ii) Within forty-five days, submit a report to the department which demonstrates that a source other than a regulated unit caused the standard to be exceeded or that the apparent noncompliance with the standards resulted from error in sampling, analysis, or evaluation;

(iii) Within forty-five days, submit to the department an application for a permit modification to make appropriate changes to the compliance monitoring program at the facility; and

(iv) Continue to monitor in accord with the compliance monitoring program established under this section.

(j) If the owner or operator determines that the compliance monitoring program no longer satisfies the requirements of this section, he must, within forty-five days, submit an

application for a permit modification to make any appropriate changes to the program.

(11) Corrective action program. An owner or operator required to establish a corrective action program under this section must, at a minimum, discharge the responsibilities described in this subsection.

(a) The owner or operator must take corrective action to ensure that regulated units are in compliance with the ground water protection standard under subsection (3) of this section. The department will specify the ground water protection standard in the facility permit, including:

(i) A list of the dangerous constituents and parameters identified under subsection (4) of this section;

(ii) Concentration limits under subsection (5) of this section, for each of those dangerous constituents and parameters;

(iii) The compliance point under subsection (6) of this section; and

(iv) The compliance period under subsection (7) of this section.

(b) The owner or operator must implement a corrective action program that prevents dangerous constituents and parameters from exceeding their respective concentration limits at the compliance point by removing the dangerous waste constituents and parameters or treating them in place. The permit will specify the specific measures that will be taken.

(c) The owner or operator must begin corrective action within a reasonable time period after the ground water protection standard is exceeded. The department will specify that time period in the facility permit. If a facility permit includes a corrective action program in addition to a compliance monitoring program, the permit will specify when the corrective action will begin and such a requirement will operate in lieu of subsection (10)(i)(ii) of this section.

(d) In conjunction with a corrective action program, the owner or operator must establish and implement a ground water monitoring program to demonstrate the effectiveness of the corrective action program. Such a monitoring program may be based on the requirements for a compliance monitoring program under subsection (10) of this section, and must be as effective as that program in determining compliance with the ground water protection standard under subsection (3) of this section, and in determining the success of a corrective action program under (e) of this subsection, where appropriate.

(e) In addition to the other requirements of this section, the owner or operator must conduct a corrective action program to remove or treat in place any dangerous constituents or parameters under subsection (4) of this section, that exceed concentration limits under subsection (5) of this section, in ground water between the compliance point under subsection (6) of this section, and the downgradient facility property boundary. The permit will specify the measures to be taken.

(i) Corrective action measures under this subsection must be initiated at the effective date of the modified permit and completed without time delays considering the extent of contamination.

(ii) Corrective action measures under this subsection may be terminated once the concentration of dangerous constituents and parameters under subsection (4) of this

section, is reduced to levels below their respective concentration limits under subsection (5) of this section.

(f) The owner or operator must continue corrective action measures during the compliance period to the extent necessary to ensure that the ground water protection standard is not exceeded. If the owner or operator is conducting corrective action at the end of the compliance period, he must continue that corrective action for as long as necessary to achieve compliance with the ground water protection standard. The owner or operator may terminate corrective action measures taken beyond the period equal to the active life of the waste management area (including the closure period) if he can demonstrate, based on data from the ground water monitoring program under (d) of this subsection, that the ground water protection standard of subsection (3) of this section, has not been exceeded for a period of three consecutive years.

(g) The owner or operator must report in writing to the department on the effectiveness of the corrective action program. The owner or operator must submit these reports semiannually.

(h) If the owner or operator determines that the corrective action program no longer satisfies the requirements of this section, he must, within forty-five days, submit an application for a permit modification to make any appropriate changes to the program.

(12) Corrective action for solid waste management units.

(a) The owner or operator of a facility seeking a permit for the treatment, storage, or disposal of dangerous waste must institute corrective action as necessary to protect human health and the environment for all releases of dangerous waste or constituents from any solid waste management unit at the facility, regardless of the time at which waste was placed in such unit.

(b) Corrective action will be specified in the permit. The permit will contain schedules of compliance for such corrective action (where such corrective action cannot be completed prior to issuance of the permit) and assurances of financial responsibility for completing such corrective action.

(c) The owner or operator must implement corrective actions beyond the facility property boundary, where necessary to protect human health and the environment, unless the owner or operator demonstrates to the satisfaction of the department that, despite the owner's or operator's best efforts, the owner or operator was unable to obtain the necessary permission to undertake such actions. The owner/operator is not relieved of all responsibility to clean up a release that has migrated beyond the facility boundary where off-site access is denied. On-site measures to address such releases will be determined on a case-by-case basis. Assurances of financial responsibility for such corrective action must be provided.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-645, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-645, filed 1/4/89; 84-09-088 (Order DE 83-36), § 173-303-645, filed 4/18/84.]

WAC 173-303-650 Surface impoundments. (1) Applicability. The regulations in this section apply to owners and operators of facilities that use surface impoundments to treat, store, or dispose of dangerous waste.

(2) Design and operating requirements.

(a)(i) A surface impoundment (except for an existing portion of a surface impoundment) must have a liner that is designed, constructed, and installed to prevent any migration of wastes out of the impoundment to the adjacent subsurface soil or ground water or surface water at any time during the active life (including the closure period) of the impoundment. The liner may be constructed of materials that may allow wastes to migrate into the liner (but not into the adjacent subsurface soil or ground water or surface water) during the active life of the facility, provided that the impoundment is closed in accordance with subsection (6)(a)(i) of this section. For impoundments that will be closed in accordance with subsection (6)(a)(ii) of this section, the liner must be constructed of materials that can prevent wastes from migrating into the liner during the active life of the facility. The liner must be:

(A) Constructed of materials that have appropriate chemical properties and sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrogeologic forces), physical contact with the waste or leachate to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation;

(B) Placed upon a foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift;

(C) Installed to cover all surrounding earth likely to be in contact with the waste or leachate; and

(D) For EHW management, the owner or operator shall submit an engineering report with his permit application under WAC 173-303-806(4) stating the basis for selecting the liner(s). The report shall be certified by a licensed professional engineer.

(ii) The owner or operator of a new surface impoundment installed after October 31, 1984, and in which liquid EHW is managed must:

(A) Install a double lined system which incorporates the specifications of subsection (3)(a), (b), and (c) of this section; and

(B) Must comply with either the ground water monitoring requirements of WAC 173-303-645, or the unsaturated zone monitoring requirements of WAC 173-303-655(6).

(b) The owner or operator will be exempted from the requirements of (a) of this subsection, if the department finds, based on a demonstration by the owner or operator, that alternate design and operating practices, together with location characteristics, will prevent the migration of any dangerous constituents listed in WAC 173-303-9905, or which otherwise cause his wastes to be regulated under this chapter, into the ground water or surface water at any future time. In deciding whether to grant an exemption, the department will consider:

(i) The nature and quantity of the wastes;

(ii) The proposed alternate design and operation;

(iii) The hydrogeologic setting of the facility, including the attenuative capacity and thickness of the liners and soils present between the impoundment and ground water or surface water; and

(iv) All other factors which would influence the quality and mobility of the leachate produced and the potential for it to migrate to ground water or surface water.

(c) A surface impoundment must be designed, constructed, maintained, and operated to prevent overtopping resulting from normal or abnormal operations; overfilling; wind and wave action; rainfall; run-on; malfunctions of level controllers, alarms, and other equipment; and human error.

(d) A surface impoundment must be designed so that any flow of waste into the impoundment can be immediately shut off in the event of overtopping or liner failure.

(e) A surface impoundment must be designed to repel birds.

(f) A surface impoundment must have dikes that are designed, constructed, and maintained with sufficient structural integrity to prevent their failure. In ensuring structural integrity, it must not be presumed that the liner system will function without leakage during the active life of the unit.

(g) Earthen dikes must be kept free of:

(i) Perennial woody plants with root systems which could weaken its structural integrity; and

(ii) Burrowing mammals which could weaken its structural integrity or create leaks through burrows.

(h) Earthen dikes must have a protective cover, such as grass, shale or rock to minimize wind and water erosion and to preserve their structural integrity.

(i) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this subsection are satisfied.

(3) Double-lined surface impoundments; exemption from WAC 173-303-645, ground water protection requirements.

(a) Except as provided in subsection (2)(a)(ii) of this section, the owner or operator of a double-lined surface impoundment is not subject to regulation under WAC 173-303-645 if the following conditions are met:

(i) The impoundment (including its underlying liners) must be located entirely above the seasonal high water table;

(ii) The impoundment must be underlain by two liners which are designed and constructed in a manner that prevents the migration of liquids into or out of the space between the liners. Both liners must meet all the specifications of subsection (2)(a)(i) of this section;

(iii) A leak detection system must be designed, constructed, maintained, and operated between the liners to detect any migration of liquids into the space between the liners; and

(iv) A leachate detection, collection and removal system must be designed and operated to remove accumulated liquids from the system as quickly as possible so as to avoid unnecessary buildup of hydrostatic pressure in the system.

(b) If liquid leaks into the leak detection system, the owner or operator must:

(i) Notify the department of the leak in writing within seven days after detecting the leak; and

(ii)(A) Within a period of time specified in the permit, remove accumulated liquid, repair or replace the liner which is leaking to prevent the migration of liquids through the liner, and obtain a certification from a qualified engineer that, to the best of his knowledge and opinion, the leak has been stopped; or

(B) If a detection monitoring program pursuant to WAC 173-303-645(9) has already been established in the permit (to be complied with only if a leak occurs), begin to comply with that program and any other applicable requirements of WAC 173-303-645 within the period of time specified in the permit.

(c) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this section are satisfied.

(4) Monitoring and inspection.

(a) During construction and installation, liners (except in the case of existing portions of surface impoundments exempt from subsection (2)(a)(i) of this section) and cover systems (e.g., membranes, sheets, or coatings) must be inspected for uniformity, damage, and imperfections (e.g., holes, cracks, thin spots, or foreign materials). Immediately after construction or installation:

(i) Synthetic liners and covers must be inspected to ensure tight seams and joints and the absence of tears, punctures, or blisters; and

(ii) Soil-based and admixed liners and covers must be inspected for imperfections including lenses, cracks, channels, root holes, or other structural nonuniformities that may cause an increase in the permeability of the liner or cover.

(b) While a surface impoundment is in operation, it must be inspected weekly and after storms to detect evidence of any of the following:

(i) Deterioration, malfunctions, or improper operation of overtopping control systems;

(ii) Sudden drops in the level of the impoundment's contents;

(iii) The presence of liquids in leak detection systems, where installed to comply with subsection (3) of this section; and

(iv) Severe erosion or other signs of deterioration in dikes or other containment devices.

(c) Prior to the issuance of a permit, and after any extended period of time (at least six months) during which the impoundment was not in service, the owner or operator must obtain a certification from a qualified engineer that the impoundment's dike, including that portion of any dike which provides freeboard, has structural integrity. The certification must establish, in particular, that the dike:

(i) Will withstand the stress of the pressure exerted by the types and amounts of wastes to be placed in the impoundment; and

(ii) Will not fail due to scouring or piping, without dependence on any liner system included in the surface impoundment construction.

(5) Emergency repairs; contingency plans.

(a) A surface impoundment must be removed from service in accordance with (b) of this subsection when:

(i) Unexpected changes of liquid levels occur; or

(ii) The dike leaks.

(b) When a surface impoundment must be removed from service as required by (a) of this subsection, the owner or operator must:

(i) Immediately shut off the flow or stop the addition of wastes into the impoundment;

(ii) Immediately contain any surface leakage which has occurred or is occurring;

(iii) Immediately stop the leak;

(iv) Take any other necessary steps to stop or prevent catastrophic failure;

(v) Empty the impoundment, if a leak cannot be stopped by any other means; and

(vi) Notify the department of the problem in writing within seven days after detecting the problem.

(c) As part of the contingency plan required in WAC 173-303-340 through 173-303-360, the owner or operator must specify:

(i) A procedure for complying with the requirements of (b) of this subsection; and

(ii) A containment system evaluation and repair plan describing: Testing and monitoring techniques; procedures to be followed to evaluate the integrity of the containment system in the event of a possible failure; description of a schedule of actions to be taken in the event of a possible failure; and the repair techniques and materials (and their availability) to be used in the event of leakage due to containment system failure or deterioration which does not require the impoundment to be removed from service.

(d) No surface impoundment that has been removed from service in accordance with the requirements of this section may be restored to service unless the portion of the impoundment which was failing is repaired and the following steps are taken:

(i) If the impoundment was removed from service as the result of actual or imminent dike failure, the dike's structural integrity must be recertified in accordance with subsection (4)(c) of this section;

(ii) If the impoundment was removed from service as the result of a sudden drop in the liquid level, then:

(A) For any existing portion of the impoundment, a liner must be installed in compliance with subsection (2)(a)(i) or (3) of this section; and

(B) For any other portion of the impoundment, the repaired liner system must be certified by a qualified engineer as meeting the design specifications approved in the permit.

(e) A surface impoundment that has been removed from service in accordance with the requirements of this section and that is not being repaired must be closed in accordance with the provisions of subsection (6) of this section.

(6) Closure and post-closure care.

(a) At closure, the owner or operator must:

(i) Remove or decontaminate all dangerous waste and dangerous waste residues, contaminated containment system components (liners, etc.), contaminated subsoils, and structures and equipment contaminated with dangerous waste and leachate, and manage them as dangerous waste; or

(ii) If the surface impoundment will be closed as a landfill, except that this option is prohibited if EHW would remain in the closed unit(s):

(A) Eliminate free liquids by removing liquid wastes or solidifying the remaining wastes and waste residues;

(B) Stabilize remaining wastes to a bearing capacity sufficient to support a final cover; and

(C) Cover the surface impoundment with a final cover designed and constructed to:

(I) Provide long-term minimization of the migration of liquids through the closed impoundment with a material that has a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present;

(II) Function with minimum maintenance;

(III) Promote drainage and minimize erosion or abrasion of the final cover; and

(IV) Accommodate settling and subsidence so that the cover's integrity is maintained.

(b) If some waste residues or contaminated materials are left in place at final closure (except that no EHW may ever be left in place), the owner or operator must comply with all post-closure requirements contained in WAC 173-303-610 (7), (8), (9), and (10), including maintenance and monitoring throughout the post-closure care period (specified in the permit). The owner or operator must:

(i) Maintain the integrity and effectiveness of the final cover, including making repairs to the cap as necessary to correct the effects of settling, subsidence, erosion, or other events;

(ii) Maintain and monitor the leak detection system in accordance with subsection (3) of this section, where such a system is present between double liner systems;

(iii) Maintain and monitor the ground water monitoring system and comply with all applicable requirements of WAC 173-303-645; and

(iv) Prevent run-on and run-off from eroding or otherwise damaging the final cover.

(c)(i) If an owner or operator plans to close a surface impoundment in accordance with (a)(i) of this subsection, and the impoundment does not comply with the liner requirements of subsection (2)(a)(i) of this section, and is not exempt from them in accordance with subsection (2)(b) of this section, then:

(A) The closure plan for the impoundment under WAC 173-303-610(3) must include both a plan for complying with (a)(i) of this subsection, and a contingent plan for complying with (a)(ii) of this subsection in case not all contaminated subsoils can be practicably removed at closure; and

(B) The owner or operator must prepare a contingent post-closure plan under WAC 173-303-610(8) for complying with (b) of this subsection in case not all contaminated subsoils can be practicably removed at closure.

(ii) The cost estimates calculated under WAC 173-303-620 (3) and (5) for closure and post-closure care of an impoundment subject to (c) of this subsection must include the cost of complying with the contingent closure plan and the contingent post-closure plan, but are not required to include the cost of expected closure under (a)(i) of this subsection.

(d) During the post-closure care period, if liquids leak into a leak detection system installed under subsection (3) of this section, the owner or operator must notify the department of the leak in writing within seven days after detecting the leak. The department will then modify the permit to require compliance with applicable requirements of WAC 173-303-645, or, if so requested by the owner or operator, to require removal of all materials in accordance with (a)(i) of this subsection.

(7) Special requirements for ignitable or reactive waste. Ignitable or reactive waste must not be placed in a surface impoundment, unless:

(a) The waste is treated, rendered, or mixed before or immediately after placement in the impoundment so that:

(i) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under WAC 173-303-090; and

(ii) WAC 173-303-395 (1)(b) is complied with; or

(b) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react; or

(c) The surface impoundment is used solely for emergencies.

(8) Special requirements for incompatible wastes. Incompatible wastes and materials must not be placed in the same surface impoundment, unless WAC 173-303-395 (1)(b) is complied with.

(9) Special requirements for dangerous wastes F020, F021, F022, F023, F026, and F027.

(a) The wastes F020, F021, F022, F023, F026, or F027 must not be placed in a surface impoundment unless the owner or operator operates the surface impoundment in accordance with a management plan for these wastes that is approved by the department pursuant to the standards set out in this subsection, and in accord with all other applicable requirements of this section. The factors to be considered are:

(i) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(ii) The attenuative properties of underlying and surrounding soils or other materials;

(iii) The mobilizing properties of other materials co-disposed with these wastes; and

(iv) The effectiveness of additional treatment, design, or monitoring techniques.

(b) The department may determine that additional design, operating, and monitoring requirements are necessary in order to reduce the possibility of migration of these wastes to ground water, surface water, or air so as to protect human health and the environment.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-650, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-650, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-650, filed 3/11/88; 86-12-057 (Order DE-85-10), § 173-303-650, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-650, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-650, filed 2/10/82.]

WAC 173-303-655 Land treatment. (1) Applicability. The regulations in this subpart apply to owners and operators of facilities that treat or dispose of dangerous waste in land treatment units, except as WAC 173-303-600 provides otherwise.

(2) Treatment program.

(a) An owner or operator subject to this section must establish a land treatment program that is designed to ensure that dangerous constituents placed in or on the treatment zone are degraded, transformed, or immobilized within the treatment zone. The department will specify in the facility permit the elements of the treatment program, including:

(i) The wastes that are capable of being treated at the unit based on a demonstration under subsection (3) of this section;

(ii) Design measures and operating practices necessary to maximize the success of degradation, transformation, and immobilization processes in the treatment zone in accordance with subsection (4)(a) of this section; and

(iii) Unsaturated zone monitoring provisions meeting the requirements of subsection (6) of this section.

(b) The department will specify in the facility permit the dangerous constituents that must be degraded, transformed, or immobilized under this section. Dangerous constituents are constituents identified in WAC 173-303-9905, and any other constituents which, although not listed in WAC 173-303-9905, cause a waste to be regulated under this chapter, that are reasonably expected to be in, or derived from, waste placed in or on the treatment zone.

(c) The department will specify the vertical and horizontal dimensions of the treatment zone in the facility permit. The treatment zone is the portion of the unsaturated zone below, and including, the land surface in which the owner or operator intends to maintain the conditions necessary for effective degradation, transformation, or immobilization of dangerous constituents. The maximum depth of the treatment zone must be:

(i) No more than 1.5 meters (5 feet) below the initial soil surface; and

(ii) More than 3 meters (10 feet) above the seasonal high water table; except that the owner or operator may demonstrate to the satisfaction of the department that a distance of less than 3 meters will be adequate. In no case shall the distance be less than 1 meter.

(3) Treatment demonstration.

(a) For each waste that will be applied to the treatment zone, the owner or operator must demonstrate, prior to application of the waste, that dangerous constituents in the waste can be completely degraded, transformed, or immobilized in the treatment zone.

(b) In making this demonstration, the owner or operator may use field tests, laboratory analyses, available data, or, in the case of existing units, operating data. If the owner or operator intends to conduct field tests or laboratory analyses in order to make the demonstration required under (a) of this subsection, he must obtain a land treatment demonstration permit under WAC 173-303-808. The department will specify in this permit the testing, analytical, design, and operating requirements (including the duration of the tests and analyses, and, in the case of field tests, the horizontal and vertical dimensions of the treatment zone, monitoring procedures, closure, and clean-up activities) necessary to meet the requirements in (c) of this subsection.

(c) Any field test or laboratory analysis conducted in order to make a demonstration under (a) of this subsection must:

(i) Accurately simulate the characteristics and operating conditions for the proposed land treatment unit including:

(A) The characteristics of the waste and of dangerous constituents present;

(B) The climate in the area;

(C) The topography of the surrounding area;

(D) The characteristics and depth of the soil in the treatment zone; and

(E) The operating practices to be used at the unit;

(ii) Be likely to show that dangerous constituents in the waste to be tested will be completely degraded, transformed,

or immobilized in the treatment zone of the proposed land treatment unit; and

(iii) Be conducted in a manner that protects human health and the environment considering:

(A) The characteristics of the waste to be tested;

(B) The operating and monitoring measures taken during the course of the test;

(C) The duration of the test;

(D) The volume of waste used in the test; and

(E) In the case of field tests, the potential for migration of dangerous constituents to ground water or surface water.

(4) Design and operating requirements. The department will specify in the facility permit how the owner or operator will design, construct, operate, and maintain the land treatment unit in compliance with this subsection.

(a) The owner or operator must design, construct, operate, and maintain the unit to maximize the degradation, transformation, and immobilization of dangerous constituents in the treatment zone. The owner or operator must design, construct, operate, and maintain the unit in accordance with all design and operating conditions that were used in the treatment demonstration under subsection (3) of this section. At a minimum, the department will specify in the facility permit:

(i) The rate and method of waste application to the treatment zone;

(ii) Measures to control soil pH;

(iii) Measures to enhance microbial or chemical reactions (e.g., fertilization, tilling); and

(iv) Measures to control the moisture content of the treatment zone.

(b) The owner or operator must design, construct, operate, and maintain the treatment zone to minimize run-off of dangerous constituents during the active life of the land treatment unit.

(c) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the treatment zone during peak discharge from at least a twenty-five-year storm.

(d) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a twenty-four-hour, twenty-five-year storm.

(e) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously and in accordance with this chapter after storms to maintain the design capacity of the system.

(f) If the treatment zone contains particulate matter which may be subject to wind dispersal, the owner or operator must control wind dispersal.

(g) The owner or operator must inspect the unit weekly and after storms to detect evidence of:

(i) Deterioration, malfunctions, or improper operation of run-on and run-off control systems; and

(ii) Improper functioning of wind dispersal control measures.

(5) Food chain crops. The department may allow the growth of food chain crops in or on the treatment zone only if the owner or operator satisfies the conditions of this subsection. The department will specify in the facility permit the specific food chain crops which may be grown.

(a)(i) The owner or operator must demonstrate that there is no substantial risk to human health caused by the growth of such crops in or on the treatment zone by demonstrating, prior to the planting of such crops, that dangerous constituents other than cadmium:

(A) Will not be transferred to the food or feed portions of the crop by plant uptake or direct contact, and will not otherwise be ingested by food chain animals (e.g., by grazing); or

(B) Will not occur in greater concentrations in or on the food or feed portions of crops grown on the treatment zone than in or on identical portions of the same crops grown on untreated soils under similar conditions in the same region.

(ii) The owner or operator must make the demonstration required under (a)(i) of this subsection prior to the planting of crops at the facility for all dangerous constituents that are reasonably expected to be in, or derived from, waste placed in or on the treatment zone.

(iii) In making such a demonstration, the owner or operator may use field tests, greenhouse studies, available data, or, in the case of existing units, operating data, and must:

(A) Base the demonstration on conditions similar to those present in the treatment zone, including soil characteristics (e.g., pH, cation exchange capacity), specific wastes, application rates, application methods, and crops to be grown; and

(B) Describe the procedures used in conducting any tests, including the sample selection criteria, sample size, analytical methods, and statistical procedures.

(iv) If the owner or operator intends to conduct field tests or greenhouse studies in order to make the demonstration he must obtain a permit for conducting such activities.

(b) The owner or operator must comply with the following conditions if cadmium is contained in wastes applied to the treatment zone;

(i)(A) The pH of the waste and soil mixture must be 6.5 or greater at the time of each waste application, except for waste containing cadmium at concentrations of 2 mg/kg (dry weight) or less;

(B) The annual application of cadmium from waste must not exceed 0.5 kilograms per hectare (kg/ha) on land used for production of tobacco, leafy vegetables, or root crops grown for human consumption. For other food chain crops, the annual cadmium application rate must not exceed:

Time period	Annual Cd application rate (kilograms per hectare)
Present to June 30, 1984	2.0
July 1, 1984 to Dec. 31, 1986	1.25
Beginning Jan. 1, 1987	0.5

(C) The cumulative application of cadmium from waste must not exceed 5kg/ha if the waste and soil mixture has a pH of less than 6.5; and

(D) If the waste and soil mixture has a pH of 6.5 or greater or is maintained at a pH of 6.5 or greater during crop growth, the cumulative application of cadmium from waste must not exceed: 5 kg/ha if soil cation exchange capacity

(CEC) is less than 5 meq/100g; 10 kg/ha if soil CEC is 5-15 meq/100g; and 20 kg/ha if soil CEC is greater than 15 meq/100g; or

(ii)(A) Animal feed must be the only food chain crop produced;

(B) The pH of the waste and soil mixture must be 6.5 or greater at the time of waste application or at the time the crop is planted, whichever occurs later, and this pH level must be maintained whenever food chain crops are grown;

(C) There must be an operating plan which demonstrates how the animal feed will be distributed to preclude ingestion by humans. The operating plan must describe the measures to be taken to safeguard against possible health hazards from cadmium entering the food chain, which may result from alternative land uses; and

(D) Future property owners must be notified by a stipulation in the land record or property deed which states that the property has received waste at high cadmium application rates and that food chain crops must not be grown except in compliance with (b)(ii) of this subsection.

(6) Unsaturated zone monitoring. An owner or operator subject to this section must establish an unsaturated zone monitoring program to discharge the responsibilities described in this subsection.

(a) The owner or operator must monitor the soil and soil-pore liquid to determine whether dangerous constituents migrate out of the treatment zone.

(i) The department will specify the dangerous constituents to be monitored in the facility permit. The dangerous constituents to be monitored are those specified under subsection (2)(b) of this section.

(ii) The department may require monitoring for principal dangerous constituents (PDCs) in lieu of the constituents specified under subsection (2)(b) of this section. PDCs are dangerous constituents contained in the wastes to be applied at the unit that are the most difficult to treat, considering the combined effects of degradation, transformation, and immobilization. The department will establish PDCs if it finds, based on waste analyses, treatment demonstrations, or other data, that effective degradation, transformation, or immobilization of the PDCs will assure treatment at at least equivalent levels for the other dangerous constituents in the wastes.

(b) The owner or operator must install an unsaturated zone monitoring system that includes soil monitoring using soil cores and soil-pore liquid monitoring using devices such as lysimeters. The unsaturated zone monitoring system must consist of a sufficient number of sampling points at appropriate locations and depths to yield samples that:

(i) Represent the quality of background soil-pore liquid quality and the chemical make-up of soil that has not been affected by leakage from the treatment zone; and

(ii) Indicate the quality of soil-pore liquid and the chemical make-up of the soil below the treatment zone.

(c) The owner or operator must establish a background value for each dangerous constituent to be monitored under (a) of this subsection. The permit will specify the background values for each constituent or specify the procedures to be used to calculate the background values.

(i) Background soil values may be based on a one-time sampling at a background plot having characteristics similar to those of the treatment zone.

(ii) Background soil-pore liquid values must be based on at least quarterly sampling for one year at a background plot having characteristics similar to those of the treatment zone.

(iii) The owner or operator must express all background values in a form necessary for the determination of statistically significant increases under (f) of this subsection.

(iv) In taking samples used in the determination of all background values, the owner or operator must use an unsaturated zone monitoring system that complies with (b)(i) of this subsection.

(d) The owner or operator must conduct soil monitoring and soil-pore liquid monitoring immediately below the treatment zone. The department will specify the frequency and timing of soil and soil-pore liquid monitoring in the facility permit after considering the frequency, timing, and rate of waste application, and the soil permeability. The owner or operator must express the results of soil and soil-pore liquid monitoring in a form necessary for the determination of statistically significant increases under (f) of this subsection.

(e) The owner or operator must use consistent sampling and analysis procedures that are designed to ensure sampling results that provide a reliable indication of soil-pore liquid quality and the chemical make-up of the soil below the treatment zone. At a minimum, the owner or operator must implement procedures and techniques for:

- (i) Sample collection;
- (ii) Sample preservation and shipment;
- (iii) Analytical procedures; and
- (iv) Chain of custody control.

(f) The owner or operator must determine whether there is a statistically significant change over background values for any dangerous constituent to be monitored under (a) of this subsection, below the treatment zone each time he conducts soil monitoring and soil-pore liquid monitoring under (d) of this subsection.

(i) In determining whether a statistically significant increase has occurred, the owner or operator must compare the value of each constituent, as determined under (d) of this subsection, to the background value for that constituent according to the statistical procedure specified in the facility permit under this subsection.

(ii) The owner or operator must determine whether there has been a statistically significant increase below the treatment zone within a reasonable time period after completion of sampling. The department will specify that time period in the facility permit after considering the complexity of the statistical test and the availability of laboratory facilities to perform the analysis of soil and soil-pore liquid samples.

(iii) The owner or operator must determine whether there is a statistically significant increase below the treatment zone using a statistical procedure that provides reasonable confidence that migration from the treatment zone will be identified. The department will specify a statistical procedure in the facility permit that it finds:

(A) Is appropriate for the distribution of the data used to establish background values; and

(B) Provides a reasonable balance between the probability of falsely identifying migration from the treatment zone and the probability of failing to identify real migration from the treatment zone.

(g) If the owner or operator determines, pursuant to (f) of this subsection, that there is a statistically significant increase of dangerous constituents below the treatment zone, he must:

(i) Notify the department of his finding in writing within seven days. The notification must indicate what constituents have shown statistically significant increases;

(ii) Within forty-five days, submit to the department an application for a permit modification to amend the operating practices at the facility in order to maximize the success of degradation, transformation, or immobilization processes in the treatment zone; and

(iii) Continue to monitor in accordance with the unsaturated zone monitoring program established under this subsection.

(h) If the owner or operator determines, pursuant to (f) of this subsection, that there is a statistically significant increase of dangerous constituents below the treatment zone, he may demonstrate that a source other than regulated units caused the increase or that the increase resulted from an error in sampling, analysis, or evaluation. While the owner or operator may make a demonstration under this subsection, he is not relieved of the requirement to submit concurrently a permit modification application within the forty-five-day period, unless the demonstration made under this subsection successfully shows that a source other than regulated units caused the increase or that the increase resulted from an error in sampling, analysis, or evaluation. In making a demonstration under this subsection, the owner or operator must:

(i) Notify the department in writing within seven days of determining a statistically significant increase below the treatment zone that he intends to make a demonstration under this subsection;

(ii) Within forty-five days, submit a report to the department demonstrating that a source other than the regulated units caused the increase or that the increase resulted from error in sampling, analysis, or evaluation;

(iii) Within forty-five days, submit to the department an application for a permit modification to make any appropriate changes to the unsaturated zone monitoring program at the facility; and

(iv) Continue to monitor in accordance with the unsaturated zone monitoring program established under this subsection.

(7) Recordkeeping. The owner or operator must include dangerous waste application dates and rates in the operating record required under WAC 173-303-380.

(8) Closure and postclosure care.

(a) During the closure period the owner or operator must:

(i) Continue all operations (including pH control) necessary to maximize degradation, transformation, or immobilization of dangerous constituents within the treatment zone as required under subsection (4)(a) of this section, except to the extent such measures are inconsistent with (a)(viii) of this subsection;

(ii) Continue all operations in the treatment zone to minimize run-off of dangerous constituents as required under subsection (4)(b) of this section;

(iii) Maintain the run-on control system required under subsection (4)(c) of this section;

(iv) Maintain the run-off management system required under subsection (4)(d) of this section;

(v) Control wind dispersal of dangerous waste if required under subsection (4)(f) of this section;

(vi) Continue to comply with any prohibitions or conditions concerning growth of food chain crops under subsection (5) of this section;

(vii) Continue unsaturated zone monitoring in compliance with subsection (6) of this section, except that soil-pore liquid monitoring may be terminated ninety days after the last application of waste to the treatment zone; and

(viii) Establish a vegetative cover on the portion of the facility being closed at such time that the cover will not substantially impede degradation, transformation, or immobilization of dangerous constituents in the treatment zone. The vegetative cover must be capable of maintaining growth without extensive maintenance.

(b) For the purpose of complying with WAC 173-303-610(6) when closure is completed, the owner or operator may submit to the department a certification by an independent qualified soil scientist, in lieu of a licensed professional engineer, that the facility has been closed in accordance with the specifications in the approved closure plan.

(c) During the postclosure care period the owner or operator must:

(i) Continue all operations (including pH control) necessary to enhance degradation and transformation and sustain immobilization of dangerous constituents in the treatment zone to the extent that such measures are consistent with other postclosure care activities;

(ii) Maintain a vegetative cover over closed portions of the facility;

(iii) Maintain the run-on control system required under subsection (4)(c) of this section;

(iv) Maintain the run-off management system required under subsection (4)(d) of this section;

(v) Control wind dispersal of dangerous waste, if required under subsection (4)(f) of this section;

(vi) Continue to comply with any prohibitions or conditions concerning growth of food chain crops under subsection (5) of this section; and

(vii) Continue unsaturated zone monitoring in compliance with subsection (6) of this section, except that soil-pore liquid monitoring may be terminated one hundred eighty days after the last application of waste to the treatment zone.

(d) The owner or operator is not subject to regulation under (a)(viii) and (c) of this subsection, if the department finds that the level of dangerous constituents in the treatment zone soil does not exceed the background value of those constituents by an amount that is statistically significant when using the test specified in (d)(iii) of this subsection. The owner or operator may submit such a demonstration to the department at any time during the closure or postclosure care periods. For the purposes of this subsection:

(i) The owner or operator must establish background soil values and determine whether there is a statistically significant increase over those values for all dangerous constituents specified in the facility permit under subsection (2)(b) of this section;

(A) Background soil values may be based on a one-time sampling of a background plot having characteristics similar to those of the treatment zone;

(B) The owner or operator must express background values and values for dangerous constituents in the treatment zone in a form necessary for the determination of statistically significant increases under (d)(iii) of this subsection;

(ii) In taking samples used in the determination of background and treatment zone values, the owner or operator must take samples at a sufficient number of sampling points and at appropriate locations and depths to yield samples that represent the chemical make-up of soil that has not been affected by leakage from the treatment zone and the soil within the treatment zone, respectively;

(iii) In determining whether a statistically significant increase has occurred, the owner or operator must compare the value of each constituent in the treatment zone to the background value for that constituent using a statistical procedure that provides reasonable confidence that constituent presence in the treatment zone will be identified. The owner or operator must use a statistical procedure that:

(A) Is appropriate for the distribution of the data used to establish background values; and

(B) Provides a reasonable balance between the probability of falsely identifying dangerous constituent presence in the treatment zone and the probability of failing to identify real presence in the treatment zone.

(e) The owner or operator is not subject to regulation under WAC 173-303-645 if the department finds that the owner or operator satisfies (d) of this subsection, and if unsaturated zone monitoring under subsection (6) of this section, indicates that dangerous constituents have not migrated beyond the treatment zone during the active life of the land treatment unit.

(9) Special requirements for ignitable or reactive waste. The owner or operator must not apply ignitable or reactive waste to the treatment zone unless:

(a) The waste is immediately incorporated into the soil so that:

(i) The resulting waste, mixture, or dissolution of material no longer meets the definition of ignitable or reactive waste under WAC 173-303-090 (5) and (7); and

(ii) WAC 173-303-395 is complied with; or

(b) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react.

(10) Special requirements for incompatible wastes. The owner or operator must not place incompatible wastes, or incompatible wastes and materials, in or on the same treatment zone, unless WAC 173-303-395 (1)(b) is complied with.

(11) Special requirements for extremely hazardous waste. Under no circumstances will EHW be allowed to remain in a closed land treatment unit after concluding the postclosure care period. If EHW remains at the end of the scheduled postclosure care period specified in the permit, then the department will either extend the postclosure care period, or require that all EHW be disposed of off-site or that it be treated. In deciding whether to extend postclosure care or require disposal or treatment, the department will take into account the likelihood that the waste will or will not continue to degrade in the land treatment unit to the extent that it is no longer EHW. For the purposes of this subsection, EHW will be considered to remain in a land treatment unit if representative samples of the treatment zone

are designated as EHW. Procedures for representative sampling and testing will be specified in the permit.

(12) Special requirements for dangerous wastes F020, F021, F022, F023, F026, and F027.

(a) Dangerous wastes F020, F021, F022, F023, F026, or F027 must not be placed in a land treatment unit unless the owner or operator operates the facility in accordance with a management plan for these wastes that is approved by the department pursuant to the standards set out in this subsection and in accord with all other applicable requirements of this chapter. The factors to be considered are:

(i) The volume, physical, and chemical characteristics of the wastes including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(ii) The attenuative properties of underlying and surrounding soils or other materials;

(iii) The mobilizing properties of other materials co-disposed with these wastes; and

(iv) The effectiveness of additional treatment, design, or monitoring techniques.

(b) The department may determine that additional design, operating, and monitoring requirements are necessary for land treatment facilities managing dangerous wastes F020, F021, F022, F023, F026, or F027 in order to reduce the possibility of migration of these wastes to ground water, surface water, or air so as to protect human health and the environment.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-655, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-655, filed 4/18/84.]

WAC 173-303-660 Waste piles. (1) Applicability.

(a) The regulations in this section apply to owners and operators of facilities that store or treat dangerous waste in piles.

(b) The regulations in this section do not apply to owners or operators of waste piles that will be closed with wastes left in place. Such waste piles are subject to regulation under WAC 173-303-665 (Landfills).

(c) The owner or operator of any waste pile that is inside or under a structure that provides protection from precipitation so that neither run-off nor leachate is generated is not subject to regulation under subsection (2) of this section, or under WAC 173-303-645, provided that:

(i) Liquids or materials containing free liquids are not placed in the pile;

(ii) The pile is protected from surface water run-on by the structure or in some other manner;

(iii) The pile is designed and operated to control dispersal of the waste by wind, by means other than wetting; and

(iv) The pile will not generate leachate through decomposition or other reactions.

(d) All EHW and respiratory carcinogens stored in waste piles must be protected from dispersal by precipitation or wind (e.g., covered, stored inside a building, etc.).

(2) Design and operating requirements.

(a) A waste pile (except for an existing portion of a waste pile) must have:

(i) A liner that is designed, constructed, installed and maintained to prevent any migration of wastes out of the pile

into the adjacent subsurface soil or ground water or surface water at any time during the active life (including the closure period) of the waste pile. The liner may be constructed of materials that may allow waste to migrate into the liner itself (but not into the adjacent subsurface soil or ground water or surface water) during the active life of the facility. The liner must be:

(A) Constructed of materials that have appropriate chemical properties and sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrogeologic forces), physical contact with the waste or leachate to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation;

(B) Placed upon a foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift; and

(C) Installed to cover all surrounding earth likely to be in contact with the waste or leachate; and

(ii) A leachate collection and removal system immediately above the liner that is designed, constructed, maintained, and operated to collect and remove leachate from the pile. The department will specify design and operating conditions in the permit to ensure that the leachate depth over the liner does not exceed 30 cm (one foot). The leachate collection and removal system must be:

(A) Constructed of materials that are:

(I) Chemically resistant to the waste managed in the pile and to the leachate expected to be generated; and

(II) Of sufficient strength and thickness to prevent collapse under the pressures exerted by overlaying wastes, waste cover materials, and by any equipment used at the pile; and

(B) Designed and operated to function without clogging through the scheduled closure of the waste pile.

(b) A liner and leachate collection and removal system must be protected from plant growth which could adversely affect any component of the system.

(c) For EHW management, the owner or operator shall submit an engineering report with his permit application stating the basis for selecting the liner required in subsection (2)(a)(i) of this section. The statement shall be certified by a licensed professional engineer.

(d) The owner or operator will be exempted from the requirements of (a), (b), and (c) of this subsection, if the department finds, based on a demonstration by the owner or operator, that alternate design and operating practices, together with location characteristics, will prevent the migration of any dangerous constituents identified under WAC 173-303-645(4) into the ground water or surface water at any future time. In deciding whether to grant an exemption, the department will consider:

(i) The nature and quantity of the wastes;

(ii) The proposed alternate design and operation;

(iii) The hydrogeologic setting of the facility, including attenuative capacity and thickness of the liners and soils present between the pile and ground water or surface water; and

(iv) All other factors which would influence the quality and mobility of the leachate produced and the potential for it to migrate to ground water or surface water.

(e) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto any portion of the pile during peak discharge from at least a twenty-five-year storm.

(f) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a twenty-four-hour, twenty-five-year storm.

(g) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously and in accordance with this chapter after storms to maintain design capacity of the system.

(h) If the pile contains any particulate matter which may be subject to wind dispersal, the owner or operator must cover or otherwise manage the pile to control wind dispersal.

(i) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this subsection are satisfied.

(3) Double-lined piles; exemption from WAC 173-303-645, ground water protection requirements.

(a) The owner or operator of a double-lined waste pile is not subject to regulation under WAC 173-303-645 if the following conditions are met:

(i) The pile (including its underlying liners) must be located entirely above the seasonal high water table;

(ii) The pile must be underlain by two liners which are designed and constructed in a manner that prevents the migration of liquids into or out of the space between the liners. Both liners must meet all the specifications of subsection (2)(a)(i) and (c) of this section;

(iii) A leak detection system must be designed, constructed, maintained, and operated between the liners to detect any migration of liquids into the space between the liners; and

(iv) The pile must have a leachate collection and removal system above the top liner that is designed, constructed, maintained, and operated in accordance with subsection (2)(a)(ii) of this section.

(b) If liquid leaks into the leak detection system, the owner or operator must:

(i) Notify the department of the leak in writing within seven days after detecting the leak; and

(ii)(A) Within the period of time specified in the permit, remove accumulated liquid, repair or replace the liner which is leaking to prevent the migration of liquids through the liner, and obtain a certification from a qualified engineer that, to the best of his knowledge and opinion, the leak has been stopped; or

(B) If a detection monitoring program pursuant to WAC 173-303-645(9) has already been defined in the permit (to be complied with only if a leak occurs), begin to comply with that program and any other applicable requirements of WAC 173-303-645 within the period of time specified in the permit.

(c) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this subsection are satisfied.

(4) Inspection of liners; exemption from WAC 173-303-645, ground water protection requirements.

(a) The owner or operator of a pile is not subject to regulation under WAC 173-303-645 if the following conditions are met:

(i) The pile (including its underlying liner) must be located entirely above the seasonal high water table;

(ii) The pile must be underlain by a liner (base) that meets all the specifications of subsection (2)(a)(i) of this section;

(iii) The wastes in the pile must be removed periodically, and the liner must be inspected for deterioration, cracks, or other conditions that may result in leaks. The frequency of inspection will be specified in the inspection plan required in WAC 173-303-320 and must be based on the potential for the liner (base) to crack or otherwise deteriorate under the conditions of operation;

(iv) The liner must be of sufficient strength and thickness to prevent failure due to puncture, cracking, tearing, or other physical damage from equipment used to place waste in or on the pile or to clean and expose the liner surface for inspection; and

(v) The pile must have a leachate collection and removal system above the liner that is designed, constructed, maintained, and operated in accordance with subsection (2)(a)(ii) of this section.

(b) If deterioration, cracking, or other condition is identified that is causing or could cause a leak, the owner or operator must:

(i) Notify the department of the condition in writing within seven days after detecting the condition; and

(ii)(A) Repair or replace the liner (base) and obtain a certification from a qualified engineer that, to the best of his knowledge and opinion, the liner (base) has been repaired and leakage will not occur; or

(B) If a detection monitoring program pursuant to WAC 173-303-645(9) has already been defined in the permit (to be complied with only if a leak occurs), begin to comply with that program and any other applicable requirements of WAC 173-303-645 within the period of time specified in the permit.

(c) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this subsection are satisfied.

(5) Monitoring and inspection.

(a) During construction or installation, liners (except in the case of existing portions of piles exempt from subsection (2)(a) of this section), and cover systems (e.g., membranes, sheets, coatings) must be inspected for uniformity, damage, and imperfections (e.g., holes, cracks, thin spots, foreign materials). Immediately after construction or installation:

(i) Synthetic liners and covers must be inspected to ensure tight seams and joints and the absence of tears, punctures, or blisters; and

(ii) Soil-based and admixed liners and covers must be inspected for imperfections including lenses, cracks, channels, root holes, or other structural nonuniformities that may cause an increase in the permeability of the liner or cover.

(b) While a waste pile is in operation, it must be inspected weekly and after storms to detect evidence of any of the following:

(i) Deterioration, malfunctions, or improper operation of run-on and run-off control systems;

(ii) The presence of liquids in leak detection systems, where installed to comply with subsection (3) of this section;
 (iii) Proper functioning of wind dispersal control systems; and

(iv) The presence of leachate in and proper functioning of leachate collection and removal systems.

(6) Containment system repairs—Contingency plans.

(a) Whenever there is any indication of a possible failure of the containment system, that system must be inspected in accordance with the provisions of the containment system evaluation and repair plan required by (d) of this subsection. Indications of possible failure of the containment system include liquid detected in the leachate detection system, evidence of leakage or the potential for leakage in the base, erosion of the base, or apparent or potential deterioration of the liner(s) based on observation or test samples of the liner materials.

(b) Whenever there is a positive indication of a failure of the containment system, the waste pile must be removed from service. Indications of positive failure of the containment system include waste detected in the leachate detection system, or a breach (e.g., a hole, tear, crack, or separation) in the base.

(c) If the waste pile must be removed from service as required by (b) of this subsection, the owner or operator must:

- (i) Immediately stop adding wastes to the pile;
- (ii) Immediately contain any leakage which has occurred or is occurring;
- (iii) Immediately cause the leak to be stopped; and
- (iv) If the leak cannot be stopped by any other means, remove the waste from the base.

(d) As part of the contingency plan required in WAC 173-303-350, the owner or operator must specify:

(i) A procedure for complying with the requirements of (c) of this subsection; and

(ii) A containment system evaluation and repair plan describing: Testing and monitoring techniques; procedures to be followed to evaluate the integrity of the containment system in the event of a possible failure; a schedule of actions to be taken in the event of a possible failure; and a description of the repair techniques and materials (and their availability) to be used in the event of leakage due to containment system failure or deterioration which does not require the waste pile to be removed from service. For EHW piles, the owner or operator must submit with his permit application a statement signed by a licensed professional engineer of the basis on which the evaluation and repair plan has been established.

(e) No waste pile that has been removed from service pursuant to (b) of this subsection, may be restored to service unless:

- (i) The containment system has been repaired; and
- (ii) The containment system has been certified by a qualified engineer as meeting the design specifications approved in the permit.

(f) A waste pile that has been removed from service pursuant to (b) of this subsection, and will not be repaired, must be closed in accordance with subsection (9) of this section.

(7) Special requirements for ignitable or reactive waste. Ignitable or reactive waste must not be placed in a pile, unless:

(a) Addition of the waste to an existing pile results in the waste or mixture no longer meeting the definition of ignitable or reactive waste under WAC 173-303-090, and complies with WAC 173-303-395 (1)(b); or

(b)(i) The waste is managed in such a way that it is protected from any material or conditions which may cause it to ignite or react; and

(ii) The generator complies with WAC 173-303-395 (1)(d).

(8) Special requirements for incompatible wastes.

(a) Incompatible wastes, or incompatible wastes and materials must not be placed in the same pile, unless WAC 173-303-395 (1)(b) is complied with.

(b) A pile of dangerous waste that is incompatible with any waste or other material stored nearby in other containers, piles, open tanks, or surface impoundments must be separated from the other materials, or protected from them by means of a dike, berm, wall, or other device. Piles of incompatible wastes must not be served by the same containment system.

(c) Dangerous waste must not be piled on the same base where incompatible wastes or materials were previously piled, unless the base has been decontaminated sufficiently to ensure compliance with WAC 173-303-395 (1)(b).

(9) Closure and postclosure care.

(a) At closure, the owner or operator must remove or decontaminate all dangerous waste, waste residues, contaminated containment system components (liners, etc.), contaminated subsoils, and structures and equipment contaminated with waste and leachate, and manage them in accordance with this chapter.

(b) If, after removing or decontaminating all residues and making all reasonable efforts regarding removal or decontamination of contaminated components, subsoils, structures, and equipment as required in (a) of this subsection, the owner or operator finds that not all contaminated subsoils can be practicably removed or decontaminated (except that no EHW may ever be left in place), he must close the facility and perform postclosure care in accordance with the closure and postclosure care requirements that apply to landfills, WAC 173-303-665(6).

(c)(i) The owner or operator of a waste pile that does not comply with the liner requirements of subsection (2)(a)(i) of this section, and is not exempt from them in accordance with subsection (1)(c) or (2)(d) of this section, must:

(A) Include in the closure plan for the pile under WAC 173-303-610(3) both a plan for complying with (a) of this subsection, and a contingent plan for complying with (b) of this subsection, in case not all contaminated subsoils can be practicably removed at closure; and

(B) Prepare a contingent postclosure plan under WAC 173-303-610(8) for complying with (b) of this subsection, in case not all contaminated subsoils can be practicably removed at closure.

(ii) The cost estimates calculated under WAC 173-303-620 (3) and (5) for closure and postclosure care of a pile must include the cost of complying with the contingent closure plan and the contingent postclosure plan but are not

required to include the cost of expected closure under (a) of this subsection.

(10) Special requirements for dangerous wastes F020, F021, F022, F023, F026, and F027.

(a) Dangerous wastes F020, F021, F022, F023, F026, and F027 must not be placed in waste piles that are not enclosed (as defined in subsection (1)(c) of this section) unless the owner or operator operates the waste pile in accordance with a management plan for these wastes that is approved by the department pursuant to the standards set out in this subsection, and in accord with all other applicable requirements of this chapter. The factors to be considered are:

(i) The volume, physical, and chemical characteristics of the wastes, including their potential to migrate through soil or to volatilize or escape into the atmosphere;

(ii) The attenuative properties of underlying and surrounding soils or other materials;

(iii) The mobilizing properties of other materials co-disposed with these wastes; and

(iv) The effectiveness of additional treatment, design, or monitoring techniques.

(b) The department may determine that additional design, operating, and monitoring requirements are necessary in order to reduce the possibility of migration of these wastes to ground water, to surface water, or air so as to protect human health and the environment.

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-660, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-660, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-660, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-660, filed 2/10/82.]

WAC 173-303-665 Landfills. (1) Applicability. The regulations in this section apply to owners and operators of facilities that dispose of dangerous waste in landfills, except as WAC 173-303-600 provides otherwise. No landfill shall be permitted to dispose of EHW, except for the Hanford facility under WAC 173-303-700.

(2) Design and operating requirements.

(a) A landfill (except for an existing portion of a landfill) must have:

(i) A liner that is designed, constructed, and installed to prevent any migration of wastes out of the landfill to the adjacent subsurface soil or ground water or surface water at anytime during the active life (including the closure period) of the landfill. The liner must be constructed of materials that prevent wastes from passing into the liner during the active life of the facility. The owner or operator must submit an engineering report with his permit application under WAC 173-303-806(4) stating the basis for selecting the liner(s). The report must be certified by a licensed professional engineer. The liner must be:

(A) Constructed of materials that have appropriate chemical properties and sufficient strength and thickness to prevent failure due to pressure gradients (including static head and external hydrogeologic forces), physical contact with the waste or leachate to which they are exposed, climatic conditions, the stress of installation, and the stress of daily operation;

(B) Placed upon a foundation or base capable of providing support to the liner and resistance to pressure

gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift; and

(C) Installed to cover all surrounding earth likely to be in contact with the waste or leachate; and

(ii) A leachate collection and removal system immediately above the liner that is designed, constructed, maintained, and operated to collect and remove leachate from the landfill. The department will specify design and operating conditions in the permit to ensure that the leachate depth over the liner does not exceed 30 cm (one foot). The leachate collection and removal system must be:

(A) Constructed of materials that are:

(I) Chemically resistant to the waste managed in the landfill and the leachate expected to be generated; and

(II) Of sufficient strength and thickness to prevent failure under the pressures exerted by overlying wastes, waste cover materials, and by any equipment used at the landfill; and

(B) Designed and operated to function without clogging through the scheduled closure of the landfill.

(b) The owner or operator will be exempted from the requirements of (a) of this subsection, if the department finds, based on a demonstration by the owner or operator, that alternative design and operating practices, together with location characteristics, will prevent the migration of any dangerous constituents into the ground water or surface water at any future time. In deciding whether to grant an exemption, the department will consider:

(i) The nature and quantity of the wastes;

(ii) The proposed alternate design and operation;

(iii) The hydrogeologic setting of the facility, including the attenuative capacity and thickness of the liners and soils present between the landfill and ground water or surface water; and

(iv) All other factors which would influence the quality and mobility of the leachate produced and the potential for it to migrate to ground water or surface water.

(c) The owner or operator must design, construct, operate, and maintain a run-on control system capable of preventing flow onto the active portion of the landfill during peak discharge from at least a twenty-five-year storm.

(d) The owner or operator must design, construct, operate, and maintain a run-off management system to collect and control at least the water volume resulting from a twenty-four-hour, twenty-five-year storm.

(e) Collection and holding facilities (e.g., tanks or basins) associated with run-on and run-off control systems must be emptied or otherwise managed expeditiously and in accordance with this chapter after storms to maintain design capacity of the system.

(f) If the landfill contains any particulate matter which may be subject to wind dispersal, the owner or operator must cover or otherwise manage the landfill to control wind dispersal.

(g) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this subsection are satisfied.

(3) Double-lined landfills; exemption from WAC 173-303-645, ground water protection requirements.

(a) The owner or operator of a double-lined landfill is not subject to regulation under WAC 173-303-645 if the following conditions are met:

(i) The landfill (including its underlying liners) must be located entirely above the seasonal high water table;

(ii) The landfill must be underlain by two liners which are designed and constructed in a manner to prevent the migration of liquids into or out of the space between the liners. Both liners must meet the specifications of subsection (2)(a)(i) of this section;

(iii) A leak detection system must be designed, constructed, maintained, and operated between the liners to detect any migration of liquid into the space between the liners; and

(iv) The landfill must have a leachate collection and removal system above the top liner that is designed, constructed, maintained, and operated in accordance with subsection (2)(a)(ii) of this section.

(b) If liquid leaks into the leak detection system, the owner or operator must:

(i) Notify the department of the leak in writing within seven days after detecting the leak; and

(ii)(A) Within the time period specified in the permit, remove accumulated liquid, repair or replace the liner which is leaking to prevent the migration of liquids through the liner, and obtain a certification from a qualified engineer that, to the best of his knowledge and opinion, the leak has been stopped; or

(B) If a detection monitoring program pursuant to WAC 173-303-645(9) has already been established in the permit (to be complied with only if a leak occurs), begin to comply with that program and any other applicable requirements of WAC 173-303-645 within the time period specified in the permit.

(c) The department will specify in the permit all design and operating practices that are necessary to ensure that the requirements of this subsection are satisfied.

(4) Monitoring and inspection.

(a) During construction or installation, liners (except in the case of existing portions of landfills exempt from subsection (2)(a) of this section), and cover systems (e.g., membranes, sheets, or coatings) must be inspected for uniformity, damage, and imperfections (e.g., holes, cracks, thin spots, or foreign materials). Immediately after construction or installation:

(i) Synthetic liners and covers must be inspected to ensure tight seams and joints and the absence of tears, punctures, or blisters; and

(ii) Soil-based and admixed liners and covers must be inspected for imperfections including lenses, cracks, channels, root holes, or other structural nonuniformities that may cause an increase in the permeability of the liner or cover.

(b) While a landfill is in operation, it must be inspected weekly and after storms to detect evidence of any of the following:

(i) Deterioration, malfunctions, or improper operation of run-on and run-off control systems;

(ii) The presence of liquids in leak detection systems, where installed to comply with subsection (3) of this section;

(iii) Proper functioning of wind dispersal control systems; and

(iv) The presence of leachate in and proper functioning of leachate collection and removal systems.

(5) Surveying and recordkeeping. The owner or operator of a landfill must maintain the following items in the operating record required under WAC 173-303-380:

(a) On a map, the exact location and dimensions, including depth, of each cell with respect to permanently surveyed benchmarks; and

(b) The contents of each cell and the approximate location of each dangerous waste type within each cell.

(6) Closure and postclosure care.

(a) At final closure of the landfill or upon closure of any cell, the owner or operator must cover the landfill or cell with a final cover designed and constructed to:

(i) Provide long-term minimization of migration of liquids through the closed landfill;

(ii) Function with minimum maintenance;

(iii) Promote drainage and minimize erosion or abrasion of the cover;

(iv) Accommodate settling and subsidence so that the cover's integrity is maintained; and

(v) Have a permeability less than or equal to the permeability of any bottom liner system or natural subsoils present.

(b) After final closure, the owner or operator must comply with all postclosure requirements contained in WAC 173-303-610 (7), (8), (9), and (10) including maintenance and monitoring throughout the postclosure care period. The owner or operator must:

(i) Maintain the integrity and effectiveness of the final cover, including making repairs to the cap as necessary to correct the effects of settling, subsidence, erosion, or other events;

(ii) Maintain and monitor the leak detection system in accordance with subsection (3) of this section, where such a system is present between double liner systems;

(iii) Continue to operate the leachate collection and removal system until leachate is no longer detected;

(iv) Maintain and monitor the ground water monitoring system and comply with all other applicable requirements of WAC 173-303-645;

(v) Prevent run-on and run-off from eroding or otherwise damaging the final cover; and

(vi) Protect and maintain surveyed benchmarks used in complying with subsection (5) of this section.

(c) During the postclosure care period, if liquid leaks into a leak detection system installed under subsection (3) of this section, the owner or operator must notify the department of the leak in writing within seven days after detecting the leak. The department will modify the permit to require compliance with the requirements of WAC 173-303-645.

(7) Special requirements for incompatible wastes. Incompatible wastes, or incompatible wastes and materials must not be placed in the same landfill cell, unless WAC 173-303-395 (1)(b) is complied with.

[Statutory Authority: Chapter 70.105 RCW. 88-02-057 (Order DE 83-36), § 173-303-665, filed 1/5/88, effective 2/5/88; 86-12-057 (Order DE-85-10), § 173-303-665, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-665, filed 4/18/84.]

WAC 173-303-670 Incinerators. (1) Applicability.

(a) Except as WAC 173-303-600 provides otherwise, the regulations in this section apply to owners and operators of facilities that incinerate dangerous waste and to owners and

operators who burn dangerous waste in boilers or industrial furnaces in order to destroy them, or who burn dangerous waste in boilers or in industrial furnaces for any recycling purpose and elect to be regulated under this section.

(b) The department may, in establishing permit conditions, exempt the facility from all requirements of this section except subsection (2) of this section, waste analysis, and subsection (8) of this section, closure, if the department finds, after an examination of the waste analysis included with Part B of the owner/operator's permit application, that the waste to be burned:

(i)(A) Is either listed as a dangerous waste in WAC 173-303-080 only because it is ignitable or, that the waste is designated only as an ignitable dangerous waste under WAC 173-303-090; or

(B) Is either listed in WAC 173-303-080 or is designated under WAC 173-303-090 solely because it is reactive for the characteristics described in WAC 173-303-090 (7)(a)(i), (ii), (iii), (vi), (vii) and (viii), and will not be burned when other dangerous wastes are present in the combustion zone; and

(ii) Contains none of the dangerous constituents listed in WAC 173-303-9905 above significant concentration limits; and

(iii) Is not designated by the dangerous waste criteria of WAC 173-303-101, Toxic dangerous wastes, nor of WAC 173-303-102, Persistent dangerous wastes, nor of WAC 173-303-103, Carcinogenic dangerous wastes.

(c) The owner or operator of an incinerator may conduct trial burns, subject only to the requirements of WAC 173-303-807, trial burn permits.

(2) Waste analysis.

(a) As a portion of a trial burn plan required by WAC 173-303-807, or with Part B of his permit application, the owner or operator must have included an analysis of his waste feed sufficient to provide all information required by WAC 173-303-807 or 173-303-806 (3) and (4).

(b) Throughout normal operation the owner or operator must conduct sufficient waste analysis to verify that waste feed to the incinerator is within the physical and chemical composition limits specified in his permit (under subsection (6)(b) of this section).

(3) Designation of principal organic dangerous constituents and dangerous combustion byproducts. Principal organic dangerous constituents (PODCs) and dangerous combustion byproducts must be treated to the extent required by the performance standards specified in subsection (4) of this section. For each waste feed to be burned, one or more PODCs and dangerous combustion byproducts will be specified in the facility's permit from among those constituents listed in WAC 173-303-9905 and, to the extent practical, from among those constituents which contribute to the toxicity, persistence, or carcinogenicity of wastes designated under WAC 173-303-084 or 173-303-101 through 173-303-103. This specification will be based on the degree of difficulty of incineration of the organic constituents of the waste feed and its combustion byproducts and their concentration or mass, considering the results of waste analyses and trial burns or alternative data submitted with Part B of the facility's permit application. Organic constituents or byproducts which represent the greatest degree of difficulty of incineration will be those most likely to be designated as

PODCs and dangerous combustion byproducts. Constituents are more likely to be designated as PODCs or dangerous combustion byproducts if they are present in large quantities or concentrations. Trial PODCs will be designated for performance of trial burns in accordance with the procedure specified in WAC 173-303-807 for obtaining trial burn permits. Trial dangerous combustion byproducts may be designated under the same procedures.

(4) Performance standards. An incinerator burning dangerous waste must be designed, constructed, and maintained so that, when operated in accordance with operating requirements specified under subsection (6) of this section, it will meet the following performance standards:

(a)(i) Except as provided in (a)(ii) of this subsection, an incinerator burning dangerous waste must achieve a destruction and removal efficiency (DRE) of 99.99 percent for each PODC designated (under subsection (3) of this section) in its permit for each waste feed. DRE is determined for each PODC from the following equation:

$$DRE = \frac{(W_{in} - W_{out}) \times 100\%}{W_{in}}$$

Where:

W_{in} = Mass feed rate of one PODC in the waste stream feeding the incinerator, and

W_{out} = Mass emission rate of the same PODC present in exhaust emissions prior to release to the atmosphere.

(ii) An incinerator burning dangerous wastes F020, F021, F022, F023, F026, or F027 must achieve a destruction and removal efficiency (DRE) of 99.9999% for each principal organic dangerous constituent (PODCs) designated (under subsection (3) of this section) in its permit. This performance must be demonstrated on PODCs that are more difficult to incinerate than tetra-, penta-, and hexachlorodibenzo-p-dioxins and dibenzofurans. DRE is determined for each PODCs from the equation in subsection (4)(a)(i) of this section. In addition, the owner or operator of the incinerator must notify the department of his intent to incinerate dangerous wastes F020, F021, F022, F023, F026, or F027.

(b) Incinerators burning dangerous waste must destroy dangerous combustion byproducts designated under subsection (3) of this section so that the total mass emission rate of these byproducts emitted from the stack is no more than .01 percent of the total mass feed rate of PODCs fed into the incinerator.

(c)(i) An incinerator burning dangerous waste and producing stack emissions of more than 1.8 kilograms per hour (4 pounds per hour) of hydrogen chloride (HCl) must control HCl emissions such that the rate of emission is no greater than the larger of either 1.8 kilograms per hour or one percent of the HCl in the stack gas prior to entering any pollution control equipment.

(ii) An incinerator burning dangerous waste must not emit particulate matter in excess of 180 milligrams per dry standard cubic meter (0.08 grains per dry standard cubic foot) when corrected for the amount of oxygen in the stack gas according to the formula:

$$P_c = \frac{P_m \times 14}{21 - Y}$$

Where P_c is the corrected concentration of particulate matter, P_m is the measured concentration of particulate matter, and Y is the measured concentration of oxygen in the stack gas, using the Orsat method for oxygen analysis of dry flue gas, presented in 40 CFR Part 60, Appendix A (Method 3). This correction procedure is to be used by all dangerous waste incinerators except those operating under conditions of oxygen enrichment. For these facilities, the department will select an appropriate correction procedure to be specified in the facility permit.

(d) The emission standards specified in (c) of this subsection shall be met when no other more stringent standards exist. Where a state or local air pollution control authority has jurisdiction and has more stringent emission standards, an incinerator burning dangerous wastes shall comply with the applicable air pollution control authority's emission standards (including limits based on best available control technology).

(e) For purposes of permit enforcement, compliance with the operating requirements specified in the permit (under subsection (6) of this section), will be regarded as compliance with subsection (4) of this section. However, evidence that compliance with those permit conditions is insufficient to ensure compliance with the performance requirements of subsection (4) of this section, may be evidence justifying modification, revocation, or reissuance of a permit under WAC 173-303-830.

(5) Trial burns and permit modifications.

(a) The owner or operator of a dangerous waste incinerator may burn only wastes specified in his permit and only under operating conditions specified for those wastes under subsection (6) of this section, except:

- (i) In approved trial burns under WAC 173-303-807; or
- (ii) Under exemptions created by WAC 173-303-670(1).

(b) New dangerous wastes may be burned only after operating conditions have been specified in a trial burn permit or a permit modification has been issued, as applicable. Operating requirements for new wastes may be based on either trial burn results or alternative data included with Part B of a permit application under WAC 173-303-806(4).

(c) The permit for a new dangerous waste incinerator must establish appropriate conditions for each of the applicable requirements of this section, including but not limited to allowable waste feeds and operating conditions necessary to meet the requirements of subsection (6) of this section, sufficient to comply with the following standards:

(i) For the period beginning with initial introduction of dangerous waste to the incinerator and ending with initiation of the trial burn, and only for the minimum time required to establish operating conditions required in (c)(ii) of this subsection, not to exceed a duration of seven hundred twenty hours operating time for treatment of dangerous waste. The operating requirements must be those most likely to ensure compliance with the performance standards of subsection (4) of this section, based on the department's engineering judgment. The department may extend the duration of this period once for up to seven hundred twenty additional hours

when good cause for the extension is demonstrated by the applicant;

(ii) For the duration of the trial burn, the operating requirements must be sufficient to demonstrate compliance with the performance standards of subsection (4) of this section, and must be in accordance with the approved trial burn plan;

(iii) For the period immediately following completion of the trial burn, and only for the minimum period sufficient to allow sample analysis, data computation, and submission of the trial burn results by the applicant, and review of the trial burn results and modification of the facility permit by the department, the operating requirements must be those most likely to ensure compliance with the performance standards of subsection (4) of this section, based on the department's engineering judgment;

(iv) For the remaining duration of the permit, the operating requirements must be those demonstrated, in a trial burn or by alternative data specified in WAC 173-303-806(4)(f)(iii)(G), as sufficient to ensure compliance with the performance standards of subsection (4) of this section.

(6) Operating requirements.

(a) An incinerator must be operated in accordance with operating requirements specified in the permit. These will be specified on a case-by-case basis as those demonstrated (in a trial burn or in alternative data as specified in subsection (5)(b) of this section and included with Part B of a facility's permit application) to be sufficient to comply with the performance standards of subsection (4) of this section.

(b) Each set of operating requirements will specify the composition of the waste feed (including acceptable variations in the physical or chemical properties of the waste feed which will not affect compliance with the performance requirement of subsection (4) of this section) to which the operating requirements apply. For each such waste feed, the permit will specify acceptable operating limits including the following conditions:

- (i) Carbon monoxide (CO) level in the stack exhaust gas;
- (ii) Waste feed rate;
- (iii) Combustion temperature;
- (iv) An appropriate indicator of combustion gas velocity;
- (v) Allowable variations in incinerator system design or operating procedures; and

(vi) Such other operating requirements as are necessary to ensure that the performance standards of subsection (4) of this section are met.

(c) During startup and shutdown of an incinerator, dangerous waste (except waste exempted in accordance with subsection (1)(b) of this section) must not be fed into the incinerator unless the incinerator is operating within the conditions of operation (temperature, air feed rate, etc.) specified in the permit.

(d) Fugitive emissions from the combustion zone must be controlled by:

- (i) Keeping the combustion zone totally sealed against fugitive emissions;
- (ii) Maintaining a combustion zone pressure lower than atmospheric pressure; or
- (iii) An alternate means of control demonstrated (with Part B of the permit application) to provide fugitive emis-

sions control equivalent to maintenance of combustion zone pressure lower than atmospheric pressure.

(e) An incinerator must be operated with a functioning system to automatically cut off waste feed to the incinerator when operating conditions deviate from limits established under (a) of this subsection.

(f) An incinerator must cease operation when changes in waste feed, incinerator design, or operating conditions exceed limits designated in its permit.

(7) Monitoring and inspections.

(a) The owner or operator must conduct, as a minimum, the following monitoring while incinerating dangerous waste:

(i) Combustion temperature, waste feed rate, and the indicator of combustion gas velocity specified in the facility permit must be monitored on a continuous basis;

(ii) Carbon monoxide (CO) must be monitored on a continuous basis at a point in the incinerator downstream of the combustion zone and prior to release to the atmosphere; and

(iii) As required by the department, sampling and analysis of the waste and exhaust emissions must be conducted to verify that the operating requirements established in the permit achieve the performance standards of subsection (4) of this section.

(b) The incinerator and associated equipment (pumps, valves, conveyors, pipes, etc.) must be completely inspected at least daily for leaks, spills, fugitive emissions, and signs of tampering. All emergency waste feed cutoff controls and system alarms must be tested at least weekly to verify proper operation, unless the owner or operator demonstrates to the department that weekly inspections will unduly restrict or upset operations and that less frequent inspection will be adequate. At a minimum, emergency cutoff and alarm systems must be tested at least monthly.

(c) This monitoring and inspection data must be recorded and the records must be placed in the operating log required by WAC 173-303-380(1).

(8) Closure. At closure the owner or operator must remove all dangerous waste and dangerous waste residues (including, but not limited to, ash, scrubber waters, and scrubber sludges) from the incinerator site. Remaining equipment, bases, liners, soil, and debris containing or contaminated with dangerous waste or waste residues must be decontaminated or removed.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-670, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-670, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-670, filed 2/10/82.]

WAC 173-303-680 Miscellaneous units. (1) Applicability. The requirements of this section apply to owners and operators of facilities that treat, store, or dispose of dangerous waste in miscellaneous units, except as WAC 173-303-600 provides otherwise.

(2) Environmental performance standards. A miscellaneous unit must be located, designed, constructed, operated, maintained, and closed in a manner that will ensure protection of human health and the environment. Permits for miscellaneous units are to contain such terms and provisions as necessary to protect human health and the environment, including, but not limited to, as appropriate, design and operating requirements, detection and monitoring require-

ments, and requirements for responses to releases of dangerous waste or dangerous constituents from the unit. Permit terms and provisions shall include those requirements in WAC 173-303-630 through 173-303-670, 173-303-806, and 40 CFR Part 146 that are appropriate for the miscellaneous units being permitted. Protection of human health and the environment includes, but is not limited to:

(a) Prevention of any releases that may have adverse effects on human health or the environment due to migration of waste constituents in the ground water or subsurface environment, considering:

(i) The volume and physical and chemical characteristics of the waste in the unit, including its potential for migration through soil, liners, or other containing structures;

(ii) The hydrologic and geologic characteristics of the unit and the surrounding area;

(iii) The existing quality of ground water, including other sources of contamination and their cumulative impact on the ground water;

(iv) The quantity and direction of ground water flow;

(v) The proximity to and withdrawal rates of current and potential ground water users;

(vi) The patterns of land use in the region;

(vii) The potential for deposition or migration of waste constituents into subsurface physical structures, and into the root zone of food-chain crops and other vegetation;

(viii) The potential for health risks caused by human exposure to waste constituents; and

(ix) The potential for damage to domestic animals, wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents.

(b) Prevention of any release that may have adverse effects on human health or the environment due to migration of waste constituents in surface water, or wetlands or on the soil surface considering:

(i) The volume and physical and chemical characteristics of the waste in the unit;

(ii) The effectiveness and reliability of containing, confining, and collecting systems and structures in preventing migration;

(iii) The hydrologic characteristics of the unit and the surrounding area, including the topography of the land around the unit;

(iv) The patterns of precipitation in the region;

(v) The quantity, quality, and direction of ground water flow;

(vi) The proximity of the unit to surface waters;

(vii) The current and potential uses of nearby surface waters and any water quality standards established for those surface waters;

(viii) The existing quality of surface waters and surface soils, including other sources of contamination and their cumulative impact on surface waters and surface soils;

(ix) The patterns of land use in the region;

(x) The potential for health risks caused by human exposure to waste constituents; and

(xi) The potential for damage to domestic animals, wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents.

(c) Prevention of any release that may have adverse effects on human health or the environment due to migration of waste constituents in the air, considering:

(i) The volume and physical and chemical characteristics of the waste in the unit, including its potential for the emission and dispersal of gases, aerosols and particulates;

(ii) The effectiveness and reliability of systems and structures to reduce or prevent emissions of dangerous constituents to the air;

(iii) The operating characteristics of the unit;

(iv) The atmospheric, meteorologic, and topographic characteristics of the unit and the surrounding area;

(v) The existing quality of the air, including other sources of contamination and their cumulative impact on the air;

(vi) The potential for health risks caused by human exposure to waste constituents; and

(vii) The potential for damage to domestic animals, wildlife, crops, vegetation, and physical structures caused by exposure to waste constituents.

(3) Monitoring, analysis, inspection, response, reporting, and corrective action. Monitoring, testing, analytical data, inspections, response, and reporting procedures and frequencies must ensure compliance with subsection (2) of this section, WAC 173-303-320, 173-303-340(1), 173-303-380(3), 173-303-390 (1) and (3), and 173-303-645(12) as well as meet any additional requirements needed to protect human health and the environment as specified in the permit.

(4) Postclosure care. A miscellaneous unit that is a disposal unit must be maintained in a manner that complied with subsection (2) of this section during the postclosure care period. In addition, if a treatment or storage unit has contaminated soils or ground water that cannot be completely removed or decontaminated during closure, then that unit must also meet the requirements of subsection (2) of this section during postclosure care. The postclosure plan under WAC 173-303-610(8) must specify the procedures that will be used to satisfy this requirement.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-680, filed 3/7/91, effective 4/7/91.]

WAC 173-303-700 Requirements for the Washington state extremely hazardous waste management facility at Hanford. (1) Purpose and applicability. The purpose of this section is to set forth the requirements for the Washington EHW management (EHWM) facility located at Hanford, Washington. It is the only facility within the state that is allowed under law to dispose of EHW (RCW 70.105.050).

(2) Waste acceptance at Hanford.

(a) The state operator shall accept EHW for treatment, storage, or disposal when:

(i) The waste has been specified in the state operator's permit as not requiring prior approval from the department and the state operator sends a copy of each written request for disposal of waste at the EHWM facility to the department, not later than one week after receiving the request; or

(ii) If the waste has not been specified in the state operator's permit, then the department provides written approval that the waste may be accepted at the EHWM facility. Notices of approval or disapproval shall be provided as soon as possible, but not later than 15 days, after the state operator has notified the department. Written approval

from the department is not required in emergencies, as specified; and

(iii) The generator has obtained prior written approval for waste acceptance from the state operator;

(iv) The waste is accompanied by a manifest specified in the generator requirements of WAC 173-303-180, Manifest; and

(v) Waste containers meet the labeling and container condition requirements of WAC 173-303-190.

(b) The state operator may accept DW, as defined in this regulation, for storage, treatment, or disposal when:

(i) All the conditions of EHW acceptance, (a) of this subsection, are met;

(ii) The generator and/or operator shows that no other permitted TSD facility in the state will handle such DW. The generator and/or operator shall refer to:

(A) County or municipal ordinances or solid waste permits forbidding DW disposal at nearby sites;

(B) The EHWM site being the shortest economical haul distance where other remotely located, DW sites may be available; and

(C) Specific rejection or disapproval, in writing, by nearby DW site operators, public or private; and

(iii) The EHWM facility is designed to handle such a request or can be modified to the extent necessary to adequately dispose of the waste.

(c) The state operator, after consulting with the department, may refuse to accept any waste that does not meet the requirements of the acceptance procedures of this subsection until the facts are ascertained, including but not limited to:

(i) The requirement that samples of waste be taken and analyzed; or

(ii) The condition of the containers by physical inspection of the delivery load.

(d) The state operator may accept dangerous waste under emergency conditions if:

(i) An emergency and potential threat to the public health and safety exists;

(ii) The state operator notifies the department as soon as possible;

(iii) The state operator stores the waste upon delivery until the full manifest has been received and approved by the department; and

(iv) The generator is fully apprised that the waste remains his liability until approved under (d)(iii) of this subsection.

(3) Other applicable requirements. The EHWM facility at Hanford shall meet all other requirements of chapter 173-303 WAC, including specific requirements for storage, treatment, transfer and disposal of EHW, and siting, performance, and operation of facilities. The EHWM facility shall also meet the following requirements:

(a) The state operator shall not remove any dangerous waste from the facility without the department's approval;

(b) The state operator shall maintain facilities for telephone and radio contact with the Hanford Reservation security patrol, and include this information with the contingency plan required in WAC 173-303-350;

(c) As a minimum, the state operator shall provide personnel having knowledge and background in the following areas:

(i) Inspecting and checking manifests for completeness and accuracy;

(ii) Applied chemistry as it relates to reactivity, explosiveness, and flammability; and

(iii) Industrial hygiene and/or toxicology of industrial, commercial, and agricultural chemicals, and emergency procedures;

(d) The state operator shall ensure that new personnel have a complete physical examination and annual checkups thereafter. The physician should be alerted to the kinds of materials the employee has been handling, so that more specific analyses can be made. The medical records shall be made a part of the state operator's records as required in WAC 173-303-380(1); and

(e) The state operator shall submit copies of all fee schedules to the department for yearly review and approval. The state operator shall supply, and the department shall use, the following criteria to review such disposal fees:

(i) Their relationship to other fees charged for similar services;

(ii) Reasonable return on investment and profit for the operator; and

(iii) The cost of administration, development, operation, maintenance, and perpetual management of the EHW facility, including administrative costs and perpetual management costs of the department.

(4) Department surveillance.

(a) In addition to the reports required under WAC 173-303-390, facility reports, the EHW facility operator shall report the following to the department:

(i) Copies of all environmental sampling results during the previous quarter;

(ii) Telephone and written accounts of any accidents or emergencies requiring action under WAC 173-303-360; and

(iii) Complete financial reports during the previous year.

(b) The state operator shall admit the department's duly authorized representative to inspect the site at any reasonable hour of the day. Inspection may cover any of the following:

(i) The site and facilities;

(ii) The waste being delivered, stored, processed, or buried, including the taking of samples, a portion of each sample being given to the operator upon his request;

(iii) The environment, by the drilling of test wells and obtaining of samples; and

(iv) Any records, reports, information, or test results relating to the purpose of this regulation.

The inspection results will be written, filed with the department, and a copy made available to the state operator.

[Statutory Authority: Chapter 70.105 RCW, 84-09-088 (Order DE 83-36), § 173-303-700, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260, 82-05-023 (Order DE 81-33), § 173-303-700, filed 2/10/82.]

WAC 173-303-800 Permit requirements for dangerous waste management facilities. (1) The purpose of WAC 173-303-800 through 173-303-840 is to establish the requirements for permits which will allow a dangerous waste facility to operate without endangering the public health and the environment.

(2) The owner/operator of a dangerous waste facility that transfers, treats, stores, or disposes (TSD) or recycles dangerous waste shall, when required by this chapter, obtain

a permit covering the active life, closure period, ground water protection compliance period, and for any regulated unit (as defined in WAC 173-303-040), and for any facility which at closure does not meet the removal or decontamination limits of WAC 173-303-610 (2)(b), post-closure care period in accordance with WAC 173-303-800 through 173-303-840.

(3) TSD facility permits will be granted only if the objectives of the siting and performance standards set forth in WAC 173-303-420 and 173-303-283 are met.

(4) Permits shall be issued according to the requirements of all applicable TSD facility standards.

(5) The owner/operator of a TSD facility is responsible for obtaining all other applicable federal, state, and local permits authorizing the development and operation of the TSD facility.

(6) The terms used in regard to permits which are not defined in WAC 173-303-040 shall have the same meanings as set forth in 40 CFR 270.2.

(7) Exemptions.

(a) A permit for an on-site cleanup action may be exempted as provided in a consent decree or order signed by the department and issued pursuant to chapter 70.105D RCW.

(b) A permit is not required for an on-site cleanup action performed by the department pursuant to chapter 70.105D RCW.

(8) Each permit issued under this chapter shall contain terms and conditions as the department determines necessary to protect human health and the environment.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251), 91-07-005 (Order 90-42), § 173-303-800, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW, 88-18-083 (Order 88-29), § 173-303-800, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-800, filed 3/11/88; 84-09-088 (Order DE 83-36), § 173-303-800, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260, 82-05-023 (Order DE 81-33), § 173-303-800, filed 2/10/82.]

WAC 173-303-801 Types of dangerous waste management facility permits. The following types of permits may be issued by the department to carry out the purpose of this regulation.

(1) Permits by rule:

(a) Ocean disposal - See WAC 173-303-802(2);

(b) Underground injection wells - See WAC 173-303-802(3);

(c) Publicly owned treatment works - See WAC 173-303-802(4); and

(d) Totally enclosed treatment facilities and elementary neutralization and wastewater treatment units - See WAC 173-303-802(5).

(2) Emergency permits - See WAC 173-303-804.

(3) Interim status permits - See WAC 173-303-805.

(4) Final facility permits:

(a) Final status TSD permits - See WAC 173-303-806;

(b) Special waste permits - See WAC 173-303-806; and

(c) Recycling permits - See WAC 173-303-806.

(5) Trial burns for dangerous waste incinerator final facility permits - See WAC 173-303-807.

(6) Demonstrations for dangerous waste land treatment final facility permits - See WAC 173-303-808.

(7) Research, development, and demonstration permits - See WAC 173-303-809.

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-801, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-801, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-801, filed 2/10/82.]

WAC 173-303-802 Permits by rule. (1) Purpose and applicability. This section provides for permit by rule for particular facilities and activities managing dangerous wastes, provided that certain conditions are met. These facilities, activities, and conditions are listed in this section. Owners and operators of facilities with permits by rule are not required to submit an application for a dangerous waste facility permit.

(2) Ocean disposal barges or vessels. The owner or operator of a barge or other vessel which accepts dangerous waste for ocean disposal, shall have a permit by rule if the owner or operator:

(a) Has a permit for ocean dumping issued under 40 CFR Part 220 (Ocean Dumping, authorized by the Marine Protection, Research, and Sanctuaries Act, as amended, 33 U.S.C. § 1420 et seq.);

(b) Complies with the conditions of that permit; and

(c) Complies with the following dangerous waste regulations:

(i) WAC 173-303-060, notification and identification numbers;

(ii) WAC 173-303-170 through 173-303-230 when initiating shipments of dangerous waste;

(iii) WAC 173-303-370, manifest system;

(iv) WAC 173-303-380 (1)(a), operating record;

(v) WAC 173-303-390(2), annual report; and

(vi) WAC 173-303-390(1), unmanifested waste report.

(3) Underground injection wells. Underground injection wells with an underground injection control (UIC) permit for underground injection shall have a permit by rule if the owner or operator has a UIC permit issued by the department under a federally approved program for underground injection control, and complies with the conditions of the permit and requirements of 40 CFR 144.14 and applicable state waste discharge rules. All underground injection wells must comply with WAC 173-303-060, notification and identification numbers. However, underground injection wells disposing of EHW are prohibited.

(4) Publicly owned treatment works (POTW). The owner or operator of a POTW which accepts dangerous waste for treatment, shall have a permit by rule if the owner or operator:

(a) Has a National Pollutant Discharge Elimination System (NPDES) permit;

(b) Complies with the conditions of that permit;

(c) Complies with the following regulations:

(i) WAC 173-303-060, notification and identification numbers;

(ii) WAC 173-303-170 through 173-303-230 when initiating shipments of dangerous waste;

(iii) WAC 173-303-283, performance standards;

(iv) WAC 173-303-370, manifest system;

(v) WAC 173-303-380 (1)(a), operating record;

(vi) WAC 173-303-390(2), annual report; and

(vii) WAC 173-303-390(1), unmanifested waste reports;

(d) Accepts the waste only if it meets all federal, state, and local pretreatment requirements which would be applicable to the waste if it were being discharged into the POTW through a sewer, pipe, or similar conveyance; and

(e) Accepts no EHW for disposal at the POTW.

(5) Totally enclosed treatment facilities or elementary neutralization or wastewater treatment units.

(a) The owner or operator of a totally enclosed treatment facility or an elementary neutralization or wastewater treatment unit that treats dangerous wastes shall have a permit by rule, except as provided in (b) of this subsection, if he:

(i) Has a NPDES permit, state waste discharge permit, pretreatment permit (or written discharge authorization from the local sewerage authority) and the permit or authorization provides effluent limits for the hazardous constituents, and provides for the use of all known, available, and reasonable methods of prevention, control, and treatment of pollution pursuant to chapter 90.48 RCW, prior to discharge;

(ii) Complies with the conditions of that permit;

(iii) Complies with the following regulations:

(A) WAC 173-303-060, notification and identification numbers;

(B) WAC 173-303-070, designation of dangerous waste;

(C) WAC 173-303-283, performance standards;

(D) WAC 173-303-310, security;

(E) WAC 173-303-350, contingency plan and emergency procedures;

(F) WAC 173-303-360, emergencies;

(G) WAC 173-303-370, manifest system;

(H) WAC 173-303-380 (1)(d), operating record;

(I) WAC 173-303-390, facility reporting.

(b) The department may require the owner or operator of a totally enclosed treatment facility or an elementary neutralization or wastewater treatment unit subject to either (a) of this subsection to apply for and obtain a final facility permit in accordance with WAC 173-303-800 through 173-303-840, if:

(i) The owner or operator violates the general facility or performance requirements specified in (a) of this subsection;

(ii) The owner or operator is conducting other activities which require him to obtain a final facility permit;

(iii) The department determines that the general facility or performance requirements specified in (a) of this subsection, are not sufficient to protect public health or the environment and that additional requirements under this chapter are necessary to provide such protection; or

(iv) The owner or operator does not comply with applicable local, state or federal requirements established pursuant to sections 402 or 307(b) of the Federal Clean Water Act, or chapter 90.48 RCW.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-802, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-802, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-802, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-802, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-802, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-802, filed 4/18/84.]

WAC 173-303-804 Emergency permits. Requirements for an emergency permit. In the event the department

finds that an imminent and substantial endangerment to human health or the environment exists, the department may issue a temporary emergency permit to a facility to allow treatment, storage, or disposal (TSD) of dangerous waste at a nonpermitted facility, or at a facility covered by an effective permit that does not otherwise allow treatment, storage, or disposal of such dangerous waste. Notice of the issuance of an emergency permit shall be given to the fire marshal, police department, and other local emergency service agencies with jurisdiction near the location of the facility. The emergency permit:

(1) May be oral or written. If oral, it shall be followed within five days by a written emergency permit;

(2) Shall not exceed ninety days in duration for dangerous wastes;

(3) Shall not exceed one hundred eighty days in duration for moderate risk wastes;

(4) Shall clearly specify the dangerous wastes to be received, and the manner and location of their treatment, storage, or disposal;

(5) May be terminated by the department at any time without following the decisionmaking procedures of WAC 173-303-840 if the department determines that termination is appropriate to protect public health and the environment;

(6)(a) Shall be accompanied by a public notice that includes:

(i) The name and address of the department;

(ii) The name and location of the permitted TSD facility;

(iii) A brief description of the wastes involved;

(iv) A brief description of the action authorized and reasons for authorizing it; and

(v) The duration of the emergency permit; and

(b) Shall be given public notice by:

(i) Publication in a daily newspaper within the area affected;

(ii) By radio broadcast within the area affected;

(iii) By mailing a copy of the public notice to the persons described in WAC 173-303-840 (3)(e)(i); and

(iv) Any other method reasonably determined to give actual notice of the emergency permit to persons potentially affected by it; and

(7) Shall incorporate, to the extent possible and not inconsistent with the emergency situation, all applicable requirements of this chapter.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-804, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-804, filed 4/18/84.]

WAC 173-303-805 Interim status permits. (1) Applicability. This section applies to all facilities eligible for an interim status permit. When a facility is owned by one person but is operated by another person, it is the operator's duty to qualify for interim status, except that the owner must also sign an interim status application. Prior to submittal of an interim status permit application the requirements of WAC 173-303-281 must be met.

(2) Failure to qualify for interim status. If the department has reason to believe upon examination of a Part A application that it fails to provide the required information, it shall notify the owner or operator in writing of the

apparent deficiency. Such notice shall specify the grounds for the department's belief that the application is deficient. The owner or operator shall have thirty days from receipt to respond to such a notification and to explain or cure the alleged deficiency in his Part A application. If, after such notification and opportunity for response, the department determines that the application is deficient it may take appropriate enforcement action.

(3) Interim status for facilities under RCRA interim status. Any existing facility operating under interim status gained under section 3005 of RCRA shall be deemed to have an interim status permit under this chapter provided that the owner/operator complies with the applicable requirements of WAC 173-303-400 and this section.

(4) Interim status for facilities managing state-designated (non-RCRA) dangerous wastes. Any existing facility which does not satisfy subsection (3) of this section, but which is only managing dangerous wastes that are not hazardous wastes under 40 CFR Part 261, shall be deemed to have an interim status permit provided that the owner/operator of the facility has complied with the notification requirements of WAC 173-303-060 by May 11, 1982 and has submitted Part A of his permit application by August 9, 1982. If an existing facility becomes subject to this chapter due to amendments to this chapter and the facility was not previously subject to this chapter, then the owner/operator of an existing facility may qualify for an interim status permit by complying with the notification requirements of WAC 173-303-060 within three months, and submitting Part A of his permit application within six months, after the adoption date of the amendments which cause the facility to be subject to the requirements of this chapter. Facilities qualifying for interim status under this subsection shall not be deemed to have interim status under section 3005 of RCRA, and may only manage non-RCRA wastes until they either qualify separately for interim status under section 3005 of RCRA or receive a final status facility permit allowing them to manage RCRA wastes.

(5) Maintaining the interim status permit.

(a) Timely notification and submission of a Part A application qualifies the owner/operator of the existing TSD facility for the interim status permit, until the department terminates interim status pursuant to subsection (8) of this section.

(b) Interim status for the existing TSD facility shall be maintained while the department makes final administrative disposition of a final facility permit pursuant to WAC 173-303-806 if:

(i) The owner/operator has submitted his final facility permit application (as described in WAC 173-303-806) within six months of the written request by the department to submit such application; and

(ii) Grounds for terminating interim status (as described in subsection (8) of this section) do not exist.

(c) The owner/operator of an interim status facility must update his Part A whenever he is managing wastes that are newly regulated under this chapter, and as necessary to comply with subsection (7) of this section. Failure to comply with this updating requirement is a violation of interim status.

(6) Prohibitions for interim status permits. Facilities with an interim status permit shall not:

(a) Treat, store, or dispose of dangerous waste not specified in Part A of the permit application;

(b) Employ processes not specified in Part A of the permit application; or

(c) Exceed the design capacities specified in Part A of the permit application.

(7) Changes during interim status.

(a) Except as provided in (b) of this subsection, the owner or operator of an interim status facility may make the following changes at the facility:

(i) Treatment, storage, or disposal of new dangerous wastes not previously identified in Part A of the permit application (and, in the case of newly listed or identified wastes, addition of the units being used to treat, store, or dispose of the dangerous wastes on the effective date of the listing or identification) if the owner or operator submits a revised Part A permit application prior to such treatment, storage, or disposal (along with a justification detailing the equipment and process or processes that the owner or operator will use to treat, store, or dispose of the new dangerous wastes) and if the department does not explicitly deny the changes within sixty days of receipt of the revised application;

(ii) Increases in the design capacity of processes used at the facility if the owner or operator submits a revised Part A permit application prior to such a change (along with a justification explaining the need for the change), the requirements of WAC 173-303-281 are met, and the department approves the changes because:

(A) There is a lack of available treatment, storage, or disposal capacity at other dangerous waste management facilities; or

(B) The change is necessary to comply with a federal, state, or local requirement.

(iii) Changes in the processes for the treatment, storage, or disposal of dangerous waste or addition of processes if the owner or operator submits a revised Part A permit application prior to such change (along with a justification explaining the need for the change) and the department approves the change because:

(A) The change is necessary to prevent a threat to human health and the environment because of an emergency situation; or

(B) The change is necessary to comply with a federal, state, or local requirement.

(iv) Changes in the ownership or operational control of a facility if the new owner or operator submits a revised Part A permit application no later than ninety days prior to the scheduled change. When a transfer of operational control of a facility occurs, the old owner or operator shall comply with the interim status financial requirements of 40 CFR Part 265, Subpart H (as referenced in WAC 173-303-400), until the new owner or operator has demonstrated to the department that he is complying with the financial requirements. Upon demonstration to the department by the new owner or operator of compliance with the interim status financial requirements, the department shall notify the old owner or operator in writing that he no longer needs to comply with the interim status financial requirements as of the date of demonstration. The new owner or operator must demonstrate compliance with the financial requirements within six months of the date of the change in ownership or operational

control of the facility. All other interim status duties are transferred effective immediately upon the date of the change in ownership or operational control of the facility.

(v) Changes made in accordance with an interim status corrective action order issued by EPA under section 3008(h) of RCRA or other federal authority, by the department under chapter 70.105 RCW or other state authority, or by a court in a judicial action brought by EPA or by the department. Changes under this subsection (7)(a)(v) are limited to the treatment, storage, or disposal of solid waste from releases that originate within the boundary of the facility.

(b) Except as specifically allowed under this subsection (7)(b), changes listed under (a) of this subsection may not be made if they amount to reconstruction of the dangerous waste management facility. Reconstruction occurs when the capital investment in the changes to the facility exceeds fifty percent of the capital cost of a comparable entirely new dangerous waste management facility. If all other requirements are met, the following changes may be made even if they amount to a reconstruction:

(i) Changes made solely for the purposes of complying with the requirements of WAC 173-303-640(4) for tanks and ancillary equipment.

(ii) If necessary to comply with federal, state, or local requirements, changes to an existing unit, changes solely involving tanks or containers, or addition of replacement surface impoundments that satisfy the standards of section 3004(o) of RCRA.

(iii) Changes that are necessary to allow owners or operators to continue handling newly listed or identified dangerous wastes that have been treated, stored, or disposed of at the facility prior to the effective date of the rule establishing the new listing or identification.

(iv) Changes during closure of a facility or of a unit within a facility made in accordance with an approved closure plan.

(v) Changes necessary to comply with an interim status corrective action order issued by EPA under section 3008(h) or other federal authority, by an authorized state under comparable state authority, or by a court in a judicial proceeding brought by EPA or an authorized state, provided that such changes are limited to the treatment, storage, or disposal of solid waste from releases that originate within the boundary of the facility.

(vi) Changes to treat or store, in tanks or containers, hazardous wastes subject to land disposal restrictions imposed by 40 CFR Part 268 or RCRA section 3004, provided that such changes are made solely for the purpose of complying with 40 CFR Part 268 or RCRA section 3004.

(8) Termination of interim status permit. The following are causes for terminating an interim status permit, or for denying a revised permit application:

(a) Final administrative disposition of a final facility permit application is made pursuant to WAC 173-303-806;

(b) When the department on examination or reexamination of a Part A application determines that it fails to meet the applicable standards of this chapter, it may notify the owner or operator that the application is deficient and that the interim status permit has been revoked. The owner or operator will then be subject to enforcement for operating without a permit;

(c) Failure to submit a requested Part B application on time, or to provide in full the information required in the Part B application;

(d) Violation of applicable interim status standards; or

(e) A determination that the permit applicant has failed to satisfy the performance standards of WAC 173-303-283.

(9) Special waste facilities. If the department determines, pursuant to WAC 173-303-550 through 173-303-560, that interim status standards can be reduced, the department will issue a notice of interim status modification stating what standards will be applied. Failure to comply with the conditions and standards as stated in the notice of modification or with the requirements of this section shall form a basis for revoking the notice. Upon revocation of the notice of interim status modification by the department, the owner or operator shall be subject to all of the requirements applicable to interim status dangerous waste management facilities. Before issuing the notice of modification, the department shall provide public notice of its intent, shall allow thirty days for public comment, and shall hold a public hearing if there is a significant degree of public interest or there is written notice of opposition and the department receives a request for a hearing during the comment period. Notice of a public hearing shall be provided at least fifteen days in advance, and the public comment period shall be extended to include the date of the hearing if it will occur after the initial thirty-day comment period. Within fifteen days of the end of the public comment period the department shall, based on comments received, issue, modify and issue, or deny the notice of interim status modification.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-805, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-805, filed 1/4/89; 88-18-083 (Order 88-29), § 173-303-805, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-805, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-805, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-805, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-805, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-805, filed 2/10/82.]

WAC 173-303-806 Final facility permits. (1) Applicability. This section applies to all dangerous waste facilities required to have a final facility permit. The final facility permit requirements are applicable to:

(a) Final status TSD facilities;

(b) Special waste management facilities; and

(c) Certain recycling facilities that are not exempt from the permit requirements.

(2) Application. Any person subject to the permit requirements of this section who intends to operate a new TSD facility must comply with WAC 173-303-281 and apply for a final facility permit. The department may, at any time, require the owner or operator of an existing TSD facility to apply for a final facility permit. Such owner or operator will be allowed one hundred eighty days to submit his application; the department may extend the length of the application period if it finds that there are good reasons to do so. The owner or operator of an existing TSD facility may voluntarily apply for a final facility permit at any time. Any person seeking a final facility permit shall complete, sign, and submit an application to the department. An application shall consist of a Part A permit form (which can be obtained

from the department), and the contents of Part B as specified in subsection (4) of this section.

(3) Effective regulations. A final facility permit will include all applicable requirements of this chapter which are in effect on the date that the permit is issued by the department. WAC 173-303-840(7) provides a means for reopening permit proceedings at the discretion of the department where new requirements become effective during the permitting process and are of sufficient magnitude to make additional proceedings desirable. Any other changes to the final facility permit will be in accordance with the permit modification requirements of WAC 173-303-830.

(4) Contents of Part B. Part B of a permit application shall consist of the information required in (a) through (i) of this subsection.

(a) General requirements. Part B of the permit application consists of the general information requirements of this subsection, and the specific information requirements in (b) through (h) of this subsection as applicable to the facility. The Part B information requirements presented in (a) through (h) of this subsection, reflect the standards promulgated in WAC 173-303-600. These information requirements are necessary in order for the department to determine compliance with WAC 173-303-600 through 173-303-670. If owners and operators of TSD facilities can demonstrate that the information prescribed in Part B cannot be provided to the extent required, the department may make allowance for submission of such information on a case-by-case basis. Information required in Part B shall be submitted to the department and signed in accordance with requirements in WAC 173-303-810(12). Certain technical data, such as design drawings and specifications, and engineering studies shall be certified by a registered professional engineer. The following information is required for all TSD facilities, except as WAC 173-303-600(3) provides otherwise.

(i) A general description of the facility.

(ii) Chemical, biological, and physical analyses of the dangerous waste to be handled at the facility. At a minimum, these analyses shall contain all the information which must be known to treat, store, or dispose of the wastes properly in accordance with WAC 173-303-600.

(iii) A copy of the waste analysis plan required by WAC 173-303-300(5) and, if applicable WAC 173-303-300(5)(g).

(iv) A description of the security procedures and equipment required by WAC 173-303-310, or a justification demonstrating the reasons for requesting a waiver of this requirement.

(v) A copy of the general inspection schedule required by WAC 173-303-320(2): Include where applicable, as part of the inspection schedule, specific requirements in WAC 173-303-395 (1)(d), 173-303-630(6), 173-303-640 (4) and (6), 173-303-650(4), 173-303-655(4), 173-303-660 (4) and (5), 173-303-665(4), 173-303-670(7), and 173-303-680(3).

(vi) A justification of any request for a waiver(s) of the preparedness and prevention requirements of WAC 173-303-340, or a description of the procedures used to comply with these requirements.

(vii) A copy of the contingency plan required by WAC 173-303-350: Include, where applicable, as part of the contingency plan, specific requirements in WAC 173-303-640(8), 173-303-650(5) and 173-303-660(6).

(viii) A description of procedures, structures, or equipment used at the facility to:

(A) Prevent hazards and contain spills in unloading/loading operations (for example, ramps, berms, pavement, special forklifts);

(B) Prevent run-off from dangerous waste handling areas to other areas of the facility or environment, or to prevent flooding (for example, berms, dikes, trenches);

(C) Prevent contamination of water supplies;

(D) Mitigate effects of equipment failure and power outages; and

(E) Prevent undue exposure of personnel to dangerous waste (for example, protective clothing).

(ix) A description of precautions to prevent accidental ignition or reaction of ignitable, reactive, or incompatible wastes as required to demonstrate compliance with WAC 173-303-395 including documentation demonstrating compliance with WAC 173-303-395 (1)(c).

(x) Traffic pattern, estimated volume (number, types of vehicles) and control (for example, show turns across traffic lanes, and stacking lanes (if appropriate)); describe access road surfacing and load bearing capacity; show traffic control signals).

(xi) Seismic risk consideration. The owner/operator of a proposed facility or expansion of an existing facility shall identify the seismic risk zone in which the facility is intended to be located. Where state or local maps are not available, United States Geological Survey Open File Report number 82-1033 may be used to identify seismic risk zones. The owner/operator shall demonstrate that the facility can and will be designed to resist seismic ground motion and that the design is sufficient to withstand the maximum horizontal acceleration of a design earthquake specified in the demonstration.

(xii) An outline of both the introductory and continuing training programs by owners or operators to prepare persons to operate or maintain the TSD facility in a safe manner as required to demonstrate compliance with WAC 173-303-330. A brief description of how training will be designed to meet actual job tasks in accordance with requirements in WAC 173-303-330 (1)(d).

(xiii) A copy of the closure plan and, where applicable, the post-closure plan required by WAC 173-303-610 (3) and (8). Include, where applicable, as part of the plans, specific requirements in WAC 173-303-630(10), 173-303-640(5), 173-303-650(6), 173-303-655(8), 173-303-660(9), 173-303-665(6), and 173-303-680 (2) and (4).

(xiv) For dangerous waste disposal units that have been closed, documentation that notices required under WAC 173-303-610(10) have been filed.

(xv) The most recent closure cost estimate for the facility prepared in accordance with WAC 173-303-620(3) and a copy of the documentation required to demonstrate financial assurance under WAC 173-303-620(4). For a new facility, a copy of the required documentation may be submitted sixty days prior to the initial receipt of dangerous wastes, if that is later than the submission of the Part B.

(xvi) Where applicable, the most recent post-closure cost estimate for the facility prepared in accordance with WAC 173-303-620(5) plus a copy of the documentation required to demonstrate financial assurance under WAC 173-303-620(6). For a new facility, a copy of the required documen-

tation may be submitted sixty days prior to the initial receipt of dangerous wastes, if that is later than the submission of the Part B.

(xvii) Where applicable, a copy of the insurance policy or other documentation which comprises compliance with the requirements of WAC 173-303-620(8). For a new facility, documentation showing the amount of insurance meeting the specification of WAC 173-303-620 (8)(a) and, if applicable, WAC 173-303-620 (8)(b), that the owner or operator plans to have in effect before initial receipt of dangerous waste for treatment, storage, or disposal. A request for a variance in the amount of required coverage, for a new or existing facility, may be submitted as specified in WAC 173-303-620 (8)(c).

(xviii) A topographic map showing a distance of one thousand feet around the facility at a scale of 2.5 centimeters (1 inch) equal to not more than 61.0 meters (200 feet). Contours must be shown on the map. The contour interval must be sufficient to clearly show the pattern of surface water flow in the vicinity of and from each operational unit of the facility. For example, contours with an interval of 1.5 meters (5 feet), if relief is greater than 6.1 meters (20 feet), or an interval of 0.6 meters (2 feet), if relief is less than 6.1 meters (20 feet). Owners and operators of TSD facilities located in mountainous areas should use large contour intervals to adequately show topographic profiles of facilities. The map shall clearly show the following:

(A) Map scale and date;

(B) One hundred-year floodplain area;

(C) Surface waters including intermittent streams;

(D) Surrounding land uses (residential, commercial, agricultural, recreational);

(E) A wind rose (i.e., prevailing windspeed and direction);

(F) Orientation of the map (north arrow);

(G) Legal boundaries of the TSD facility site;

(H) Access control (fences, gates);

(I) Injection and withdrawal wells both on-site and off-site;

(J) Buildings; treatment, storage, or disposal operations; or other structure (recreation areas, run-off control systems, access and internal roads, storm, sanitary, and process sewerage systems, loading and unloading areas, fire control facilities, etc.);

(K) Barriers for drainage or flood control; and

(L) Location of operational units within the TSD facility site, where dangerous waste is (or will be) treated, stored, or disposed (include equipment clean-up areas).

(Note - For large TSD facilities the department will allow the use of other scales on a case-by-case basis.)

(xix) Applicants may be required to submit such information as may be necessary to enable the department to carry out its duties under other state or federal laws as required.

(xx) Additional information requirements. The following additional information regarding protection of ground water is required from owners or operators of dangerous waste surface impoundments, waste piles, land treatment units, and landfills except as otherwise provided in WAC 173-303-645 (1)(b):

(A) A summary of the ground water monitoring data obtained during the interim status period under 40 CFR 265.90 through 265.94, where applicable;

(B) Identification of the uppermost aquifer and aquifers hydraulically interconnected beneath the facility property, including ground water flow direction and rate, and the basis for such identification (i.e., the information obtained from hydrogeologic investigations of the facility area);

(C) On the topographic map required under (a)(xviii) of this subsection, a delineation of the waste management area, the property boundary, the proposed "point of compliance" as defined under WAC 173-303-645(6), the proposed location of ground water monitoring wells as required under WAC 173-303-645(8), and, to the extent possible, the information required in (a)(xx)(B) of this subsection;

(D) A description of any plume of contamination that has entered the ground water from a regulated unit at the time that the application was submitted that:

(I) Delineates the extent of the plume on the topographic map required under (a)(xviii) of this subsection;

(II) Identifies the concentration of each constituent throughout the plume or identifies the maximum concentrations of each constituent in the plume. (Constituents are those listed in WAC 173-303-9905, and any other constituents not listed there which have caused a managed waste to be regulated under this chapter.);

(E) Detailed plans and an engineering report describing the proposed ground water monitoring program to be implemented to meet the requirements of WAC 173-303-645(8);

(F) If the presence of dangerous constituents has not been detected in the ground water at the time of permit application, the owner or operator must submit sufficient information, supporting data, and analyses to establish a detection monitoring program which meets the requirements of WAC 173-303-645(9). This submission must address the following items specified under WAC 173-303-645(9):

(I) A proposed list of indicator parameters, waste constituents, or reaction products that can provide a reliable indication of the presence of dangerous constituents in the ground water;

(II) A proposed ground water monitoring system;

(III) Background values for each proposed monitoring parameter or constituent, or procedures to calculate such values; and

(IV) A description of proposed sampling, analysis and statistical comparison procedures to be utilized in evaluating ground water monitoring data;

(G) If the presence of dangerous constituents has been detected in the ground water at the point of compliance at the time of permit application, the owner or operator must submit sufficient information, supporting data, and analyses to establish a compliance monitoring program which meets the requirements of WAC 173-303-645(10). The owner or operator must also submit an engineering feasibility plan for a corrective action program necessary to meet the requirements of WAC 173-303-645(11) except as provided in WAC 173-303-645 (9)(h)(v). Alternatively, the owner or operator can obtain written authorization in advance from the department to submit a proposed permit schedule for development and submittal of such information. To demonstrate compli-

ance with WAC 173-303-645(10), the owner or operator must address the following items:

(I) A description of the wastes previously handled at the facility;

(II) A characterization of the contaminated ground water, including concentrations of dangerous constituents and parameters;

(III) A list of constituents and parameters for which compliance monitoring will be undertaken in accordance with WAC 173-303-645 (8) and (10);

(IV) Proposed concentration limits for each dangerous constituent and parameter, based on the criteria set forth in WAC 173-303-645 (5)(a), including a justification for establishing any alternate concentration limits;

(V) Detailed plans and an engineering report describing the proposed ground water monitoring system, in accordance with the requirements of WAC 173-303-645(8); and

(VI) A description of proposed sampling, analysis and statistical comparison procedures to be utilized in evaluating ground water monitoring data; and

(H) If dangerous constituents or parameters have been measured in the ground water which exceed the concentration limits established under WAC 173-303-645(5), Table 1, or if ground water monitoring conducted at the time of permit application under 40 CFR 265.90 through 265.94 at the waste boundary indicates the presence of dangerous constituents from the facility in ground water over background concentrations, the owner or operator must submit sufficient information, supporting data, and analyses to establish a corrective action program which meets the requirements of WAC 173-303-645(11). However, an owner or operator is not required to submit information to establish a corrective action program if he demonstrates to the department that alternate concentration limits will protect human health and the environment after considering the criteria listed in WAC 173-303-645(5). An owner or operator who is not required to establish a corrective action program for this reason must instead submit sufficient information to establish a compliance monitoring program which meets the requirements of WAC 173-303-645 (10) and (a)(xx)(F) of this subsection. To demonstrate compliance with WAC 173-303-645(11), the owner or operator must address, at a minimum, the following items:

(I) A characterization of the contaminated ground water, including concentrations of dangerous constituents and parameters;

(II) The concentration limit for each dangerous constituent and parameter found in the ground water as set forth in WAC 173-303-645(5);

(III) Detailed plans and an engineering report describing the corrective action to be taken;

(IV) A description of how the ground water monitoring program will demonstrate the adequacy of the corrective action; and

(V) The permit may contain a schedule for submittal of the information required in (a)(xx)(H)(III) and (IV) of this subsection, provided the owner or operator obtains written authorization from the department prior to submittal of the complete permit application.

(xxi) Contingent ground water protection program. The following actions are required for owners or operators of proposed land-based facilities and may be required for

owners/operators of existing land-based facilities, except as provided in WAC 173-303-645 (1)(b).

(A) Contingent ground water protection program. The owner or operator shall develop a contingent ground water protection program. The purpose of this program will be to prevent the migration of dangerous waste or dangerous waste constituents from waste management units to the nearest hydraulically downgradient receptor at any time during the life of the facility. For the purposes of this subsection, the downgradient receptor shall be the facility property line, perennial surface water or domestic well, whichever is nearest to the dangerous waste management unit. The contingent ground water protection program shall at a minimum:

(I) Define the local and regional hydrogeologic characteristics. The contingent ground water protection program shall be based on a sufficient understanding of site geology, hydrology, and other factors to allow evaluation of its adequacy by the department. Site characterization shall be performed in sufficient detail to provide, at a minimum, the following information: Site geostratigraphy; site hydrostratigraphy; identification of aquifers, aquitards, and aquicludes; flow models for each stratum (i.e., porous media or fracture flow); the distribution of vertical and horizontal hydraulic conductivity; effective porosity; horizontal and vertical hydraulic gradients; ground water travel time to receptors; and heterogeneity for each stratigraphic unit. Site interpretative models shall include ranges of tested values: The provisions of WAC 173-303-806 (4)(a)(xx) and 173-303-645, shall be used as guidance in the development of the contingent ground water protection program.

(II) Identify the range of potential release scenarios that could occur during facility operation and the postclosure care period. The scenarios shall incorporate the intended design(s) of the dangerous waste management unit(s), wastes to be placed in the dangerous waste management unit(s), waste and leachate chemistry, waste, and soil and rock geochemical interactions, and the results of site characterization pursuant to WAC 173-303-806 (4)(a)(xx) and (xxi);

(III) Include specific physical action to be taken if dangerous waste or dangerous waste constituents are detected in one or more of the monitoring wells. The physical actions shall be based upon engineering feasibility studies describing remedial actions established from site specific conditions and waste features. Such actions may include installation of a pump and treat system between the monitoring well and the receptor or installation of a section of slurry wall to decrease ground water travel times. The description of the systems shall also provide how the remediation system will achieve cleanup, its efficiency, and the timeframes involved;

(IV) Incorporate the design, construction, and sampling methods outlined in WAC 173-303-645 (8)(c), (d), (e), (f), and (g);

(V) Demonstrate to the satisfaction of the department that the owner/operator of the dangerous waste management facility has the financial capability to implement the proposed ground water protection plan; and

(VI) Include reporting procedures to the department.

(B) The response actions identified in WAC 173-303-806 (4)(a)(xxi)(A)(III) shall be activated if the presence of dangerous waste or dangerous waste constituents have been

detected at the point of compliance in accordance with WAC 173-303-645 (9)(g), and shall continue until the concentration of dangerous waste or dangerous waste constituents under WAC 173-303-645(4) are reduced to levels below their respective concentration limits specified in WAC 173-303-645(5).

(C) If the owner/operator does not demonstrate that the ground water protection program will prevent the migration of dangerous waste or its constituents to the nearest receptor, the department will require corrections to be made in the protection program, increase setbacks from the nearest receptor, or deny the permit.

(xxii) Additional requirements for incineration facilities. The following actions regarding the protection of human health and the environment must be taken by owners/operators of proposed hazardous waste incineration facilities and may be required for owners or operators of existing incineration facilities.

(A) Ambient monitoring program. The owner/operator shall be required to develop an ambient monitoring program. The purpose of this ambient monitoring program will be to: Gather baseline environmental information characterizing on-site and off-site environmental conditions prior to facility operation; and, to identify and measure changes in the environment which may be linked to the construction and operation of the facility. The ambient monitoring program shall, at a minimum:

(I) Include a characterization of facility emission sources and pathways of contaminant transport.

(II) Characterize local and regional ecosystems, including agricultural, and their sensitivity to the potential contaminants from the facility.

(III) Incorporate the findings of the environmental impact statement's health risk assessment and/or other assessments specific to the proposal or available to the scientific community regarding emissions from dangerous waste management facilities and their potential human health and environmental effects.

(IV) Identify sensitive indicator plants and animals for biomonitoring, identify specific chemical constituents of concern, sampling locations, sampling frequency, sampling and analytical methods, chain of custody procedures, quality assurance/quality control procedures, reporting times, recordkeeping procedures, and data evaluation procedures.

(B) Environmental review procedures. The owner/operator shall establish procedures to allow for public review of facility operation and all monitoring data required by the facility's permit. In developing this process, the owner/operator shall, at a minimum:

(I) Coordinate this effort with the public and interested local organizations;

(II) Identify the informational needs of the community and develop a public information process which meets these needs; and

(III) Develop procedures allowing full access by the public to all monitoring data required by the permit.

(C) Impact mitigation plan. Prior to the department issuing a permit, the owner/operator shall submit an impact mitigation plan which demonstrates to the satisfaction of the department that the owner/operator will mitigate all probable significant adverse impacts, including economic, due to facility location and operations. The owner/operator shall

use as a basis for identifying probable significant adverse economic impacts those probable economic impacts identified during a public review process, such as the environmental impact statement scoping process, if applicable.

The plan must include, but is not limited to, a description of what the owner/operator will do to reduce or prevent any probable significant impacts before they occur, to mitigate such impacts should they occur, and to ensure the owner/operator has and will have the financial capability to implement such preventative and mitigative measures. Mitigation measures may include, as an element, financial compensation to adversely affected parties.

This plan may be submitted with environmental reports the department requires for compliance with the State Environmental Policy Act, with the written citizen proponent negotiation report and agreements, or with the Part B permit application. If the plan does not demonstrate that the owner/operator is capable of adequately mitigating the identified probable significant adverse economic impacts, the department will require modification of the plan or of the proposed facility location, or will deny the permit application. The department must be satisfied with the plan prior to the issuance of the permit.

(b) Specific Part B information requirements for containers. Except as otherwise provided in WAC 173-303-600(3), owners or operators of facilities that store containers of dangerous waste must provide the following additional information:

(i) A description of the containment system to demonstrate compliance with WAC 173-303-630(7). Show at least the following:

(A) Basic design parameters, dimensions, and materials of construction including allowance for a twenty-five-year, twenty-four-hour storm;

(B) How the design promotes positive drainage control or how containers are kept from contact with standing liquids in the containment system;

(C) Capacity of the containment system relative to the volume of the largest container to be stored;

(D) Provisions for preventing or managing run-on;

(E) How accumulated liquids can be analyzed and removed to prevent overflow; and

(F) A description of the building or other protective covering for EHW containers;

(ii) For storage areas that store containers holding wastes that do not contain free liquids, a demonstration of compliance with WAC 173-303-630(7)(c), including:

(A) Test procedures and results or other documentation or information to show that the wastes do not contain free liquids; and

(B) A description of how the storage area is designed or operated to drain and remove liquids or how containers are kept from contact with standing liquids;

(iii) A description of the procedures for labeling containers;

(iv) Sketches, drawings, or data demonstrating compliance with WAC 173-303-630(8) (location of buffer zone and containers holding ignitable or reactive wastes) and WAC 173-303-630(9)(c) (location of incompatible wastes), where applicable; and

(v) Where incompatible wastes are stored or otherwise managed in containers, a description of the procedures used

to ensure compliance with WAC 173-303-630(9)(a) and (b), and 173-303-395(1)(b) and (c).

(c) Specific Part B information requirements for tanks. Except as otherwise provided in WAC 173-303-600(3), owners and operators of facilities that use tanks to store or treat dangerous waste must provide the following information:

(i) A written assessment that is reviewed and certified by an independent, qualified, registered professional engineer as to the structural integrity and suitability for handling dangerous waste of each tank system, as required under WAC 173-303-640(2) and (3);

(ii) Dimensions and capacity of each tank;

(iii) Description of feed systems, safety cutoff, bypass systems, and pressure controls (e.g., vents);

(iv) A diagram of piping, instrumentation, and process flow for each tank system;

(v) A description of materials and equipment used to provide external corrosion protection, as required under WAC 173-303-640(3)(a)(iii)(B);

(vi) For new tank systems, a detailed description of how the tank system(s) will be installed in compliance with WAC 173-303-640(3)(b), (c), (d), and (e);

(vii) Detailed plans and a description of how the secondary containment system for each tank system is or will be designed, constructed, and operated to meet the requirements of WAC 173-303-640(4)(a), (b), (c), (d), (e), and (f);

(viii) For tank systems for which a variance from the requirements of WAC 173-303-640(4) is sought (as provided by WAC 173-303-640(4)(g)):

(A) Detailed plans and engineering and hydrogeologic reports, as appropriate, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any dangerous waste or dangerous constituents into the ground water or surface water during the life of the facility; or

(B) A detailed assessment of the substantial present or potential hazards posed to human health or the environment should a release enter the environment.

(ix) Description of controls and practices to prevent spills and overflows, as required under WAC 173-303-640(5)(b);

(x) For tank systems in which ignitable, reactive, or incompatible wastes are to be stored or treated, a description of how operating procedures and tank system and facility design will achieve compliance with the requirements of WAC 173-303-640(9) and (10);

(xi) A description of the marking and/or labeling of tanks; and

(xii) Tank design to prevent escape of vapors and emissions of acutely or chronically toxic (upon inhalation) EHW.

(d) Specific Part B information requirements for surface impoundments. Except as otherwise provided in WAC 173-303-600(3), owners and operators of facilities that store, treat, or dispose of dangerous waste in surface impoundments must provide the following additional information:

(i) A list of the dangerous wastes placed or to be placed in each surface impoundment;

(ii) Detailed plans and an engineering report describing how the surface impoundment is or will be designed,

constructed, operated and maintained to meet the requirements of WAC 173-303-650(2). This submission must address the following items as specified in WAC 173-303-650(2):

(A) The liner system (except for an existing portion of a surface impoundment), including the certification required by WAC 173-303-650 (2)(a)(i)(D) for EHW management. If an exemption from the requirement for a liner is sought as provided by WAC 173-303-650 (2)(b), submit detailed plans and engineering and hydrogeologic reports, as appropriate, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any dangerous constituents into the ground water or surface water at any future time;

(B) Prevention of overtopping; and

(C) Structural integrity of dikes;

(iii) If any exemption from WAC 173-303-645 is sought, as provided by WAC 173-303-650(3), detailed plans and an engineering report explaining the location of the saturated zone in relation to the surface impoundment, and the design of a double-liner system that incorporates a leak detection system between the liners;

(iv) A description of how each surface impoundment, including the liner and cover systems and appurtenances for control of overtopping, will be inspected in order to meet the requirements of WAC 173-303-650 (4)(a) and (b). This information should be included in the inspection plan submitted under (a)(v) of this subsection;

(v) A certification by a qualified engineer which attests to the structural integrity of each dike, as required under WAC 173-303-650 (4)(c). For new units, the owner or operator must submit a statement by a qualified engineer that he will provide such a certification upon completion of construction in accordance with the plans and specifications;

(vi) A description of the procedure to be used for removing a surface impoundment from service, as required under WAC 173-303-650 (5)(b) and (c). This information should be included in the contingency plan submitted under (a)(vii) of this subsection;

(vii) A description of how dangerous waste residues and contaminated materials will be removed from the unit at closure, as required under WAC 173-303-650 (6)(a)(i). For any wastes not to be removed from the unit upon closure, the owner or operator must submit detailed plans and an engineering report describing how WAC 173-303-650 (6)(a)(ii) and (b) will be complied with. This information should be included in the closure plan and, where applicable, the post-closure plan submitted under (a)(xiii) of this subsection;

(viii) If ignitable or reactive wastes are to be placed in a surface impoundment, an explanation of how WAC 173-303-650(7) will be complied with;

(ix) If incompatible wastes, or incompatible wastes and materials will be placed in a surface impoundment, an explanation of how WAC 173-303-650(8) will be complied with; and

(x) Where applicable, a waste management plan for Dangerous Waste Nos. F020, F021, F022, F023, F026, or F027 describing how the surface impoundment is or will be designed to meet the requirements of WAC 173-303-650(9).

(e) Specific Part B information requirements for waste piles. Except as otherwise provided in WAC 173-303-

600(3), owners and operators of facilities that store or treat dangerous waste in waste piles must provide the following additional information:

(i) A list of dangerous wastes placed or to be placed in each waste pile;

(ii) If an exemption is sought to WAC 173-303-660(2), and 173-303-645 as provided by WAC 173-303-660 (1)(c), an explanation of how the standards of WAC 173-303-660 (1)(c) will be complied with;

(iii) Detailed plans and an engineering report describing how the pile is or will be designed, constructed, operated, and maintained to meet the requirements of WAC 173-303-660(2). This submission must address the following items as specified in WAC 173-303-660(2):

(A) The liner system (except for an existing portion of a pile), including the licensed engineer's certification when required by WAC 173-303-660 (2)(c). If an exemption from the requirement for a liner is sought, as provided by WAC 173-303-660 (2)(d), the owner or operator must submit detailed plans and engineering and hydrogeologic reports, as applicable, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any hazardous constituents into the ground water or surface water at any future time;

(B) Control of run-on;

(C) Control of run-off;

(D) Management of collection and holding units associated with run-on and run-off control systems; and

(E) Control of wind dispersal of particulate matter, where applicable;

(iv) If an exemption from WAC 173-303-645 is sought as provided by WAC 173-303-660 (3) or (4), submit detailed plans and an engineering report describing how the requirements of WAC 173-303-660 (3)(a) or (4)(a) will be complied with;

(v) A description of how each waste pile, including the liner and appurtenances for control of run-on and run-off, will be inspected in order to meet the requirements of WAC 173-303-660(5). This information should be included in the inspection plan submitted under (a)(v) of this subsection. If an exemption is sought to WAC 173-303-645 pursuant to WAC 173-303-660(4), describe in the inspection plan how the inspection requirements of WAC 173-303-660 (4)(a)(iii) will be complied with;

(vi) If treatment is carried out on or in the pile, details of the process and equipment used, and the nature and quality of the residuals;

(vii) If ignitable or reactive wastes are to be placed in a waste pile, an explanation of how the requirements of WAC 173-303-660(7) will be complied with;

(viii) If incompatible wastes, or incompatible wastes and materials will be placed in a waste pile, an explanation of how WAC 173-303-660(8) will be complied with;

(ix) A description of how dangerous waste, waste residues and contaminated materials will be removed from the waste pile at closure, as required under WAC 173-303-660 (9)(a). For any waste not to be removed from the waste pile upon closure, the owner or operator must submit detailed plans and an engineering report describing how WAC 173-303-665 (6)(a) and (b) will be complied with. This information should be included in the closure plan and,

where applicable, the post-closure plan submitted under (a)(xiii) of this subsection;

(x) Where applicable, a waste management plan for Dangerous Waste Nos. F020, F021, F022, F023, F026, or F027 describing how a waste pile that is not enclosed (as defined in WAC 173-303-660 (1)(c)) is or will be designed, constructed, operated, and maintained to meet the requirements of WAC 173-303-660(10).

(f) Specific Part B information requirements for incinerators. Except as WAC 173-303-670(1) provides otherwise, owners and operators of facilities that incinerate dangerous waste must fulfill the informational requirements of (f) of this subsection.

(i) When seeking an exemption under WAC 173-303-670 (1)(b) (ignitable or reactive wastes only):

(A) Documentation that the waste is listed as a dangerous waste in WAC 173-303-080, solely because it is ignitable; or

(B) Documentation that the waste is listed as a dangerous waste in WAC 173-303-080, solely because it is reactive for characteristics other than those listed in WAC 173-303-090 (7)(a)(iv) and (v), and will not be burned when other dangerous wastes are present in the combustion zone; or

(C) Documentation that the waste is a dangerous waste solely because it possesses the characteristic of ignitability, as determined by the tests for characteristics of dangerous waste under WAC 173-303-090; or

(D) Documentation that the waste is a dangerous waste solely because it possesses the reactivity characteristics listed in WAC 173-303-090 (7)(a)(i), (ii), (iii), (vi), (vii), and (viii), and that it will not be burned when other dangerous wastes are present in the combustion zone.

(ii) Submit a trial burn plan or the results of a trial burn, including all required determinations, in accordance with WAC 173-303-807.

(iii) In lieu of a trial burn, the applicant may submit the following information;

(A) An analysis of each waste or mixture of wastes to be burned including:

(I) Heating value of the waste in the form and composition in which it will be burned;

(II) Viscosity (if applicable), or description of physical form of the waste, and specific gravity of the waste;

(III) An identification of any dangerous organic constituents listed in WAC 173-303-9905 or, if not listed, which cause the waste(s) to be regulated, which are present in the waste to be burned, except that the applicant need not analyze for constituents which would reasonably not be expected to be found in the waste. The constituents excluded from analysis must be identified and the basis for their exclusion stated. The waste analysis must rely on analytical techniques specified in WAC 173-303-110(3), or their equivalent;

(IV) An approximate quantification of the dangerous constituents identified in the waste, within the precision produced by the analytical methods specified in WAC 173-303-110(3); and

(V) A quantification of those dangerous constituents in the waste which may be designated as principal organic dangerous constituents (PODC's) based on data submitted from other trial or operational burns which demonstrate

compliance with the performance standards in WAC 173-303-670(4);

(B) A detailed engineering description of the incinerator, including:

(I) Manufacturer's name and model number of incinerator;

(II) Type of incinerator;

(III) Linear dimension of incinerator unit including cross sectional area of combustion chamber;

(IV) Description of auxiliary fuel system (type/feed);

(V) Capacity of prime mover;

(VI) Description of automatic waste feed cutoff system(s);

(VII) Stack gas monitoring and pollution control monitoring system;

(VIII) Nozzle and burner design;

(IX) Construction materials; and

(X) Location and description of temperature, pressure, and flow indicating devices and control devices;

(C) A description and analysis of the waste to be burned compared with the waste for which data from operational or trial burns are provided to support the contention that a trial burn is not needed. The data should include those items listed in (f)(iii)(A) of this subsection. This analysis should specify the principal organic dangerous constituents (PODC's) which the applicant has identified in the waste for which a permit is sought, and any differences from the PODC's in the waste for which burn data are provided;

(D) The design and operating conditions of the incinerator unit to be used, compared with that for which comparative burn data are available;

(E) A description of the results submitted from any previously conducted trial burn(s) including:

(I) Sampling and analysis techniques used to calculate performance standards in WAC 173-303-670(4); and

(II) Methods and results of monitoring temperatures, waste feed rates, carbon monoxide, and an appropriate indicator of combustion gas velocity (including a statement concerning the precision and accuracy of this measurement);

(F) The expected incinerator operation information to demonstrate compliance with WAC 173-303-670 (4) and (6), including:

(I) Expected carbon monoxide (CO) level in the stack exhaust gas;

(II) Waste feed rate;

(III) Combustion zone temperature;

(IV) Indication of combustion gas velocity;

(V) Expected stack gas volume, flow rate, and temperature;

(VI) Computed residence time for waste in the combustion zone;

(VII) Expected hydrochloric acid removal efficiency;

(VIII) Expected fugitive emissions and their control procedures; and

(IX) Proposed waste feed cutoff limits based on the identified significant operating parameters;

(G) Such supplemental information as the department finds necessary to achieve the purposes of this subsection;

(H) Waste analysis data, including that submitted in (f)(iii)(A) of this subsection, sufficient to allow the department to specify as permit principal organic dangerous

constituents (permit PODC's) those constituents for which destruction and removal efficiencies will be required; and

(I) Test protocols and sampling and analytical data to demonstrate the designation status under WAC 173-303-070 of:

- (I) Incinerator ash residues, if any; and
- (II) Residues from the air pollution control devices.

(iv) The department shall approve a permit application without a trial burn if the department finds that:

- (A) The wastes are sufficiently similar; and
- (B) The incinerator units are sufficiently similar, and the data from other trial burns are adequate to specify (under WAC 173-303-670(6)) operating conditions that will ensure that the performance standards in WAC 173-303-670(4) will be met by the incinerator.

(g) Specific Part B information requirements for land treatment facilities. Except as otherwise provided in WAC 173-303-600(3), owners and operators of facilities that use land treatment to dispose of dangerous waste must provide the following additional information:

(i) A description of plans to conduct a treatment demonstration as required under WAC 173-303-655(3). The description must include the following information:

- (A) The wastes for which the demonstration will be made and the potential dangerous constituents in the waste;
- (B) The data sources to be used to make the demonstration (e.g., literature, laboratory data, field data, or operating data);
- (C) Any specific laboratory or field test that will be conducted, including:
 - (I) The type of test (e.g., column leaching, degradation);
 - (II) Materials and methods, including analytical procedures;
 - (III) Expected time for completion; and
 - (IV) Characteristics of the unit that will be simulated in the demonstration, including treatment zone characteristics, climatic conditions, and operating practices;

(ii) A description of a land treatment program, as required under WAC 173-303-655(2). This information must be submitted with the plans for the treatment demonstration, and updated following the treatment demonstration. The land treatment program must address the following items:

- (A) The wastes to be land treated;
- (B) Design measures and operating practices necessary to maximize treatment in accordance with WAC 173-303-655 (4)(a) including:

- (I) Waste application method and rate;
- (II) Measures to control soil pH;
- (III) Enhancement of microbial or chemical reactions;

and
 (IV) Control of moisture content;
 (C) Provisions for unsaturated zone monitoring, including:

- (I) Sampling equipment, procedures, and frequency;
- (II) Procedures for selecting sampling locations;
- (III) Analytical procedures;
- (IV) Chain of custody control;
- (V) Procedures for establishing background values;
- (VI) Statistical methods for interpreting results; and
- (VII) The justification for any dangerous constituents recommended for selection as principal dangerous constituents,

ents, in accordance with the criteria for such selection in WAC 173-303-655 (6)(a);

(D) A list of dangerous constituents reasonably expected to be in, or derived from, the wastes to be land treated based on waste analysis performed pursuant to WAC 173-303-300;

(E) The proposed dimensions of the treatment zone;

(iii) A description of how the unit is or will be designed, constructed, operated, and maintained in order to meet the requirements of WAC 173-303-655(4). This submission must address the following items:

- (A) Control of run-on;
- (B) Collection and control of run-off;
- (C) Minimization of run-off of dangerous constituents from the treatment zone;

(D) Management of collection and holding facilities associated with run-on and run-off control systems;

(E) Periodic inspection of the unit. This information should be included in the inspection plan submitted under (a)(v) of this subsection; and

(F) Control of wind dispersal of particulate matter, if applicable;

(iv) If food-chain crops are to be grown in or on the treatment zone of the land treatment unit, a description of how the demonstration required under WAC 173-303-655(5) will be conducted including:

- (A) Characteristics of the food-chain crop for which the demonstration will be made;
- (B) Characteristics of the waste, treatment zone, and waste application method and rate to be used in the demonstration;
- (C) Procedures for crop growth, sample collection, sample analysis, and data evaluation;
- (D) Characteristics of the comparison crop including the location and conditions under which it was or will be grown; and

(E) If cadmium is present in the land treated waste, a description of how the requirements of WAC 173-303-655 (5)(b) will be complied with;

(v) A description of the vegetative cover to be applied to closed portions of the facility, and a plan for maintaining such cover during the post-closure care period, as required under WAC 173-303-655 (8)(a)(viii) and (c)(ii). This information should be included in the closure plan and, where applicable, the post-closure care plan submitted under (a)(xiii) of this subsection;

(vi) If ignitable or reactive wastes will be placed in or on the treatment zone, an explanation of how the requirements of WAC 173-303-655(9) will be complied with; and

(vii) If incompatible wastes, or incompatible wastes and materials, will be placed in or on the same treatment zone, an explanation of how WAC 173-303-655(10) will be complied with.

(viii) Where applicable, a waste management plan for Dangerous Waste Nos. F020, F021, F022, F023, F026, or F027 describing how a land treatment facility is or will be designed, constructed, operated, and maintained to meet the requirements of WAC 173-303-655(12).

(h) Specific Part B information requirements for landfills. Except as otherwise provided in WAC 173-303-600(3), owners and operators of facilities that dispose of dangerous waste in landfills must provide the following additional information;

(i) A list of the dangerous wastes placed or to be placed in each landfill or landfill cell;

(ii) Detailed plans and an engineering report describing how the landfill is or will be designed, constructed, operated and maintained to comply with the requirements of WAC 173-303-665(2). This submission must address the following items as specified in WAC 173-303-665(2):

(A) The liner system and leachate collection and removal system (except for an existing portion of a landfill), including the licensed engineer's certification required by WAC 173-303-665 (2)(a)(i). If an exemption from the requirements for a liner and a leachate collection and removal system is sought, as provided by WAC 173-303-665 (2)(b), submit detailed plans and engineering and hydrogeologic reports, as appropriate, describing alternate design and operating practices that will, in conjunction with location aspects, prevent the migration of any dangerous constituent into the ground water or surface water at any future time;

(B) Control of run-on;

(C) Control of run-off;

(D) Management of collection and holding facilities associated with run-on and run-off control systems; and

(E) Control of wind dispersal of particulate matter, where applicable;

(iii) If an exemption from WAC 173-303-645 is sought, as provided by WAC 173-303-665(3), the owner or operator must submit detailed plans and an engineering report explaining the location of the saturated zone in relation to the landfill, the design of a double-liner system that incorporates a leak detection system between the liners, and a leachate collection and removal system above the liners;

(iv) A description of how each landfill, including the liner and cover systems, will be inspected in order to meet the requirements of WAC 173-303-665(4). This information should be included in the inspection plan submitted under (a)(v) of this subsection;

(v) Detailed plans and an engineering report describing the final cover which will be applied to each landfill or landfill cell at closure in accordance with WAC 173-303-665 (6)(a), and a description of how each landfill will be maintained and monitored after closure in accordance with WAC 173-303-665 (6)(b) and (c). This information should be included in the closure and post-closure plans submitted under (a)(xiii) of this subsection;

(vi) If incompatible wastes, or incompatible wastes and materials will be landfilled, an explanation of how WAC 173-303-665(7) will be complied with;

(vii) A description of how each landfill will be designed and operated in order to comply with WAC 173-303-140.

(i) Specific Part B information requirements for miscellaneous units. Except as otherwise provided in WAC 173-303-680(1), owners and operators of facilities that treat, store, or dispose of dangerous waste in miscellaneous units must provide the following additional information:

(i) A detailed description of the unit being used or proposed for use, including the following:

(A) Physical characteristics, materials of construction, and dimensions of the unit;

(B) Detailed plans and engineering reports describing how the unit will be located, designed, constructed, operated,

maintained, monitored, inspected, and closed to comply with the requirements of WAC 173-303-680 (2) and (3); and

(C) For disposal units, a detailed description of the plans to comply with the postclosure requirements of WAC 173-303-680(4).

(ii) Detailed hydrologic, geologic, and meteorologic assessments and land-use maps for the region surrounding the site that address and ensure compliance of the unit with each factor in the environmental performance standards of WAC 173-303-680(2). If the applicant can demonstrate that he does not violate the environmental performance standards of WAC 173-303-680(2) and the department agrees with such demonstration, preliminary hydrologic, geologic, and meteorologic assessments will suffice.

(iii) Information on the potential pathways of exposure of humans or environmental receptors to dangerous waste or dangerous constituents and on the potential magnitude and nature of such exposures.

(iv) For any treatment unit, a report on a demonstration of the effectiveness of the treatment based on laboratory or field data.

(v) Any additional information determined by the department to be necessary for evaluation of compliance of the unit with the environmental performance standards of WAC 173-303-680(2).

(5) Construction. A person may begin physical construction of a new facility, or of new portions of an existing facility if the new portions would amount to reconstruction under interim status (WAC 173-303-805(7)), only after complying with WAC 173-303-281, submitting Part A and Part B of the permit application and receiving a final facility permit. All permit applications must be submitted at least one hundred eighty days before physical construction is expected to begin.

(6) Reapplications. Any dangerous waste facility with an effective final facility permit shall submit a new application one hundred eighty days prior to the expiration date of the effective permit, unless the department grants a later date provided that such date will never be later than the expiration date of the effective permit.

(7) Continuation of expiring permits.

(a) When the owner/operator submits a timely application for a final facility permit and the application is determined by the department to be complete pursuant to subsection (8) of this section, the facility is allowed to continue operating under the expiring or expired permit until the effective date of the new permit.

(b) When the facility is not in compliance with the conditions of the expiring or expired permit, the department may choose to do any of the following:

(i) Initiate enforcement action based upon the permit which has been continued;

(ii) Issue a notice of intent to deny the new permit. If the permit is denied, the owner or operator would then be required to cease the activities authorized by the continued permit or be subject to enforcement action for operating without a permit;

(iii) Issue a new permit with appropriate conditions; and/or

(iv) Take other actions authorized by this chapter.

(8) Completeness. The department shall not issue a final facility permit before receiving a complete application,

except for permits by rule or emergency permits. An application for a permit is complete when the application form and any supplemental information has been submitted to the department's satisfaction. The completeness of any application for a permit shall be judged independently of the status of any other permit application or permit for the same facility or activity.

(9) Recordkeeping. Applicants shall keep records of all data used to complete the permit applications, and any supplemental information submitted to the department for a period of at least three years from the date the application is signed.

(10) General permit conditions. All final facility permits shall contain general permit conditions described in WAC 173-303-810.

(11) Permit duration.

(a) Final facility permits shall be effective for a fixed term not to exceed ten years.

(b) The department may issue any final facility permit for a duration that is less than the full allowable term.

(c) The term of a final facility permit shall not be extended beyond ten years, unless otherwise authorized under subsection (7) of this section.

(12) Grounds for termination. The following are causes for terminating a final facility permit during its term:

(a) Noncompliance by the permittee with any condition of the permit;

(b) The permittee's failure in the application or during the permit issuance process to disclose fully all relevant facts, or the permittee's misrepresentation of any relevant facts at any time; or

(c) A determination that the permitted activity endangers public health or the environment and the hazard can only be controlled by permit modification or termination.

(13) Grounds for denial. A permit application shall be denied if it is determined that the proposed location and/or activity endangers public health and the environment as demonstrated by the permit applicant's failure to satisfy the performance standards of WAC 173-303-283.

(14) Permit changes. All final facility permits shall be subject to the requirements of permit changes, WAC 173-303-830.

(15) Procedures for decision making. Issuance of final facility permits will be subject to the procedures for decision making described in WAC 173-303-840.

(16) Other requirements for final special waste and recycling facility permits. In lieu of issuing a final special waste or recycling facility permit, the department may, after providing opportunity for public comment in accordance with WAC 173-303-840, defer to a permit already issued under other statutory authority administered by the department (such as the State Water Pollution Control Act, chapter 90.48 RCW, the State Clean Air Act, chapter 70.94 RCW, etc.) which incorporates the requirements of this section, and WAC 173-303-500 through 173-303-525 for recycling facilities or WAC 173-303-550 through 173-303-560 for special waste facilities.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-806, filed 3/7/91, effective 4/7/91. Statutory Authority: RCW 43.21A.080 and 70.105.210 et seq. 90-20-016, § 173-303-806, filed 9/21/90, effective 10/22/90. Statutory Authority: Chapter 70.105 RCW.

89-02-059 (Order 88-24), § 173-303-806, filed 1/4/89; 88-18-083 (Order 88-29), § 173-303-806, filed 9/6/88; 88-07-039 (Order 87-37), § 173-303-806, filed 3/11/88; 87-14-029 (Order DE-87-4), § 173-303-806, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-806, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-806, filed 4/18/84.]

WAC 173-303-807 Trial burns for dangerous waste incinerator final facility permits. (1) Purpose and applicability. For purposes of determining operational readiness and establishing conditions in final facility permits for dangerous waste incinerators, the department may approve trial burns. Trial burns shall not exceed seven hundred twenty hours operating time, except that the department may extend the duration of this operational period once, up to seven hundred twenty additional hours, at the request of the owner/operator of the incinerator when good cause is shown. The permit may be modified to reflect the extension according to WAC 173-303-830(4). The procedures for requesting and approving trial burns are described in:

(a) Subsection (10) of this section for existing incinerators with interim status permits; and

(b) Subsection (11) of this section for new incinerators and for incinerators with final facility permits in which the owner/operator wishes to burn new wastes not currently included in the permit.

(2) Trial burn plan. The trial burn must be conducted in accordance with a trial burn plan prepared by the applicant and approved by the department. The trial burn plan will then become a condition of the permit and will include the following information:

(a) An analysis of each waste or mixture of waste to be burned which includes:

(i) Heating value of the waste in the form and composition in which it will be burned;

(ii) Viscosity (if applicable), or description of physical form of the waste, and specific gravity of the waste;

(iii) An analysis identifying any dangerous organic constituents listed in WAC 173-303-9905, and any other dangerous constituents which, although not listed, caused the waste to be regulated as a dangerous waste, which are reasonably expected to be present in the waste to be burned. The constituents excluded from analysis must be identified and the basis for their exclusion stated. The waste analysis must rely on analytical techniques specified or referenced in WAC 173-303-110, or their equivalent;

(iv) An approximate quantification of the dangerous constituents identified in the waste, within the precision produced by the analytical methods specified or referenced in WAC 173-303-110; and

(v) A quantification of those dangerous constituents in the waste which may be designated as principal organic dangerous constituents (PODC) based on data submitted from other trial or operational burns which demonstrate compliance with the performance standard in WAC 173-303-670(4);

(b) A detailed engineering description of the incinerator for which the trial burn permit is sought including:

(i) Manufacturer's name and model number of incinerator (if available);

(ii) Type of incinerator;

(iii) Linear dimensions of the incinerator unit including the cross sectional area of the combustion chamber;

- (iv) Description of the auxiliary fuel system (type/feed);
- (v) Capacity of the prime air mover;
- (vi) Description of automatic waste feed cutoff system(s);
- (vii) Stack gas monitoring and pollution control equipment;
- (viii) Nozzle and burner design;
- (ix) Construction materials; and
- (x) Location and description of temperature, pressure, and flow indicating and control devices;

(c) A detailed description of sampling and monitoring procedures, including sampling and monitoring locations in the system, the equipment to be used, sampling and monitoring frequency, and planned analytical procedures for sample analysis;

(d) A detailed test schedule for each waste for which the trial burn is planned including date(s), duration, quantity of waste to be burned, and other factors relevant to the department's decision under subsection (5) of this section;

(e) A detailed test protocol, including, for each waste identified, the ranges of temperature, waste feed rate, air feed rate, use of auxiliary fuel, and other relevant parameters that will be varied to affect the destruction and removal efficiency of the incinerator;

(f) A description of, and planned operating conditions for, any emission control equipment which will be used;

(g) Procedures for rapidly stopping waste feed, shutting down the incinerator, and controlling emissions in the event of an equipment malfunction;

(h) A detailed test protocol to sample and analyze the following for designation under WAC 173-303-070:

(i) Any incinerator ash residue collected in the incinerator; and

(ii) Any residues collected in the air pollution control devices; and

(i) Such other information as the department reasonably finds necessary to determine whether to approve the trial burn plan in light of the purposes of this section.

(3) Additional information required. The department, in reviewing the trial burn plan, shall evaluate the adequacy of the information provided and may require the applicant to supplement this information, if necessary, to achieve the purposes of this section.

(4) Trial PODCs. Based on the waste analysis data in the trial burn plan, the department will specify as trial principal organic dangerous constituents (trial PODCs) those constituents for which destruction and removal efficiencies must be calculated during the trial burn. These trial PODCs will be specified by the department based on its estimate of the difficulty of incineration of the constituents identified in the waste analysis, the concentration or mass in the waste feed, and the dangerous waste constituent or constituents identified in WAC 173-303-9905, or identified as causing the waste to be regulated as a dangerous waste.

(5) Approval of the plan. The department shall approve a trial burn plan if it finds that:

(a) The trial burn is likely to determine whether the incinerator performance standard required by WAC 173-303-670(4) can be met;

(b) The trial burn itself will not present an imminent hazard to public health or the environment;

(c) The trial burn will help the department to determine operating requirements to be specified under WAC 173-303-670(6); and

(d) The information sought in (a), (b), and (c) of this subsection cannot reasonably be developed through other means.

(6) Trial burns. During each approved trial burn (or as soon after the burn as is practicable), the applicant must make the following determinations:

(a) A quantitative analysis of the trial PODCs in the waste feed to the incinerator;

(b) A quantitative analysis of the exhaust gas for the concentration and mass emissions of the trial PODCs, O₂, hydrogen chloride (HC1), carbon monoxide (CO) and dangerous combustion byproducts, including the total mass emission rate of byproducts as a percent of the total mass feed rate of PODCs fed to the incinerator;

(c) A quantitative analysis of the scrubber water (if any), ash residues, and other residues, for the purpose of estimating the fate of the trial PODCs and whether they are designated according to WAC 173-303-070;

(d) A total mass balance of the trial PODCs in the waste;

(e) A computation of destruction and removal efficiency (DRE), in accordance with the DRE formula specified in WAC 173-303-670 (4)(a);

(f) If the HC1 emission rate exceeds 1.8 kilograms of HC1 per hour (4 pounds per hour), a computation of HC1 removal efficiency in accordance with WAC 173-303-670 (4)(c)(i);

(g) A computation of particulate emissions, in accordance with WAC 173-303-670 (4)(c)(ii);

(h) An identification of sources of fugitive emissions and their means of control;

(i) A measurement of average, maximum, and minimum temperatures, and combustion gas velocity;

(j) A continuous measurement of carbon monoxide in the exhaust gas;

(k) An identification of any existing air emission standards where a state or local air pollution control authority has established emission standards and such standards are applicable to the incinerator; and

(l) Such other information as the department may specify as necessary to ensure that the trial burn will determine compliance with the performance standard of WAC 173-303-670(4), and to establish the operating conditions required by WAC 173-303-670(6).

(7) Certification. The applicant shall submit to the department a certification that the trial burn has been carried out in accordance with the approved trial burn plan, and must submit the results of all determinations required by subsection (6) of this section. This submission shall be made within thirty days of the completion of the trial burn, or later if approved by the department.

(8) Submission of data. All data collected during any trial burn must be submitted to the department following the completion of the trial burn.

(9) Signatures required. All submissions required under this section shall be certified on behalf of the applicant by the signature of a person authorized to sign a permit application under WAC 173-303-810(12).

(10) Existing incinerators with interim status permits.

(a) The owner/operator of an existing incinerator currently operating under an interim status permit may, when required by the department (or when he chooses) to apply for a final facility permit, request the department to approve of a trial burn. The trial burn may be requested for the purposes of determining feasibility of compliance with the performance standards of WAC 173-303-670(4) and the operating conditions of WAC 173-303-670(6). If a trial burn is requested, the owner/operator shall prepare and submit a trial burn plan and, upon approval by the department, perform a trial burn in accordance with subsections (2) through (9) of this section.

(b) If the department approves the trial burn, it shall issue a notice of interim status modification granting such approval and specifying the conditions applicable to the trial burn. The notice of modification shall be a condition of the interim status permit. Note: The national emission standards for hazardous air pollutants may require review for a notice of construction. Owners and operators should consult chapter 173-400 WAC or local air pollution control agency regulations for applicability.

(c) If the trial burn is approved before submitting a final facility permit application, the owner/operator shall complete the trial burn and submit the information described in subsection (6) of this section, with Part B of the permit application. If completion of this process conflicts with the date set for submission of Part B of the final facility permit application, the owner/operator must contact the department to extend the date for submitting the Part B or the trial burn results. If the applicant submits a trial burn plan with Part B of the final facility permit application, the department will specify in the notice of interim status modification issued under (b) of this subsection, a time period for conducting the trial burn and submitting the results.

(11) New incinerators and new wastes.

(a)(i) The owner/operator of a new incinerator may submit with Part B of a final facility permit application a request for approval of a trial burn. This request shall include a statement of why the trial burn is desirable, and a trial burn plan prepared in accordance with subsection (2) of this section.

(ii) The department shall proceed to issue a final facility permit in accordance with WAC 173-303-806. The permit shall include the trial burn plan, and shall establish operating conditions for the trial burn including but not limited to those described in WAC 173-303-670(6). The time period for conducting the trial burn and submitting the results shall also be specified in the permit.

(iii) After the trial burn has been completed and the results submitted to the department, the final facility permit shall be modified in accordance with WAC 173-303-830(4) to establish the final operating requirements and performance standards for the incinerator.

(b) The owner/operator of an incinerator with a final facility permit who wishes to burn new wastes not currently included in his permit may request approval of a trial burn for the new wastes. The request and approval shall be handled in the same way as described in (a) of this subsection, except that in lieu of issuing an entirely new final facility permit the department will modify the existing final facility permit in accordance with WAC 173-303-830.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-807, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-807, filed 4/18/84.]

WAC 173-303-808 Demonstrations for dangerous waste land treatment final facility permits. (1) Purpose and applicability. This section is applicable to the owner/operator of a land treatment facility who must demonstrate that his proposed treatment will be successful. The purpose of this section is to allow the department to issue a land treatment demonstration permit.

(2) Permit issuance. The department may issue a land treatment demonstration permit either in advance of or as part of a final facility permit so that the owner/operator of a land treatment facility can make the demonstration required in WAC 173-303-655(3). If issued in advance of the final facility permit, the land treatment demonstration permit shall be issued as described in subsection (3) of this section, as a demonstration permit only. If issued as part of the final facility permit, the land treatment demonstration and final facility permit shall be issued as described in subsection (4) of this section, as a phased permit. The determination for which procedure to follow will be made by the department based on the information submitted by the owner/operator in Part B of the final facility permit application.

(3) Demonstration permit only.

(a) If the department finds that the Part B does not contain enough information regarding the proposed treatment to allow the department to establish permit conditions necessary for compliance with all requirements of WAC 173-303-655, it may issue a land treatment demonstration permit only. The demonstration permit will be issued in accordance with the decision-making procedures of WAC 173-303-840. The demonstration permit may be issued either as a treatment or disposal permit, will cover only the field test or laboratory analyses, shall contain only those requirements necessary to meet the standards in WAC 173-303-655(3), and shall provide a specific time period for the demonstration. The department may extend the demonstration period as a modification (or minor modification, if applicable) to the demonstration permit.

(b) Within thirty days (unless the department approves a later date) of the end of the treatment demonstration, the owner/operator shall submit a revised Part B to the department containing the results of the field tests or laboratory analyses and all data developed during the demonstration period. The department shall then use the information and Part B to determine whether or not there is adequate information to issue a final facility permit which will incorporate conditions sufficient to provide compliance with all requirements of WAC 173-303-655. If the information is adequate, the department will proceed under WAC 173-303-806 to issue a final facility permit. If the information is not adequate, the department may, as the situation warrants, either issue a modification to the demonstration permit in accordance with the procedures of subsection (3)(a) of this section, or deny the final facility permit application.

(4) Phased permit.

(a) The department may issue a two-phase final facility permit if it finds that, based on information submitted in Part B of the permit application, substantial (although incomplete

and inconclusive) information exists upon which to base the issuance of a final facility permit. The phased permit will be issued in the same manner as a final facility permit under WAC 173-303-806, except that it shall contain a first phase for making a land treatment demonstration, and a second phase (to become effective after completion of the first phase) for establishing conditions for operation of the land treatment facility.

(b) If the department finds that a phased permit may be issued, it will establish, as requirements in the first phase of the facility permit, conditions for conducting the field tests or laboratory analyses. These permit conditions will include design and operating parameters (including the duration of the tests or analyses and, in the case of field tests, the horizontal and vertical dimensions of the treatment zone), monitoring procedures, post-demonstration cleanup activities, and any other conditions which the department finds may be necessary under WAC 173-303-655 (3)(c). The department will include conditions in the second phase of the facility permit to attempt to meet all WAC 173-303-655 requirements pertaining to unit design, construction, operation, and maintenance. The department will establish these conditions in the second phase of the permit based upon the substantial but incomplete or inconclusive information contained in the Part B application.

(i) The first phase of the permit will be effective as provided in WAC 173-303-840 (8)(b).

(ii) The second phase of the permit will be effective as provided in (d) of this subsection.

(c) When the owner or operator who has been issued a two-phase permit has completed the treatment demonstration, he must submit to the department a certification, signed by a person authorized to sign a permit application or report under WAC 173-303-810(12), that the field tests or laboratory analyses have been carried out in accordance with the conditions specified in phase one of the permit for conducting such tests or analyses. The owner or operator must also submit all data collected during the field tests or laboratory analyses within thirty days of completion of those tests or analyses unless the department approves a later date.

(d) If the department determines that the results of the field tests or laboratory analyses meet the requirements of WAC 173-303-655(3), it will modify the second phase of the permit to incorporate any requirements necessary for operation of the facility in compliance with WAC 173-303-655, based upon the results of the field tests or laboratory analyses.

(i) This permit modification may proceed under WAC 173-303-830(4) or otherwise will proceed as a modification under WAC 173-303-830 (3)(a)(ii). If such modifications are necessary, the second phase of the permit will become effective only after those modifications have been made.

(ii) If no modifications of the second phase of the permit are necessary, the department will give notice of its final decision to the permit applicant and to each person who submitted written comments on the phased permit or who requested notice of the final decision on the second phase of the permit. The second phase of the permit then will become effective as specified in WAC 173-303-840 (8)(b).

(iii) If modifications under WAC 173-303-830(3) are necessary, the second phase of the permit will become effective only after those modifications have been made.

(e) If the department determines that the results of the field tests or laboratory analyses do not meet the requirements of WAC 173-303-655(3), the second phase of the permit will not become effective, and the department will, as the situation warrants, either:

(i) Modify the permit according to WAC 173-303-830(3) to allow for additional field tests or laboratory analyses; or

(ii) Proceed to terminate the permit according to WAC 173-303-840.

[Statutory Authority: Chapters 70.105, 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251), 91-07-005 (Order 90-42), § 173-303-808, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW, 84-09-088 (Order DE 83-36), § 173-303-808, filed 4/18/84.]

WAC 173-303-809 Research, development and demonstration permits. (1) The department may issue a research, development, and demonstration permit for any dangerous waste treatment facility which proposes to utilize an innovative and experimental dangerous waste treatment technology or process for which permit standards for such experimental activity have not been promulgated under WAC 173-303-500 through 173-303-670. Any such permit shall include such terms and conditions as will assure protection of human health and the environment. Such permits:

(a) Shall provide for the construction of such facilities as necessary, and for operation of the facility for not longer than one year unless renewed as provided in subsection (4) of this section; and

(b) Shall provide for the receipt and treatment by the facility of only those types and quantities of dangerous waste which the department deems necessary for purposes of determining the efficacy and performance capabilities of the technology or process and the effects of such technology or process on human health and the environment; and

(c) Shall include such requirements as the department deems necessary to protect human health and the environment (including, but not limited to, requirements regarding monitoring, operation, financial responsibility, closure, and remedial action), and such requirements as the department deems necessary regarding testing and providing of information to the department with respect to the operation of the facility.

(2) For the purpose of expediting review and issuance of permits under this section, the department may, consistent with the protection of human health and the environment, modify or waive permit application and permit issuance requirements in WAC 173-303-800 through 173-303-840 except that there may be no modification or waiver of regulations regarding financial responsibility (including insurance) or of procedures regarding public participation.

(3) The department may order an immediate termination of all operations at the facility at any time he determines that termination is necessary to protect human health and the environment.

(4) Any permit issued under this section may be renewed not more than three times. Each such renewal shall be for a period of not more than one year.

[Statutory Authority: Chapter 70.105 RCW, 87-14-029 (Order DE-87-4), § 173-303-809, filed 6/26/87; 84-14-031 (Order DE 84-22), § 173-303-809, filed 6/27/84.]

WAC 173-303-810 General permit conditions. (1) Purpose and applicability. This section sets forth the general permit conditions that are applicable to all permits, except interim status permits and permits by rule, to assure compliance with this chapter. If the conditions of this section are incorporated in a permit by reference, a specific citation to this section must be given in the permit.

(2) Duty to comply. The permittee must comply with all conditions of his permit. Any permit noncompliance constitutes a violation and is grounds for enforcement action; for permit termination, revocation and reissuance, or modification; or for denial of a permit renewal application. The permittee need not comply with the conditions of his permit to the extent and for the duration such noncompliance is authorized in an emergency permit.

(3) Duty to reapply. If the permittee wishes to continue an activity regulated by the permit after its expiration date, the permittee must apply for and obtain a new permit.

(4) Duty to halt or reduce activity. A permittee who has not complied with his permit, and who subsequently is subject to enforcement actions, may not argue that it would have been necessary to halt or reduce the permitted activities in order to maintain compliance with the conditions of the permit.

(5) Duty to mitigate. The permittee shall take all steps required by the department to minimize or correct any adverse impact on the environment resulting from noncompliance with the permit.

(6) Proper operation and maintenance. The permittee shall at all times properly operate and maintain all facilities and systems of treatment and control which are installed or used by the permittee to achieve compliance with the conditions of the permit. Proper operation and maintenance includes effective performance, adequate funding, adequate operator staffing and training, and adequate laboratory and process controls, including appropriate quality assurance procedures. This provision requires the operation of back-up or auxiliary facilities or similar systems only when necessary to achieve compliance with the conditions of the permit.

(7) Permit actions. The permit may be modified, revoked and reissued, or terminated for cause. The filing of a request by the permittee for a permit modification, revocation and reissuance, termination, notification of planned changes, or anticipated noncompliance, does not stay any permit condition.

(8) Effect of a permit. The issuance of a permit does not convey any property rights of any sort, or any exclusive privilege. The issuance of a permit does not authorize any injury to persons or property or invasion of other private rights, or any infringement of state or local laws or regulations.

(9) Duty to provide information. The permittee shall furnish to the department, within a reasonable time, any information which it may request to determine whether cause exists for modifying, revoking and reissuing, or terminating a permit, or to determine compliance with a permit. The permittee shall also furnish to the department, upon request, copies of records required to be kept by the permit.

(10) Inspection and entry. The permittee shall allow representatives of the department, upon the presentation of proper credentials, to:

(a) Enter upon the permittee's premises where a regulated facility or activity is located or conducted, or where records must be kept under the conditions of the permit;

(b) Have access to and copy, at reasonable times, any records that must be kept under the conditions of the permit;

(c) Inspect at reasonable times any facilities, equipment (including monitoring and control equipment), practices, or operations regulated or required under the permit; and

(d) Sample or monitor at reasonable times, for the purposes of assuring permit compliance or as otherwise authorized by chapter 173-303 WAC, any substances or parameters at any location.

(11) Monitoring and monitoring records.

(a) All permits shall specify:

(i) Requirements concerning the proper use, maintenance, and installation, when appropriate, of monitoring equipment or methods; and

(ii) Required monitoring including type, intervals, and frequency sufficient to yield data which are representative of the monitored activity including, when appropriate, continuous monitoring.

(b) Samples and measurements taken for the purpose of monitoring shall be representative of the monitored activity.

(c) The permittee shall retain records of all monitoring information, including all calibration and maintenance records and all original strip chart recordings for continuous monitoring instrumentation, copies of all reports required by this permit, and records of all data used to complete the application for this permit, for a period of at least three years from the date of the sample, measurement, report, or application. This period may be extended by request of the department at any time.

(d) Records of monitoring information shall include:

(i) The date, exact place, and time of sampling or measurements;

(ii) The individual(s) who performed the sampling or measurements;

(iii) The date(s) analyses were performed;

(iv) The individual(s) who performed the analyses;

(v) The analytical techniques or methods used; and

(vi) The results of such analyses.

(e) The permittee shall maintain all records of ground water quality and ground water surface elevations for the active life of the facility, and for the post-closure period as well.

(12) Signatory requirement. All applications, reports, or information submitted to the department shall be signed in accordance with this subsection and shall be certified according to subsection (13) of this section.

(a) Applications. When a dangerous waste facility is owned by one person, but is operated by another person, then the operator shall be the permit applicant and responsible for developing the permit application and all accompanying materials, except that the owner must also sign and certify the permit application. Permit applications shall be signed as follows:

(i) For a corporation: By a responsible corporate officer. For the purposes of this subsection, a responsible corporate officer means:

(A) A president, secretary, treasurer, or vice president of the corporation in charge of a principal business function,

or any other person who performs similar policy or decision-making functions for the corporation; or

(B) The manager of one or more manufacturing, production or operating facilities employing more than two hundred fifty persons or having gross annual sales or expenditures exceeding twenty-five million dollars (in second-quarter 1980 dollars), if authority to sign documents has been assigned or delegated to the manager in accordance with corporate procedures;

(ii) For a partnership or sole proprietorship: By a general partner or the proprietor, respectively; or

(iii) For a municipality, state, federal, or other public agency: By either a principal executive officer or ranking elected official. For purposes of this subsection, a principal executive officer of a federal agency includes:

(A) The chief executive officer of the agency; or

(B) A senior executive officer having responsibility for the overall operations of a principal geographic unit of the agency.

(b) Reports. All reports required by permits and other information requested by the department shall be signed by a person described in (a) of this subsection, or by a duly authorized representative of that person. A person is a duly authorized representative only if:

(i) The authorization is made in writing by a person described in (a) of this subsection;

(ii) The authorization specifies either an individual or a position having responsibility for overall operation of the regulated facility or activity such as the position of plant manager, operator of a well or a well field, superintendent, or position of equivalent responsibility. (A duly authorized representative may thus be either a named individual or any individual occupying a named position); and

(iii) The written authorization is submitted to the department.

(c) Changes to authorization. If an authorization under (b) of this subsection is no longer accurate because a different individual or position has responsibility for the overall operation of the facility, a new authorization satisfying the requirements of (b) of this subsection must be submitted to the department prior to or together with any reports, information, or applications to be signed by an authorized representative.

(13) Certification.

(a) Except as provided in (b) of this subsection, any person signing the documents required under (a) or (b) of subsection (12) of this section shall make the following certification:

"I certify under penalty of law that this document and all attachments were prepared under my direction or supervision in accordance with a system designed to assure that qualified personnel properly gather and evaluate the information submitted. Based on my inquiry of the person or persons who manage the system, or those persons directly responsible for gathering the information, the information submitted is, to the best of my knowledge and belief, true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment for knowing violations."

(b) When a dangerous waste facility is owned by one person, but is operated by another person, then the permit application must be certified as follows:

(i) The operator must make the certification described under (a) of this subsection; and

(ii) The owner must make the following certification:

"I certify under penalty of law that I own the real property described in, and am aware of the contents of, this permit application, and that I have received a copy of this application. As owner of the real property, I understand that I am responsible for complying with any requirements of chapter 173-303 WAC with which only I am able to comply, and that there are significant penalties for failure to comply with such requirements."

(14) Reporting. The following reports shall be provided:

(a) Planned changes. The permittee shall give notice to the department as soon as possible of any planned physical alterations or additions to the permitted facility. For a new TSD facility and for a facility being modified, the permittee may not treat, store, or dispose of dangerous waste in the new or modified portion of the facility until:

(i) The permittee has submitted to the department by certified mail or hand delivery a letter signed by the permittee and a registered professional engineer stating that the facility has been constructed or modified in compliance with the permit; and either

(ii) The department has inspected the modified or newly constructed facility and finds it is in compliance with the conditions of the permit; or

(iii) Within fifteen days of the date of submission of the letter, the permittee has not received notice from the department of its intent to inspect, prior inspection is waived and the permittee may commence treatment, storage, or disposal of dangerous waste.

(b) Anticipated noncompliance. The permittee shall give advance notice to the department of any planned changes in the permitted facility or activity which may result in noncompliance with permit requirements. For a new facility, the permittee may not treat, store, or dispose of dangerous waste; and for a facility being modified, the permittee may not treat, store, or dispose of dangerous waste in the modified portion of the facility except as provided in WAC 173-303-830(4).

(c) Transfers. The permit is not transferable to any person except after notice to the department. The department may require modification or revocation and reissuance of the permit to change the name of the permittee and incorporate such other requirements as may be necessary.

(d) Monitoring reports. Monitoring results (including monitoring of the facility's impacts as required by the applicable sections of this chapter) shall be reported at the intervals specified elsewhere in the permit.

(e) Compliance schedules. Reports of permit compliance or noncompliance or any progress reports on interim and final permit requirements contained in any compliance schedule shall be submitted no later than fourteen days following each scheduled date.

(f) Immediate reporting. The permittee shall immediately report any noncompliance which may endanger health or the environment. Information shall be provided orally to the department as soon as the permittee becomes aware of the circumstances. A written submission shall also be provided within five days of the time the permittee becomes aware of the circumstances provided that the department may waive

the written submission requirement in favor of a written report, to be submitted within fifteen days. The written submission shall contain a description of the noncompliance and its cause; the period of noncompliance, including exact dates and times, and if the noncompliance has not been corrected, the anticipated time it is expected to continue; and steps taken or planned to reduce, eliminate, and prevent reoccurrence of the noncompliance.

Information which must be reported immediately shall include:

(i) Release of dangerous waste that may cause an endangerment to drinking water supplies or ground or surface waters;

(ii) Any information of a release or discharge of dangerous waste, fire, or explosion from the permitted facility which could threaten the environment or human health outside the facility;

(iii) The following description of any such occurrence:

(A) Name, address, and telephone number of the owner or operator;

(B) Name, address, and telephone number of the facility;

(C) Date, time, and type of incident;

(D) Name and quantity of material(s) involved;

(E) The extent of injuries, if any;

(F) An assessment of actual or potential hazards to the environment and human health outside the facility, where this is applicable; and

(G) Estimated quantity and disposition of recovered material that resulted from the incident.

(g) Other noncompliance. The permittee shall report all instances of noncompliance not reported under (d), (e), and (f) of this subsection, at the time monitoring reports are submitted. The reports shall contain the information listed in (f) of this subsection.

(h) Other information. Where the permittee becomes aware that he failed to submit any relevant facts in a permit application, or submitted incorrect information in a permit application or in any report to the department, he shall promptly submit this information.

(i) Other reports. In addition, the following reports are required when appropriate:

(i) Manifest discrepancy report as required by WAC 173-303-370(5);

(ii) Unmanifested waste report as required by WAC 173-303-390(1); and

(iii) Annual report as required by WAC 173-303-390(2).

(15) Confidentiality.

(a) Information submitted by the owner/operator of a facility identified as confidential will be treated in accordance with chapter 42.17 RCW and RCW 43.21A.160.

(b) Proprietary information can be held confidential if the owner/operator indicates to the department the degree of harm if the information is made to the public.

(c) Claims of confidentiality for permit application information must be substantiated at the time the application is submitted and in the manner prescribed in the application instructions. Claims of confidentiality for the name and address of any permit applicant will be denied.

(d) If a submitter does not provide substantiation, the department will notify the owner/operator by certified mail of the requirement to do so. If the department does not

receive the substantiation within ten days after the submitter receives the notice, the department shall place the unsubstantiated information in the public file.

(e) The department will determine if the owner/operator's request meets the confidential information criteria.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-810, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-810, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-810, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-810, filed 2/10/82.]

WAC 173-303-815 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-815, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-815, filed 2/10/82.]

WAC 173-303-820 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-820, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-820, filed 2/10/82.]

WAC 173-303-825 (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-825, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-825, filed 2/10/82.]

WAC 173-303-830 Permit changes. (1) Purpose and applicability. This section describes the types of permit changes that may be made to all permits issued by the department. This section does not apply to permits by rule or interim status permits.

(2) Transfer of permits.

(a) A permit may be transferred by the permittee to a new owner or operator only if the permit has been modified or revoked and reissued (under (b) of this subsection or subsection (3) of this section) to identify the new permittee and incorporate such other requirements as may be necessary under the appropriate act.

(b) Changes in the ownership or operational control of a facility may be made as a Class 1 modification with prior written approval of the department in accordance with subsection (4) of this section. The new owner or operator must submit a revised permit application no later than ninety days prior to the scheduled change. A written agreement containing a specific date for transfer of permit responsibility between the current and new permittees must also be submitted to the department. When a transfer of ownership or operational control occurs, the old owner or operator shall comply with the requirements of WAC 173-303-620 (Financial requirements) until the new owner or operator has demonstrated that he or she is complying with the financial requirements. The new owner or operator must demonstrate compliance with the financial requirements within six months of the date of the change of ownership or operational control of the facility. Upon demonstration to the department by the new owner or operator of compliance with the financial requirements, the department shall notify the old

owner or operator that he or she no longer needs to comply with the financial requirements as of the date of demonstration.

(3) Modification or revocation and reissuance of permits. When the department receives any information (for example, inspects the facility, receives information submitted by the permittee as required in the permit, receives a request for revocation and reissuance, or conducts a review of the permit file), the department may determine whether or not one or more of the causes listed in (a) and (b) of this subsection for modification or revocation and reissuance or both exist. If cause exists, the department may modify or revoke and reissue the permit accordingly, subject to the limitations of (c) of this subsection, and may request an updated application if necessary. When a permit is modified, only the conditions subject to modification are reopened. If a permit is revoked and reissued, the entire permit is reopened and subject to revision and the permit is reissued for a new term. If cause does not exist under this subsection, the department shall not modify or revoke and reissue the permit, except on request of the permittee. If a permit modification is requested by the permittee, the department shall approve or deny the request according to the procedures of subsection (4) of this section. Otherwise, a draft permit must be prepared and public review provided in accordance with WAC 173-303-840.

(a) Causes for modification. The following are causes for modification but not revocation and reissuance of permits, unless agreed to or requested by the permittee:

(i) Alterations. There are material and substantial alterations or additions to the permitted facility or activity which occurred after permit issuance which justify the application of permit conditions that are different or absent in the existing permit;

(ii) Information. Permits may be modified during their terms if the department receives information that was not available at the time of permit issuance and which would have justified the application of different permit conditions at the time of issuance;

(iii) New regulations. The standards or regulations on which the permit was based have been changed by statute, through promulgation of amended standards or regulations or by judicial decision after the permit was issued. Permits may be modified during their terms for this cause only when:

(A) The permit condition requested to be modified was based on an effective regulation; and

(B) The department has revised, withdrawn, or modified that portion of the regulation on which the permit condition was based; and either

(I) The department decides to modify the permit because there would be a potential threat to public health or the environment if the permit does not incorporate the requirements of the amended regulation; or

(II) A permittee requests modification within ninety days after the date the regulation amendments are adopted;

(iv) Compliance schedules. The department determines good cause exists for modification of a compliance schedule, such as an act of God, strike, flood, or materials shortage, or other events over which the permittee has little or no control and for which there is no reasonably available remedy;

(v) Closure plans or postclosure. When modification of a closure or postclosure plan is required under WAC 173-303-610 (3) or (8);

(vi) Revocation of changes approved prior to notice of closure. After the department receives the notification of expected closure under WAC 173-303-610(3), the department may determine that previously approved changes are no longer warranted. These include:

(A) Extension of the ninety or one hundred eighty day periods under WAC 173-303-610(4);

(B) Modification of the thirty year postclosure period under WAC 173-303-610(7);

(C) Continuation of security requirements under WAC 173-303-610(7); or

(D) Permission to disturb the integrity of the containment system under WAC 173-303-610(7);

(vii) When the permittee has filed a request under WAC 173-303-620 for a variance to the level of financial responsibility or when the department demonstrates under WAC 173-303-620 that an upward adjustment of the level of financial responsibility is required;

(viii) When the corrective action program specified in the permit under WAC 173-303-645 has not brought the regulated unit into compliance with the ground water protection standard within a reasonable period of time;

(ix) To include a detection monitoring program meeting the requirements of WAC 173-303-645, when the owner or operator has been conducting a compliance monitoring program under WAC 173-303-645 or a corrective action program under WAC 173-303-645 and compliance period ends before the end of the postclosure care period for the unit;

(x) When a permit requires a compliance monitoring program under WAC 173-303-645, but monitoring data collected prior to permit issuance indicate that the facility is exceeding the ground water protection standard;

(xi) To include conditions applicable to units at a facility that were not previously included in the facility's permit; or

(xii) When a land treatment unit is not achieving complete treatment of dangerous constituents under its current permit conditions.

(b) Causes for modification or revocation and reissuance. The following are causes to modify, or alternatively, revoke and reissue a permit:

(i) Cause exists for termination under WAC 173-303-806 (12) for final facility permits, and the department determines that modification or revocation and reissuance is appropriate; or

(ii) The department has received notification of a proposed transfer of the permit.

(c) Facility siting. Suitability of the facility location will not be considered at the time of permit modification or revocation and reissuance unless new information or standards indicate that a threat to human health or the environment exists which was unknown at the time of permit issuance.

(4) Permit modification at the request of the permittee.

(a) Class 1 modifications.

(i) Except as provided in (a)(ii) of this subsection, the permittee may put into effect Class 1 modifications listed in Appendix I of this section under the following conditions:

(A) The permittee must notify the department concerning the modification by certified mail or other means that establish proof of delivery within seven calendar days after the change is put into effect. This notice must specify the changes being made to permit conditions or supporting documents referenced by the permit and must explain why they are necessary. Along with the notice, the permittee must provide the applicable information required by WAC 173-303-806(4), 173-303-807, and 173-303-808.

(B) The permittee must send a notice of the modification to all persons on the facility mailing list, maintained by the department in accordance with WAC 173-303-840 (3)(e)(i)(D), and the appropriate units of state and local government, as specified in WAC 173-303-840 (3)(e)(i)(E). This notification must be made within ninety calendar days after the change is put into effect. For the Class 1 modifications that require prior department approval, the notification must be made within ninety calendar days after the department approves the request.

(C) Any person may request the department to review, and the department may for cause reject, any Class 1 modification. The department must inform the permittee by certified mail that a Class 1 modification has been rejected, explaining the reasons for the rejection. If a Class 1 modification has been rejected, the permittee must comply with the original permit conditions.

(ii) Class 1 permit modifications identified in Appendix I by an asterisk may be made only with the prior written approval of the department.

(iii) For a Class 1 permit modification, the permittee may elect to follow the procedures in (b) of this subsection for Class 2 modifications instead of the Class 1 procedures. The permittee must inform the department of this decision in the notice required in (b)(i) of this subsection.

(b) Class 2 modifications.

(i) For Class 2 modifications, listed in Appendix I of this section, the permittee must submit a modification request to the department that:

(A) Describes the exact change to be made to the permit conditions and supporting documents referenced by the permit;

(B) Identifies that the modification is a Class 2 modification;

(C) Explains why the modification is needed; and

(D) Provides the applicable information required by WAC 173-303-806(4), 173-303-807, and 173-303-808.

(ii) The permittee must send a notice of the modification request to all persons on the facility mailing list maintained by the department and to the appropriate units of state and local government as specified in WAC 173-303-840 (3)(e)(i)(E) and must publish this notice in a major local newspaper of general circulation. This notice must be mailed and published within seven days before or after the date of submission of the modification request, and the permittee must provide to the department evidence of the mailing and publication. The notice must include:

(A) Announcement of a sixty-day comment period, in accordance with (b)(v) of this subsection, and the name and address of a departmental contact to whom comments must be sent;

(B) Announcement of the date, time, and place for a public meeting held in accordance with (b)(iv) of this subsection;

(C) Name and telephone number of the permittee's contact person;

(D) Name and telephone number of a departmental contact person;

(E) Location where copies of the modification request and any supporting documents can be viewed and copied; and

(F) The following statement: "The permittee's compliance history during the life of the permit being modified is available from the department of ecology contact person."

(iii) The permittee must place a copy of the permit modification request and supporting documents in a location accessible to the public in the vicinity of the permitted facility.

(iv) The permittee must hold a public meeting no earlier than fifteen days after the publication of the notice required in (b)(ii) of this subsection and no later than fifteen days before the close of the sixty-day comment period. The meeting must be held to the extent practicable in the vicinity of the permitted facility.

(v) The public shall be provided sixty days to comment on the modification request. The comment period will begin on the date the permittee publishes the notice in the local newspaper. Comments should be submitted to the department of ecology contact identified in the public notice.

(vi)(A) No later than ninety days after receipt of the notification request, the department must:

(I) Approve the modification request, with or without changes, and modify the permit accordingly;

(II) Deny the request;

(III) Determine that the modification request must follow the procedures in (c) of this subsection for Class 3 modifications for the following reasons:

(AA) There is significant public concern about the proposed modification; or

(BB) The complex nature of the change requires the more extensive procedures of Class 3;

(IV) Approve the request, with or without changes, as a temporary authorization having a term of up to one hundred eighty days; or

(V) Notify the permittee that he or she will decide on the request within the next thirty days.

(B) If the department notifies the permittee of a thirty-day extension for a decision, the department must, no later than one hundred twenty days after receipt of the modification request:

(I) Approve the modification request, with or without changes, and modify the permit accordingly;

(II) Deny the request; or

(III) Determine that the modification request must follow the procedures in (c) of this subsection for Class 3 modifications for the following reasons:

(AA) There is significant public concern about the proposed modification; or

(BB) The complex nature of the change requires the more extensive procedures of Class 3.

(IV) Approve the request, with or without changes, as a temporary authorization having a term of up to one hundred eighty days.

(C) If the department fails to make one of the decisions specified in (b)(vi)(B) of this subsection by the one hundred twentieth day after receipt of the modification request, the permittee is automatically authorized to conduct the activities described in the modification request for up to one hundred eighty days, without formal departmental action. The authorized activities must be conducted as described in the permit modification request and must be in compliance with all appropriate standards of 40 CFR Part 265 (as referenced by WAC 173-303-400). If the department approves, with or without changes, or denies the modification request during the term of the temporary or automatic authorization provided for in (b)(vi)(A), (B), or (C) of this subsection, such action cancels the temporary or automatic authorization.

(D)(I) In the case of an automatic authorization under (b)(vi)(C) of this subsection, or a temporary authorization under (b)(vi)(A)(IV) or (B)(IV) of this subsection, if the department has not made a final approval or denial of the modification request by the date fifty days prior to the end of the temporary or automatic authorization, the permittee must within seven days of that time send a notification to persons on the facility mailing list, and make a reasonable effort to notify other persons who submitted written comments on the modification request, that:

(AA) The permittee has been authorized temporarily to conduct the activities described in the permit modification request; and

(BB) Unless the department acts to give final approval or denial of the request by the end of the authorization period, the permittee will receive authorization to conduct such activities for the life of the permit.

(II) If the owner/operator fails to notify the public by the date specified in (b)(vi)(D)(I) of this subsection, the effective date of the permanent authorization will be deferred until fifty days after the owner/operator notifies the public.

(E) Except as provided in (b)(vi)(G) of this subsection, if the department does not finally approve or deny a modification request before the end of the automatic or temporary authorization period or reclassify the modification as a Class 3, the permittee is authorized to conduct the activities described in the permit modification request for the life of the permit unless modified later under subsection (3) or (4) of this section. The activities authorized under this subsection (b)(vi)(E) must be conducted as described in the permit modification request and must be in compliance with all appropriate standards of 40 CFR Part 265 (as referenced by WAC 173-303-400).

(F) In making a decision to approve or deny a modification request, including a decision to issue a temporary authorization or to reclassify a modification as a Class 3, the department must consider all written comments submitted during the public comment period and must respond in writing to all significant comments in his or her decision.

(G) With the written consent of the permittee, the department may extend indefinitely or for a specified period the time periods for final approval or denial of a modification request or for reclassifying a modification as a Class 3.

(vii) The department may deny or change the terms of a Class 2 permit modification request under (b)(6)(i) through (iii) of this subsection for the following reasons:

(A) The modification request is incomplete;

(B) The requested modification does not comply with the appropriate requirements of WAC 173-303-283 through 173-303-395 and 173-303-600 through 173-303-680 or other applicable requirements; or

(C) The conditions of the modification fail to protect human health and the environment.

(viii) The permittee may perform any construction associated with a Class 2 permit modification request beginning sixty days after the submission of the request unless the department establishes a later date for commencing construction and informs the permittee in writing before day sixty.

(c) Class 3 modifications.

(i) For Class 3 modifications listed in Appendix I of this section, the permittee must submit a modification request to the department that:

(A) Describes the exact change to be made to the permit conditions and supporting documents referenced by the permit;

(B) Identifies that the modification is a Class 3 modification;

(C) Explains why the modification is needed; and

(D) Provides the applicable information required by WAC 173-303-806(4), 173-303-807, and 173-303-808.

(ii) The permittee must send a notice of the modification request to all persons on the facility mailing list maintained by the department and to the appropriate units of state and local government as specified in WAC 173-303-840 (3)(e)(i)(E) and must publish this notice in a major local newspaper of general circulation. This notice must be mailed and published within seven days before or after the date of submission of the modification request, and the permittee must provide to the department evidence of the mailing and publication. The notice must include:

(A) Announcement of a sixty-day comment period, and a name and address of an agency contact to whom comments must be sent;

(B) Announcement of the date, time, and place for a public meeting on the modification request, in accordance with (c)(4) of this subsection;

(C) Name and telephone number of the permittee's contact person;

(D) Name and telephone number of a departmental contact person;

(E) Location where copies of the modification request and any supporting documents can be viewed and copied; and

(F) The following statement: "The permittee's compliance history during the life of the permit being modified is available from the department of ecology contact person."

(iii) The permittee must place a copy of the permit modification request and supporting documents in a location accessible to the public in the vicinity of the permitted facility.

(iv) The permittee must hold a public meeting no earlier than fifteen days after the publication of the notice required in (c)(ii) of this subsection and no later than fifteen days before the close of the sixty-day comment period. The meeting must be held to the extent practicable in the vicinity of the permitted facility.

(v) The public shall be provided at least sixty days to comment on the modification request. The comment period

will begin on the date the permittee publishes the notice in the local newspaper. Comments should be submitted to the department of ecology contact identified in the notice.

(vi) After the conclusion of the sixty-day comment period, the department must grant or deny the permit modification request according to the permit modification procedures of WAC 173-303-840. In addition, the department must consider and respond to all significant written comments received during the sixty-day comment period.

(d) Other modifications.

(i) In the case of modifications not explicitly listed in Appendix I of this section, the permittee may submit a Class 3 modification request to the department, or he or she may request a determination by the department that the modification should be reviewed and approved as a Class 1 or Class 2 modification. If the permittee requests that the modification be classified as a Class 1 or 2 modification, he or she must provide the department with the necessary information to support the requested classification.

(ii) The department shall make the determination described in (d)(i) of this subsection as promptly as practicable. In determining the appropriate class for a specific modification, the department shall consider the similarity of the modification to other modifications codified in Appendix I and the following criteria:

(A) Class 1 modifications apply to minor changes that keep the permit current with routine changes to the facility or its operation. These changes do not substantially alter the permit conditions or reduce the capacity of the facility to protect human health or the environment. In the case of Class 1 modifications, the department may require prior approval.

(B) Class 2 modifications apply to changes that are necessary to enable a permittee to respond, in a timely manner, to:

(I) Common variations in the types and quantities of the wastes managed under the facility permit;

(II) Technological advancements; and

(III) Changes necessary to comply with new regulations, where these changes can be implemented without substantially changing design specifications or management practices in the permit.

(C) Class 3 modifications substantially alter the facility or its operation.

(e) Temporary authorizations.

(i) Upon request of the permittee, the department may, without prior public notice and comment, grant the permittee a temporary authorization in accordance with this subsection. Temporary authorizations must have a term of not more than one hundred eighty days.

(ii)(A) The permittee may request a temporary authorization for:

(I) Any Class 2 modification meeting the criteria in (e)(iii)(B) of this subsection; and

(II) Any Class 3 modification that meets the criteria in (e)(iii)(B)(I) or (II) of this subsection; or that meets the criteria in (e)(iii)(B)(III) through (V) of this subsection and provides improved management or treatment of a dangerous waste already listed in the facility permit.

(B) The temporary authorization request must include:

(I) A description of the activities to be conducted under the temporary authorization;

(II) An explanation of why the temporary authorization is necessary; and

(III) Sufficient information to ensure compliance with the standards in WAC 173-303-280 through 173-303-395 and 173-303-600 through 173-303-680.

(C) The permittee must send a notice about the temporary authorization request to all persons on the facility mailing list maintained by the department and to appropriate units of state and local governments as specified in WAC 173-303-840 (3)(e)(i)(E). This notification must be made within seven days of submission of the authorization request.

(iii) The department shall approve or deny the temporary authorization as quickly as practical. To issue a temporary authorization, the department must find:

(A) The authorized activities are in compliance with the standards of WAC 173-303-280 through 173-303-395 and 173-303-600 through 173-303-680.

(B) The temporary authorization is necessary to achieve one of the following objectives before action is likely to be taken on a modification request:

(I) To facilitate timely implementation of closure or corrective action activities;

(II) To allow treatment or storage in tanks or containers of restricted wastes in accordance with 40 CFR Part 268;

(III) To prevent disruption of ongoing waste management activities;

(IV) To enable the permittee to respond to sudden changes in the types or quantities of the wastes managed under the facility permit; or

(V) To facilitate other changes to protect human health and the environment.

(iv) A temporary authorization may be reissued for one additional term of up to one hundred eighty days provided that the permittee has requested a Class 2 or 3 permit modification for the activity covered in the temporary authorization, and:

(A) The reissued temporary authorization constitutes the department's decision on a Class 2 permit modification in accordance with (b)(vi)(A)(IV) or (B)(IV) of this subsection; or

(B) The department determines that the reissued temporary authorization involving a Class 3 permit modification request is warranted to allow the authorized activities to continue while the modification procedures of (c) of this subsection are conducted.

(f) Public notice and appeals of permit modification decisions.

(i) The department shall notify persons on the facility mailing list and appropriate units of state and local government within ten days of any decision under this section to grant or deny a Class 2 or 3 permit modification request. The department shall also notify such persons within ten days after an automatic authorization for a Class 2 modification goes into effect under (b)(vi)(C) or (E) of this subsection.

(ii) The department's decision to grant or deny a Class 2 or 3 permit modification request under this section may be appealed under the permit appeal procedures of WAC 173-303-845.

(iii) An automatic authorization that goes into effect under (b)(vi)(C) or (E) of this subsection may be appealed under the permit appeal procedures of WAC 173-303-845;

however, the permittee may continue to conduct the activities pursuant to the automatic authorization until the appeal has been granted pursuant to WAC 173-303-845, notwithstanding the provisions of WAC 173-303-840 (8)(b).

(g) Newly listed or identified wastes.

(i) The permittee is authorized to continue to manage wastes listed or identified as dangerous under WAC 173-303-070 if he or she:

(A) Was in existence as a dangerous waste facility with respect to the newly listed or identified waste on the effective date of the final rule listing or identifying the waste;

(B) Submits a Class 1 modification request on or before the date on which the waste becomes subject to the new requirements;

(C) Is in compliance with the standards of 40 CFR Part 265 (as referenced in WAC 173-303-400);

(D) In the case of Classes 2 and 3 modifications, also submits a complete permit modification request within one hundred eighty days after the effective date of the rule listing or identifying the waste; and

(E) In the case of land disposal units, certifies that such unit is in compliance with all applicable Part 265 ground water monitoring and financial responsibility requirements (as referenced in WAC 173-303-400) on the date twelve months after the effective date of the rule identifying or listing the waste as dangerous. If the owner or operator fails to clarify compliance with these requirements, he or she shall lose authority to operate under this section.

(ii) New wastes or units added to a facility's permit under this subsection do not constitute expansions for the purpose of the twenty-five percent capacity expansion limit for Class 2 modifications.

(h) Permit modification list. The department must maintain a list of all approved permit modifications and must publish a notice once a year in a state-wide newspaper that an updated list is available for review.

APPENDIX I

Modifications

Class

A. General Permit Provisions

1. Administrative and informational changes 1
2. Correction of typographical errors 1
3. Equipment replacement or upgrading with functionally equivalent components (e.g., pipes, valves, pumps, conveyors, controls) 1
4. Changes in the frequency of or procedures for monitoring, reporting, sampling, or maintenance activities by the permittee:
a. To provide for more frequent monitoring, reporting, sampling, or maintenance 1
b. Other changes 2
5. Schedule of compliance:
a. Changes in interim compliance dates, with prior approval of the Director 11
b. Extension of final compliance date 3
6. Changes in expiration date of permit to allow earlier permit termination, with prior approval of the Director 11

7. Changes in ownership or operational control of a facility, provided the procedures of subsection (2)(b) of this section are followed 11
B. General Facility Standards
1. Changes to waste sampling or analysis methods:
a. To conform with agency guidance or regulations 1
b. Other changes 2
2. Changes to analytical quality assurance/control plan:
a. To conform with agency guidance or regulations 1
b. Other changes 2
3. Changes in procedures for maintaining the operating record 1
4. Changes in frequency or content of inspection schedules 2
5. Changes in the training plan:
a. That affect the type or decrease the amount of training given to employees 2
b. Other changes 1
6. Contingency plan:
a. Changes in emergency procedures (i.e., spill or release response procedures) 2
b. Replacement with functionally equivalent equipment, upgrade, or relocate emergency equipment listed 1
c. Removal of equipment from emergency equipment list 2
d. Changes in name, address, or phone number of coordinators or other persons or agencies identified in the plan 1

Note: When a permit modification (such as introduction of a new unit) requires a change in facility plans or other general facility standards, that change shall be reviewed under the same procedures as the permit modification.

C. Ground Water Protection

1. Changes to wells:
a. Changes in the number, location, depth, or design of upgradient or downgradient wells of permitted ground water monitoring system 2
b. Replacement of an existing well that has been damaged or rendered inoperable, without change to location, design, or depth of the well 1
2. Changes in ground water sampling or analysis procedures or monitoring schedule, with prior approval of the Director 11
3. Changes in statistical procedure for determining whether a statistically significant change in ground water quality between upgradient and downgradient wells has occurred, with prior approval of the Director 11
4. Changes in point of compliance 12
5. Changes in indicator parameters, hazardous constituents, or concentration limits (including ACLs):
a. As specified in the ground water protection standard 3
b. As specified in the detection monitoring program 2
6. Changes to a detection monitoring program as required by WAC 173-303-645 (9)(j), unless otherwise specified in this appendix 2

7. Compliance monitoring program:

- a. Addition of compliance monitoring program as required by WAC 173-303-645 (9)(h)(iv) and (10) 3
- b. Changes to a compliance monitoring program as required by WAC 173-303-645 (10)(k), unless otherwise specified in this appendix 2

8. Corrective action program:

- a. Addition of a corrective action program as required by WAC 173-303-645 (10)(i)(ii) and (11) 3
- b. Changes to a corrective action program as required by WAC 173-303-645 (11)(h), unless otherwise specified in this appendix 2

D. Closure

- 1. Changes to the closure plan:
 - a. Changes in estimate of maximum extent of operations or maximum inventory of waste on-site at any time during the active life of the facility, with prior approval of the Director 11
 - b. Changes in the closure schedule for any unit, changes in the final closure schedule for the facility, or extension of the closure period, with prior approval of the Director 11
 - c. Changes in the expected year of final closure, where other permit conditions are not changed, with prior approval of the Director 11
 - d. Changes in procedures for decontamination of facility equipment or structures, with prior approval of the Director 11
 - e. Changes in approved closure plan resulting from unexpected events occurring during partial or final closure, unless otherwise specified in this appendix 2
 - f. Extension of the closure period to allow a landfill, surface impoundment, or land treatment unit to receive nondangerous wastes after final receipt of dangerous wastes under WAC 173-303-610 (4)(d) and (e) 2
- 2. Creation of a new landfill unit as part of closure 3
- 3. Addition of the following new units to be used temporarily for closure activities:
 - a. Surface impoundments 3
 - b. Incinerators 3
 - c. Waste piles that do not comply with WAC 173-303-660 (1)(c) 3
 - d. Waste piles that comply with WAC 173-303-660 (1)(c) 2
 - e. Tanks or containers (other than specified below) 2
 - f. Tanks used for neutralization, dewatering, phase separation, or component separation, with prior approval of the Director 11

E. Post-Closure

- 1. Changes in name, address, or phone number of contact in post-closure plan 1
- 2. Extension of post-closure care period 2
- 3. Reduction in the post-closure care period 3
- 4. Changes to the expected year of final closure, where other permit conditions are not changed 1
- 5. Changes in post-closure plan necessitated by events occurring during the active life of the facility, including partial and final closure 2

F. Containers

- 1. Modification or addition of container units:
 - a. Resulting in greater than 25% increase in the facility's container storage capacity, except as provided in F(1)(c) and F(4)(a) below 3
 - b. Resulting in up to 25% increase in the facility's container storage capacity, except as provided in F(1)(c) and F(4)(a) below 2
 - c. Or treatment processes necessary to treat wastes that are restricted from land disposal to meet some or all of the applicable treatment standards or to treat wastes to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in 40 CFR 268.8(a)(2)(ii), with prior approval of the department. This modification may also involve addition of new waste codes or narrative descriptions of wastes. It is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 11
- 2:
 - a. Modification of a container unit without increasing the capacity of the unit 2
 - b. Addition of a roof to a container unit without alteration of the containment system 1
- 3. Storage of different wastes in containers:
 - a. That require additional or different management practices from those authorized in the permit, except as provided in F(4) below 3
 - b. That do not require additional or different management practices from those authorized in the permit 2

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

- 4. Storage of treatment of different wastes in containers:
 - a. That require addition of units or change in treatment process or management standards, provided that the wastes are restricted from land disposal and are to be treated to meet some or all of the applicable treatment standards, or that are to be treated to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in 40 CFR 268.8(a)(2)(ii). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 1
 - b. That do not require the addition of units or a change in the treatment process or management standards, and provided that the units have previously received wastes of the same type (e.g., incinerator scrubber water). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 11

G. Tanks

- 1:
 - a. Modification or addition of tank units resulting in greater than 25% increase in the facility's tank capacity, except as provided in G(1)(c), G(1)(d), and G(1)(e) below 3
 - b. Modification or addition of tank units resulting in up to 25% increase in the facility's tank capacity, except as provided in G(1)(d) and G(1)(e) below 2
 - c. Addition of a new tank that will operate for more than 90 days using any of the following physical or chemical

treatment technologies: neutralization, dewatering, phase separation, or component separation 2

d. After prior approval of the department, addition of a new tank that will operate for up to 90 days using any of the following physical or chemical treatment technologies: neutralization, dewatering, phase separation, or component separation 11

e. Modification or addition of tank units or treatment processes necessary to treat wastes that are restricted from land disposal to meet some or all of the applicable treatment standards or to treat wastes to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in 40 CFR 268.8(a)(2)(ii), with prior approval of the department. This modification may also involve addition of new waste codes. It is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 11

2. Modification of a tank unit or secondary containment system without increasing the capacity of the unit 2

3. Replacement of a tank with a tank that meets the same design standards and has a capacity within +/- 10% of the replaced tank provided 1

-The capacity difference is no more than 1500 gallons,
-The facility's permitted tank capacity is not increased, and

-The replacement tank meets the same conditions in the permit.

4. Modification of a tank management practice . . . 2

5. Management of different wastes in tanks:

a. That require additional or different management practices, tank design, different fire protection specifications, or significantly different tank treatment process from that authorized in the permit, except as provided in G(5)(c) below 3

b. That do not require additional or different management practices, tank design, different fire protection specifications, or significantly different tank treatment process than authorized in the permit, except as provided in G(5)(d) 2

c. That require addition of units or change in treatment processes or management standards, provided that the wastes are restricted from land disposal and are to be treated to meet some or all of the applicable treatment standards or that are to be treated to satisfy (in whole or in part) the standard of "use of practically available technology that yields the greatest environmental benefit" contained in 40 CFR 268.8(a)(2)(ii). The modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 11

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

H. Surface Impoundments

1. Modification or addition of surface impoundment units that result in increasing the facility's surface impoundment storage or treatment capacity 3

2. Replacement of a surface impoundment unit . . . 3

3. Modification of a surface impoundment unit without increasing the facility's surface impoundment storage or treatment capacity and without modifying the unit's liner, leak detection system, or leachate collection system . . . 2

4. Modification of a surface impoundment management practice 2

5. Treatment, storage, or disposal of different wastes in surface impoundments:

a. That require additional or different management practices or different design of the liner or leak detection system than authorized in the permit 3

b. That do not require additional or different management practices or different design of the liner or leak detection system than authorized in the permit 2

c. That are wastes restricted from land disposal that meet the applicable treatment standards or that are treated to satisfy the standard of "use of practically available technology that yields the greatest environmental benefit" contained in 40 CFR 268.8(a)(2)(ii), and provided that the unit meets the minimum technological requirements stated in 40 CFR 268.5(h)(2). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 1

d. That are residues from wastewater treatment or incineration, provided that disposal occurs in a unit that meets the minimum technological requirements stated in 40 CFR 268.5(h)(2), and provided further that the surface impoundment has previously received wastes of the same type (for example, incinerator scrubber water). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 1

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

I. Enclosed Waste Piles. For all waste piles except those complying with WAC 173-303-660 (1)(c), modifications are treated the same as for a landfill. The following modifications are applicable only to waste piles complying with WAC 173-303-660 (1)(c).

1. Modification or addition of waste pile units:

a. Resulting in greater than 25% increase in the facility's waste pile storage or treatment capacity 3

b. Resulting in up to 25% increase in the facility's waste pile storage or treatment capacity 2

2. Modification of waste pile unit without increasing the capacity of the unit 2

3. Replacement of a waste pile unit with another waste pile unit of the same design and capacity and meeting all waste pile conditions in the permit 1

4. Modification of a waste pile management practice 2

5. Storage or treatment of different wastes in waste piles:

a. That require additional or different management practices or different design of the unit 3

b. That do not require additional or different management practices or different design of the unit 2

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

J. Landfills and Unenclosed Waste Piles

1. Modification or addition of landfill units that result in increasing the facility's disposal capacity 3

2. Replacement of a landfill 3

3. Addition or modification of a liner, leachate collection system, leachate detection system, run-off control, or final cover system 3

4. Modification of a landfill unit without changing a liner, leachate collection system, leachate detection system, run-off control, or final cover system 2

5. Modification of a landfill management practice 2

6. Landfill different wastes:

 a. That require additional or different management practices, different design of the liner, leachate collection system, or leachate detection system 3

 b. That do not require additional or different management practices, different design of the liner, leachate collection system, or leachate detection system 2

 c. That are wastes restricted from land disposal that meet the applicable treatment standards or that are treated to satisfy the standard of "use of practically available technology that yields the greatest environmental benefit" contained in 40 CFR 268.8(a)(2)(ii), and provided that the landfill unit meets the minimum technological requirements stated in 40 CFR 268.5(h)(2). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 1

 d. That are residues from wastewater treatment or incineration, provided that disposal occurs in a landfill unit that meets the minimum technological requirements stated in 40 CFR 268.5(h)(2), and provided further that the landfill has previously received wastes of the same type (for example, incinerator ash). This modification is not applicable to dioxin-containing wastes (F020, 021, 022, 023, 026, 027, and 028) 1

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

K. Land Treatment

1. Lateral expansion of or other modification of a land treatment unit to increase areal extent 3

2. Modification of run-on control system 2

3. Modify run-off control system 3

4. Other modifications of land treatment unit component specifications or standards required in permit 2

5. Management of different wastes in land treatment units:

 a. That require a change in permit operating conditions or unit design specifications 3

 b. That do not require a change in permit operating conditions or unit design specifications 2

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

6. Modification of a land treatment unit management practice to:

 a. Increase rate or change method of waste application

 b. Decrease rate of waste application 2

7. Modification of a land treatment unit management practice to change measures of pH or moisture content, or to enhance microbial or chemical reactions 2

8. Modification of a land treatment unit management practice to grow food chain crops, to add to or replace existing permitted crops with different food chain crops, or to modify operating plans for distribution of animal feeds resulting from such crops 3

9. Modification of operating practice due to detection of releases from the land treatment unit pursuant to WAC 173-303-655 (6)(g)(ii) 3

10. Changes in the unsaturated zone monitoring system, resulting in a change to the location, depth, number of sampling points, or replace unsaturated zone monitoring

devices or components of devices with devices or components that have specifications different from permit requirements 3

11. Changes in the unsaturated zone monitoring system that do not result in a change to the location, depth, number of sampling points, or that replace unsaturated zone monitoring devices or components of devices with devices or components having specifications different from permit requirements 2

12. Changes in background values for hazardous constituents in soil and soil-pore liquid 2

13. Changes in sampling, analysis, or statistical procedure 2

14. Changes in land treatment demonstration program prior to or during the demonstration 2

15. Changes in any condition specified in the permit for a land treatment unit to reflect results of the land treatment demonstration, provided performance standards are met, and the Director's prior approval has been received 2

16. Changes to allow a second land treatment demonstration to be conducted when the results of the first demonstration have not shown the conditions under which the wastes can be treated completely, provided the conditions for the second demonstration are substantially the same as the conditions for the first demonstration and have received the prior approval of the Director 2

17. Changes to allow a second land treatment demonstration to be conducted when the results of the first demonstration have not shown the conditions under which the wastes can be treated completely, where the conditions for the second demonstration are not substantially the same as the conditions for the first demonstration 3

18. Changes in vegetative cover requirements for closure 2

L. Incinerators

1. Changes to increase by more than 25% any of the following limits authorized in the permit: A thermal feed rate limit, a waste feed rate limit, or an organic chlorine feed rate limit. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means 3

2. Changes to increase by up to 25% any of the following limits authorized in the permit: A thermal feed rate limit, a waste feed limit, or an organic chlorine feed rate limit. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means 2

3. Modification of an incinerator unit by changing the internal size or geometry of the primary or secondary combustion units, by adding a primary or secondary combustion unit, by substantially changing the design of any component used to remove HCl or particulate from the combustion gases, or by changing other features of the incinerator that could affect its capability to meet the regulatory performance standards. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means 3

4. Modification of an incinerator unit in a manner that would not likely affect the capability of the unit to meet the

regulatory performance standards but which would change the operating conditions or monitoring requirements specified in the permit. The Director may require a new trial burn to demonstrate compliance with the regulatory performance standards 2

5. Operating requirements:

a. Modification of the limits specified in the permit for minimum combustion gas temperature, minimum combustion gas residence time, or oxygen concentration in the secondary combustion chamber. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means 3

b. Modification of any stack gas emission limits specified in the permit, or modification of any conditions in the permit concerning emergency shutdown or automatic waste feed cutoff procedures or controls 3

c. Modification of any other operating condition or any inspection or recordkeeping requirement specified in the permit 2

6. Incineration of different wastes:

a. If the waste contains a POHC that is more difficult to incinerate than authorized by the permit or if incineration of the waste requires compliance with different regulatory performance standards than specified in the permit. The Director will require a new trial burn to substantiate compliance with the regulatory performance standards unless this demonstration can be made through other means 3

b. If the waste does not contain a POHC that is more difficult to incinerate than authorized by the permit and if incineration of the waste does not require compliance with different regulatory performance standards than specified in the permit 2

Note: See (g) of this subsection for modification procedures to be used for the management of newly listed or identified wastes.

7. Shakedown and trial burn:

a. Modification of the trial burn plan or any of the permit conditions applicable during the shakedown period for determining operational readiness after construction, the trial burn period, or the period immediately following the trial burn 2

b. Authorization of up to an additional 720 hours of waste incineration during the shakedown period for determining operational readiness after construction, with the prior approval of the Director 11

c. Changes in the operating requirements set in the permit for conducting a trial burn, provided the change is minor and has received the prior approval of the Director 11

d. Changes in the ranges of the operating requirements set in the permit to reflect the results of the trial burn, provided the change is minor and has received the prior approval of the Director 11

8. Substitution of an alternate type of fuel that is not specified in the permit 1

¹ Class 1 modifications requiring prior Agency approval.

(5) Permit termination. The department shall follow the applicable procedures in WAC 173-303-840, procedures for decision making, in terminating any permit. The following are causes for terminating a permit during its term or for denying a permit renewal application:

(a) Noncompliance by the permittee with any condition of the permit;

(b) The permittee's failure in the application or during the permit issuance process to disclose fully all relevant facts, or the permittee's misrepresentation of any relevant facts at any time; or

(c) A determination that the permitted activity endangers public health or the environment and can only be regulated to acceptable levels by permit modification or termination.

(6) Schedules of compliance.

(a) General. The permit may, when appropriate, specify a schedule of compliance leading to compliance with chapter 173-303 WAC.

(b) Time for compliance. Any schedules of compliance under this section shall require compliance as soon as possible.

(c) Interim dates. If a permit establishes a schedule of compliance which exceeds one year from the date of permit issuance, the schedule shall set forth interim requirements and the dates for their achievement as follows;

(i) The time between interim dates shall not exceed one year; or

(ii) If the time necessary for completion of any interim requirement (such as the construction of a control facility) is more than one year and is not readily divisible into stages for completion, the permit shall specify interim dates for the submission of reports of progress toward completion of the interim requirements and indicate a projected completion date.

(d) Reporting. The permit shall be written to require that no later than fourteen days following each interim date and the final date of compliance, the permittee shall notify the department in writing of its compliance or noncompliance with the interim or final requirements.

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-830, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-830, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-830, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-830, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-830, filed 2/10/82.]

WAC 173-303-840 Procedures for decision making.

(1) Application and completeness.

(a) The department will not begin the processing of a permit until the applicant has fully complied with the application requirements for the permit. Permit applications must comply with the signature and certification requirements of WAC 173-303-810 (12) and (13).

(b) The department shall review for completeness each application for a permit under this chapter. Each application for a permit should be reviewed for completeness within sixty days of its receipt. Upon completing the review, the department shall notify the applicant in writing whether or not the application is complete. If the application is incomplete, the department shall list the information necessary to

make the application complete, and shall specify in the notice of deficiency a date for submitting the necessary information. After the application is completed, the department may request additional information from an applicant but only when necessary to clarify, modify, or supplement previously submitted material. Requests for such additional information will not render an application incomplete.

(c) If an applicant fails or refuses to correct deficiencies in the application, the permit may be denied and appropriate enforcement actions may be taken under chapter 70.105 RCW.

(d) If the department decides that a site visit is necessary for any reason in conjunction with the processing of an application, then the department shall notify the applicant and a date shall be scheduled.

(e) The effective date of an application is the date on which the department notifies the applicant that the application is complete as provided in (b) of this subsection.

(2) Draft permits.

(a) A draft permit is a document prepared by the department indicating the tentative decision to issue, deny, modify, revoke and reissue, or terminate a permit.

(b) When an application is completed, the department shall tentatively decide whether to prepare a draft permit, or to deny the application.

(c) If the department tentatively decides to deny the permit application, then the department shall issue a notice of intent to deny. A notice of intent to deny the permit application is a type of draft permit which follows the same procedures as any draft permit prepared under this subsection. If the department's final decision is that the tentative decision to deny was incorrect, then the department shall withdraw the notice of intent to deny and proceed to prepare a draft permit under this subsection.

(d) If the department decides to prepare a draft permit, it shall contain the following information:

(i) All conditions applicable to permits under WAC 173-303-810;

(ii) Applicable conditions under WAC 173-303-830; and

(iii) All applicable standards for storage, treatment and disposal, and other permit conditions.

(e) All draft permits must be accompanied by a fact sheet that is supported by administrative record and made available for public comment.

(f) Fact sheet; statement of basis.

(i) A fact sheet shall be prepared for every draft permit for a major dangerous waste management facility, and for every draft permit which the department finds is the subject of wide-spread public interest or raises major issues.

(ii) The fact sheet shall briefly set forth the principal facts and the significant factual, legal, methodological, and policy questions considered in preparing the draft permit. The department shall send this fact sheet to the applicant and, on request, to any other person.

(iii) The fact sheet shall include, when applicable:

(A) A brief description of the type of facility or activity which is the subject of the draft permit;

(B) The type and quantity of wastes, fluids, or pollutants which are proposed to be or are being treated, stored, disposed, injected, emitted, or discharged;

(C) A brief summary of the basis for the draft permit conditions including supporting references;

(D) Reasons why any requested variances or alternatives to required standards do or do not appear justified; and

(E) A description of the procedures for reaching a final decision on the draft permit including:

(I) The beginning and ending dates of the comment period and the address where comments will be received;

(II) Procedures for requesting a hearing and the nature of that hearing;

(III) Any other procedures by which the public may participate in the final decision; and

(IV) Name and telephone number of a person to contact for additional information.

(iv) The department shall prepare a statement of basis for every draft permit for which a fact sheet is not prepared. The statement of basis shall briefly describe the derivation of the conditions of the draft permit and the reasons for them or, in the case of notices of intent to deny or terminate, reasons supporting the tentative decision. The statement of basis shall be sent to the applicant and, on request, to any other person.

(3) Public notice and involvement.

(a) The department shall give public notice that the following actions have occurred:

(i) A draft permit has been prepared or an application is tentatively being denied;

(ii) A hearing on a permit has been scheduled; or

(iii) An appeal on a permit has been filed with the pollution control hearings board.

(b) No public notice is required when a request for permit modification, revocation and reissuance, or termination is denied. A written notice of the denial shall be given to the person who requested the permit change and to the permittee.

(c) The public notice may describe more than one permit or permit action.

(d) Public notice of the preparation of a draft permit, including a notice of intent to deny a permit application shall allow at least forty-five days for public comment. Public notice of a public hearing shall be given at least thirty days before the hearing.

(e) Public notice of activities described in this subsection shall be given by the following methods:

(i) By mailing a copy of a notice to the following persons (any person otherwise entitled to receive notice under this paragraph may waive his or her rights to receive notice for any classes and categories of permits):

(A) The applicant;

(B) Any other agency which the department knows has issued or is required to issue a permit for the same activity or facility;

(C) Federal and state agencies with jurisdiction over fish, shellfish, and wildlife resources and over coastal zone management plans, the advisory council on historic preservation, state historic preservation officers, and other appropriate government authorities, including any affected states;

(D) Persons on the mailing list developed by:

(I) Including those who request in writing to be on the list;

(II) Soliciting persons for an area list from participants in past permit proceedings in that area; and

(III) Notifying the public of the opportunity to be put on the mailing list through periodic publications in the public press and in appropriate publications of the department;

(E) Any unit of local government having jurisdiction over the area where the facility is proposed to be located, and each state agency having any authority under state law with respect to construction or operation of such facility;

(ii) For major permits, by publication of a notice in a daily or weekly newspaper within the area affected by the facility;

(iii) For all permits, by publication of notice in a daily or weekly major local newspaper of general circulation, and local radio broadcast of the public notice; and

(iv) By any other method reasonably calculated to give notice of the action in question to the persons potentially affected by it, including press releases or any other forum or medium to elicit public participation.

(4) Contents of the public notice.

(a) All public notices issued shall contain the following minimum information:

(i) Name and address of the office processing the permit action for which notice is being given;

(ii) Name and address of the permittee or permit applicant and, if different, of the facility or activity regulated by the permit;

(iii) A brief description of the business conducted at the facility or activity described in the permit application or the draft permit;

(iv) Name, address, and telephone number of a person from whom interested persons may obtain further information, including copies of the draft permit, fact sheet or statement of basis, and the application;

(v) A brief description of the comment procedures and the time and place of any hearing that will be held, including a statement of procedures to request a hearing (unless a hearing has already been scheduled) and other procedures by which the public may participate in the final permit decision;

(vi) And any additional information considered necessary or proper.

(b) In addition to the general public notice described in (a) of this subsection, public notice of a hearing under subsection (5) of this section shall contain the following information:

(i) Date, time, and place of the hearing;

(ii) Reference to the date of the previous public notice relating to the permit; and

(iii) A brief description of the nature and purpose of the hearing including the applicable rules and procedures.

(c) In addition to the general public notice all persons identified in WAC 173-303-840 (3)(e)(i)(A), (B), and (C) shall be mailed a copy of the fact sheet, the permit application (if any), and the draft permit (if any).

(d) Public comments and request for public hearings. During the public comment period any interested person may submit written comments on the draft permit and may request a public hearing, if no hearing has already been scheduled. A request for a public hearing shall be in writing and shall state the nature of the issues proposed to be raised in the hearing. All comments shall be considered in making the final decision and shall be answered according to WAC 173-303-840(9).

(5) Public hearings.

(a) The department shall hold a public hearing whenever, on the basis of requests, there is a significant degree of public interest in a draft permit or there is written notice of opposition and the director receives a request for a hearing during the forty-five day comment period. The department also may hold a public hearing at its discretion, whenever, for instance, such a hearing might clarify one or more issues involved in the permit decision. Public notice of the hearing shall be given as specified in WAC 173-303-840(3). Whenever possible, the department shall schedule a public hearing under this subsection at a location convenient to the nearest population center to the proposed facility.

(b) Any person may submit oral or written statements and data concerning the draft permit. Reasonable limits may be set upon the time allowed for oral statements, and the submission of statements in writing may be required. The public comment period under WAC 173-303-840(3) shall automatically be extended to the close of any public hearing under this subsection. The hearing officer may also extend the comment period by so stating at the hearing.

(c) A tape recording or written transcript of the hearing shall be made available to the public.

(6) Obligation to raise issues and provide information during the public comment period.

(a) All persons, including applicants, who believe any condition of a draft permit is inappropriate, or that the department's tentative decision to deny an application, terminate a permit, or prepare a draft permit is inappropriate, must raise all reasonably ascertainable issues and submit all reasonably available arguments and factual grounds supporting their position, including all supporting material, by the close of the public comment period (including any public hearing) under WAC 173-303-840(3).

(b) All supporting materials shall be included in full and may not be incorporated by reference, unless they are already part of the administrative record in the same proceeding, or consist of state or federal statutes and regulations, documents of general applicability, or other generally available reference materials. Commenters shall make supporting material not already included in the administrative record available to the department. A comment period longer than thirty days will often be necessary in complicated proceedings to give commenters a reasonable opportunity to comply with the requirements of this subsection. Commenters may request a longer comment period.

(7) Reopening of the public comment period. If any data, information, or arguments submitted during the public comment period, including information or arguments required under subsection (6) of this section, appear to raise substantial new questions concerning a permit, the department may take one or more of the following actions:

(a) Prepare a new draft permit, appropriately modified;

(b) Prepare a revised statement of basis, a fact sheet or revised fact sheet, and reopen the comment period; or

(c) Reopen or extend the comment period to give interested persons an opportunity to comment on the information or arguments submitted.

Comments filed during the reopened comment period shall be limited to the substantial new questions that caused its reopening. The public notice shall define the scope of the reopening.

(8) Issuance and effective date of permit.

(a) After the close of the public comment period under WAC 173-303-840(5) on a draft permit, the department shall issue a final permit decision. The department shall notify the applicant and each person who has submitted written comments or requested notice of the final permit decision. For purposes of this section, a final permit means a final decision to issue, deny, modify, revoke and reissue, or terminate a permit.

(b) A final permit decision shall become effective thirty days after the service of notice of the decision, unless:

(i) A later effective date is specified in the decision; or

(ii) No comments requested a change in the draft permit, in which case the permit shall become effective immediately upon issuance.

(9) Response to comments. At the time that any final permit is issued, the department shall issue a response to comments. This response shall specify which provisions, if any, of the draft permit have been changed in the final permit decision and the reason for the change, and briefly describe and respond to all significant comments of the draft permit raised during the public comment period or during any hearing. The response to comments shall be available to the public.

(10) Decision-making procedure for modification, revocation and reissuance, or termination of permits.

(a) Permits may be modified, revoked and reissued, or terminated either at the request of any interested person (including the permittee) or upon the department's initiative. However, permits may only be modified or revoked and reissued for the reasons specified in WAC 173-303-830 (3) and (4), or terminated for the reasons specified in WAC 173-303-805 or 173-303-806. All requests shall be in writing and shall contain facts or reasons supporting the request.

(b) If the department tentatively decides to modify or revoke and reissue a permit under WAC 173-303-830(3), it shall prepare the draft permit under WAC 173-303-840(2), incorporating the proposed changes. The department may request additional information and, in the case of a modified permit, may require the submission of an updated permit application. In the case of revoked and reissued permits, the department shall require the submission of a new application.

(c) In a permit modification under this section, only those conditions to be modified shall be reopened when a new draft permit is prepared. All other aspects of the existing permit shall remain in effect for the duration of the unmodified permit. When a permit is revoked and reissued under this section, the entire permit is reopened just as if the permit had expired and was being reissued. During any revocation and reissuance proceeding the permittee shall comply with all conditions of the existing permit until a new final permit is reissued.

(d) "Minor modifications" as defined in WAC 173-303-830(4) are not subject to the requirements of this section.

(e) If the department tentatively decides to terminate an interim status permit under WAC 173-303-805 or a final permit under WAC 173-303-806, it shall issue a notice of intent to terminate. A notice of intent to terminate is a type of draft permit which follows the same procedures as any draft permit prepared under WAC 173-303-840(2).

[Statutory Authority: Chapter 70.105 RCW. 84-14-031 (Order DE 84-22), § 173-303-840, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW

and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-840, filed 2/10/82.]

WAC 173-303-845 Appeal of decision. Any person who is adversely affected by a decision of the department under chapter 173-303 WAC may appeal the decision to the pollution control hearings board pursuant to chapter 43.21B RCW.

[Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-845, filed 2/10/82.]

WAC 173-303-900 Public involvement and participation. (1) Intent. Public involvement and participation plays a significant role in the decision making process. The department intends to foster public awareness, information and consultation, and to respond actively to public concerns. The department will inform the public of major issues, proposed projects, and regulatory changes, and will consult interested and affected segments of the public before making important decisions. The overall goal of the department is to provide knowledge to the public about dangerous waste issues that vitally affect the state, to encourage broader understanding of the public role in dangerous wastes and their proper management, and to promote an open dialogue between the public, industry, and government.

(2) Applicable requirements. In fulfilling the intent of public involvement and participation in the decision making process, the department will refer to and, where applicable, follow the requirements and guidance set forth in the following:

(a) Chapter 34.04 RCW, Administrative Procedure Act;

(b) Chapter 34.08 RCW, Washington State Register Act of 1977;

(c) Chapter 42.17 RCW, Public Records Act;

(d) Chapter 197-10 WAC, Guidelines Interpreting and Implementing the State Environmental Policy Act;

(e) 40 CFR Part 25, Public Participation in Programs Under the Resource Conservation and Recovery Act, the Safe Drinking Water Act, and the Clean Water Act; and

(f) The Washington state solid waste management plan, December 1980.

[Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-900, filed 2/10/82.]

WAC 173-303-902 Citizen/proponent negotiations.

(1) Intent and purpose. Successful siting of dangerous waste management facilities depends on public confidence, which requires affected communities to have opportunities to meet with owners/operators of proposed dangerous waste management facilities to resolve concerns about such facilities. RCW 70.105.260 authorizes the department to specify a procedure for conflict resolution activities for dangerous waste management facility proponents, host communities, citizens and citizen groups, and to expend funds to support such activities. The purpose of this section is to set forth a procedure for negotiations between affected communities and the proponent of a facility, and the eligibility criteria for financial assistance.

(2) Applicability.

(a) This section applies to local governments and citizens potentially affected by the siting and permitting of

a dangerous waste management facility, owners and operators of proposed facilities, and owners and operators of facilities for which interim or final status permit applications have been submitted to the department prior to the effective date of this section. This section also applies to existing facilities with interim or final status for which the department receives an application for expansion. This section only applies to the expanded portion of the existing facility.

(b) A modified citizen/proponent negotiations (CPN) process shall apply to lead local governments who are also proponents of the facility.

(c) This section does not apply to owners/operators of facilities or portions of facilities applying for research, development and demonstration permits, pursuant to section 3005(g) of the Resource Conservation and Recovery Act, codified in 40 CFR Part 270.65. In addition, this section does not apply to mobile facilities for on-site cleanup at treatment, storage, or disposal facilities undergoing closure, facilities operating under an emergency permit pursuant to WAC 173-303-804, or facilities for on-site cleanup of sites under the Comprehensive Environmental Response, Compensation, and Liability Act, or chapters 70.105, 90.48 RCW, and The Model Toxics Control Act.

(3) Relationship to other legislation and administrative rules.

(a) The lead local government receiving a grant under this section, shall comply fully with all applicable federal, state, and local laws, orders, regulations, and permits.

(b) Nothing in this section shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to dangerous waste management and disposal.

(c) All grants under this section shall be subject to all existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

(4) Definitions. As used in this section:

(a) "Citizen/proponent negotiations (CPN)" means a communication process, as specified in these regulations and associated guidelines, between the proponent of a dangerous waste management facility and potentially affected citizens, to reach an agreement when there are shared and opposing interests.

(b) "Designated zone facility" means any facility that requires an interim or final status permit, located in a land use zone designated for handling hazardous substances and hazardous waste, and is not a preempted facility as defined in this section.

(c) "Environmental impact statement (EIS)" means an environmental document prepared according to the State Environmental Policy Act (SEPA), that provides decision makers and the public with an impartial discussion of probable significant environmental impacts, reasonable alternatives, and mitigation measures that would avoid impacts, minimize adverse impacts, or enhance environmental quality.

(d) "Existing facility," as defined by WAC 173-303-281, means a facility for which an interim or final status permit has been issued by the department pursuant to WAC 173-303-805 or 173-303-806.

(e) "Expansion," as defined by WAC 173-303-281, means the enlargement of the land surface area of an existing facility from that described in an interim status

permit, the addition of a new dangerous waste management process, or an increase in the overall design capacity of existing dangerous waste management processes at a facility. However, a process or equipment change within the existing handling code (not to include "other") as defined under WAC 173-303-380 (2)(d) will not be considered a new dangerous waste management process.

(f) "Facilitator" means one who assists at a meeting or group discussion.

(g) "Grant applicant" means the lead local government requesting a citizen/proponent negotiations grant.

(h) "Lead local government" means the city or county in which all or a majority of the proposed dangerous waste management facility would be located, unless the lead local government is a proponent of the project.

(i) "Local negotiating committee" means a committee, appointed by the lead local government, whose membership consists of broad representation from city and county government, citizen groups, academia, business, industry, Indian tribes, and environmental groups potentially affected by the siting of a dangerous waste management facility.

(j) "Mediator" means a neutral person who is accepted voluntarily by opposing parties in a dispute to assist in reaching a settlement.

(k) "Notice of intent," as specified in WAC 173-303-281, means the notice provided by the owner/operator of a facility to the department, local communities, and the public stating that the siting of a dangerous waste management facility, or the expansion of an existing facility, is being considered.

(l) "Neutral convener" means a nonpartisan person hired by the lead local government to convene and preside over the official public meeting.

(m) "Preempted facility" means any facility that includes as a significant part of its activities any of the following operations: (i) Landfill, (ii) incineration, (iii) land treatment, (iv) surface impoundment to be closed as a landfill, or (v) waste pile to be closed as a landfill.

Local jurisdictions who fail to establish designated land use zones for handling hazardous substances and hazardous waste within eighteen months after the enactment of siting criteria in accordance with RCW 70.105.210 shall be subject to preemptive provisions until such time as zone designations are completed and approved by the department.

(n) "Potentially affected area" means the area within a twenty-mile radius of a proposed dangerous waste management facility or a proposed expansion to an existing facility or, any area of impact larger or smaller than the twenty-mile radius as determined by the department.

(o) "Proponent" means any person applying to the department for a dangerous waste management facility permit or for the expansion of an existing permit under WAC 173-303-805 or 173-303-806.

(p) "Proposed facility" means a facility that does not have interim or final status on the effective date of this section, and for which the owner/operator applies for an interim or final status permit under WAC 173-303-805 or 173-303-806 after the effective date of this section.

(q) "SEPA" means the State Environmental Policy Act, chapter 43.21C RCW, and SEPA rules, chapter 197-11 WAC.

(5) Citizen/proponent negotiations procedures.

(a) Notice of intent. A proponent for a dangerous waste management facility must apply to the department for a dangerous waste management facility permit or for the expansion of an existing permit. In compliance with WAC 173-303-281, the proponent shall submit a notice of intent to the department no less than one hundred fifty days prior to filing an application for a permit or permit revision.

(b) Notice letter.

(i) Within fourteen days of receipt of the notice of intent, the department shall send, by registered mail, a copy of the notice of intent, a copy of the CPN regulation, associated guidelines, and a CPN grant application to the elected officials of the lead local government and all local governments within the potentially affected area.

(ii) The notice letter will alert all communities within the potentially affected area that a notice of intent to file was submitted to the department, the availability of a CPN grant, the procedures for applying for a CPN grant, and the procedures for conducting the CPN process.

(iii) Within thirty days of the effective date of this section, the department shall send, by registered mail, a notice letter to all local governments potentially affected by facilities for which the department has already received a permit application. The notice letter shall contain a copy of the CPN regulation, associated guidelines, and a CPN grant application.

(iv) If the lead local government is also a proponent of the facility, responsibility for CPN shall be deferred to a committee comprised of representatives from all incorporated cities and towns, and all the counties in the potentially affected area. This committee shall decide, among the government entities represented, who will be the lead local government for the purposes of applying for and administering the CPN grant and selecting members to the negotiating committee as set forth in subsection (6) of this section.

(c) Selection of the neutral convener. Within sixty days of the notice letter, the lead local government and the facility proponent shall jointly select a neutral convener, facilitator, or mediator to organize and preside over an official public meeting, assist in selecting the local negotiating committee, and mediate citizen/proponent negotiations.

(d) The public meeting. The purpose of the public meeting shall be:

(i) To advise local citizens within the potentially affected area of the CPN procedures, the State Environmental Policy Act (SEPA) requirements, and the dangerous waste management permit process;

(ii) To allow the proponent to present elements of the proposal;

(iii) To take public testimony on whether to agree to participate in the CPN process.

(e) Expenditures by the lead local government for the initial costs of the neutral convener and the official public meeting shall be reimbursed by the department through an interagency agreement with the lead local government.

(f) Decision notice. Within forty-five days of the public meeting the lead local government shall decide whether to proceed with the negotiations process. The lead local government shall forward notice of that decision to the department and the proponent of the facility. Notice to the department of an affirmative decision may include a completed grant application for financial assistance. If the lead

local government decides to participate in the negotiations process for preempted facilities, then the proponent shall be required to participate. Citizen/proponent negotiations at designated zone facilities will be voluntary for both parties.

(g) Appointment of local negotiating committee. Within thirty days of the decision notice to proceed with CPN, the lead local government and local governments within the potentially affected area shall appoint members to a local negotiating committee, as set forth in subsection (6) of this section, and mail notice of those appointments to the department and to the facility proponent.

(h) Organizational meeting. Within twenty-one days of the committee appointments, the committee shall hold an organizational meeting to establish the committee goals, set schedules, identify tasks, discuss funding, and identify issues to research.

(i) Negotiations process. The negotiations process may occur in two stages.

(i) Stage 1. Within thirty days of the organizational meeting, the local negotiating committee, with the assistance of the neutral convener, shall initiate negotiations and public information and education activities. The local negotiating committee shall have one hundred twenty days, or until completion of the SEPA process, to conduct public information and education activities on dangerous waste management and dangerous waste management facilities and to negotiate emerging issues and concerns.

(ii) Stage 2. Upon completion of the SEPA process, with the assistance of the neutral convener, the local negotiating committee may continue formal negotiations. If no environmental impact statement is required as part of the SEPA process, the local negotiating committee may negotiate for up to one hundred twenty days. If an environmental impact statement is required as part of the SEPA process, negotiations may take place until one hundred twenty days after the issuance of the final environmental impact statement. Upon completion of formal negotiations, all agreements should be submitted to the department for review for applicability to the operating permit.

(iii) Negotiations should focus on the mitigation of impacts identified by persons in the affected area and those impacts identified during the SEPA process, which may include but are not limited to:

- (A) Technical aspects of the facility proposal;
- (B) Emergency response;
- (C) Economic impacts;
- (D) Management of the facility;
- (E) Site characteristics;
- (F) Transportation;
- (G) Compliance assurance.

(iv) During each stage of the negotiations process, the committee shall, at a minimum:

(A) Arrange public forums at key points in the negotiations to solicit input from the local community and provide public education regarding the issues and elements of the proposed facility or facility expansion.

(B) Arrange smaller community gatherings with the whole committee or subgroups of the committee to supplement the larger meetings and to provide more opportunities for discussion with community members.

(C) Meet with key community leaders to solicit information and opinion.

(D) Prepare a draft of the completed local negotiating committee report and agreements. The draft shall be submitted for review and comment to the proponent and local county, city, and town officials who made the committee appointments.

(E) Prepare the final local negotiating committee report and agreements. Final copies shall be submitted to the department and distributed to the proponent and local county, city, and town officials who made the committee appointments.

(v) Negotiations may be reopened upon agreement by both parties as long as a draft permit has not been issued.

(j) Agreements. Any specific agreement reached between the local negotiating committee and the proponent, deemed valid and applicable by the department, may be incorporated in the operating permit issued by the department. Any agreements not applicable to the operating permit may be implemented by the proponent and local communities through a contract or other legal means.

(6) Local negotiating committee.

(a) Appointments to the local negotiating committee shall be made as follows:

(i) Four members shall be appointed by the lead local government.

If the lead local government is the county, committee appointments will be made by the county executive in charter counties or the board of county commissioners. If the lead local government is an incorporated town or city, committee appointments will be made by the mayor.

(ii) The mayor of each incorporated city or town in the potentially affected area, that is not a lead local government, shall appoint one member to the committee.

(iii) The county executive or the board of county commissioners of each county in the potentially affected area, that is not a lead local government, shall appoint one member to the committee.

(iv) Each federally-recognized Indian tribe located in the potentially affected area shall appoint one member to the committee.

(v) If all or the majority of a facility is located wholly within city limits, the board of county commissioners or county executive of the potentially affected county shall appoint two members to the citizen negotiating committee. If the facility is located wholly within the county, these appointments will not be made.

(b) Local negotiating committees shall have broad representation including but not limited to representation from academia, business and industry, citizen organizations, environmental groups, agricultural groups, health professionals, emergency response organizations, and fire districts.

(c) After the initial committee appointments are made, the neutral convener shall assess the group representation and determine which interest groups are not represented. The committee, with the aid of the neutral convener, will then select up to four additional members to serve on the local negotiating committee. These selections shall be made from interest groups not already represented on the negotiating committee.

(d) Elected officials will not be members of the local negotiating committee.

(7) Modified CPN procedures. Modified CPN procedures shall apply to lead local governments who are also proponents of a dangerous waste management facility.

(a) Notice letter. Within fourteen days of the notice of intent or thirty days of the effective date of this section, the department shall notify all local governments in the potentially affected area of applications for proposed facilities or expansions of existing facilities and of the opportunity for formal negotiations under CPN and the availability of a CPN grant.

(b) Decision notice. The local governments shall have forty-five days to form a committee to:

(i) Determine whether they wish to participate in CPN;

(ii) Determine who will be the lead local government;

(iii) Select a neutral convener, facilitator, or mediator;

(iv) Notify the department and the proponent of those decisions; and

(v) Complete a grant application for financial assistance if a decision is made to proceed with CPN.

(c) Once the lead local government is determined, modified CPN procedures shall follow CPN procedures set forth in subsections (5)(d) through (6)(d) of this section.

(8) Grant eligibility and eligible activities.

(a) Grant applicant eligibility and eligible activities shall be the same for CPN and modified CPN.

(b) Grant applicant eligibility. Grants up to fifty thousand dollars shall be awarded to the lead local government and may be renewed once during the permitting process.

(c) Eligible costs. Eligible costs include direct costs of the activities of the negotiating process. These costs include:

(i) The local committee's expenses such as travel, office space or lodging, supplies, postage, report production costs, and meeting room costs;

(ii) Neutral convener's, facilitator's, or mediator's fees and expenses;

(iii) Technical assistance for the committee; and

(iv) Other costs determined necessary by the department.

(d) Ineligible costs. Grant funds may not be used by the grant applicant to support legal actions against the department, or facility owners/operators.

(9) Grant administration and funding.

(a) A grant application package will be sent to the lead local government with the notice letter. Grant application packages include grant application deadlines, grant guidelines, and application forms.

(b) Completed grant applications will be reviewed by the department. To receive a grant offer, successful applications must include all required elements as outlined in the guidelines.

(c) The obligation of the department to make grant awards and payments is contingent upon the availability of funds through legislative appropriation and allotment, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums, the obligation of the department is contingent upon the appropriation of funds during the next biennium.

(d) The department shall fund up to fifty percent of the total grant amount or up to fifty thousand dollars for citizen/proponent negotiations and the proponent of a dangerous

waste management facility shall fund up to fifty percent of the total grant amount or up to fifty thousand dollars.

(e) Disbursement of funds. The department shall be responsible for reimbursement of all eligible CPN costs incurred. The proponent shall enter into a contract with the department for the proponent's share of the CPN grant. The department will be responsible for all eligible CPN costs incurred before the decision notice and its share of any eligible CPN costs incurred after the decision notice, up to fifty thousand dollars. The proponent shall be responsible for its share of all remaining eligible CPN costs incurred after the decision notice and after an executed grant award is made to the lead local government, up to fifty thousand dollars.

(f) The department, on at least a biennial basis, will determine the amount of funding available for citizen/proponent negotiation grants.

(g) All grantees shall be held responsible for payment of salaries, consultant's fees, and other overhead costs contracted under a grant awarded to the lead local government.

(h) To the extent that the Constitution and laws of the state of Washington permit, the grantee shall indemnify and hold the department harmless from and against, any liability for any or all injuries to persons or property arising from the negligent act or omission of the grantee arising out of a grant contract, except for such damage, claim, or liability resulting from the negligent act or omission of the department.

(i) All grants under this chapter shall be consistent with the provisions of "Financial Guidelines for Grant Management" WDOE 80-6, May 1980, Reprinted March 1982, or subsequent guidelines adopted thereafter.

[Statutory Authority: RCW 70.105.260 and 1989 c 2, 89-21-071 (Order 89-25), § 173-303-902, filed 10/17/89, effective 11/17/89.]

WAC 173-303-905 Response to requests for public records. RCW 42.17.320 requires that the department, when responding to requests for public records make such responses "promptly." The department often receives requests, submitted pursuant to chapter 42.17 RCW, for public records that exist because of the requirements of or actions mandated by this chapter (such public records are referred to as dangerous waste records). When the department receives requests for such dangerous waste records, then the department shall respond promptly, as required by RCW 42.17.320, and in no event will the response occur later than twenty working days after receipt of the public request submitted pursuant to chapter 42.17 RCW.

[Statutory Authority: Chapter 70.105 RCW. 88-18-083 (Order 88-29), § 173-303-905, filed 9/6/88.]

WAC 173-303-910 Petitions. (1) General petitions.

(a) Any person may petition the department to modify or revoke any provision in this chapter. This subsection sets forth general requirements which apply to all such petitions. The remaining subsections of this section describe additional requirements for specific types of petitions.

(b) Each petition must be submitted to the department by certified mail and must include:

- (i) The petitioner's name and address;

- (ii) A statement of the petitioner's interest in the proposed action;

- (iii) A description of the proposed action, including (where appropriate) suggested regulatory language; and

- (iv) A statement of the need and justification for the proposed action, including any supporting tests, studies, or other information.

(c) The department will make a tentative decision to grant or deny the petition and give public notice of the tentative decision in writing. The notice shall be distributed to interested persons on a mailing list developed specifically for petitions and persons expressing interest in amendments to this chapter. The public comment period shall be a minimum of forty-five days.

(d) Upon the written request of any interested person, the director may, at his discretion, hold a conference to consider oral comments on the action proposed in the petition. A person requesting a conference must state the issues to be raised and explain why written comments would not suffice to communicate the person's views. The director may in any case decide on his own motion to hold a conference.

(e) After evaluating all public comments the department will make a final decision in accordance with RCW 34.04.060 or 34.04.080. The department will either deny the petition in writing (stating its reasons for denial), or grant the petition and, when appropriate, initiate rule-making proceedings in accordance with RCW 34.04.025.

(2) Petitions for equivalent testing or analytical methods.

(a) Any person seeking to add a testing or analytical method to WAC 173-303-110 may petition for a regulatory amendment under this section. To be successful, the person must demonstrate to the satisfaction of the department that the proposed method is equal to or superior to the corresponding method prescribed in WAC 173-303-110, in terms of its sensitivity, accuracy, and precision (i.e., reproducibility).

(b) Each petition must include, in addition to the information required by subsection (1) of this section:

- (i) A full description of the proposed method, including all procedural steps and equipment used in the method;

- (ii) A description of the types of wastes or waste matrices for which the proposed method may be used;

- (iii) Comparative results obtained from using the proposed method with those obtained from using the relevant or corresponding methods prescribed in WAC 173-303-110;

- (iv) An assessment of any factors which may interfere with, or limit the use of, the proposed method; and

- (v) A description of the quality control procedures necessary to ensure the sensitivity, accuracy and precision of the proposed method.

(c) After receiving a petition for an equivalent testing or analytical method, the department may request any additional information on the proposed method which it may reasonably require to evaluate the proposal.

(d) If the department amends the regulations to permit use of a new testing method, the method will be incorporated in a document which will be available from the department.

(3) Petitions for exempting dangerous wastes from a particular generator.

(a) Any generator seeking to exempt his dangerous waste may petition the department for exemption from the requirements of WAC 173-303-070 through 173-303-103.

(b) To be successful, the generator must make the demonstrations required in WAC 173-303-072(3) and, where applicable, (4) and (5).

(c) Each petition must include, in addition to the information required by subsection (1) of this section:

(i) The name and address of the laboratory facility performing the sampling or tests of the waste;

(ii) The names and qualifications of the persons sampling and testing the waste;

(iii) The dates of sampling and testing;

(iv) The location of the generating facility;

(v) A description of the manufacturing processes or other operations and feed materials producing the waste and an assessment of whether such processes, operations, or feed materials can or might produce a waste that is not covered by the demonstration;

(vi) A description of the waste and an estimate of the average and maximum monthly and annual quantities of waste covered by the demonstration;

(vii) Pertinent data on and discussion of the factors delineated in WAC 173-303-072(3) and, where applicable, (4) and (5);

(viii) A description of the methodologies and equipment used to obtain the representative samples;

(ix) A description of the sample handling and preparation techniques, including techniques used for extraction, containerization and preservation of the samples;

(x) A description of the tests performed (including results);

(xi) The names and model numbers of the instruments used in performing the tests and the date of the last calibration for instruments which must be calibrated according to manufacturer's instructions; and

(xii) The following statement signed by the generator of the waste or his authorized representative:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this demonstration and all attached documents, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe that the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(d) After receiving a petition for a dangerous waste exemption, the department may request any additional information which it may reasonably require to evaluate the petition.

(e) An exemption will only apply to the waste generated by the particular generator covered by the demonstration and will not apply to waste from any other generator.

(f) The department may exempt only part of the waste for which the demonstration is submitted where there is reason to believe that variability of the waste justifies a partial exemption.

(g) The department may (but shall not be required to) grant a temporary exemption before making a final decision

under subsection (1) of this section, whenever it finds that there is a substantial likelihood that an exemption will be finally granted.

(h) Any waste for which an exemption is sought will remain designated and be subject to the applicable requirements of this chapter until the generator of the waste is notified by the department that his waste is exempt.

(4) Petition for exclusion.

(a) Any generators seeking exclusion of a class of similar or identical wastes under WAC 173-303-071, excluded categories of waste, may petition the department for exclusion. To be successful, the generator(s) must make the demonstrations required in WAC 173-303-072(6) for all those wastes generated in the state which might be excluded pursuant to granting a petition submitted under this subsection. No class of wastes will be excluded if any of the wastes are regulated as hazardous waste under 40 CFR Part 261.

(b) Each petition for exclusion must include the information required by subsections (1) and (3)(c) of this section and any other information required by the department.

(c) After receiving a petition for exclusion, the department may request any additional information it deems necessary to evaluate the petition.

(5) Petition for designation change. The provisions of (a)(i) of this subsection do not apply to any dangerous waste which is also designated as a hazardous waste under 40 CFR Part 261 Subpart D.

(a) A generator may petition the department to change the designation of his waste as follows:

(i) A waste which is designated only for toxicity pursuant to WAC 173-303-084 or 173-303-101 but which is toxic solely because it is highly acidic or basic (i.e., due to high or low pH) may be subject only to the requirements for corrosive dangerous wastes, provided that the generator can demonstrate this fact to the department's satisfaction through information provided under (b) of this subsection; and

(ii) A waste which is designated EHW may be redesignated DW, provided that the generator can demonstrate that such redesignation is appropriate through information provided under (b) of this subsection.

(b) A petition under this subsection must include:

(i) The information required by subsections (1) and (3)(c) of this section; and

(ii) Such other information as required by the department.

(c) A designation change under this subsection will become effective only after the department has approved the change and notified the generator of such approval.

(6) Petitions to allow land disposal of a waste restricted under WAC 173-303-140.

(a) Any person seeking a land disposal restriction exemption allowed under WAC 173-303-140(6) must submit a petition to the department. The petition must include the following general information:

(i) The petitioner's name and address;

(ii) A statement of the petitioner's interest in the proposed action;

(iii) A description of the proposed action;

(iv) A statement of the need and justification for the proposed action;

(v) An identification of the specific waste and the specific land disposal unit for which the exemption is desired;

(vi) A waste analysis to describe fully the chemical and physical characteristics of the subject waste. All waste and environmental sampling, test, and analysis data must be accurate and reproducible to the extent that state-of-the-art techniques allow; and

(vii) A quality assurance and quality control plan that addresses all sampling and testing aspects of the information provided in the petition.

(b) In addition to the general information requirements in subsection (a) of this section, the following specific information must be provided in the petition for individual case-by-case exemptions.

(i) Petition for land disposal exemption for treatment residuals. Petitions for exemption of treatment residuals, as allowed under WAC 173-303-140 (6)(a), must:

(A) Provide the type of waste management or treatment method applied to the waste and the rationale for selecting this method as the best achievable management method; and

(B) Document that the land disposal of the treatment residual would not pose a greater risk to public health and the environment than land disposal of the original wastes, including an analysis of the treatment residuals to fully describe their chemical and physical characteristics; and

(C) Provide the management alternatives for the treatment residuals and the factors which, if an exemption is not granted, would prevent the utilization of the best achievable management method for the original dangerous waste.

(ii) Petition for economic hardship exemption. Petitions for exemption on the basis of economic hardship, as allowed under WAC 173-303-140 (6)(b), must:

(A) Supply the current management costs and the projected management costs to comply with the requirements of WAC 173-303-140; and

(B) Provide the source of information utilized in determining the economic estimates; and

(C) Provide a discussion of how the projected compliance costs would impose an unreasonable economic burden.

(iii) Petition for leachable inorganic waste exemption. Petitions for exemption of leachable inorganic wastes, as allowed under WAC 173-303-140 (6)(c), must:

(A) Provide information demonstrating that the stabilization of the dangerous waste is less protective of public health and the environment than landfilling; or

(B) Provide a list of stabilization facilities that could accept the dangerous waste and information demonstrating that they do not have available capacity to stabilize the waste; or

(C) Provide information describing the types of stabilization utilized which did not reduce the solubility and mobility of the dangerous waste constituents and describe any other stabilization methods that have been considered but not utilized.

(iv) Petition for organic/carbonaceous waste exemption. Petitions for exemption of organic/carbonaceous wastes, as allowed under WAC 173-303-140 (6)(d), must:

(A) Provide information demonstrating that recycling, treatment and incineration facilities are unavailable for the waste, including a map marked both with the point of waste generation and the point(s) of the nearest treatment, recycling and incineration facility(s) that could manage the dangerous waste; or

(B) Provide information demonstrating that the alternative management methods for organic/carbonaceous waste are less protective of public health and the environment than stabilization and landfilling; or

(C) Provide information demonstrating that:

(I) Recycling and treatment facilities are unavailable for the waste, including a map marked both with the point of waste generation and the point(s) of the nearest treatment, recycling and incineration facility(s) that could manage the dangerous waste; and

(II) The organic/carbonaceous waste has a heat content less than 3,000 BTU/LB or a moisture content greater than sixty-five percent.

(c) Each petition must include the following statement signed by the petitioner or an authorized representative:

I certify under penalty of law that I have personally examined and am familiar with the information submitted in this petition and all attached documents, and that, based on my inquiry of those individuals immediately responsible for obtaining the information, I believe the submitted information is true, accurate, and complete. I am aware that there are significant penalties for submitting false information, including the possibility of fine and imprisonment.

(d) Each petition must be submitted to:

Department of Ecology
 Hazardous Waste Land
 Disposal Exemption
 Mailstop PV-11
 Olympia, WA 98504-8711

(e) After receiving a petition, the department may request any additional information that reasonably may be required to evaluate the petition and accompanying demonstration, such as a comprehensive characterization of the disposal unit site including an analysis of background air, soil, and water quality. Simulation models must be calibrated for the specific waste and site conditions, and verified for accuracy by comparison with actual measurements.

(f)(i) The department will make a tentative decision to grant or deny the petition and give public notice of the tentative decision in writing. The notice shall be distributed to interested persons on a mailing list developed specifically for petitions and persons expressing interest in amendments to this chapter. The public comment period shall be a minimum of forty-five days.

(ii) Upon the written request of any interested person, the department may, at its discretion, hold a conference to consider oral comments on the action proposed in the petition. A person requesting a conference must state the issues to be raised and explain why written comments would not suffice to communicate the person's views. The department may in any case decide on its own motion to hold a conference.

(iii) After evaluating all public comments the department will make a final decision in accordance with RCW 34.04.060 or 34.04.080. The department will either deny the

petition in writing (stating its reasons for denial), or grant the petition.

(g) Prior to the department's decision, the applicant is required to comply with all restrictions on land disposal under WAC 173-303-140. The department should respond to a petition within ninety days.

(h) If an exemption is granted, the department may include specific conditions as deemed necessary by the department to protect public health and the environment.

(i) If granted, the exemption will apply to land disposal of the specific restricted waste at the individual disposal unit described in the petition and accompanying demonstration. The exemption will not apply to any other restricted waste at that disposal unit, nor will it apply to that specific restricted waste at any other disposal unit.

(j) If an exemption is granted, the department may withdraw the exemption on the following bases:

(i) If there is a threat to public health and the environment; or

(ii) If there is migration of dangerous waste constituents from the land disposal unit or site for as long as the waste remains dangerous; or

(iii) If the department finds reason to believe that the information submitted in a petition is inaccurate or has been falsified such that the petition should have been denied.

(k) The term of an exemption granted under this subsection will be established by the department at the time of issuance.

(l) Any exemption granted by the department does not relieve the petitioner of his responsibilities in the management of dangerous waste under chapter 173-303 WAC.

(m) The department may (but shall not be required to) grant a temporary exemption before making a final decision, whenever it finds that there is a substantial likelihood that an exemption will be finally granted. Temporary exemptions shall not be subject to the procedures of (f) of this subsection. Temporary exemptions shall not be a cause of delaying final decision making on the petition request.

[Statutory Authority: Chapter 70.105 RCW. 88-02-057 (Order DE 83-36), § 173-303-910, filed 1/5/88, effective 2/5/88; 86-12-057 (Order DE-85-10), § 173-303-910, filed 6/3/86; 84-14-031 (Order DE 84-22), § 173-303-910, filed 6/27/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-910, filed 2/10/82.]

WAC 173-303-950 Violations and enforcement.

Any violation of this chapter may be subject to the enforcement and penalty sanctions of chapter 70.105 RCW. Such violations include, but are not limited to:

(1) Offering or transporting dangerous waste to a facility which does not have a permit;

(2) Transferring, treating, storing, or disposing of dangerous waste without a permit; or

(3) Falsely representing information in any application, label, manifest, record, report, permit, petition, or other document filed, maintained or used for the purpose of compliance with this chapter.

[Statutory Authority: Chapter 70.105 RCW. 84-09-088 (Order DE 83-36), § 173-303-950, filed 4/18/84.]

WAC 173-303-960 Special powers and authorities of the department. (1) Applicability. This section applies to departmental powers and authorities when taking actions

[Title 173 WAC—p 606]

against activities that may present an imminent and substantial endangerment to health or the environment.

(2) Notwithstanding any other provision of this chapter, upon receipt of evidence or with due cause the department believes that the handling, storage, treatment, transportation, recycling, or disposal of any dangerous waste or solid waste may present an imminent and substantial endangerment to health or the environment, the department may:

(a) Authorize an agency inspector to enter at reasonable times establishments regulated under this chapter for the purposes of inspection, monitoring, and sampling; and

(b) Direct the attorney general to bring suit on behalf of the state to immediately restrain any person contributing to such handling, storage, treatment, transportation, recycling, or disposal to immediately stop such handling, storage, treatment, transportation, recycling, or disposal or to take such other action as may be necessary.

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-960, filed 6/3/86.]

WAC 173-303-9901 Flow chart for designating dangerous wastes. (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-9901, filed 6/26/87; 84-09-088 (Order DE 83-36), § 173-303-9901, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-9901, filed 2/10/82.]

WAC 173-303-9902 Narrative for designating dangerous wastes. (Reserved.)

[Statutory Authority: Chapter 70.105 RCW. 86-12-057 (Order DE-85-10), § 173-303-9902, filed 6/3/86. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-9902, filed 2/10/82.]

WAC 173-303-9903 Discarded chemical products list.

DISCARDED CHEMICAL PRODUCTS LIST

Dangerous Waste No.	Substance	WDOE Hazard Designation	Reason for Designation*
---------------------	-----------	-------------------------	-------------------------

ACUTELY DANGEROUS CHEMICAL PRODUCTS

P023	Acetaldehyde, chloro-	EHW	B H
U001	Acetaldehyde	EHW	C
U034	Acetaldehyde, trichloro-	EHW	H
P002	Acetamide, N-(aminothioxomethyl)-	EHW	B
P057	Acetamide, 2-fluoro-	EHW	B H
P058	Acetic acid, fluoro-, sodium salt	EHW	A H
U144	Acetic acid, lead salt	EHW	D EP
P066	Acetimidic acid, N-[(methylcarbamoyl)oxy]thio-, methyl ester	EHW	B
U003	Acetonitrile	EHW	C I
P001	3-(alpha-Acetonyl-benzyl)-4-hydroxycoumarin and salts	EHW	A
P002	1-Acetyl-2-thiourea	EHW	B
U006	Acetyl chloride	EHW	C H O R
P003	Acrolein	EHW	X I
U007	Acrylamide	EHW	C
U008	Acrylic acid	EHW	C O I
U009	Acrylonitrile	EHW	C + I
P070	Aldicarb	EHW	B
P004	Aldrin	EHW	X H
P005	Allyl alcohol	EHW	B I

(1992 Ed.)

Dangerous Waste Regulations

173-303-9903

P006	Aluminum phosphide (R,T)	EHW	B R	U021	'1,1"-Biphenyl)-4,4'-diamine	EHW	B +
P007	5-(Aminomethyl)-3-isoxazolol	EHW	B	U073	(1,1'-Biphenyl-4,4'-diamine, 3,3'-dichloro-	EHW	H +
P008	4-alpha-Aminopyridine	EHW	B				
P009	Ammonium picrate	EHW	R	U095	(1,1'-Biphenyl)-4,4'-diamine, 3,3'-dimethyl-	EHW	C +
P119	Ammonium vanadate	EHW	B				
U012	Aniline	EHW	C I	U024	Bis(2-chloroethoxy) methane	EHW	C H
P010	Arsenic acid	EHW	B	U027	Bis(2-chloroisopropyl) ether	EHW	C H O
P012	Arsenic (III) oxide	EHW	B +	P016	Bis(chloromethyl) ether	EHW	B H +
P011	Arsenic (V) oxide	EHW	B	U246	Bromine cyanide	EHW	C H
P011	Arsenic pentoxide	EHW	B	P017	Bromoacetone	EHW	C H
P012	Arsenic trioxide	EHW	B +	U225	Bromoform	EHW	H
P038	Arsine, diethyl-	EHW	B	U030	4-Bromophenyl phenyl ether	EHW	H
U015	Azaserine	EHW	C +	P018	Brucine	EHW	A
P054	Aziridine	EHW	B +	U128	1,3-Butadiene, 1,1,2,3,4,4-hexachloro-	EHW	C H
U010	Azirino(2',3':3,4)pyrrolo(1,2a)indole-4,7-dione, 6-amino-8-[[[(aminocarbonyl)oxy methyl]-1,1a,2,8,8a,8b-hexahydro-8a-methoxy-5-methyl-	EHW	B +	U035	Butanoic acid, 4-[bis(2-chloroethyl)amino] benzene-	EHW	H +
				U160	2-Butanone peroxide	EHW	B R
				U053	2-Butenal	EHW	B I
P013	Barium cyanide	EHW	A	U074	2-Butene, 1,4-dichloro-	EHW	C H I
U157	Benz[j]aceanthrylene, 1,2-dihydro-3-methyl-	EHW	H P	U032	Calcium chromate	EHW	C + EP
				P021	Calcium cyanide	EHW	B
U017	Benzal chloride	EHW	D H	P123	Camphene, octachloro-	EHW	X H
U018	Benz[a]anthracene	EHW	P +	U178	Carbamic acid, methylnitroso-, ethylester	EHW	C +
U018	1,2-Benzanthracene	EHW	P +				
U094	1,2-Benzanthracene, 7,12-dimethyl-	EHW	C P	U176	Carbamide, N-ethyl-N-nitroso-	EHW	C +
U012	Benzenamine	EHW	C I	U177	Carbamide, N-methyl-N-nitroso-	EHW	C +
P024	Benzenamine, 4-chloro-	EHW	C H	U219	Carbamide, thio-	EHW	C +
U049	Benzenamine, 4-chloro-2-methyl-	EHW	H	P103	Carbamimidoseleonic acid	EHW	B
U093	Benzenamine, N, N-dimethyl-4-(phenylazo)-	EHW	C +	U097	Carbamoyl chloride, dimethyl-	EHW	D H +
				P022	Carbon bisulfide	EHW	D I ?
U158	Benzenamine, 4,4-methylenebis (2-chloro-	EHW	H +	P022	Carbon disulfide	EHW	D I ?
				U156	Carbonochloridic acid, methyl ester	EHW	B H I
P077	Benzenamine, 4-nitro-	EHW	D ?	U033	Carbon oxyfluoride	EHW	B H R
P028	Benzene, (chloromethyl)-	EHW	B H +	U211	Carbon tetrachloride	EHW	C H +
U019	Benzene	EHW	C + I	P095	Carbonyl chloride	EHW	B H
U038	Benzenecetic acid, 4-chloro-alpha-(4-chlorophenyl)-alpha-hydroxy, ethylester	EHW	H	U033	Carbonyl fluoride	EHW	B H R
				U035	Chlorambucil	EHW	H +
U030	Benzene, 1-bromo-4-phenoxy-	EHW	H	U036	Chlordane, technical	EHW	X H
U037	Benzene, chloro-	EHW	B H I	P033	Chlorine cyanide	EHW	A H
U190	1,2-Benzenedicarboxylic acid anhydride	EHW	C	U026	Chlornaphazine	EHW	H +
				P023	Chloroacetaldehyde	EHW	B H
U070	Benzene, 1,2-dichloro-	EHW	B H	P024	p-Chloroaniline	EHW	C H
U071	Benzene, 1,3-dichloro-	EHW	B H	U037	Chlorobenzene	EHW	B H I
U072	Benzene, 1,4-dichloro-	EHW	B H	U039	4-Chloro-m-cresol	EHW	H
U017	Benzene, (dichloromethyl)-	EHW	D H	U041	1-Chloro-2,3-epoxypropane	EHW	C H + I
U223	Benzene, 1,3-diisocyanatomethyl-	EHW	B R	U042	2-Chloroethyl vinyl ether	EHW	C H
U239	Benzene, dimethyl-	EHW	C I	U044	Chloroform	EHW	C H +
U201	1,3-Benzenediol	EHW	C	U046	Chloromethyl methyl ether	EHW	D H + I
U127	Benzene, hexachloro-	EHW	H	U047	beta-Chloronaphthalene	EHW	D H
U056	Benzene, hexahydro-	EHW	C I	U048	o-Chlorophenol	EHW	D H
U188	Benzene, hydroxy-	EHW	C	P026	1-(o-Chlorophenyl)thiourea	EHW	A H
U220	Benzene, methyl-	EHW	C I	P027	3-Chloropropionitrile	EHW	B H
U105	Benzene, 1-methyl-2,4-dinitro	EHW	C	U049	4-Chloro-o-toluidine, hydrochloride	EHW	H
U106	Benzene, 1-methyl-2,6-dinitro	EHW	C	U032	Chromic acid, calcium salt	EHW	C + EP
U055	Benzene, (1,methylethyl)-	EHW	C I	U050	Chrysene	EHW	P +
U169	Benzene, nitro-	EHW	C I	P029	Copper cyanides	EHW	B
U183	Benzene, pentachloro	EHW	H	U052	Cresols	EHW	B
U185	Benzene, pentachloronitro-	EHW	D H +	U052	Cresylic acid	EHW	B
U020	Benzenesulfonic acid chloride	EHW	D H O R	U053	Crotonaldehyde	EHW	B I
U020	Benzenesulfonyl chloride	EHW	D H O R	U055	Cummene	EHW	C I
U207	Benzene, 1,2,4,5-tetrachloro-	EHW	D H	P030	Cyanides (soluble cyanide salts), not elsewhere specified	EHW	A
U023	Benzene, (trichloromethyl)-	EHW	H O R	P031	Cyanogen	EHW	B I
P042	1,2-Benzenediol, 4-[1-hydroxy-2-(methyl-amino)ethyl]-	EHW	B	U246	Cyanogen bromide	EHW	C H
				P033	Cyanogen chloride	EHW	A H
P014	Benzenethiol	EHW	A	U197	1,4-Cyclohexadienedione	EHW	C
U021	Benzidine	EHW	B +	U056	Cyclohexane	EHW	C I
U022	Benzo[a]pyrene	EHW	P +	U057	Cyclohexanone	EHW	C I
U022	3,4-Benzopyrene	EHW	P +	U130	1,3-Cyclopentadiene, 1,2,3,4,5,5-hexa-chloro-	EHW	X H
U197	p-Benzoquinone	EHW	C				
U023	Benzotrichloride	EHW	H O R	U058	Cyclophosphamide	EHW	C H + I
U050	1,2-Benzphenanthrene	EHW	P +	U240	2,4-D, salts and esters	EHW	B H
P028	Benzyl chloride	EHW	B H +	U060	DDD	EHW	C H +
P015	Beryllium dust	EHW	C +	U061	DDT	EHW	X H +
U085	2,2'-Bioxirane	EHW	B I				

U142	Decachlorooctahydro-1,3,4-metheno-2H-cyclobuta[c,d]-pentalen-2-one	EHW	X H	P046	Ethanamine, 1,1-dimethyl-2-phenyl-	EHW	C
U062	Diallate	EHW	C H +	U067	Ethane, 1,2-dibromo-	EHW	C H +
U133	Diamine	EHW	B + R	U076	Ethane, 1,1-dichloro-	EHW	D H
U063	Dibenz[a,h]anthracene	EHW	A P +	U077	Ethane, 1,2-dichloro-	EHW	D H
U063	1,2,5,6-Dibenzanthracene	EHW	P + A	U114	1,2-Ethanediybiscarbamodithioic acid	EHW	B
U064	1,2,7,8-Dibenzopyrene	EHW	P +	U131	Ethane, 1,1,1,2,2,2-hexachloro-	EHW	H
U064	Dibenz[a,i]pyrene	EHW	P +	U024	Ethane, 1,1'-[methylenebis(oxy)]bis[2-chloro-	EHW	C H
U066	1,2-Dibromo-3-chloropropane	EHW	C H +	U247	Ethane, 1,1,1-trichloro-2,2-bis(p-methoxy phenyl)	EHW	D H
U062	S-(2,3-Dichloroallyl) diisopropylthiocarbamate	EHW	C H +	U003	Ethanenitrile	EHW	C
U070	o-Dichlorobenzene	EHW	B H	U025	Ethane, 1,1'-oxybis[2-chloro-	EHW	C H
U071	m-Dichlorobenzene	EHW	B H	U184	Ethane, pentachloro-	EHW	A H
U072	p-Dichlorobenzene	EHW	B H	U208	Ethane, 1,1,1,2-tetrachloro-	EHW	H
U073	3,3'-Dichlorobenzidine	EHW	H +	U209	Ethane, 1,1,2,2-Tetrachloro-	EHW	H
U074	1,4-Dichloro-2-butene	EHW	C H I	U227	Ethane, 1,1,2-trichloro-	EHW	C H
U075	Dichlorodifluoromethane	EHW	H	P084	Ethenamine, N-methyl-N-nitroso	EHW	B +
U060	Dichloro diphenyl dichloroethane	EWH	C H +	U043	Ethene, chloro-	EHW	D H +
U061	Dichloro diphenyl trichloroethane	EWH	X H +	U042	Ethane, 2-chloroethoxy-	EHW	C H
U078	1,1-Dichloroethylene	EHW	C H +	U078	Ethene, 1,1-dichloro-	EHW	C H +
U079	1,2-Dichloroethylene	EHW	D H	U079	Ethene, trans-1,2-dichloro-	EHW	D H
U025	Dichloroethyl ether	EHW	C H	U210	Ethene, 1,1,2,2-tetrachloro-	EHW	C H
U081	2,4-Dichlorophenol	EHW	D H	U006	Ethanoyl chloride	EHW	C H O R
U082	2,6-Dichlorophenol	EHW	D H	P101	Ethyl cyanide	EHW	B
U240	2,4-Dichlorophenoxyacetic acid, salts and esters	EHW	B H	U038	Ethyl 4,4'-dichlorobenzilate	EHW	D H
P036	Dichlorophenylarsine	EHW	B H	U114	Ethylenebis(dithiocarbamic acid), salts and esters	EHW	B
U083	1,2-Dichloropropane	EHW	C H I	U067	Ethylene dibromide	EHW	C H
U084	1,3-Dichloropropene	EHW	C H	U077	Ethylene dichloride	EHW	D H
P037	Dieldrin	EHW	X H +	U115	Ethylene oxide	EHW	C I
U085	1,2,3,4-Diepoxybutane	EHW	B I	P054	Ethylenimine	EHW	B +
P038	Diethylarsine	EHW	B	U076	Ethylidene dichloride	EHW	D H
P039	O,O-Diethyl S-[2-(ethylthio)ethyl] phosphorodithioate	EHW	A	P097	Famphur	EHW	A
U087	O,O-Diethyl-S-methyl-dithiophosphate	EHW	B	P056	Fluorine	EHW	B
P041	Diethyl-p-nitrophenyl phosphate	EHW	A	P057	Fluoroacetamide	EHW	B H
P040	O,O-Diethyl O-pyrazenyl phosphorothioate	EHW	A	P058	Fluoroacetic acid, sodium salt	EHW	A H
P043	Diisopropyl fluorophosphate	EHW	B H	U122	Formaldehyde	EHW	C
P044	Dimethoate	EHW	A	P065	Fulminic acid, mercury (II) salt	EHW	R ?
U092	Dimethylamine	EHW	C I	U125	2-Furancarboxaldehyde	EHW	C I
U093	Dimethylaminoazobenzene	EHW	C +	U147	2,5-Furandione	EHW	C
U094	7,12-Dimethylbenz[a]anthracene	EWH	C P	U125	Furfural	EHW	C I
U095	3,3'-Dimethylbenzidine	EHW	C +	U126	Glycidylaldehyde	EHW	C +
U096	alpha,alpha-Dimethylbenzylhydro peroxide	EHW	C R	U163	Guanidine, N-nitroso-N-methyl-N' nitro-	EHW	C +
U097	Dimethylcarbamoyl chloride	EHW	D H +	P059	Heptachlor	EHW	X H +
U099	1,2-Dimethylhydrazine	EHW	C + I	U127	Hexachlorobenzene	EHW	H
P045	3,3-Dimethyl-1-(methylthio)-2-butanone,O-[(methylamino) carbonyl] oxime	EHW	B	U128	Hexachlorobutadiene	EHW	C H
P071	O,O-Dimethyl O-p-nitrophenyl phosphorothioate	EHW	A	U129	Hexachlorocyclohexane (gamma isomer)	EHW	H +
P082	Dimethylnitrosamine	EHW	B +	U130	Hexachlorocyclopentadiene	EHW	X H
P046	alpha, alpha-Dimethylphenethylamine	EHW	C	P051	1,2,3,4,10,10-Hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-endo, endo-1,4,5,8-dimethanonaphthalene	EHW	X H
U103	Dimethyl sulfate	EHW	C O +	P037	1,2,3,4,10,10-Hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-endo, exo-1,4,5,8-dimethanonaphthalene	EHW	X H +
P047	4,6-Dinitro-o-cresol and salts	EHW	B	U131	Hexachloroethane	EHW	H
P034	4,6-Dinitro-o-cyclohexylphenol	EHW	C	P060	1,2,3,4,10,10-Hexachloro-1,4,4a,5,8,8a-hexahydro-1,4:5,8-endo, endo-dimethanonaphthalene	EHW	B H
P048	2,4-Dinitrophenol	EHW	B	P004	1,2,3,4,10,10-Hexachloro-1,4,4a,5,8,8a-hexahydro-1,4,5,8-endo, exodimethanonaphthalene	EHW	B H
U105	2,4-Dinitrotoluene	EHW	C	P060	Hexachlorohexahydro-endo, endo-dimethanonaphthalene	EHW	B H
U106	2,6-Dinitrotoluene	EHW	C	U132	Hexachlorophene	EHW	C H
P020	Dinoseb	EHW	B	U243	Hexachloropropene	EHW	H
U109	1,2-Diphenylhydrazine	EHW	C	P062	Hexaethyl tetraphosphate	EHW	B
P035	Diphosphoramidate, octamethyl	EHW	?	U133	Hydrazine	EHW	B + R
U110	Dipropylamine	EHW	C I	P116	Hydrazinecarbothioamide	EHW	B
U111	Di-n-propylnitrosamine	EHW	C +	U099	Hydrazine, 1,2-dimethyl-	EHW	C + I
P039	Disulfoton	EHW	A	U109	Hydrazine, 1,2-diphenyl-	EHW	C
P049	2,4-Dithiobiuret	EHW	A	P068	Hydrazine, methyl-	EHW	A I
P109	Dithiopyrophosphoric acid, tetraethyl ester	EHW	A	P063	Hydrocyanic acid	EHW	A
P050	Endosulfan	EHW	X H	P063	Hydrogen cyanide	EHW	A
P088	Endothall	EHW	B	P096	Hydrogen phosphide	EHW	B I
P051	Endrin	EHW	X H				
P042	Epinephrine	EHW	B				
U001	Ethanal	EHW	C				
U174	Ethanamine, N-ethyl-N-nitroso-	EHW	C +				

Dangerous Waste Regulations

173-303-9903

U135	Hydrogen sulfide	EHW	B I	P075	Nicotine and salts	EHW	B
U096	Hydroperoxide, 1-methyl-1-phenylethyl-	EHW	C R	P076	Nitric oxide	EHW	B
				P077	p-Nitroaniline	EHW	D ?
U245	Indomethacin	EHW	B H	U169	Nitrobenzene	EHW	C I
P064	Isocyanic acid, methyl ester	EHW	I ?	P078	Nitrogen dioxide	EHW	A
P007	3(2H)-Isoxazolone, 5-(aminomethyl)-	EHW	B	P076	Nitrogen (II) oxide	EHW	B
U142	Kepona	EHW	X H	P078	Nitrogen (IV) oxide	EHW	A
U143	Lasiocarpine	EHW	C +	P081	Nitroglycerine	EHW	R ?
U144	Lead acetate	EHW	D EP	U170	p-Nitrophenol	EHW	C
U129	Lindane	EHW	H +	U171	2-Nitropropane	EHW	C I
U147	Maleic anhydride	EHW	C	U174	N-Nitrosodiethylamine	EHW	C +
U149	Malononitrile	EHW	C	P082	N-Nitrosodimethylamine	EHW	B +
U151	Mercury	EHW	EP	U176	N-Nitroso-N-ethylurea	EHW	C +
P092	Mercury, (acetato-O)phenyl-	EHW	B	U177	N-Nitroso-N-methylurea	EHW	C +
P065	Mercury fulminate	EHW	R ?	U178	N-Nitroso-N-methylurethane	EHW	C +
U152	Methacrylonitrile	EHW	B I	P084	N-Nitrosomethylvinylamine	EHW	B +
U092	Methanamine, N-methyl-	EHW	C I	U179	N-Nitrosopiperidine	EHW	C +
P016	Methane, oxybis(chloro)-	EHW	B H +	U111	N-Nitroso-n-propylamine	EWH	C +
P112	Methane, tetranitro-	EHW	A R	P050	5-Norbornene-2,3,-dimethanol, 1,4,5,6,7,7-hexachloro, cyclic sulfite	EHW	X H
U029	Methane, bromo-	EHW	H				
U045	Methane, chloro-	EHW	H I				
U046	Methane, chloromethoxy-	EHW	D H + I	P085	Octamethylpyrophosphoramidate	EHW	A
U068	Methane, dibromo-	EHW	C H +	P087	Osmium oxide	EHW	B
U080	Methane, dichloro-	EHW	C H	P087	Osmium tetroxide	EHW	B
U075	Methane, dichlorodifluoro-	EHW	H	P088	7-Oxabicyclo[2.2.1]heptane-2,3-dicarboxylic acid	EHW	B
U138	Methane, iodo-	EHW	H +				
U211	Methane, tetrachloro-	EHW	C H +	U058	2H-1,3,2-Oxazaphosphorine, 2-[bis (2-chloro ethyl)amino]tetrahydro-, 2-oxide	EHW	C H I +
P118	Methanethiol, trichloro-	EHW	H				
U153	Methanethiol	EHW	B I				
U225	Methane, tribromo	EHW	H	U115	Oxirane	EWH	C I
U121	Methane, trichlorofluoro-	EHW	H	U041	Oxirane, 2-(chloromethyl)-	EHW	C H + I
U044	Methane, trichloro-	EHW	C H +	P089	Parathion	EHW	X
P059	4,7-Methano-1H-indene, 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-	EHW	X H +	U183	Pentachlorobenzene	EHW	H
U036	4,7-Methanoindan, 1,2,4,5,6,7,8,8-octa-chloro-3a,4,7,7a-tetrahydro-	EHW	X H	U184	Pentachloroethane	EHW	A H
				U185	Pentachloronitrobenzene	EHW	D H +
P066	Methomyl	EHW	B		See F027 Pentachlorophenol	EHW	A H
P067	2-Methylaziridine	EHW	B + I	U188	Phenol	EHW	C
P068	Methyl hydrazine	EHW	A I	P034	Phenol, 2-cyclohexyl-4,6-dinitro-	EHW	C
P064	Methyl isocyanate	EHW	I ?	P048	Phenol, 2,4-dinitro-	EHW	B
P069	2-Methylactonitrile	EHW	A	P047	Phenol, 2-methyl-4,6 dinitro-, and salts	EHW	B
P071	Methyl parathion	EHW	A	P020	Phenol, 2,4-dinitro-6-(1-methylpropyl)-	EHW	B
U029	Methyl bromide	EHW	H	P009	Phenol, 2,4,6-trinitro-, ammonium salt	EHW	R
U045	Methyl chloride	EHW	H I				
U156	Methyl chlorocarbonate	EHW	B H I	U048	Phenol, 2-chloro-	EHW	D H
U226	Methylchloroform	EHW	C H	U039	Phenol, 4-chloro-3-methyl-	EHW	H
U157	3-Methylcholanthrene	EHW	H P	U081	Phenol, 2,4-dichloro-	EHW	D H
U158	4,4'-Methylenebis(2-chloroaniline)	EHW	H +	U082	Phenol, 2,6-dichloro-	EHW	D H
U132	2,2'-Methylenebis(3,4,6-trichlorophenol)	EHW	C H	U170	Phenol, 4-nitro-	EHW	C
				See F027 Phenol, pentachloro-	EHW	A H	
U068	Methylene bromide	EHW	C H +	See F027 Phenol, 2,3,4,6-tetrachloro-	EHW	C H	
U080	Methylene chloride	EHW	C H	See F027 Phenol, 2,4,5-trichloro-	EHW	A H	
U122	Methylene oxide	EHW	C	See F027 Phenol, 2,4,6-trichloro-	EHW	A H	
U160	Methyl ethyl ketone peroxide	EHW	B R	P036	Phenyl dichloroarsine	EHW	B H
U138	Methyl iodide	EHW	H +	P092	Phenylmercuric acetate	EHW	B
U163	N-Methyl-N'-nitro-N-nitrosoguanidine	EHW	C + R	P093	N-Phenylthiourea	EHW	A
U010	Mitomycin C	EHW	B +	P094	Phorate	EHW	X
U165	Naphthalene	EHW	B	P095	Phosgene	EHW	B H
U047	Naphthalene, 2-chloro-	EHW	D H	P096	Phosphine	EHW	B I
U166	1,4-Naphthalenedione	EHW	C	P041	Phosphoric acid, diethyl p-nitrophenyl ester	EHW	A
U236	2,7-Naphthalenedisulfonic acid, 3,3'-[(3,3'-dimethyl-(1,1'-biphenyl)-4,4' diyl)]-bis (azo)bis(5-amino-4-hydroxy)-, tetrasodium salt	EHW	H +	P044	Phosphorodithioic acid, O,O-dimethyl S-[2-(methylamino)-2-oxoethyl] ester	EHW	A
U166	1,4-Naphthoquinone	EHW	C				
U167	1-Naphthylamine	EHW	B +	P043	Phosphorofluoridic acid, bis(1-methyl-ethyl)ester	EHW	B H
U168	2-Naphthylamine	EHW	B +	P094	Phosphorothioic acid, O,O-diethyl S-(ethylthio)methyl ester	EHW	X
U167	alpha-Naphthylamine	EHW	B +				
U168	beta-Naphthylamine	EHW	B +	P097	Phosphorothioic acid, O,O-dimethyl O-[p-((dimethylamino)-sulfonyl)phenyl]ester	EHW	A
U026	2-Naphthylamine, N,N-bis(2-chloro-ethyl)-	EHW	H +	P089	Phosphorothioic acid, O,O-diethyl O-(p-nitrophenyl)ester	EHW	X
P072	alpha-Naphthylthiourea	EHW	B	P040	Phosphorothioic acid, O,O-diethyl O-pyra-zinyl ester	EHW	A
P073	Nickel carbonyl	EHW	B				
P074	Nickel cyanide	EHW	D R ?				
P074	Nickel (II) cyanide	EHW	D R ?				
P073	Nickel tetracarbonyl	EHW	B				

U189	Phosphorus sulfide	EHW	B I R	P045	Thiofanox	EHW	B
U190	Phthalic anhydride	EHW	C	P049	Thioimidodicarbonic diamide	EHW	A
U191	2-Picoline	EHW	C	U153	Thiomethanol	EHW	B I
P110	Plumbane, tetraethyl-	EHW	A	P014	Thiophenol	EHW	A
P098	Potassium cyanide	EHW	A	P116	Thiosemicarbazide	EHW	B H +
P099	Potassium silver cyanide	EHW	A	U219	Thiourea	EHW	C+
P070	Propanal, 2-methyl-2(methylthio)- O-[(methylamino)carbonyl]oxime	EHW	B	P026	Thiourea, (2-chlorophenyl)-	EHW	A H
U194	1-Propanamine	EHW	C I	P072	Thiourea, 1-naphthalenyl-	EHW	B
U110	1-Propanamine, N-propyl-	EHW	C I	P093	Thiourea, phenyl-	EHW	A
U066	Propane, 1,2-dibromo-3-chloro-	EHW	C H +	U220	Toluene	EHW	C I
U149	Propanedinitrile	EHW	C	U223	Toluene diisocyanate	EHW	B R
P101	Propanenitrile	EHW	B	P123	Toxaphene	EHW	X H
P027	Propanenitrile, 3-chloro-	EHW	B H	U226	1,1,1-Trichloroethane	EHW	C H
P079	Propanenitrile, 2-hydroxy-2-methyl-	EHW	A	U227	1,1,2-Trichloroethane	EHW	C H
U171	Propane, 2-nitro-	EHW	C I	U228	Trichloroethene	EHW	C H +
U027	Propane, 2,2'oxybis[2-chloro-	EHW	C H O	U228	Trichloroethylene	EHW	C H +
P081	1,2,3-Propanetriol, trinitrate-	EHW	R ?	P118	Trichloromethanethiol	EHW	H
U235	1-Propanol, 2,3-dibromo-, phosphate (3:1)	EHW	D H	U121	Trichloromonofluoromethane	EHW	H
U126	1-Propanol, 2,3-epoxy-	EHW	C +	See	F027 2,4,5-Trichlorophenol	EHW	A H
P017	2-Propanone, 1-bromo-	EHW	C H	See	F027 2,4,6-Trichlorophenol	EHW	A H
P102	Propargyl alcohol	EHW	X	U232	2,4,5-Trichlorophenoxy- acetic acid, salts and esters	EHW	B H+
P003	2-Propenal	EHW	X	U233	2,4,5-Trichlorophenoxy- propionic acid, salts and esters	EHW	B H+
U007	2-Propenamide	EHW	C	U235	Tris(2,3-dibromopropyl) phosphate	EHW	D H
U084	Propene, 1,3-dichloro-	EHW	C H	U236	Trypan blue	EHW	H
U243	1-Propene, 1,1,2,3,3,3-hexachloro-	EHW	H	U237	Uracil, 5[bis(2-chloroethyl)amino]-	EHW	B H +
U009	2-Propenenitrile	EHW	C + I	U237	Uracil mustard	EHW	B H +
U152	2-Propenenitrile, 2-methyl-	EHW	B I	P119	Vanadic acid, ammonium salt	EHW	B
U008	2-Propenoic acid	EHW	C O I	P120	Vanadium pentoxide	EHW	B
P005	2-Propen-1-ol	EHW	B I	P120	Vanadium (V) oxide	EHW	B
See	F027 Propionic acid, 2-(2,4,5- trichlorophenoxy)-	EHW	B H	U043	Vinyl chloride	EHW	D H +
U194	n-Propylamine	EHW	C I	P001	Warfarin	EHW	A
U083	Propylene dichloride	EHW	C H I	U239	Xylene	EHW	C I
P067	1,2-Propylenimine	EHW	B + I	P121	Zinc cyanide	EHW	C
P102	2-Propyn-1-ol	EHW	X	P122	Zinc phosphide	EHW	B R
P008	4-Pyridinamine	EHW	B				
P075	Pyridine, (S)-3-(1-methyl-2- pyrrolidinyl)-, and salts	EHW	B				
U196	Pyridine	EHW	C I	U187	Acetamide, N-(4-ethoxyphenyl)-	DW	D +
U179	Pyridine, hexahydro-N-nitroso-	EHW	C +	U005	Acetamide, N-9H-fluoren-2-yl-	DW	?
U191	Pyridine, 2-methyl-	EHW	C	U112	Acetic acid, ethyl ester	DW	D I
P111	Pyrophosphoric acid, tetraethyl ester	EHW	A	U214	Acetic acid, thallium(I) salt	DW	?
U201	Resorcinol	EHW	C	U002	Acetone	DW	D I
P103	Selenourea	EHW	B	U004	Acetophenone	DW	D
U015	L-Serine, diazoacetate (ester)	EHW	C +	U005	2-Acetylaminofluorene	DW	?
P104	Silver cyanide	EHW	C	U150	Alanine, 3-[p-bis(2-chloroethyl) amino] phenyl-, L-	DW	+
See	F027 Silvex	EHW	B H	U328	2-Amino-1-methylbenzene	DW	D +
P105	Sodium azide	EHW	A	U353	4-Amino-1-methylbenzene	DW	D
P106	Sodium cyanide	EHW	A	U011	Amitrole	DW	D +
P107	Strontium sulfide	EHW	R	U014	Auramine	DW	+
P108	Strychnidin-10-one, and salts	EHW	B	U016	Benz[c]acridine	DW	+
P018	Strychnidin-10-one, 2,3-dimethoxy-	EHW	A	U016	3,4-Benzacridine	DW	+
P108	Strychnine and salts	EHW	B	U014	Benzenamine, 4,4-carbonimidoylbis (N,N-dimethyl-	DW	+
U135	Sulfur hydride	EHW	B I	U222	Benzenamine, 2-methyl-, hydrochloride	DW	D +
U103	Sulfuric acid, dimethyl ester	EHW	C O +	U181	Benzenamine, 2-methyl-5-nitro	DW	D
P115	Sulfuric acid, thallium (I) salt	EHW	B	U028	1,2-Benzenedicarboxylic acid, [bis(2-ethyl-hexyl)] ester	DW	?
U189	Sulfur phosphide	EHW	B I R	U069	1,2-Benzenedicarboxylic acid, dibutyl ester	DW	D
See	F027 2,4,5-T	EHW	B H +	U088	1,2-Benzenedicarboxylic acid, diethyl ester	DW	?
See	F027 1,2,4,5-Tetrachlorobenzene	EHW	D H	U102	1,2-Benzenedicarboxylic acid, dimethyl ester	DW	?
U208	1,1,1,2-Tetrachloroethane	EHW	H	U107	1,2-Benzenedicarboxylic acid, di-n- octyl ester	DW	?
U209	1,1,1,2-Tetrachloroethane	EHW	H	U203	Benzene, 1,2-methylenedioxy-4-allyl-	DW	D +
U210	Tetrachloroethylene	EHW	C H +	U141	Benzene, 1,2-methylenedioxy-4- propenyl-	DW	D +
U212	2,3,4,6-Tetrachlorophenol	EHW	C H	U090	Benzene, 1,2-methylenedioxy-4- propyl-	DW	D +
P109	Tetraethylthiopyrophosphate	EHW	A	U234	Benzene, 1,3,5-trinitro-	DW	D R
P110	Tetraethyl lead	EHW	A				
P111	Tetraethylpyrophosphate	EHW	A				
P112	Tetranitromethane	EHW	A R				
P062	Tetraphosphoric acid, hexaethyl ester	EHW	B				
P113	Thallic oxide	EHW	B				
P113	Thallium (III) oxide	EHW	B				
P114	Thallium (I) selenide	EHW	C				
P115	Thallium (I) sulfate	EHW	B				

MODERATELY DANGEROUS CHEMICAL PRODUCTS

Dangerous Waste Regulations

173-303-9903

U202	1,2- Benzisothiazilin-3-one, 1, 1-dioxide, and salts	DW	+	U059	5,12-Naphthacenedione, (8S-cis)-8-acetyl-10-[(3-amino-2,3,6-trideoxy-alpha-L-lyxo-hexopyranosyl)oxyl]-7,8,9,10-tetrahydro-6,8,11-trihydroxy-1-methoxy-	DW	+
U120	Benzo[j,k]fluorene	DW	D	U172	N-Nitrosodi-n-butylamine	DW	D +
U091	(1,1'-Biphenyl)-4,4'-diamine, 3,3'-dimethoxy-	DW	D +	U173	N-Nitrosodiethanolamine	DW	+
U244	Bis(dimethylthiocarbomoyl) disulfide	DW	D	U180	N-Nitrosopyrrolidine	DW	D +
U028	Bis(2-ethylthoxy) phthalate	DW	?	U181	5-Nitro-o-toluidine	DW	D
U172	1-Butanamine, N-butyl-N-nitroso-	DW	D +	U193	1,2-Oxathiolane, 2,2-dioxide	DW	+
U031	1-Butanol	DW	D I	U182	Paraldehyde	DW	D I
U159	2-Butanone	DW	D I	U186	1,3-Pentadiene	DW	D I
U031	n-Butyl alcohol	DW	D I	U187	Phenacetin	DW	D+
U136	Cacodylic acid	DW	D	U101	Phenol, 2,4-dimethyl-	DW	D
U238	Carbamic acid, ethyl ester	DW	+	U137	1,10-(1,2-Phenylene)pyrene	DW	+
U215	Carbonic acid, dithallium(I) salt	DW	?	U145	Phosphoric acid, lead salt	DW	+
U051	Creosote	DW	D	U087	Phosphorodithioic acid, O,O-diethyl-,S-methyl ester	DW	?
U059	Daunomycin	DW	+	U192	Pronamide	DW	?
U221	Diaminotoluene	DW	?	U193	1,3-Propane sultone	DW	+
U069	Dibutyl phthalate	DW	D	U140	1-Propanol, 2-methyl-	DW	D I
U192	3,5-Dichloro-N-(1,1-dimethyl-2-propynyl) benzamide	DW	?	U002	2-Propanone	DW	D I
U108	1,4-Diethylene dioxide	DW	D +	U113	2-Propenoic acid, ethyl ester	DW	D I
U086	N,N-Diethylhydrazine	DW	+	U118	2-Propenoic acid, 2-methyl-, ethyl ester	DW	I
U088	Diethyl phthalate	DW	?	U162	2-Propenoic acid, 2-methyl-, methyl ester	DW	D I
U089	Diethylstilbestrol	DW	+	U155	Pyridine, 2-[(2dimethylamino)ethyl]- 2-phenylamino		
U148	1,2-Dihydro-3-,6-pyridinedione	DW	D	U164	4(1H)-Pyrimidinone, 2,3-dihydro-6-methyl-2-thioxo-	DW	+
U090	Dihydrosafrole	DW	D +	U180	Pyrrrole, tetrahydro-N-nitroso-	DW	D +
U091	3,3'-Dimethoxybenzidine	DW	D +	U200	Reserpine	DW	?
U098	1,1-Dimethylhydrazine	DW	+ I	U202	Saccharin and salts	DW	+
U101	2,4-Dimethylphenol	DW	D	U203	Safrole	DW	D +
U102	Dimethyl phthalate	DW	?	U204	Seleniousacid	DW	O
U107	Di-n-octyl phthalate	DW	?	U204	Selenium dioxide	DW	O
U108	1,4-Dioxane	DW	D +	U205	Selenium disulfide	DW	R
U117	Ethane, 1,1'-oxybis-	DW	D I	U089	4,4'-Stilbenediol, alpha,alpha'-diethyl-	DW	+
U218	Ethanethioamide	DW	+	U206	Streptozotocin	DW	+
U173	Ethanol, 2,2-(nitrosoimino)bis-	DW	+	U205	Sulfur selenide	DW	R
U004	Ethanone, 1-phenyl-	DW	D	U213	Tetrahydrofuran	DW	I
U112	Ethyl acetate	DW	D I	U214	Thallium(1) acetate	DW	?
U113	Ethyl acrylate	DW	D I	U215	Thallium(1) carbonate	DW	?
U238	Ethyl carbamate (urethan)	DW	+	U216	Thallium(1) chloride	DW	?
U116	Ethylene thiourea	DW	D +	U217	Thallium(1) nitrate	DW	?
U117	Ethyl ether	DW	D I	U218	Thioacetamide	DW	+
U118	Ethyl methacrylate	DW	I	U244	Thiran	DW	D
U119	Ethyl methanesulfonate	DW	+	U221	Toluenediamine	DW	?
U139	Ferric dextran	DW	+	U328	o-Toluidine	DW	D +
U120	Fluoranthene	DW	D	U353	p-Toluidine	DW	D
U123	Formic Acid	DW	D O	U222	o-Toluidine hydrochloride	DW	D +
U124	Furan	DW	I	U011	1H-1,2,4-Triazol-3-amine	DW	D +
U213	Furan, tetrahydro-	DW	I	U234	sym-Trinitrobenzene	DW	D R
U124	Furfuran	DW	I	U182	1,3,5-Trioxane, 2,4,6-trimethyl-	DW	D I
U206	D-Glucopyranose, 2-deoxy-2(3-methyl-3-nitrosoureido)-	DW	+	U200	Yohimban-16-carboxylic acid, 11,17-di-methoxy-18-[(3,4,5-trimethoxybenzoyl)oxy]-,methyl ester	DW	?
U086	Hydraxine, 1,2-diethyl-	DW	+				
U098	Hydrazine, 1,1-dimethyl-	DW	+ I				
U134	Hydrofluoric acid	DW	D O				
U134	Hydrogen fluoride	DW	D O				
U136	Hydroxydimethylarsine oxide	DW	D				
U116	2-Imidazolidinethione	DW	D +				
U137	Indeno[1,2,3-cd]pyrene	DW	+				
U139	Iron dextran	DW	+				
U140	Isobutyl alcohol	DW	D I				
U141	Isosafrole	DW	D +				
U145	Lead phosphate	DW	+				
U146	Lead subacetate	DW	+				
U148	Maleic hydrazide	DW	D				
U150	Melphalan	DW	+				
U119	Methanesulfonic acid, ethyl ester	DW	+				
U123	Methanoic acid	DW	D O				
U154	Methanol	DW	D I				
U155	Methapyrilene	DW	D				
U154	Methyl alcohol	DW	D I				
U186	1-Methylbutadiene	DW	D I				
U159	Methyl ethyl ketone	DW	D I				
U161	Methyl isobutyl ketone	DW	D I				
U162	Methyl methacrylate	DW	D I				
U161	4-Methyl-2-pentanone	DW	+				
U164	Methylthiouracil	DW	+				

* EHW = Extremely Hazardous Waste
 DW = Dangerous Waste
 X = Toxic, Category X
 A = Toxic, Category A
 B = Toxic, Category B
 C = Toxic, Category C
 D = Toxic, Category D
 ? = Toxic, Category not determined
 H = Persistent, Halogenated Hydrocarbon
 O = Corrosive
 P = Persistent, Polycyclic Aromatic Hydrocarbon
 + = IARC Animal or Human, Sufficient or Limited Carcinogen

- I = Ignitable
- R = Reactive
- EP = Toxicity Characteristic

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-9903, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-9903, filed 1/4/89; 86-12-057 (Order DE-85-10), § 173-303-9903, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-9903, filed 4/18/84. Statutory Authority: Chapter 70.105 RCW and RCW 70.95.260. 82-05-023 (Order DE 81-33), § 173-303-9903, filed 2/10/82.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-303-9904 Dangerous waste sources list.

DANGEROUS WASTE SOURCES LIST

Dangerous Waste No.	Sources
------------------------	---------

Nonspecific Sources

Generic:

- F001 The following spent halogenated solvents used in degreasing: Tetrachloroethylene, trichloroethylene, methylene chloride, 1,1,1-trichloroethane, carbon tetrachloride, and chlorinated fluorocarbons; and sludges from the recovery of these solvents in degreasing operations. (See footnote 1, below.)
- F002 The following spent halogenated solvents: Tetrachloroethylene, methylene chloride, trichloroethylene, 1,1,1-trichloroethane, chlorobenzene, 1,1,2-trichloro-1,2,2-trifluoroethane, ortho-dichlorobenzene, trichlorofluoromethane and 1,1,2 trichloroethane; and the still bottoms from the recovery of these solvents. (See footnote 1, below.)
- F003 The following spent nonhalogenated solvents: Xylene, acetone, ethyl acetate, ethyl benzene, ethyl ether, methyl isobutyl ketone, n-butyl alcohol, cyclohexanone, and methanol; and the still bottoms from the recovery of these solvents.
- F004 The following spent nonhalogenated solvents: Cresols and cresylic acid, nitrobenzene; and the still bottoms from the recovery of these solvents.
- F005 The following spent nonhalogenated solvents: Toluene, methyl ethyl ketone, carbon disulfide, isobutanol, pyridine, benzene, 2-ethoxyethanol, 2-nitropropane; and the still bottoms from the recovery of these solvents.
- F006 Wastewater treatment sludges from electroplating operations except from the following processes: (1) Sulfuric acid anodizing of aluminum; (2) tin plating on carbon steel; (3) zinc plating (segregated basis) on carbon steel; (4) aluminum or zinc-aluminum plating on carbon steel; (5) cleaning/stripping associated with tin, zinc, and aluminum plating on carbon steel; and (6) chemical etching and milling of aluminum.
- F019 Wastewater treatment sludges from the chemical conversion coating of aluminum.

- F007 Spent cyanide plating bath solutions from electroplating operations.
- F008 Plating bath residues from the bottom of plating baths from electroplating operations where cyanides are used in the process.
- F009 Spent stripping and cleaning bath solutions from electroplating operations where cyanides are used in the process.
- F010 Quenching bath residues from oil baths from metal heat treating operations where cyanides are used in the process.
- F011 Spent cyanide solutions from salt bath pot cleaning from metal heat treating operations.
- F012 Quenching wastewater treatment sludges from metal heat-treating operations where cyanides are used in the process.
- F020 Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tri- or tetrachlorophenol, or of intermediates used to produce their pesticide derivatives. (This listing does not include wastes from the production of hexachlorophene from highly purified 2,4,5-trichlorophenol.) (See footnote 2, below.)
- F021 Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of pentachlorophenol, or of intermediates used to produce its derivatives. (See footnote 2, below.)
- F022 Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tetra-, penta-, or hexachlorobenzenes under alkaline conditions. (See footnote 2, below.)
- F023 Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for the production or manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tri- and tetrachlorophenols. (See footnote 2, below.) (This listing does not include wastes from equipment used only for the production or use of hexachlorophene from highly purified 2,4,5-trichlorophenol.)
- F026 Wastes (except wastewater and spent carbon from hydrogen chloride purification) from the production of materials on equipment previously used for the manufacturing use (as a reactant, chemical intermediate, or component in a formulating process) of tetra-, penta-, or hexachlorobenzene under alkaline conditions. (See footnote 2, below.)
- F027 Discarded unused formulations containing tri-, tetra-, or pentachlorophenol or discarded unused

- formulations containing compounds derived from these chlorophenols. (See footnote 2, below.) (This listing does not include formulations containing hexachlorophene synthesized from prepurified 2,4,5-trichlorophenol as the sole component.)
- F028 Residues resulting from the incineration or thermal treatment of soil contaminated with nonspecific sources wastes F020, F021, F022, F023, F026 and F027.
- F024 Wastes, including but not limited to, distillation residues, heavy ends, tars, and reactor cleanout wastes from the production of chlorinated aliphatic hydrocarbons, having carbon content from one to five, utilizing free radical catalyzed processes. (See footnote 1, below.) (This listing does not include light ends, spent filters and filter aids, spent dessicants, wastewater, wastewater treatment sludges, spent catalysts, and wastes listed under specific sources, below.)

Specific Sources

Wood Preservation:

- K001 Bottom sediment sludge from the treatment of wastewaters from wood preserving processes that use creosote and/or pentachlorophenol. (See footnote 1, below.)

Inorganic Pigments:

- K002 Wastewater treatment sludge from the production of chrome yellow and orange pigments.
- K003 Wastewater treatment sludge from the production of molybdate orange pigments.
- K004 Wastewater treatment sludge from the production of zinc yellow pigments.
- K005 Wastewater treatment sludge from the production of chrome green pigments.
- K006 Wastewater treatment sludge from the production of chrome oxide green pigments (anhydrous and hydrated).
- K007 Wastewater treatment sludge from the production of iron blue pigments.
- K008 Oven residue from the production of chrome oxide green pigments.

Organic Chemicals:

- K009 Distillation bottoms from the production of acetaldehyde from ethylene.
- K010 Distillation side cuts from the production of acetaldehyde from ethylene.
- K011 Bottom stream from the wastewater stripper in the production of acrylonitrile.
- K013 Bottom stream from the acetonitrile column in the production of acrylonitrile.
- K014 Bottoms from the acetonitrile purification column in the production of acrylonitrile.

- K015 Still bottoms from the distillation of benzyl chloride. (See footnote 1, below.)
- K016 Heavy ends or distillation residues from the production of carbon tetrachloride. (See footnote 1, below.)
- K017 Heavy ends (still bottoms) from the purification column in the production of epichlorohydrin. (See footnote 1, below.)
- K018 Heavy ends from the fractionation column in ethyl chloride production. (See footnote 1, below.)
- K019 Heavy ends from the distillation of ethylene dichloride in ethylene dichloride production. (See footnote 1, below.)
- K020 Heavy ends from the distillation of vinyl chloride in vinyl chloride monomer production. (See footnote 1, below.)
- K021 Aqueous spent antimony catalyst waste from fluoromethanes production. (See footnote 1, below.)
- K022 Distillation bottom tars from the production of phenol/acetone from cumene.
- K023 Distillation light ends from the production of phthalic anhydride from naphthalene.
- K024 Distillation bottoms from the production of phthalic anhydride from naphthalene.
- K093 Distillation light ends from the production of phthalic anhydride from ortho-xylene.
- K094 Distillation bottoms from the production of phthalic anhydride from ortho-xylene.
- K025 Distillation bottoms from the production of nitrobenzene by the nitration of benzene.
- K026 Stripping still tails from the production of methyl ethyl pyridines.
- K027 Centrifuge and distillation residues from toluene diisocyanate production.
- K028 Spent catalyst from the hydrochlorinator reactor in the production of 1,1,1-trichloroethane. (See footnote 1, below.)
- K029 Waste from the product steam stripper in the production of 1,1,1-trichloroethane. (See footnote 1, below.)
- K095 Distillation bottoms from the production of 1,1,1-trichloroethane. (See footnote 1, below.)
- K096 Heavy ends from the heavy ends column from the production of 1,1,1-trichloroethane. (See footnote 1, below.)
- K030 Column bottoms or heavy ends from the combined production of trichloroethylene and perchloroethylene. (See footnote 1, below.)
- K083 Distillation bottoms from aniline production.
- K103 Process residues from aniline extraction from the production of aniline.

- K104 Combined wastewater streams generated from nitrobenzene/aniline production.
- K085 Distillation of fractionation column bottoms from the production of chlorobenzenes. (See footnote 1, below.)
- K105 Separated aqueous stream from the reactor product washing step in the production of chlorobenzenes. (See footnote 1, below.)
- K111 Product washwaters from the production of dinitrotoluene via nitration of toluene.
- K112 Reaction by-product water from the drying column in the production of toluenediamine via hydrogenation of dinitrotoluene.
- K113 Condensed liquid light ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
- K114 Vicinals from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
- K115 Heavy ends from the purification of toluenediamine in the production of toluenediamine via hydrogenation of dinitrotoluene.
- K116 Organic condensate from the solvent recovery column in the production of toluene diisocyanate via phosgenation of toluenediamine. (See footnote 1, below.)

Explosives:

- K044 Wastewater treatment sludges from the manufacturing and processing of explosives.
- K045 Spent carbon from the treatment of wastewater containing explosives.
- K046 Wastewater treatment sludges from the manufacturing, formulation and loading of lead-based initiating compounds.
- K047 Pink/red water from TNT operations.

Inorganic Chemicals:

- K071 Brine purification muds from the mercury cell process in chlorine production, where separately prepurified brine is not used.
- K073 Chlorinated hydrocarbon waste from the purification step of the diaphragm cell process using graphite anodes in chlorine production. (See footnote 1, below.)
- K106 Wastewater treatment sludge from the mercury cell process in chlorine production.

Petroleum Refining:

- K048 Dissolved air flotation (DAF) float from the petroleum refining industry.
- K049 Slop oil emulsion solids from the petroleum refining industry.
- K050 Heat exchanger bundle cleaning sludge from the petroleum refining industry.

- K051 API separator sludge from the petroleum refining industry.
- K052 Tank bottoms (leaded) from the petroleum refining industry.

Iron and Steel:

- K061 Emission control dust/sludge from the primary production of steel in electric furnaces.
- K062 Spent pickle liquor generated by steel finishing operations of facilities within the iron and steel industry (SIC Codes 331 and 332).

Pesticides:

- K031 Byproduct salts generated in the production of MSMA and cacodylic acid.
- K032 Wastewater treatment sludge from the production of chlordane. (See footnote 3, below.)
- K033 Wastewater and scrub water from the chlorination of cyclopentadiene in the production of chlordane. (See footnote 3, below.)
- K034 Filter solids from the filtration of hexachlorocyclopentadiene in the production of chlordane. (See footnote 3, below.)
- K097 Vacuum stripper discharge from the chlordane chlorinator in the production of chlordane. (See footnote 3, below.)
- K035 Wastewater treatment sludges generated in the production of creosote.
- K036 Still bottoms from toluene reclamation distillation in the production of disulfoton.
- K037 Wastewater treatment sludges from the production of disulfoton.
- K038 Wastewater from the washing and stripping of phorate production. (See footnote 3, below.)
- K039 Filter cake from the filtration of diethylphosphorodithioic acid in the production of phorate. (See footnote 3, below.)
- K040 Wastewater treatment sludge from the production of phorate. (See footnote 3, below.)
- K041 Wastewater treatment sludge from the production of toxaphene. (See footnote 3, below.)
- K098 Untreated process wastewater from the production of toxaphene. (See footnote 3, below.)
- K042 Heavy ends or distillation residues from the distillation of tetrachlorobenzene in the production of 2,4,5-T. (See footnote 1, below.)
- K043 2,6-Dichlorophenol waste from the production of 2,4-D. (See footnote 1, below.)
- K099 Untreated wastewater from the production of 2,4-D. (See footnote 1, below.)
- K123 Process wastewater (including supernates, filtrates, and wastewaters) from the production of ethylenebisdithiocarbamic acid and its salts.

- K124 Reactor vent scrubber water from the production of ethylenedisithiocarbamic acid and its salts.
- K125 Filtration, evaporation, and centrifugation solids from the production of ethylenedisithiocarbamic acid and its salts.
- K126 Baghouse dust and floor sweepings in milling and packaging operations from the production or formulation of ethylenedisithiocarbamic acid and its salts.

Primary Copper:

- K064 Acid plant blowdown slurry/sludge resulting from the thickening of blowdown slurry from primary copper production.

Primary Lead:

- K065 Surface impoundment solids contained in and dredged from surface impoundments at primary lead smelting facilities.

Primary Zinc:

- K066 Sludge from treatment of process wastewater and/or acid plant blowdown from primary zinc production.

Primary Aluminum:

- K088 Spent potliners from primary aluminum reduction.

Ferroalloys:

- K090 Emission control dust or sludge from ferrochromium-silicon production.
- K091 Emission control dust or sludge from ferrochromium production.

Secondary Lead:

- K069 Emission control dust/sludge from secondary lead smelting.
- K100 Waste leaching solution from acid leaching of emission control dust/sludge from secondary lead smelting.

Veterinary Pharmaceuticals:

- K084 Wastewater treatment sludges generated during the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
- K101 Distillation tar residues from the distillation of aniline-based compounds in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.
- K102 Residue from the use of activated carbon for decolorization in the production of veterinary pharmaceuticals from arsenic or organo-arsenic compounds.

Ink Formulation:

- K086 Solvent washes and sludges, caustic washes and sludges, or water washes and sludges from cleaning tubs and equipment used in the formulation of ink from pigments, driers, soaps, and stabilizers containing chromium and lead.

Coking:

- K060 Ammonia still-lime sludge from coking operations.
- K087 Decanter tank tar sludge from coking operations.

Footnotes

- 1 These wastes contain or may contain halogenated hydrocarbons. Although WAC 173-303-082 states that these wastes are DW, WAC 173-303-070(5), special knowledge, requires generators who know that their waste contains greater than one percent of these listed halogenated hydrocarbons to designate their waste EHW.
- 2 For wastes listed with the dangerous waste numbers F020, F021, F022, F023, F026, or F027 the quantity exclusion limit is 2.2 lbs. (1 kg) per month or per batch.
- 3 These wastes contain or may contain X Category toxic constituents. Although WAC 173-303-082 states that these wastes are DW, WAC 173-303-070(5), special knowledge, requires generators who know that their waste contains greater than 0.1 percent of these listed toxic constituents to designate their waste EHW.

State Sources

- W001 The following wastes generated from the salvaging, rebuilding, or discarding of transformers, bushing, or capacitors which contain polychlorinated biphenyls (PCB): Cooling and insulating fluids; cores, including core papers, from unrinsed transformers and capacitors; transformers and capacitors which will no longer be used for their intended use, except for those transformers or capacitors which have been rinsed; and, rinsate from the rinsing of transformers and capacitors. For the purposes of this listing, the rinsing of PCB containing items shall be conducted as follows: First, the item is drained of all free flowing liquid; second, the item is filled with solvent and allowed to stand for at least eighteen hours; last, the item is drained thoroughly and the solvent is collected. Solvents may include kerosene, xylene, toluene and other solvents in which PCB are readily soluble. (Note—Certain PCB wastes are excluded from this listing under WAC 173-303-071 (3)(k). The generator should check that section to determine if his PCB waste is excluded from the requirements of chapter 173-303 WAC.)

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-9904, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-9904, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-9904, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-9904, filed 6/3/86; 85-09-042 (Order DE-85-02), § 173-303-9904, filed 4/15/85; 84-09-088 (Order DE 83-36), § 173-303-9904, filed 4/18/84. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-9904, filed 2/10/82.]

WAC 173-303-9905 Dangerous waste constituents list.

- Acetic Acid,2,4,5-trichlorophenoxy-, salts and esters (2,4,5-T, salts and esters)
 Acetonitrile [Ethanenitrile]
 Acetophenone (Ethanone, 1-phenyl)
 -(alpha-Acetylbenzyl)-4-hydroxycoumarin and salts (Warfarin)
 2-Acetylaminofluorene (Acetamide,N-9H- fluoren-2-yl-)
 Acetyl chloride (Ethanoyl chloride)
 1-Acetyl-2-thiourea (Acetamide, N-(aminothioxomethyl)-)
 Acrolein (2-Propenal)
 Acrylamide (2-Propenamamide)
 Acrylonitrile (2-Propenenitrile)
 Aflatoxins
 Aldrin (1,2,3,4,10,10-Hexachloro- 1,4,4a,5,8,8a,-hexahydro-endo,exo- 1,4:5,8-Dimethanonaphthalene)
 Allyl alcohol (2-Propen-1-ol)
 Aluminum phosphide
 4-Aminobiphenyl ([1,1'-Biphenyl]-4-amine)
 6-Amino-1,1a,2,8,8a,8b-hexahydro-8-(hydroxymethyl)-8a-methoxy-5-methyl- carbamate azirino[2',3':3,4]pyrrolo[1,2-a]indole-4,7-dione, (ester) (Mitomycin C)
 (Azirino[2'3':3,4]pyrrolo(1,2-a)indole-4,7- dione, 6-amino-8[
 4-Aminopyridine(4-Pyridinamine)
 Arsenic and compounds, N.O.S.*
 Barium and compounds, N.O.S.*
 Barium cyanide
 Benz[c]acridine (3,4-Benzacridine)
 Benz[a]anthracene (1,2-Benzanthracene)
 Benzene (Cyclohexatriene)
 Benzenearsonic acid (Arsonic acid, phenyl-)
 Benzene, 2-amino-1-methyl (o-Toluidine)
 Benzene, 4-amino-1-methyl (p-Toluidine)
 Benzene, dichloromethyl- (Benzal chloride)
 Benzenethiol (Thiophenol)
 Benzidine ([1,1'-Biphenyl]-4,4' diamine)
 Benzo[b]fluoranthene (2,3-Benzofluoranthene)
 Benzo[j]fluoranthene (7,8-Benzofluoranthene)
 Benzo[a]pyrene (3,4-Benzopyrene)
 p Benzoquinone (1,4-Cyclohexadienedione)
 Benzotrichloride (Benzene, trichloromethyl-)
 Benzyl chloride (Benzene, (chloromethyl)-)
 Beryllium and compounds, N.O.S.*
 Bis(2-chloroethoxy)methane (Ethane, 1,1'-[methylenebis(oxy)]bis[2-chloro-])
 Bis(2-chloroethyl) ether (Ethane, 1,1'-oxybis[2-chloro-])
 N,N-Bis(2-chloroethyl)-2-naphthylamine (Chlornaphazine)
 Bis(2-chloroisopropyl) ether (Propane, 2,2'-oxybis[2-chloro-])
 Bis(chloromethyl) ether (Methane, oxybis[chloro-])
 Bis(2-ethylhexyl) phthalate (1,2-Benzenedicarboxylic acid, bis(2-ethylhexyl) ester)
 Bromoacetone (2-Propanone, 1-bromo-)
 Bromomethane (Methyl bromide)
 4-Bromophenyl phenyl ether (Benzene, 1-bromo-4-phenoxy-)
 Brucine (Strychnidin-10-one, 2,3-dimethoxy-)
 2-Butanone peroxide (Methyl ethyl ketone, peroxide)
 Butyl benzyl phthalate (1,2-Benzenedicarboxylic acid, butyl phenylmethyl ester)
 2-sec-Butyl-4,6-dinitrophenol (DNBP) (Phenol, 2,4-dinitro-6-(1-methylpropyl)-)
 Cadmium and compounds, N.O.S.*
 Calcium chromate (Chromic acid, calcium salt)
 Calcium cyanide
 Carbamic Acid, ethyl ester
 Carbon disulfide (Carbon bisulfide)
 Carbon oxyfluoride (Carbonyl fluoride)
 Chloral (Acetaldehyde, trichloro-)
 Chlorambucil (Butanoic acid, 4-[bis(2-chloroethyl)amino]benzene-)
 Chlordane (alpha and gamma isomers) (4,7-Methanoindan, 1,2,4,5,6,7,8,8-octachloro-3,4,7,7a-tetrahydro-) (alpha and gamma isomers)
 Chlorinated benzenes, N.O.S.*
 Chlorinated ethane, N.O.S.*
 Chlorinated fluorocarbons, N.O.S.*
 Chlorinated naphthalene, N.O.S.*
 Chlorinated phenol, N.O.S.*
 Chloroacetaldehyde (Acetaldehyde, chloro-)
 Chloroalkyl ethers, N.O.S.*
 P-Chloroaniline (Benzenamine, 4-chloro-)
 Chlorobenzene (Benzene, chloro-)
 Chlorobenzilate (Benzenoacetic acid, 4-chloro-alpha-(4-chlorophenyl)-alpha-hydroxy-,ethyl ester)
 2-Chloro-1,3-butadiene
 p-Chloro-m-cresol (Phenol, 4-Chloro-3-methyl)
 1-Chloro-2,3-epoxypropane (Oxirane, 2-(chloromethyl)-)
 2-Chloroethyl vinyl ether (Ethene, (2-chloroethoxy)-)
 Chloroform (Methane, trichloro-)
 Chloromethane (Methyl chloride)
 Chloromethyl methyl ether (Methane, chloromethoxy-)
 2-Chloronaphthalene (Naphthalene, beta-chloro-)
 2-Chlorophenol (Phenol, o-chloro-)
 1-(o-Chlorophenyl)thiourea (Thiourea, (2-chlorophenyl)-)
 3-Chloropropene
 3-Chloropropionitrile (Propanenitrile, 3-chloro-)
 Chromium and compounds, N.O.S.*
 Chrysene (1,2-Benzphenanthrene)
 Citrus red No. 2 (2-Naphthol, 1-[(2,5-dimethoxyphenyl)azo]-)
 Coal tars
 Copper cyanide
 Creosote (Creosote, wood)
 Cresols (Cresylic acid) (Phenol, methyl-)
 Crotonaldehyde (2-Butenal)
 Cyanides (soluble salts and complexes), N.O.S.*
 Cyanogen (Ethanedinitrile)
 Cyanogen bromide (Bromine cyanide)
 Cyanogen chloride (Chlorine cyanide)
 Cytasin (beta-D-Glucopyranoside, (methyl-ONN-azoxy)methyl-)

- 2-Cyclohexyl-4,6-dinitrophenol (Phenol, 2-cyclohexyl-4,6-dinitro-)
- Cyclophosphamide (2H-1,3,2,-Oxazaphosphorine, [bis(2-chloroethyl)amino]-tetrahydro-, 2-oxide)
- Daunomycin (5,12-Naphthacenedione, (8S-cis)-8-acetyl-10-[(3-amino-2,3,6-trideoxy)-alpha-L-lyxohexopyranosyl)oxy]-7,8,9,10-tetrahydro-6,8,11-trihydroxy-1-methoxy-)
- DDD (Dichlorodiphenyldichloroethane) (Ethane, 1,1-dichloro-2,2-bis(p chlorophenyl)-)
- DDE (Ethylene, 1,1-dichloro-2,2-bis(4-chlorophenyl)-)
- DDT (Dichlorodiphenyltrichloroethane) (Ethane, 1,1,1-trichloro-2,2-bis(p-chlorophenyl)-)
- Diallate (S-(2,3-dichloroallyl) diisopropylthiocarbamate)
- Dibenz[a,h]acridine (1,2,5,6-Dibenzacridine)
- Dibenz[a,j]acridine (1,2,7,8-Dibenzacridine)
- Dibenz[a,h]anthracene (1,2,5,6-Dibenzanthracene)
- 7H-Dibenzoc[c,g]carbazole (3,4,5,6-Dibenzcarbazole)
- Dibenzo[a,e]pyrene (1,2,4,5-Dibenzpyrene)
- Dibenzo[a,h]pyrene (1,2,5,6-Dibenzpyrene)
- Dibenzo[a,i]pyrene (1,2,7,8-Dibenzpyrene)
- 1,2-Dibromo-3-chloropropane (Propane, 1,2-dibromo-3-chloro-)
- 1,2-Dibromoethane (Ethylene dibromide)
- Dibromomethane (Methylene bromide)
- Di-n-butyl phthalate (1,2-Benzenedicarboxylic acid, dibutyl ester)
- o-Dichlorobenzene (Benzene, 1,2-dichloro-)
- m-Dichlorobenzene (Benzene, 1,3-dichloro-)
- p-Dichlorobenzene (Benzene, 1,4-dichloro-)
- Dichlorobenzene, N.O.S.* (Benzene, dichloro-, N.O.S.*)
- 3,3'-Dichlorobenzidine ([1,1'-Biphenyl]-4,4'-diamine, 3,3'-dichloro-)
- 1,4-Dichloro-2-butene (2-Butene, 1,4-Butene, 1,4-dichloro-)
- Dichlorodifluoromethane (Methane, dichlorodifluoro-)
- 1,1-Dichloroethane (Ethylidene dichloride)
- 1,2-Dichloroethane (Ethylene dichloride)
- trans-1,2-Dichloroethene (1,2-Dichloroethylene)
- Dichloroethylene, N.O.S.* (Ethene, dichloro-, N.O.S.*)
- 1,1-Dichloroethylene (Ethene, 1,1-dichloro-)
- Dichloromethane (Methylene chloride)
- 2,4-Dichlorophenol (Phenol, 2,4-dichloro-)
- 2,6-Dichlorophenol (Phenol, 2,6-dichloro)
- 2,4-Dichlorophenoxyacetic acid (2,4-D), salts and esters (Acetic acid, 2,4-dichlorophenoxy-, salts and esters)
- Dichlorophenylarsine (Phenyl dichloroarsine)
- Dichloropropane, N.O.S.* (Propane, dichloro-, N.O.S.*)
- 1,2-Dichloropropane (Propylene dichloride)
- Dichloropropanol, N.O.S.* (Propanol, dichloro-, N.O.S.*)
- Dichloropropene, N.O.S.* (Propene, dichloro-, N.O.S.*)
- 1,3-Dichloropropene, (1-Propene, 1,3-dichloro-)
- Dieldrin (1,2,3,4,10,10-hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octa-hydro-endo, exo-1,4:5,8-Dimethanonaphthalene)
- 1,2:3,4-Diepoxybutane (2,2'-Bioxirane)
- Diethylarsine (Arsine, diethyl-)
- N,N'-Diethylhydrazine (Hydrazine, 1,2-diethyl)
- O,O-Diethyl S-methyl ester of phosphorodithioic acid (Phosphorodithioic acid, O,O-diethyl S-methyl ester)
- O,O-Diethylphosphoric acid, O-p-nitrophenyl ester (Phosphoric acid, diethyl p-nitrophenyl ester)
- Diethyl phthalate (1,2-Benzenedicarboxylic acid, diethyl ester)
- O,O-Diethyl O-2-pyrazinyl phosphorothioate (Phosphorothioic acid, O,O-diethyl O-pyrazinyl ester)
- Diethylstilbesterol (4,4'-Stilbenediol, alpha,alpha-diethyl, bis(dihydrogen phosphate, (E)-)
- Dihydrosafrole (Benzene, 1,2-methylenedioxy-4-propyl-)
- 3,4-Dihydroxy-alpha-(methylamino)methyl benzyl alcohol (1,2-Benzenediol, 4-[1-hydroxy-2-(methylamino)ethyl]-)
- Diisopropylfluorophosphate (DFP) (Phosphorofluoridic acid, bis(1-methylethyl) ester)
- Dimethoate (Phosphorodithioic acid, O,O-dimethyl S-[2-(methylamino)-2-oxoethyl] ester)
- 3,3'-Dimethoxybenzidine ([1,1'-Biphenyl]-4,4'-diamine, 3-3' dimethoxy-)
- p-Dimethylaminoazobenzene (Benzenamine, N,N-dimethyl-4-(phenylazo)-)
- 7,12-Dimethylbenz[a]anthracene (1,2-Benzanthracene, 7,12-dimethyl-)
- 3,3'-Dimethylbenzidine ([1,1'-Biphenyl]-4,4'-diamine, 3,3'-dimethyl-)
- Dimethylcarbamoyl chloride (Carbamoyl chloride, dimethyl-)
- 1,1-Dimethylhydrazine (Hydrazine, 1,1-dimethyl-)
- 1,2-Dimethylhydrazine (Hydrazine, 1,2-dimethyl-)
- 3,3-Dimethyl-1-(methylthio)-2-butanone, O-[(methylamino) carbonyl]oxime (Thiofanox)
- alpha,alpha-Dimethylphenethylamine (Ethanamine, 1,1-dimethyl-2-phenyl)
- 2,4-Dimethylphenol (Phenol, 2,4-dimethyl-)
- Dimethyl phthalate (1,2-Benzenedicarboxylic acid, dimethyl ester)
- Dimethyl sulfate (Sulfuric acid, dimethyl ester)
- Dinitrobenzene, N.O.S.* (Benzene, dinitro-, N.O.S.*)
- 4,6-Dinitro-o-cresol and salts (Phenol, 2,4-dinitro-6-methyl-, and salts)
- 2,4-Dinitrophenol (Phenol, 2,4-dinitro-)
- 2,4-Dinitrotoluene (Benzene, 1-methyl-2,4-dinitro-)
- 2,6-Dinitrotoluene (Benzene, 1-methyl-2,6-dinitro-)
- Di-n-octyl phthalate (1,2-Benzenedicarboxylic acid, dioctyl ester)
- 1,4-Dioxane (1,4-Diethylene oxide)
- Diphenylamine (Benzenamine, N-Phenyl-)
- 1,2-Diphenylhydrazine (Hydrazine, 1,2-diphenyl-)
- Di-n-propylmitrosamine (N-Nitroso-di-n-propylamine)
- Disulfoton (O,O-diethyl S-[2-(ethylthio)ethyl] phosphorodithioate)
- 2,4-Dithiobiuret (Thioimidodicarbonic diamide)
- Endosulfan (5-Norbornene, 2,3-dimethanol, 1,4,5,6,7,7-hexachloro-, cyclic sulfite)

- Endrin and metabolites (1,2,3,4,10,10-hexachloro-6,7-epoxy-1,4,4a,5,6,7,8,8a-octahydro-endo,endo-1,4:5,8-dimethanonaphthalene, and metabolites)
- Ethyl carbamate (Urethan) (Carbamic acid, ethyl ester)
- Ethyl cyanide (propanenitrile)
- Ethylenebisdithiocarbamic acid, salts and esters (1,2-Ethanediylobis(carbamodithioic acid, salts and esters)
- Ethyleneimine (Aziridine)
- Ethylene oxide (Oxirane)
- Ethylenethiourea (2-Imidazolidinethione)
- Ethylmethacrylate (2-Propenoic acid, 2-methyl-, ethyl ester)
- Ethyl methanesulfonate (Methanesulfonic acid, ethyl ester)
- Fluoranthene (Benzo[j,k]fluorene)
- Fluorine
- 2-Fluoroacetamide (Acetamide, 2-fluoro-)
- Fluoroacetic acid, sodium salt (Acetic acid, fluoro-, sodium salt)
- Formaldehyde (Methylene, oxide)
- Formic acid (Methanoic acid)
- Glycidylaldehyde (1-Propanol-2,3-epoxy)
- Halomethane, N.O.S.*
- Heptachlor (4,7-Methano-1H-indene, 1,4,5,6,7,8,8-heptachloro-3a,4,7,7a-tetrahydro-)
- Heptachlor epoxide (alpha, beta, and gamma isomers) (4,7-Methano-1H-indene, 1,4,5,6,7,8,8-heptachloro-2,3-epoxy-3a,4,7,7-tetrahydro-, alpha, beta and gamma isomers)
- Hexachlorobenzene (Benzene, hexachloro-)
- Hexachlorobutadiene (1,3-Butadiene, hexachloro-)
- Hexachlorocyclohexane (all isomers) (Lindane and isomers)
- Hexachlorocyclopentadiene (1,3-Cyclopentadiene, 1,2,3,4,5,5-hexachloro-)
- Hexachlorodibenzo-p-dioxins
- Hexachlorodibenzofurans
- Hexachloroethane (Ethane, hexachloro-)
- 1,2,3,4,10,10-Hexachloro-1,4,4a,5,8,8a-hexahydro-1,4:5,8-endo,endo-dimethanonaphthalene (Hexachlorohexahydro-endo,endo-dimethanonaphthalene)
- Hexachlorophene (2,2'-Methylenebis(3,4,6-trichlorophenol))
- Hexachloropropene (Propene, hexachloro-)
- Hexaethyl tetraphosphate (Tetraphosphoric acid, hexaethyl ester)
- Hydrazine (Diamine)
- Hydrocyanic acid (Hydrogen cyanide)
- Hydrofluoric acid (Hydrogen fluoride)
- Hydrogen sulfide (Sulfur hydride)
- Hydroxydimethylarsine oxide (Cacodylic acid)
- Indeno(1,2,3-cd)pyrene (1,10-(1,2-phenylene)pyrene)
- Iodomethane (Methyl iodide)
- Iron Dextran (Ferric dextran)
- Isocyanic acid, methyl ester (Methyl isocyanate)
- Isobutyl alcohol (1-Propanol, 2-methyl-)
- Isosafrole (Benzene, 1,2-methylenedioxy-4-allyl-)
- Kepone (Decachlorooctahydro-1,3,4-Methano-2H-cyclobuta[cd]pentalene-2-one)
- Lasiocarpine (2-Butenoic acid, 2-methyl-,7-[(2,3-dihydroxy-2-(1-methoxyethyl)-3-methyl-1-oxobutoxy)methyl]-2,3,5,7a-tetrahydro-1H-pyrrolizin-1-yl ester)
- Lead and compounds, N.O.S.*
- Lead acetate (Acetic acid, lead salt)
- Lead phosphate (Phosphoric acid, lead salt)
- Lead subacetate (Lead, bis(acetato-O)tetrahydroxytri-)
- Maleic anhydride (2,5-Furandione)
- Maleic hydrazide (1,2-Dihydro-3,6-pyridazinedione)
- Malononitrile (Propanedinitrile)
- Melphalan (Alanine, 3-[p-bis(2-chloroethyl)amino]phenyl-,L-)
- Mercury Fulminate (Fulminic acid, mercury salt)
- Mercury and compounds, N.O.S.*
- Methacrylonitrile (2-Propenenitrile, 2-methyl-)
- Methanethiol (Thiomethanol)
- Methapyrilene (Pyridine, 2-[(2-dimethylamino)ethyl]-2-thenylamino-)
- Metholonyl (Acetimidic acid, N-[(methylcarbamoyleoxy]thio-,methyl ester)
- Methoxychlor (Ethane, 1,1,1-trichloro-2,2'-bis(p-methoxyphenyl)-)
- 2-Methylaziridine (1,2-Propylenimine)
- 3-Methylcholanthrene (Benz[j]aceanthrylene, 1,2-dihydro-3-methyl-)
- Methyl chlorocarbonate (Carbonochloridic acid, methyl ester)
- 4,4'-Methylenebis(2-chloroaniline) (Benzenamine, 4,4'-methylenebis-(2-chloro-)
- Methyl ethyl ketone (MEK) (2-Butanone)
- Methyl hydrazine (Hydrazine, methyl-)
- 2-Methylactonitrile (Propanenitrile, 2-hydroxy-2-methyl-)
- Methyl methacrylate (2-Propenoic acid, 2-methyl-, methyl ester)
- Methyl methanesulfonate (Methanesulfonic acid, methyl ester)
- 2-Methyl-2-(methylthio)propionaldehyde-o-(methylcarbonyl) oxime
- N-Methyl-N'-nitro-N-nitrosoguanidine (Guanidine, N-nitros-N-methyl-N' nitro-)
- Methyl parathion (O,O-dimethyl O-(4-nitrophenyl) phosphorothioate)
- Methylthiouracil (4-1H-Pyrimidinone, 2,3-dihydro-6-methyl-2-thioxo-)
- Mustard gas (Sulfide, bis(2-chloroethyl)-)
- Naphthalene
- 1,4-Naphthoquinone (1,4-Naphthalenedione)
- 1-Naphthylamine (alpha-Naphthylamine)
- 2-Naphthylamine (beta-Naphthylamine)
- 1-Naphthyl-2-thiourea (Thiourea, 1-naphthalenyl-)
- Nickel and compounds, N.O.S.*
- Nickel carbonyl (Nickel tetracarbonyl)
- Nickel cyanide (nickel (II) cyanide)
- Nicotine and salts, Pyridine, (S)-3-(1-methyl-2-pyrrolidinyl)-, and salts)
- Nitric oxide (Nitrogen (II) oxide)
- p-Nitroaniline (Benzenamine, 4-nitro-)
- Nitrobenzine (Benzene, nitro-) Nitrobenzene
- Nitrogen dioxide (Nitrogen (IV) oxide)

- Nitrogen mustard and hydrochloride salt (Ethanamine, 2-chloro-, N-(2-chloroethyl)-N-methyl-, and hydrochloride salt)
- Nitrogen mustard N-Oxide and hydrochloride salt (Ethanamine, 2-chloro-, N-(2-chloroethyl)-N-methyl-, N-oxide, and hydro-chloride salt)
- Nitroglycerine (1,2,3-Propanetriol, trinitrate)
- 4-Nitrophenol (Phenol, 4-nitro-)
- 4-Nitroquinoline-1-oxide (Quinoline, 4-nitro-1-oxide-)
- Nitrosamine, N.O.S.*
- N-Nitrosodi-n-butylamine (1-Butanamine, N-butyl-N-nitroso-)
- N-Nitrosodiethanolamine (Ethanol, 2,2'-(nitrosoimino)bis-)
- N-Nitrosodiethylamine (Ethanamine, N-Ethyl-N-nitroso-)
- N-Nitrosodimethylamine (Dimethylnitrosamine)
- N-Nitroso-N-ethylurea (Carbamide, N-ethyl-N-nitroso-)
- N-Nitrosomethylethylamine (Ethanamine, N-methyl-N-nitroso-)
- N-Nitroso-N-methylurea (Carbamide, N-methyl-N-nitroso-)
- N-Nitroso-N-methylurethane (Carbamic acid, methylnitroso-, ethyl ester)
- N-Nitrosomethylvinylamine (Ethenamine, N-methyl-N-nitroso-)
- N-Nitrosomorpholine (Morpholine, N-nitroso-)
- N-Nitrosornicotine (Nornicotine, N-nitroso-)
- N-Nitrosopiperidine (Pyridine, hexahydro-, N-nitroso-)
- N-Nitrosopyrrolidine (pyrrole, tetrahydro-, N-nitroso-)
- N-Nitrososarcosine (Sarcosine, N-nitroso-)
- 5-Nitro-o-toluidine (Benzenamine, 2-methyl-5-nitro-)
- Octamethylpyrophosphoramidate (Diphosphoramidate, octamethyl-)
- Osmium tetroxide (Osmium (VIII) oxide)
- 7-Ocabcyclo[2.2.1]heptane-2,3-dicarboxylic acid (Endothal)
- Paraldehyde (1,3,5-Trioxane, 2,4,6-trinethyl-)
- Parathion (Phosphorothioic acid, O,O-diethyl O-(p-nitrophenyl) ester)
- Pentachlorobenzene (Benzene, pentachloro-)
- Pentachlorodibenzo-p-dioxins
- Pentachlorodibenzofurans
- Pentachloroethane (Ethane, pentachloro-)
- Pentachloronitrobenzene (PCNB) (Benzene, pentachloronitro-)
- Pentachlorophenol (Phenol, pentachloro-)
- Perchloromethyl mercaptan (Methanesulferryl chloride, trichloro-)
- Phenacetin (Acetamide, N-(4-ethoxyphenyl)-)
- Phenol (Benzene, hydroxy-)
- Phenylenediamine (Benzenediamine)
- Phenylmercury acetate (Mercury, acetatophenyl-)
- N-Phenylthiourea (Thiourea, phenyl-)
- Phosgene (Carbonyl chloride)
- Phosphine (Hydrogen phosphide)
- Phosphorodithioic acid, O,O-diethyl S-[(ethylthio)methyl] ester (Phorate)
- Phosphorothioic acid, O,O-dimethyl O-[p-((dimethylamino)sulfonyl)phenyl] ester (Famphur)
- Phthalic acid esters, N.O.S.* (Benzene, 1,2-dicarboxylic acid, esters, N.O.S.*)
- Phthalic anhydride (1,2-Benzenedicarboxylic acid anhydride)
- 2-Picoline (Pyridine, 2-methyl-)
- Polychlorinated biphenyl, N.O.S.*
- Potassium cyanide
- Potassium silver cyanide (Argentate(1-), dicyano-, potassium)
- Pronamide (3,5-Dichloro-N-(1,1-dimethyl-2-propynyl)benzamide)
- 1,3-Propanesultone (1,2-Oxathiolane, 2,2-dioxide)
- Propionic acid, 2-(2,4,5-trichlorophenoxy), salts and esters (2,4,5-TP, Silvex, salts and esters)
- n-Propylamine (1-Propane)
- Propylthiouracil (2,3 dihydro-6-propyl-2 thioxo-4(1H)-pyrimidinone)
- 2-Propyn-1-ol (Propargyl alcohol)
- Pyridine
- Reserpine (Yohimban-16-carboxylic acid, 11,17-dimethoxy-18-[(3,4,5-trimethoxybenzoyl)oxy]-, methyl ester)
- Resorcinol (1,3-Benzenediol)
- Saccharin and salts (1,2-Benzoisothiazolin-3-one, 1,1-dioxide, and salts)
- Safrol (Benzene, 1,2-methylenedioxy-4-allyl-)
- Selenious acid (Selenium dioxide)
- Selenium and compounds, N.O.S.*
- Selenium sulfide (Sulfur selenide)
- Selenourea (Carbamimidoseleonic acid)
- Silver and compounds, N.O.S.*
- Silver cyanide
- Sodium cyanide
- Streptozotocin (D-Glucopyranose, 2-deoxy-2-(3-methyl-3-nitrosoureido)-)
- Strontium sulfide
- Strychnine and salts (Strychnidin-10-one, and salts)
- 1,2,4,5-Tetrachlorobenzene (Benzene, 1,2,4,5-tetrachloro-)
- Tetrachlorodibenzo-p-dioxins
- Tetrachlorodibenzofurans
- 2,3,7,8-Tetrachlorodibenzo-p-dioxin (TCDD) Dibenzo-p-dioxin, 2,3,7,8-tetrachloro-)
- Tetrachloroethane, N.O.S.* (Ethane, tetrachloro-, N.O.S.*)
- 1,1,1,2-Tetrachlorethane (Ethane, 1,1,1,2-tetrachloro-)
- 1,1,2,2-Tetrachlorethane (Ethane, 1,1,2,2-tetrachloro-)
- Tetrachlorethylene (Ethene, 1,1,2,2-tetrachloro-)¹
- Tetrachloromethane (Carbon tetrachloride)
- 2,3,4,6-Tetrachlorophenol (Phenol, 2,3,4,6-tetrachloro-)
- Tetraethyldithiopyrophosphate (Dithiopyrophosphoric acid, tetraethyl-ester)
- Tetraethyl lead (Plumbane, tetraethyl-)
- Tetraethylpyrophosphate (Pyrophosphoric acid, tetraethyl ester)
- Tetranitromethane (Methane, tetranitro-)
- Thallium and compounds, N.O.S.*
- Thallic oxide (Thallium (III) oxide)
- Thallium (1) acetate (Acetic acid, thallium (I) salt)
- Thallium (I) carbonate (Carbonic acid, dithallium (I) salt)
- Thallium (I) chloride

Thallium (I) nitrate (Nitric acid, thallium (I) salt)
 Thallium selenite
 Thallium (I) sulfate (Sulfuric acid, thallium (I) salt)
 Thioacetamide (Ethanethioamide)
 Thiosemicarbazide (Hydrazinecarbothioamide)
 Thiourea (Carbamide thio-)
 Thiuram (Bis(dimethylthiocarbamoyl) disulfide)
 Toluene (Benzene, methyl-)
 Toluenediamine, N.O.S. (Toluene, 2,5-diamine-)
 2,4-Toluenediamine
 2,6-Toluenediamine
 3,4-Toluenediamine
 o-Toluidine hydrochloride (Benzenamine, 2-methyl-, hydrochloride)
 Toluylene diisocyanate (Benzene, 2,4- and 2,6-diiisocyanatomethyl-)
 Toxaphene (Camphene, octachloro-)
 Tribromomethane (Bromoform)
 1,2,4-Trichlorobenzene (Benzene, 1,2,4-trichloro-)
 1,1,1-Trichloroethane (Methyl chloroform)
 1,1,2-Trichloroethane (Ethane, 1,1,2-trichloro-)
 Trichloroethene (Trichloroethylene)
 Trichloromonofluoromethane (Methane, trichlorofluoro-)
 2,4,5-Trichlorophenol (Phenol, 2,4,5-trichloro-)
 2,4,6-Trichlorophenol (Phenol, 2,4,6-trichloro-)
 2,4,5-Trichlorophenoxyacetic acid (2,4,5-T, salts and esters) (Acetic acid, 2,4,5-trichlorophenoxy-, salts and esters)
 2,4,5-Trichlorophenoxypropionic acid (Propionic acid, 2-(2,4,5-trichlorophenoxy), salts and esters (2,4,5-TP, Silvex, salts and esters))
 Trichloropropane, N.O.S.* (Propane, trichloro-, N.O.S.*)
 1,2,3-Trichloropropane (Propane, 1,2,3-trichloro-)
 O,O,O-Triethyl phosphorothioate (Phosphorothioic acid, O,O,O-triethyl ester)
 sym-Trinitrobenzene (Benzene, 1,3,5-trinitro-)
 Tris(1-aziridinyl) phosphine sulfide (Phosphine sulfide, tris(1-aziridinyl-))
 Tris(2,3-dibromopropyl) phosphate (1-Propanol, 2,3-dibromo-, phosphate)
 Trypan blue (2,7-Naphthalenedisulfonic acid, 3,3'-[(3,3'-dimethyl(1,1'-biphenyl)-4,4'-diyl)bis(azo)]bis(5-amino-4-hydroxy-, tetrasodium salt)
 Undecamethylenediamine, N,N'-bis-(2-chloro-benzyl)-, dihydrochloride N,N'-Undecamethyl-enebis(2-chlorobenzylamine, dihydrochloride)
 Uracil mustard (Uracil 5-[bis(2-chlorethyl)amino]-)
 Vanadic acid, ammonium salt (ammonium vanadate)
 Vanadium pentoxide (Vanadium (V) oxide)
 Vinyl chloride (Ethane, chloro-)
 Zinc cyanide
 Zinc phosphide


Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-9905, filed 2/10/82.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

* The abbreviation N.O.S. signifies those members of the general class "not otherwise specified" by name in this listing.


[Statutory Authority: Chapter 70.105 RCW. 89-02-059 (Order 88-24), § 173-303-9905, filed 1/4/89; 87-14-029 (Order DE-87-4), § 173-303-9905, filed 6/26/87; 86-12-057 (Order DE-85-10), § 173-303-9905, filed 6/3/86; 84-09-088 (Order DE 83-36), § 173-303-9905, filed 4/18/84. Statutory

WAC 173-303-9906 Toxic dangerous waste mixtures graph.

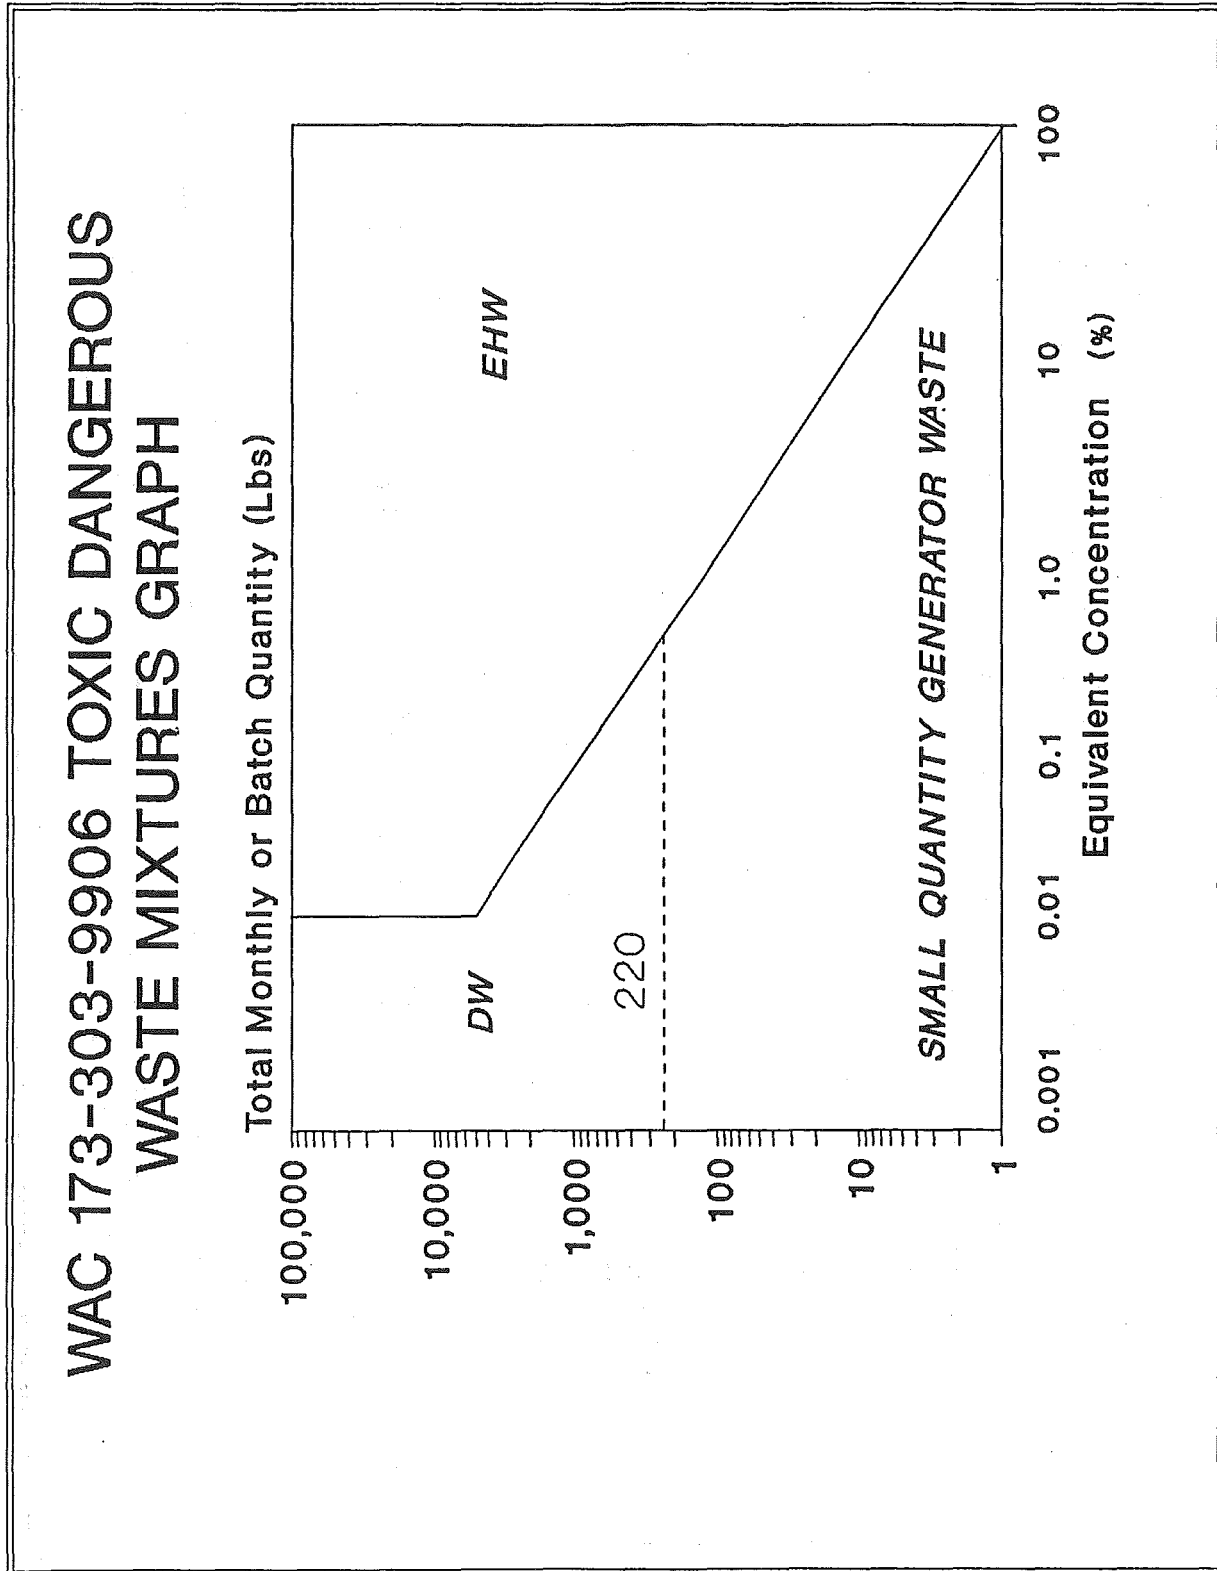

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251). 91-07-005 (Order 90-42), § 173-303-9906, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW. 87-14-029 (Order DE-87-4), § 173-303-9906, filed 6/26/87. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW. 82-05-023 (Order DE 81-33), § 173-303-9906, filed 2/10/82.]

WAC 173-303-9907 Persistent dangerous waste mixtures graph.

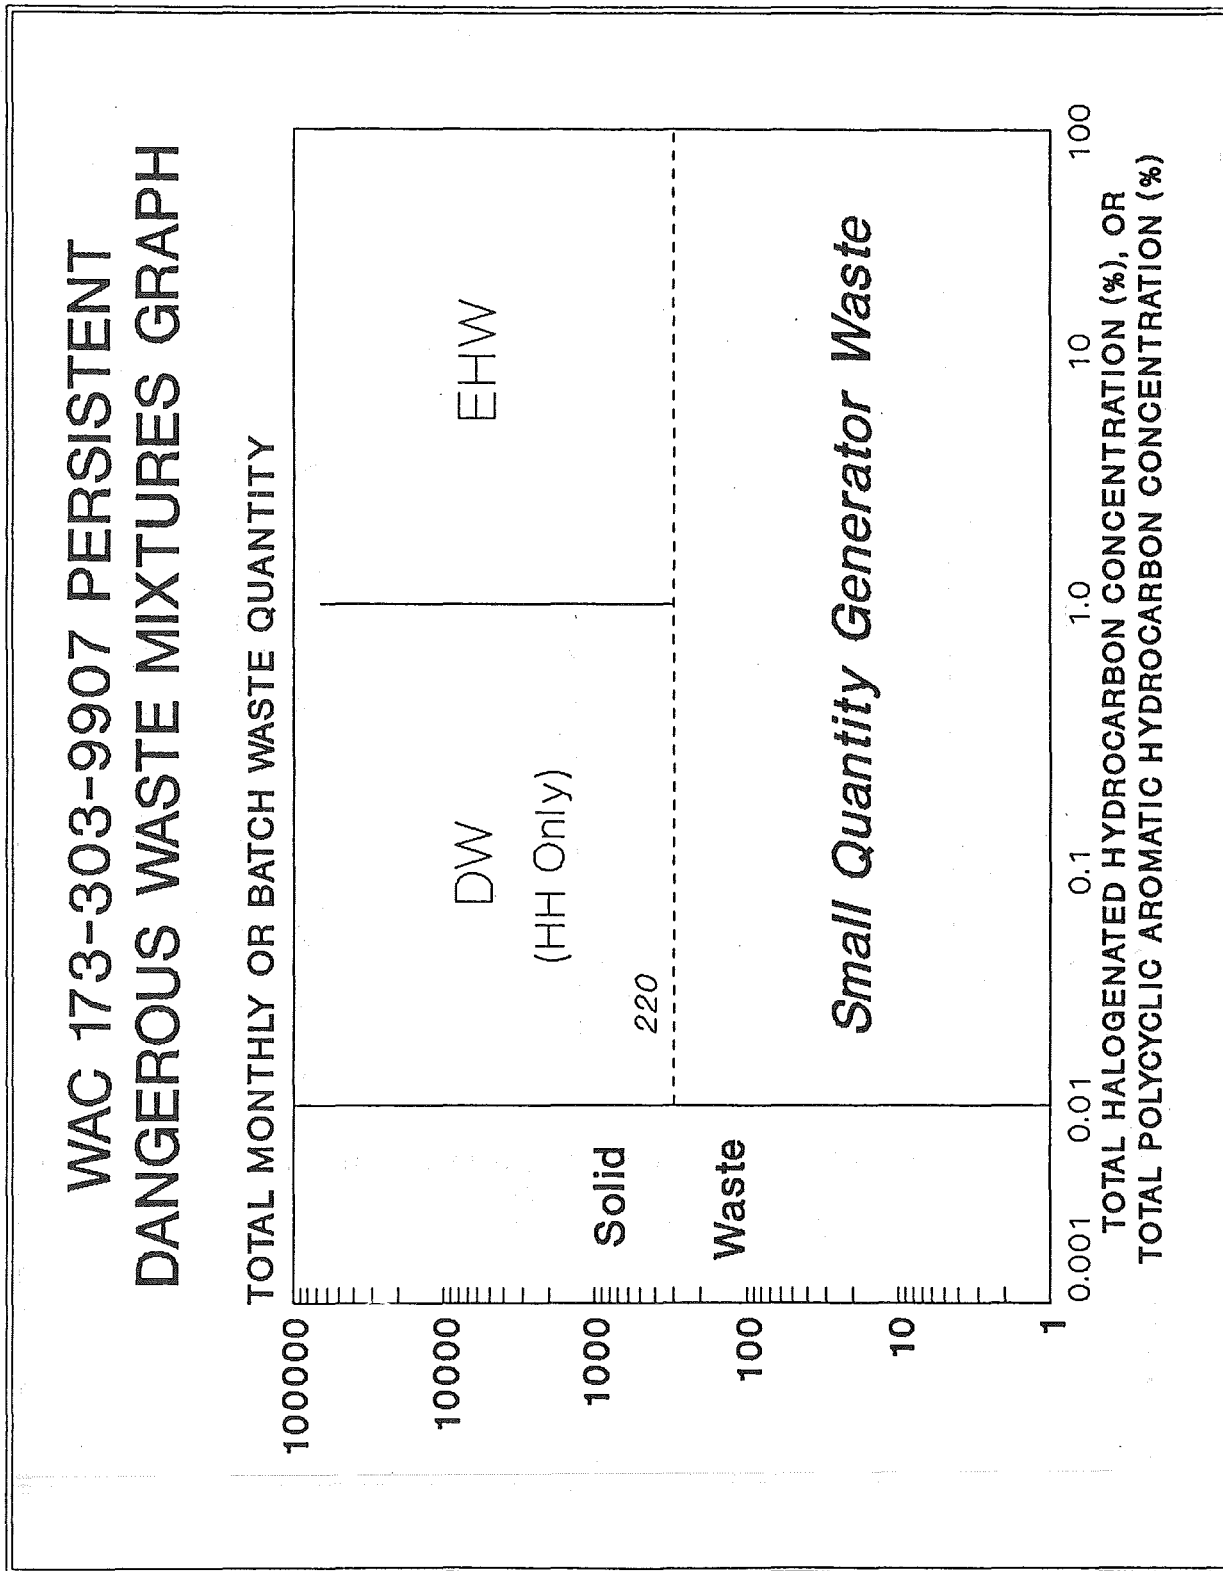

[Statutory Authority: Chapters 70.105 and 70.105D RCW, 40 CFR Part 271.3 and RCRA § 3006 (42 U.S.C. 3251), 91-07-005 (Order 90-42), § 173-303-9907, filed 3/7/91, effective 4/7/91. Statutory Authority: Chapter 70.105 RCW, 87-14-029 (Order DE-87-4), § 173-303-9907, filed 6/26/87. Statutory Authority: RCW 70.95.260 and chapter 70.105 RCW, 82-05-023 (Order DE 81-33), § 173-303-9907, filed 2/10/82.]

Chapter 173-304 WAC
MINIMUM FUNCTIONAL STANDARDS FOR
SOLID WASTE HANDLING

WAC

173-304-010	Authority and purpose.
173-304-011	County planning requirements.
173-304-012	Planning requirements for energy recovery or incineration facilities.
173-304-015	Applicability.
173-304-100	Definitions.
173-304-130	Locational standards for disposal sites.
173-304-190	Owner responsibilities for solid waste.
173-304-195	Permit required.
173-304-200	On-site containerized storage, collection and transportation standards for solid waste.
173-304-300	Waste recycling facility standards.
173-304-400	Solid waste handling facility standards.
173-304-405	General facility requirements.
173-304-407	General closure and post-closure requirements.
173-304-410	Transfer stations, baling and compaction systems, and drop box facilities.
173-304-420	Piles used for storage and treatment—Facility standards.
173-304-430	Surface impoundment standards.
173-304-440	Energy recovery and incinerator standards.
173-304-450	Landspreading disposal standards.
173-304-460	Landfilling standards.
173-304-461	Inert waste and demolition waste landfilling facility requirements.
173-304-462	Woodwaste landfilling facility requirements.
173-304-463	Problem waste landfills. (Reserved)
173-304-467	Financial assurance for public facilities.
173-304-468	Financial assurance for private landfill disposal facilities.
173-304-470	Other methods of solid waste handling.
173-304-490	Ground water monitoring requirements.
173-304-600	Permit requirements for solid waste facilities.
173-304-700	Variances.
173-304-9901	Maximum contaminant levels for ground water.

WAC 173-304-010 Authority and purpose. This regulation is promulgated under the authority of chapter 70.95 RCW to protect public health, to prevent land, air, and water pollution, and conserve the state's natural, economic, and energy resources by:

- (1) Setting minimum functional performance standards for the proper handling of all solid waste materials originating from residences, commercial, agricultural and industrial operations and other sources;
- (2) Identifying those functions necessary to assure effective solid waste handling programs at both the state and local level;
- (3) Following the direction set by the legislature for the management of solid waste in order of descending priority as applicable:
 - (a) Waste reduction;
 - (b) Waste recycling;
 - (c) Energy recovery or incineration;
 - (d) Landfill.
- (4) Describing the responsibility of persons, municipalities, regional agencies, state and local government under existing laws and regulations related to solid waste;

(5) Requiring use of the best available technology for siting, and all known available and reasonable methods for designing, constructing, operating and closing solid waste handling facilities; and

(6) Establishing these standards as minimum standards for solid waste handling to provide a state-wide consistency and expectation as to the level at which solid waste is managed throughout the state. Local ordinances setting standards for solid waste handling shall not be less stringent than these minimum standards, and shall be adopted not later than one year after the effective date of this regulation. Local ordinances need not adopt WAC 173-304-011, County planning requirements, but shall otherwise comply with the requirements of WAC 173-304-011. Solid waste regulations or ordinances adopted by counties, cities, or jurisdictional boards of health shall be filed with the department ninety days following adoption.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-010, filed 10/28/85.]

WAC 173-304-011 County planning requirements. The concept of "solid waste management" includes in addition to proper storage, collection, and disposal of discards, other management functions or operational activities including waste reduction, source separation, waste recycling, transportation, processing, treatment, resource recovery, energy recovery, incineration, and landfilling. Under the State Solid Waste Management Act, chapter 70.95 RCW, primary responsibility for managing solid waste is assigned to local government (RCW 70.95.020). The state, however, is responsible for assuring that effective local programs are established throughout Washington state. Therefore, state and local solid waste planning for the aforementioned activities is an essential part of proper solid waste management.

(1) **State responsibility.** As described in RCW 70.95.260, the department shall coordinate the development of a state solid waste management plan in cooperation with local government, the department of community development, and other appropriate state and regional agencies. The state plan shall be reviewed at two-year intervals, revised as necessary, and extended so that the plan shall look to the future for twenty years as a guide in carrying out a coordinated state solid waste management program.

(2) **Local government responsibility.** The overall purpose of local comprehensive solid waste planning is to determine the nature and extent of the various solid waste categories and to establish management concepts for their handling, utilization, and disposal consistent with the priorities established in RCW 70.95.010 for waste reduction, waste recycling, energy recovery and incineration, and landfill. Each local plan shall be prepared in accordance with RCW 70.95.080, 70.95.090, 70.95.100, and 70.95.110. Additionally, the department has available "Guidelines for the development of local or regional solid waste management plans and plan revisions" to be followed by local government. RCW 70.95.165 also requires counties to establish a local solid waste advisory committee to assist in the develop-

ment of programs and policies concerning solid waste handling and disposal and to review and comment upon proposed rules, policies, or ordinances prior to their adoption.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-011, filed 10/28/85.]

WAC 173-304-012 Planning requirements for energy recovery or incineration facilities. In order to implement the priorities and provide a basis for permit requirements established in chapter 70.95 RCW, each comprehensive solid waste management plan shall contain an analysis for waste reduction and recycling. The analysis will include a determination of levels of waste reduction and recycling which could occur for solid wastes that are proposed to be landfilled or incinerated. The analysis shall include: A description of markets for recycled material, a review of waste generation trends, a description of waste composition, a cost analysis of the impact of recycling or reduction programs on collection and disposal rates and a discussion and description of any additional programs needed to assist public and private sector recycling programs.

[Statutory Authority: Chapter 70.95 RCW. 87-15-049 (Order 87-3), § 173-304-012, filed 7/14/87.]

WAC 173-304-015 Applicability. These regulations apply to solid wastes as that term is defined in WAC 173-304-100. These regulations shall not apply to the following solid wastes:

- (1) Overburden from mining operations intended for return to the mine;
- (2) Liquid wastes whose discharge or potential discharge is regulated under federal, state or local water pollution permits;
- (3) Dangerous wastes as defined by chapter 70.105 RCW and chapter 173-303 WAC;
- (4) Woodwaste used for ornamental, animal bedding, mulch and plant bedding, or roadbuilding purposes;
- (5) Agricultural wastes, limited to manures and crop residues, returned to the soils at agronomic rates;
- (6) Clean soils and clean dredge spoils as defined in WAC 173-304-100 or as otherwise regulated by section 404 of the Federal Clean Water Act (PL 95-217);
- (7) Septage taken to a sewage treatment plant permitted under chapter 90.48 RCW;
- (8) Radioactive wastes, defined by chapters 402-12 and 402-19 WAC; and
- (9) Wood debris resulting from the harvesting of timber and whose disposal is permitted under chapter 76.04 RCW, the State Forest Practices Act.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-015, filed 10/28/85.]

WAC 173-304-100 Definitions. When used in this regulation, the following terms have the meanings given below.

(1) "Active area" means that portion of a facility where solid waste recycling, reuse, treatment, storage, or disposal operations are being, are proposed to be, or have been conducted. Buffer zones shall not be considered part of the active area of a facility.

(2) "Agricultural wastes" means wastes on farms resulting from the production of agricultural products including but not limited to manures, and carcasses of dead animals weighing each or collectively in excess of fifteen pounds.

(3) "Agronomic rates" means the rates of application of sludges, manures, or crop residues in accordance with rates specified by the appropriate fertilizer guide for the crop under cultivation.

(4) "Air quality standard" means a standard set for maximum allowable contamination in ambient air as set forth in chapter 173-400 WAC, General regulations for air pollution sources.

(5) "Aquifer" means a geologic formation, group of formations, or part of a formation capable of yielding a significant amount of ground water to wells or springs.

(6) "Ashes" means the residue including any air pollution flue dusts from combustion or incineration of material including solid wastes.

(7) "Balefill" means a landfill which uses compacted bales of solid waste to form discrete lifts as the landfill is filled.

(8) "Buffer zone" means that part of a facility that lies between the active area and the property boundary.

(9) "Bulky waste" means large items of refuse, such as appliances, furniture, and other oversize wastes which would typically not fit into reusable or disposable containers.

(10) "Clean soils and clean dredge spoils" means soils and dredge spoils which are not dangerous wastes or problem wastes as defined in this section.

(11) "Closure" means those actions taken by the owner or operator of a solid waste site or facility to cease disposal operations and to ensure that all such facilities are closed in conformance with applicable regulations at the time of such closures and to prepare the site for the post-closure period.

(12) "Collecting agency" means any agency, business or service operated by a person for the collecting of solid waste.

(13) "Compliance schedule" means a written schedule of required measures in a permit including an enforceable sequence leading to compliance with these regulations.

(14) "Composting" means the controlled degradation of organic solid waste yielding a product for use as a soil conditioner.

(15) "Container" means a device used for the collection, storage, and/or transportation of solid waste including but not limited to reusable containers, disposable containers, detachable containers and tanks, fixed or detachable.

(16) "Contaminate" means to allow to discharge a substance into ground water that would cause:

(a) The concentration of that substance in the ground water to exceed the maximum contamination level specified in WAC 173-304-9901, or

(b) A statistically significant increase in the concentration of that substance in the ground water where the existing concentration of that substance exceeds the maximum contaminant level specified in WAC 173-304-9901, or

(c) A statistically significant increase above background in the concentration of a substance which:

- (i) Is not specified in WAC 173-304-9901, and
- (ii) Is present in the solid waste, and

(iii) Has been determined to present a substantial risk to human health or the environment in the concentrations found at the point of compliance by the jurisdictional health department in consultation with the department and the department of social and health services.

(17) "Cover material" means soil or other suitable material that has been approved by the jurisdictional health department as cover for wastes.

(18) "Dangerous wastes" means any solid waste designated as dangerous waste by the department under chapter 173-303 WAC.

(19) "Demolition waste" means solid waste, largely inert waste, resulting from the demolition or razing of buildings, roads and other man-made structures. Demolition waste consists of, but is not limited to, concrete, brick, bituminous concrete, wood and masonry, composition roofing and roofing paper, steel, and minor amounts of other metals like copper. Plaster (i.e., sheet rock or plaster board) or any other material, other than wood, that is likely to produce gases or a leachate during the decomposition process and asbestos wastes are not considered to be demolition waste for the purposes of this regulation.

(20) "Department" means the department of ecology.

(21) "Detachable containers" means reusable containers that are mechanically loaded or handled such as a "dumpster" or drop box.

(22) "Disposable containers" means containers that are used once to handle solid waste such as plastic bags, cardboard boxes and paper bags.

(23) "Disposal" or "deposition" means the discharge, deposit, injection, dumping, leaking, or placing of any solid waste into or on any land or water.

(24) "Disposal site" means the location where any final treatment, utilization, processing, or deposition of solid waste occurs. See also the definition of interim solid waste handling site.

(25) "Drop box facility" means a facility used for the placement of a detachable container including the area adjacent for necessary entrance and exit roads, unloading and turn-around areas. Drop box facilities normally serve the general public with loose loads and receive waste from off-site.

(26) "Energy recovery" means the recovery of energy in a useable form from mass burning or refuse derived fuel incineration, pyrolysis or any other means of using the heat of combustion of solid waste that involves high temperature (above twelve hundred degrees Fahrenheit) processing.

(27) "Existing facility" means a facility which is owned or leased, and in operation, or for which construction has begun, on or before the effective date of this regulation and the owner or operator has obtained permits or approvals necessary under federal, state and local statutes, regulations and ordinances. A facility has commenced construction if either:

(a) A continuous on-site physical construction program has begun; or

(b) The owner or operator has entered into contractual obligations which cannot be cancelled or modified without substantial financial loss for physical construction of the facility to be completed within a reasonable time.

Lateral extensions of a landfill's active area on land purchased and permitted by the jurisdictional health depart-

ment for the purpose of landfilling before the effective date of this regulation shall be considered existing facilities.

(28) "Expanded facility" means a facility adjacent to an existing facility for which the land is purchased and approved by the jurisdictional health department after the effective date of this regulation. A vertical expansion approved and permitted by the jurisdictional health department after the effective date of this regulation shall also be considered an expanded facility.

(29) "Facility" means all contiguous land (including buffer zones) and structures, other appurtenances, and improvements on the land used for solid waste handling.

(30) "Facility structures" means buildings, sheds, utility lines, and drainage pipes on the facility.

(31) "Final treatment" means the act of processing or preparing solid waste for disposal, utilization, reclamation, or other approved method of use.

(32) "Free liquids" means any sludge which produces measurable liquids when the Paint Filter Liquids Test, Method 9095 of EPA Publication Number SW-846, is used.

(33) "One hundred year floodplain" means any land area which is subject to one percent or greater chance of flooding in any given year from any source.

(34) "Garbage" means unwanted animal and vegetable wastes and animal and vegetable wastes resulting from the handling, preparation, cooking and consumption of food, swill and carcasses of dead animals, and of such a character and proportion as to be capable of attracting or providing food for vectors, except sewage and sewage sludge.

(35) "Ground water" means that part of the subsurface water which is in the zone of saturation.

(36) "Holocene fault" means a fracture along which rocks on one side have been displaced with respect to those on the other side and that has occurred in the most recent epoch of the quaternary period extending from the end of the pleistocene to the present.

(37) "Incineration" means reducing the volume of solid wastes by use of an enclosed device using controlled flame combustion.

(38) "Interim solid waste handling site" means any interim treatment, utilization or processing site engaged in solid waste handling which is not the final site of disposal. Transfer stations, drop boxes, baling and compaction sites, source separation centers, and treatment are considered interim solid waste handling sites.

(39) "Industrial solid wastes" means waste by-products from manufacturing operations such as scraps, trimmings, packing, and other discarded materials not otherwise designated as dangerous waste under chapter 173-303 WAC.

(40) "Inert wastes" means noncombustible, nondangerous solid wastes that are likely to retain their physical and chemical structure under expected conditions of disposal, including resistance to biological attack and chemical attack from acidic rainwater.

(41) "Jurisdictional health department" means city, county, city-county or district public health department.

(42) "Landfill" means a disposal facility or part of a facility at which solid waste is permanently placed in or on land and which is not a landspreading disposal facility.

(43) "Landspreading disposal facility" means a facility that applies sludges or other solid wastes onto or incorpo-

rates solid waste into the soil surface at greater than vegetative utilization and soil conditioners/immobilization rates.

(44) "Leachate" means water or other liquid that has been contaminated by dissolved or suspended materials due to contact with solid waste or gases therefrom.

(45) "Local fire control agency" means a public or private agency or corporation providing fire protection such as a local fire department, the department of natural resources or the United States Forest Service.

(46) "Lower explosive limits" means the lowest percentage by volume of a mixture of explosive gases which will propagate a flame in air at twenty-five degrees centigrade and atmospheric pressure.

(47) "Medical waste" means all the infectious, and injurious waste originating from a medical, veterinary, or intermediate care facility.

(48) "New facility" means a facility which begins operation or construction after the effective date of this regulation (see also definition of "existing facility").

(49) "Nonconforming site" means a solid waste handling facility which does not currently comply with the facility requirements of WAC 173-304-400 but does comply with a compliance schedule issued in a solid waste permit by the jurisdictional health department.

(50) "Nuisance" consists in unlawfully doing an act, or omitting to perform a duty, which act or omission either annoys, injures, or endangers the comfort, repose, health or safety of others, offends decency, or unlawfully interferes with, obstructs or tends to obstruct, any lake or navigable river, bay, stream, canal, or basin, or any public park, square, street or highway; or in any way renders other persons insecure in life, or in the use of property.

(51) "Open burning" means the burning of solid waste materials in an open fire or an outdoor container without providing for the control of combustion or the control of emissions from the combustion.

(52) "Performance standard" means the criteria for the performance of solid waste handling facilities.

(53) "Permeability" means the ease with which a porous material allows liquid or gaseous fluids to flow through it. For water, this is usually expressed in units of centimeters per second and termed hydraulic conductivity. Soils and synthetic liners with a permeability for water of 1×10^{-7} cm/sec or less may be considered impermeable.

(54) "Permit" means an authorization issued by the jurisdictional health department which allows a person to perform solid waste activities at a specific location and which includes specific conditions for such facility operations.

(55) "Person" means an individual, firm, association, copartnership, political subdivision, government agency, municipality, industry, public or private corporation, or any other entity whatsoever.

(56) "Pile" means any noncontainerized accumulation of solid waste that is used for treatment or storage.

(57) "Plan of operation" means the written plan developed by an owner or operator of a facility detailing how a facility is to be operated during its active life and during closure and post-closure.

(58) "Point of compliance" means that part of ground water that lies beneath the perimeter of a solid waste

facilities' active area as that active area would exist at closure of the facility.

(59) "Post-closure" means the requirements placed upon disposal sites after closure to ensure their environmental safety for at least a twenty-year period or until the site becomes stabilized (i.e., little or no settlement, gas production, or leachate generation).

(60) "Premises" means a tract or parcel of land with or without habitable buildings.

(61) "Problem wastes" means: (a) Soils removed during the cleanup of a remedial action site, or a dangerous waste site closure or other cleanup efforts and actions and which contain harmful substances but are not designated dangerous wastes, or (b) dredge spoils resulting from the dredging of surface waters of the state where contaminants are present in the dredge spoils at concentrations not suitable for open water disposal and the dredge spoils are not dangerous wastes and are not regulated by section 404 of the Federal Clean Water Act (PL 95-217).

(62) "Processing" means an operation to convert a solid waste into a useful product or to prepare it for disposal.

(63) "Putrescible waste" means solid waste which contains material capable of being decomposed by microorganisms.

(64) "Pyrolysis" means the process in which solid wastes are heated in an enclosed device in the absence of oxygen to vaporization, producing a hydrocarbon-rich gas capable of being burned for recovery of energy.

(65) "Reclamation site" means a location used for the processing or the storage of recycled waste.

(66) "Reusable containers" means containers that are used more than once to handle solid waste such as garbage cans.

(67) "Run-off" means any rainwater, leachate or other liquid which drains over land from any part of the facility.

(68) "Run-on" means any rainwater or other liquid which drains over land onto any part of a facility.

(69) "Scavenging" means the removal of materials at a disposal site, or interim solid waste handling site without the approval of the owner or operator and the jurisdictional health department.

(70) "Septage" means a semisolid consisting of settled sewage solids combined with varying amounts of water and dissolved materials generated from a septic tank system.

(71) "Sludge" means a semisolid substance consisting of settled sewage solids combined with varying amounts of water and dissolved materials generated from a wastewater treatment plant or other source.

(72) "Sole source aquifer" means an aquifer designated by the Environmental Protection Agency pursuant to Section 1424e of the Safe Drinking Water Act (PL 93-523).

(73) "Solid waste" means all putrescible and nonputrescible solid and semisolid wastes, including but not limited to garbage, rubbish, ashes, industrial wastes, swill, demolition and construction wastes, abandoned vehicles or parts thereof, and discarded commodities. This includes all liquid, solid and semisolid, materials which are not the primary products of public, private, industrial, commercial, mining, and agricultural operations. Solid waste includes but is not limited to sludge from wastewater treatment plants and septage, from septic tanks, woodwaste, dangerous waste, and problem wastes.

(74) "Solid waste handling" means the management, storage, collection, transportation, treatment, utilization, processing or final disposal of solid wastes, including the recovery and recycling of materials from solid wastes, the recovery of energy resources from such wastes or the conversion of the energy in such wastes to more useful forms or combinations thereof.

(75) "Solid waste management" means the systematic administration of activities which provide for the collection, source separation, storage, transportation, transfer, processing, treatment, and disposal of solid waste.

(76) "Storage" means the holding of solid waste materials for a temporary period.

(77) "Twenty-five year storm" means a storm of a particular duration and of such an intensity that it has a four percent probability of being equalled or exceeded each year.

(78) "Twenty-four hour, twenty-five year storm" means a twenty-five year storm of twenty-four hours duration.

(79) "Stream" means the point at which any confined freshwater body of surface water reaches a mean annual flow of twenty cubic feet per second.

(80) "Surface impoundment" means a facility or part of a facility which is a natural topographic depression, man-made excavation, or diked area formed primarily of earthen materials (although it may be lined with man-made materials), and which is designed to hold an accumulation of liquids or sludges. The term includes holding, storage, settling, and aeration pits, ponds, or lagoons, but does not include injection wells.

(81) "Surface water" means all lakes, rivers, ponds, streams, inland waters, salt waters and all other water and water courses within the jurisdiction of the state of Washington.

(82) "Transfer station" means a permanent, fixed, supplemental collection and transportation facility, used by persons and route collection vehicles to deposit collected solid waste from off-site into a larger transfer vehicle for transport to a solid waste handling facility. Transfer stations may also include recycling facilities.

(83) "Treatment" means the physical, chemical or biological processing of solid waste to make such solid wastes safer for storage or disposal, amenable for energy or material resource recovery or reduced in volume.

(84) "Utilization" means consuming, expending, or exhausting by use, solid waste materials.

(85) "Vadose zone" means that portion of a geologic formation in which soil pores contain some water, the pressure of that water is less than atmospheric pressure, and the formation occurs above the zone of saturation.

(86) "Vector" means a living animal, insect or other arthropod which transmits an infectious disease from one organism to another.

(87) "Waste recycling" means reusing waste materials and extracting valuable materials from a waste stream.

(88) "Waste reduction" means reducing the amount or type of waste generated.

(89) "Water quality standard" means a standard set for maximum allowable contamination in surface waters as set forth in chapter 173-201 WAC, Water quality standards for waters of the state of Washington.

(90) "Wetlands" means those areas that are inundated or saturated by surface or ground water at a frequency and

duration sufficient to support a prevalence of vegetative or aquatic life that requires saturated or seasonally saturated soil conditions for growth and reproduction. Wetlands generally include swamps, marshes, bogs, estuaries, and similar areas.

(91) "Woodwaste" means solid waste consisting of wood pieces or particles generated as a by-product or waste from the manufacturing of wood products, handling and storage of raw materials and trees and stumps. This includes but is not limited to sawdust, chips, shavings, bark, pulp, hog fuel, and log sort yard waste, but does not include wood pieces or particles containing chemical preservatives such as creosote, pentachlorophenol, or copper-chrome-arsenate.

(92) "Zone of saturation" means that part of a geologic formation in which soil pores are filled with water and the pressure of that water is equal to or greater than atmospheric pressure.

(93) "Buy-back recycling center" means any facility which collects, receives, or buys recyclable materials from household, commercial, or industrial sources for the purpose of accumulating, grading, or packaging recyclable materials for subsequent shipment and reuse, other than direct application to land.

(94) "Domestic wastewater facility" means all structures, equipment, or processes required to collect, carry away, treat, reclaim, or dispose of domestic wastewater together with such industrial waste as may be present.

(95) "Industrial wastewater facility" means all structures, equipment, or processes required to collect, carry away, treat, reclaim, or dispose of industrial wastewater.

(96) "Liquid" means a substance that flows readily and assumes the form of its container but retains its independent volume.

(97) "Reserved" means a section having no requirements and which is set aside for future possible rule-making as a note to the regulated community.

(98) "Limited purpose landfills" means a landfill that receives solid waste of limited types, known and consistent composition, other than woodwastes, garbage, inert waste, and demolition waste.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-100, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-100, filed 10/28/85.]

WAC 173-304-130 Locational standards for disposal sites. (1) Applicability. These standards apply to all new and expanded disposal sites including landfills, landspreading disposal sites, and piles and surface impoundments that are to be closed as landfills. These standards do not apply to:

(a) Existing facilities or facilities that have engaged in closure and closed before the effective date of this regulation;

(b) Interim solid waste handling sites;

(c) Energy recovery and incineration sites;

(d) Piles and surface impoundments used for storage, unless otherwise referred to in WAC 173-304-400, Solid waste handling facility standards;

(e) Utilization of sludge and other waste on land;

(f) Inert wastes and demolition wastes as defined in WAC 173-304-100 unless otherwise referred to in WAC 173-304-400, Solid waste handling facility standards; and

(g) Problem wastes, as defined in WAC 173-304-100.

(2) Locational standards. All applicable solid waste facilities shall be subject to the following locational standards:

(a) Geology. No facility shall be located over a holocene fault, in subsidence areas, or on or adjacent to geologic features which could compromise the structural integrity of the facility.

(b) Ground water.

(i) No facility shall be located at a site where the bottom of the lowest liner is any less than ten feet above the seasonal high level of ground water in the uppermost aquifer, or five feet when a hydraulic gradient control system or the equivalent has been installed to control ground water fluctuations;

(ii) No landfill shall be located over a sole source aquifer; and

(iii) No facility's active area shall be located closer than one thousand feet to a down-gradient drinking water supply well, in use and existing at the time of the county's adoption of the comprehensive solid waste management plan unless the owner or operator can show that the active area is no less than ninety days travel time hydraulically to the nearest down-gradient drinking water supply well in the uppermost useable aquifer.

(c) Natural soils. See WAC 173-304-400, such as WAC 173-304-460 (3)(c)(i), landfill liners;

(d) Flooding. See WAC 173-304-400 such as WAC 173-304-460 (3)(d), landfill, floodplains;

(e) Surface water. No facility's active area shall be located within two hundred feet measured horizontally, of a stream, lake, pond, river, or salt water body, nor in any wetland nor any public land that is being used by a public water system for watershed control for municipal drinking water purposes in accordance with WAC 248-54-660(4);

(f) Slope. No facility's active area shall be located on any hill whose slope is unstable;

(g) Cover material. See WAC 173-304-400, such as WAC 173-304-460 (3)(e), landfills, closure;

(h) Capacity. See WAC 173-304-400, such as WAC 173-304-460, Landfilling standards, (for standards that vary according to capacity);

(i) Climatic factors. See WAC 173-304-400 such as WAC 173-304-460(3) landfill standards, (for standards applicable to arid climates);

(j) Land use. No facility shall be located:

(i) Within ten thousand feet of any airport runway currently used by turbojet aircraft or five thousand feet of any airport runway currently used by only piston-type aircraft unless a waiver is granted by the federal aviation administration. This requirement is only applicable where such facility is used for disposing of garbage such that a bird hazard to aircraft would be created;

(ii) In areas designated by the United States Fish and Wildlife Service or the department of game as critical habitat for endangered or threatened species of plants, fish, or wildlife;

(iii) So that the active area is any closer than one hundred feet to the facility property line for land zoned as nonresidential, except that the active area may be no closer than two hundred and fifty feet to the property line of adjacent land zoned as residential existing at the time of the

county's adoption of the comprehensive solid waste management plan;

(iv) So as to be at variance with any locally-adopted land use plan or zoning requirement unless otherwise provided by local law or ordinance; and

(v) So that the active area is any closer than one thousand feet to any state or national park.

(k) Toxic air emissions. See WAC 173-304-400 such as WAC 173-304-460 (2)(b), landfill performance standards.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-130, filed 10/28/85.]

WAC 173-304-190 Owner responsibilities for solid waste. The owner, operator, or occupant of any premise, business establishment, or industry shall be responsible for the satisfactory and legal arrangement for the solid waste handling of all solid waste accumulated by them on the property.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-190, filed 10/28/85.]

WAC 173-304-195 Permit required. After approval by the department of the comprehensive solid waste plan required by RCW 70.95.100, no solid waste disposal site or facility shall be maintained, established, substantially altered, expanded or improved until the county, city or other person operating or owning such site has obtained a permit from the jurisdictional health department pursuant to the provisions of WAC 173-304-600.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-195, filed 10/28/85.]

WAC 173-304-200 On-site containerized storage, collection and transportation standards for solid waste.

(1) Applicability. These standards apply to all persons storing containerized solid waste generated on-site, and to all persons who are engaged in the collection and transportation of solid waste of more than one single family residence or single family farm including collection and transportation of septage and septic tank pumpings.

(2) On-site storage standards.

(a) The owner or occupant of any premises, business establishment, or industry shall be responsible for the safe and sanitary storage of all containerized solid wastes accumulated at that premises.

(b) The owner, operator, or occupant of any premises, business establishment, or industry shall store containerized solid wastes in containers that meet the following requirements:

(i) Disposable containers shall be sufficiently strong to allow lifting without breakage and shall be thirty-two gallons in capacity or less where manual handling is practiced;

(ii) Reusable containers, except for detachable containers, shall be:

(A) Rigid and durable;

(B) Corrosion resistant;

(C) Nonabsorbent and water tight;

(D) Rodent-proof and easily cleanable;

(E) Equipped with a close fitting cover;

(F) Suitable for handling with no sharp edges or other hazardous conditions; and

(G) Equal to or less than thirty-two gallons in volume where manual handling is practiced.

(iii) Detachable containers shall be durable, corrosion-resistant, nonabsorbent, nonleaking and having either a solid cover or screen cover to prevent littering.

(3) Collection and transportation standards.

(a) All persons collecting or transporting solid waste shall avoid littering, or the creation of other nuisances at the loading point, during transport and for the proper unloading of the solid waste at a permitted transfer station, or other permitted solid waste handling site.

(b) Vehicles or containers used for the collection and transportation of solid waste shall be tightly covered or screened where littering may occur, durable and of easily cleanable construction. Where garbage is being collected or transported, containers shall be cleaned as necessary to prevent nuisances, odors and insect breeding and shall be maintained in good repair.

(c) Vehicles or containers used for the collection and transportation of any solid waste shall be loaded and moved in such manner that the contents will not fall, leak in quantities to cause a nuisance, or spill therefrom. Where such spillage or leakage does occur, the waste shall be picked up immediately by the collector or transporter and returned to the vehicle or container and the area otherwise properly cleaned.

(d) All persons commercially collecting or transporting solid waste shall inspect collection and transportation vehicles monthly, for repairs to containers such as missing or loose-fitting covers or screens, leaking containers, etc., and maintain such inspection records at the facility normally used to park such vehicles or such other location that maintenance records are kept. Such records shall be kept for a period of at least two years, and be made available upon the request of the jurisdictional health department.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-200, filed 10/28/85.]

WAC 173-304-300 Waste recycling facility standards. (1) Applicability.

(a) These standards apply to facilities engaged in recycling or utilization of solid waste on the land, including but not limited to:

(i) Noncontainerized composting in piles;

(ii) Utilization of sewage sludge, septage and other organic wastes on land for beneficial use;

(iii) Accumulation of wastes in piles for recycling or utilization.

(b) These standards do not apply to:

(i) Single family residences and single family farms engaged in composting of their own wastes;

(ii) Facilities engaged in the recycling of solid waste containing garbage, such as garbage composting, which are subject to WAC 173-304-400, Solid waste handling facility standards;

(iii) Facilities engaged in the storage of tires which are subject to WAC 173-304-400, Solid waste handling facility standards;

(iv) Problem wastes as defined in WAC 173-304-100;

(v) Facilities engaged in recycling of solid waste stored in surface impoundments which are subject to WAC 173-304-400, Solid waste handling facility standards; and

(vi) Woodwaste or hog fuel piles to be used as fuel or raw materials stored temporarily in piles being actively used so long as the criteria of WAC 173-304-300 (3)(c)(i) are met.

(c) These standards do not apply to any facility that recycles or utilizes solid wastes in containers, tanks, vessels, or in any enclosed building, including buy-back recycling centers.

(2) Effective dates. All existing facilities recycling solid waste not in conformance with this section shall be placed upon a compliance schedule under WAC 173-304-600(1) to assure compliance within two years of the effective date of this regulation.

(3) Waste recycling requirements.

(a) All applicable solid waste recycling facilities shall apply for and obtain a solid waste permit under WAC 173-304-600, permits.

(b) Applicable waste recycling facilities shall submit annual reports to the jurisdictional health department and the department by March 1 of the following year for which the data is collected on forms supplied by the department. The annual reports shall include quantities and types of waste recycled for purposes of determining progress towards achieving the goals of waste reduction, waste recycling, and treatment in accordance with RCW 70.95.010(4). Such facilities may request and be assured of confidentiality for their reports in accordance with chapter 42.17 RCW and RCW 43.21A.160.

(c) All facilities storing solid waste in outdoor piles or surface impoundments for the purpose of waste recycling shall be considered to be storing or disposing of solid waste if:

(i) At least fifty percent of the material has not been shown to have been recycled in the past three years and any material has been on-site more than five years; or

(ii) Ground water or surface water, air, and/or land contamination has occurred or will likely occur under current conditions of storage or in case of fire, or flood.

Upon such a determination by the jurisdictional health department that (c)(i) or (ii) of this subsection are met, the jurisdictional health department may require a permit application and issuance of a permit under WAC 173-304-600 of these rules.

(d) Waste recycling facilities shall allow jurisdictional health department and department representatives entry for inspection purposes and to determine compliance with these rules at reasonable times.

(e) All applicable waste recycling facilities shall not conflict with the county comprehensive solid waste management plan required by WAC 173-304-011 of these rules.

(f) All waste recycling facilities shall comply with applicable local, state and federal laws and regulations, including but not limited to environmental regulations and laws.

(4) Sewage sludge utilization requirements.

In addition to the requirements of subsection (3) of this section, all facilities utilizing sewage sludge, including septage shall comply with the department's *Municipal and Domestic Sludge Utilization Guidelines* WDOE 82-11, dated

September 1982 or as hereafter amended. Facilities utilizing sewage sludge on the land in a manner not consistent with nor meeting the requirement of the guidelines are required to meet the landspreading disposal standards of WAC 173-304-450.

(5) Woodwaste and other organic sludge utilization requirements.

(a) Facilities utilizing woodwaste not otherwise excluded under WAC 173-304-015, shall comply with these recycling standards. Applying woodwaste and other primarily organic sludges such as pulp and paper mill treatment sludges to the land shall be in a manner consistent with the *Municipal and Domestic Sludge Utilization Guidelines* WDOE 82-11 dated September 1982 or as hereafter amended. Only agricultural or silvicultural sites where such sludges are demonstrated to have soil conditioning or fertilizer value shall be acceptable, provided that the woodwaste and other primarily organic sludges are applied as a soil conditioner or fertilizer in accordance with accepted agricultural and silvicultural practice. Facilities utilizing woodwaste or other primarily organic sludges on the land in a manner not consistent with nor meeting the requirement of the guidelines are required to meet the landspreading disposal standards of WAC 173-304-450.

(b) Facilities utilizing woodwaste or other primarily organic sludges shall also comply with the standards of subsection (3) of this section.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-300, filed 10/28/85.]

WAC 173-304-400 Solid waste handling facility standards. (1) Applicability. The standards of WAC 173-304-405 through 173-304-490 are the solid waste handling facility standards and apply to all solid waste handling facilities, except for:

(a) Waste recycling facilities, whose standards are spelled out in WAC 173-304-300;

(b) On-site containerized storage, collection and transportation facilities which are spelled out in WAC 173-304-200;

(c) Single family residences and single family farms whose year round occupants engage in solid waste handling of the single family's solid waste on-site;

(d) Problem wastes as defined in WAC 173-304-100;

(e) Solid waste handling facilities that have engaged in closure and closed before the effective date of this regulation; and

(f) Domestic wastewater facilities and industrial wastewater facilities otherwise regulated by federal, state, or local water pollution permits except for any portion that utilizes or engages in landspreading disposal sludges or solid residues directly on the land.

(2) Standards for permits. The standards of WAC 173-304-405 through 173-304-490 shall be used as the basis for permitting as required in WAC 173-304-600.

(3) Effective dates.

(a) All existing facilities not in conformance with the following sections of the facility standards shall be placed upon compliance schedules under WAC 173-304-600 (1)(c) to assure full compliance within eighteen months of the effective date of this regulation for:

(i) The general facility standards, WAC 173-304-405;

(ii) The transfer stations, baling and compaction standards, WAC 173-304-410;

(iii) Ground water monitoring required in WAC 173-304-490;

(iv) The landfill operating and maintenance standards, WAC 173-304-460(4);

(v) The tire pile standards of WAC 173-304-420(4); and

(vi) The landspreading disposal standards of WAC 173-304-450(5).

(b) All applicable solid waste facilities shall be in compliance with the general closure and post-closure standards of WAC 173-304-407 and the financial assurance standards of WAC 173-304-467 and 173-304-468 by twelve months after the effective date of WAC 173-304-407, 173-304-467, and 173-304-468, except for owners or operators of existing facilities that have a closure plan approved by the jurisdictional health department in a solid waste permit issued before the effective date of these amendments and are closing before November 27, 1989. Existing solid waste facilities shall be placed upon compliance schedules under WAC 173-304-600 (1)(c) to assure compliance by the effective date of this subsection.

(c) All existing solid waste facilities not in conformance with facility standards other than those in (a) and (b) of this subsection shall be placed upon compliance schedules under WAC 173-304-600 (1)(c) to assure full compliance within four years of the effective date of this regulation.

(d) All new and expanded facilities other than those in (b) of this subsection shall meet the facility standards of WAC 173-304-405 to 173-304-490 after the effective date of this regulation.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-400, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-400, filed 10/28/85.]

WAC 173-304-405 General facility requirements.

(1) Applicability. All applicable solid waste handling facilities shall meet the requirements of this section.

(2) Plan of operation. Each owner or operator shall develop, keep and abide by a plan of operation approved as part of the permitting process in WAC 173-304-600. The plan shall describe the facilities' operation and shall convey to site operating personnel the concept of operation intended by the designer. The plan of operation shall be available for inspection at the request of the jurisdictional health officer. The facility must be operated in accordance with the plan or the plan must be so modified with the approval of the jurisdictional health department. Owners or operators of drop boxes may develop a generic plan of operation applicable to all such drop boxes, owned or operated.

Each plan of operation shall include:

(a) How solid wastes are to be handled on-site during its active life;

(b) How inspections and monitoring are conducted and their frequency;

(c) Actions to take if there is a fire or explosion;

(d) Actions to take if leaks are detected;

(e) Corrective action programs to take if ground water is contaminated;

(f) Actions to take for other releases (e.g. failure of run-off containment system);

(g) How equipment such as leachate collection and gas collection equipment are to be maintained;

(h) A safety plan or procedure; and

(i) Other such details as required by the jurisdictional health department.

(3) Recordkeeping. Each owner or operator shall maintain daily operating records on the weights (or volumes), number of vehicles entering and, if available, the types of wastes received. Major deviations from the plan of operation shall also be noted on the operating record.

(4) Reporting. Each owner or operator shall prepare and submit a copy of an annual report to the jurisdictional health department and the department by March 1 of each year. The annual report shall cover facility activities during the previous year and must include the following information:

(a) Name and address of the facility;

(b) Calendar year covered by the report;

(c) Annual quantity, in tons, or volume, in cubic yards, and estimated in-place density in pounds per cubic yard of solid waste handled, by type of solid waste if available, for each type of treatment, storage, or disposal facility, including applicable recycling facilities; and

(d) Results of ground water monitoring required in WAC 173-304-490.

(5) Inspections. The owner or operator shall inspect the facility to prevent malfunctions and deterioration, operator errors and discharges which may cause or lead to the release of wastes to the environment or a threat to human health. The owner or operator must conduct these inspections often enough to identify problems in time to correct them before they harm human health or the environment. The owner or operator shall keep an inspection log or summary including at least the date and time of inspection, the printed name and the handwritten signature of the inspector, a notation of observations made and the date and nature of any repairs or corrective action. The log or summary must be kept at the facility or other convenient location if permanent office facilities are not on-site, for at least three years from the date of inspection. Inspection records shall be available to the jurisdictional health department upon request.

(6) Recording with county auditor. Maps and a statement of fact concerning the location of the disposal site shall be recorded as part of the deed with the county auditor not later than three months after closure. Records and plans specifying solid waste amounts, location and periods of operation shall be submitted to the local zoning authority or the authority with jurisdiction over land use and be made available for inspection.

(7) State and local requirements. All solid waste disposal facilities shall comply with all state and local requirements such as zoning land use, fire protection, water pollution prevention, air pollution prevention, nuisance and aesthetics.

[Statutory Authority: RCW 70.95.215, 88-20-066 (Order 88-28), § 173-304-405, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW, 85-22-013 (Order 85-18), § 173-304-405, filed 10/28/85.]

WAC 173-304-407 General closure and post-closure requirements. (1) Applicability. The requirements of subsections (2), (3), (4), and (5) of this section apply to all solid waste handling facilities. The requirements of subsections (6), (7), and (8) of this section apply to:

(a) Landfills subject to WAC 173-304-460 including limited purpose landfills under WAC 173-304-460(5);

(b) Surface impoundments under WAC 173-304-430 (2)(g) closed with waste remaining in place;

(c) Woodwaste landfills under WAC 173-304-462; and

(d) Landspreading disposal facilities under WAC 173-304-450(2).

(2) Effective dates. Existing facilities subject to the requirements of this section shall meet the applicable facility standards of this section within twelve months of the effective date of this regulation. All new or expanded facilities subject to the requirements of this section shall meet the applicable facility standards on the effective date of this regulation.

(3) Closure performance standard. Each owner or operator shall close their facility in a manner that:

(a) Minimizes the need for further maintenance;

(b) Controls, minimizes, or eliminates threats to human health and the environment from post-closure escape of solid waste constituents, leachate, landfill gases, contaminated rainfall or waste decomposition products to the ground, ground water, surface water, and the atmosphere; and

(c) Prepares the facility for the post-closure period.

(4) Closure plan and amendment(s). Closure as defined in WAC 173-304-100(11), includes but is not limited to grading, seeding, landscaping, contouring, and/or screening. For interim solid waste handling sites, closure includes waste removal and decontamination of the site.

(a) Each owner or operator shall develop, keep and abide by a plan of closure approved by the jurisdictional health department as part of the permitting process in WAC 173-304-600.

(b) The closure plan shall project time intervals at which sequential partial closure is to be implemented, and identify closure cost estimates and projected fund withdrawal intervals for the associated closure costs, from the approved financial assurance instrument.

(c) Each owner or operator shall not commence disposal operations in any part of a facility until a closure plan for the entire facility has been approved by the jurisdictional health department, and until a financial assurance instrument has been provided, as required by applicable laws and regulations.

(d) The jurisdictional health department shall approve, disapprove, or require amendment of the closure plan as part of the permitting process of WAC 173-304-600 in accordance with applicable laws and regulations.

(e) Each owner and operator shall close the facility in accordance with the approved closure plan and all approved amendments.

(5) Closure procedures.

(a) Each owner and operator shall notify the jurisdictional health department and where applicable, the financial assurance instrument trustee, of the intent to implement the closure plan in part or whole, no later than one hundred eighty days prior to the projected final receipt of waste at the entire facility unless otherwise specified in the closure plan.

(b) The owner or operator shall commence implementation of the closure plan in part or whole within thirty days after receipt of the final volume of waste and/or attaining the final landfill elevation at part of or at the entire facility as identified in the approved facility closure plan unless otherwise specified in the closure plan.

(c) Waste shall not be accepted for disposal or for use in closure except as identified in the closure plan approved by the jurisdictional health department, as required in subsection (3)(a) of this section.

(d) When facility closure is completed in part or whole, each owner and operator shall submit the following to the jurisdictional health department:

(i) Facility closure plan sheets signed by a professional engineer registered in the state of Washington and modified as necessary to represent as-built changes to final closure construction as approved in the closure plan;

(ii) Certification by the owner or operator, and a professional engineer registered in the state of Washington that the site has been closed in accordance with the approved closure plan.

(e) The jurisdictional health department shall notify the owner or operator and the department of ecology of the date when the facility post-closure period has begun, which period shall commence when the jurisdictional health department has verified the facility has been closed in accordance with the specifications of the approved closure plan and the closure requirements of this section.

(6) Post-closure performance standard. Each owner or operator shall provide post-closure activities to allow for continued facility maintenance and monitoring of air, land, and water as long as necessary for the facility to stabilize and to protect human health and the environment.

(7) Post-closure plan and amendment. For disposal facilities; post-closure includes ground water monitoring; surface water monitoring; gas monitoring; and maintenance of the facility, facility structures, and monitoring systems for their intended use for a period of twenty years and any other activities deemed appropriate by the jurisdictional health department.

(a) Each owner or operator shall develop, keep and abide by a post-closure plan approved as a part of the permitting process in WAC 173-304-600. The post-closure plan shall address facility maintenance and monitoring activities for at least a twenty-year period or until the site becomes stabilized (i.e., little or no settlement, gas production or leachate generation), and monitoring of ground water, surface water, and gases can be safely discontinued.

(b) The post-closure plan shall project time intervals at which post-closure activities are to be implemented, and identify post-closure cost estimates and projected fund withdrawal intervals from the selected financial assurance instrument, where applicable, for the associated post-closure costs.

(c) Each owner or operator shall not commence disposal operations in any part of a facility until a post-closure plan for the entire facility has been approved by the jurisdictional health department, and until a financial assurance instrument has been provided where applicable, as required by WAC 173-304-467.

(d) Each owner or operator shall complete the post-closure activities in accordance with the approved post-

closure plan and schedule. Facility post-closure activities shall be completed in accordance with the approved post-closure plan or the plan shall be so amended with the approval of the jurisdictional health department.

(e) The jurisdictional health department may determine that a facility post-closure plan is invalid and require an owner or operator to amend the facility post-closure plan.

(i) The health department may direct facility post-closure activities, in part or whole, to cease until the post-closure plan amendment has received written approval by the health department.

(ii) When the health department determines a facility post-closure amendment is required, the health department shall, after consultation with the owner/operator, designate a compliance schedule for submittal of the amendment and its review and approval by the department.

(8) Post-closure procedures.

(a) Each owner or operator shall commence post-closure activities after completion of closure activities outlined in subsection (5)(d)(i) and (ii) of this section. The jurisdictional health department may direct that post-closure activities cease until the owner or operator receives a notice to proceed with post-closure activities.

(b) When post-closure activities are complete, the owner or operator shall certify to the jurisdictional health department, signed by the owner or operator, and a professional engineer registered in the state of Washington stating why post-closure activities are no longer necessary (i.e., little or no settlement, gas production, or leachate generation).

(c) If the jurisdictional health department finds that post-closure monitoring has established that the facility is stabilized (i.e., little or no settlement, gas production, or leachate generation), the health department may authorize the owner or operator to discontinue post-closure maintenance and monitoring activities.

[Statutory Authority: RCW 70.95.215, 88-20-066 (Order 88-28), § 173-304-407, filed 10/4/88.]

WAC 173-304-410 Transfer stations, baling and compaction systems, and drop box facilities. (1) Applicability. All transfer stations, baling and compaction systems and drop boxes receiving solid waste from off-site shall meet the requirements of this section. Facilities receiving solid waste from on-site shall meet the requirements of WAC 173-304-200.

(2) Transfer stations, baling and compacting systems standards. Transfer stations, baling and compaction systems shall be designed, constructed, and operated so as to:

(a) Be surrounded by a fence, trees, shrubbery, or natural features so as to control access and be screened from the view of immediately adjacent neighbors, unless the tipping floor is fully enclosed by a building;

(b) Be sturdy and constructed of easily cleanable materials;

(c) Be free of potential rat harborage, and provide effective means to control rodents, insects, birds and other vermin;

(d) Be adequately screened to prevent blowing of litter and to provide effective means to control litter;

(e) Provide protection of the tipping floor from wind, rain or snow other than below grade bins or detachable containers;

(f) Have an adequate buffer zone around the operating area to minimize noise and dust nuisances, and for transfer stations, baling, or compaction systems, a buffer zone of fifty feet from the active area to the nearest property line in areas zoned residential;

(g) Comply with local zoning and building codes including approved local variances and waivers;

(h) Provide pollution control measures to protect surface and ground waters, including run-off collection and discharge designed and operated to handle a twenty-four hour, twenty-five year storm and equipment cleaning and washdown water;

(i) Provide all-weather approach roads, exit roads, and all other vehicular areas;

(j) Provide pollution control measures to protect air quality including a prohibition against all burning and the development of odor and dust control plans to be made a part of the plan of operation in WAC 173-304-405(2);

(k) Prohibit scavenging;

(l) Provide attendant(s) on-site during hours of operation;

(m) Have a sign that identifies the facility and shows at least the name of the site, and, if applicable, hours during which the site is open for public use, what constitutes materials not to be accepted and other necessary information posted at the site entrance;

(n) Have communication capabilities to immediately summon fire, police, or emergency service personnel in the event of an emergency; and

(o) Remove all wastes at closure, as defined in WAC 173-304-100, from the facility to a permitted facility.

(3) Drop box facility standards. Drop box facilities, as defined in WAC 173-304-100, shall:

(a) Be constructed of durable water tight materials with a lid or screen on top that prevents the loss of materials during transport and access by rats and other vermin;

(b) Be located in an easily identifiable place accessible by all-weather roads;

(c) Be designed and serviced as often as necessary to ensure adequate dumping capacity at all times. Storage of solid waste outside the drop boxes is prohibited;

(d) Comply with subsection (2)(m) of this section, signs; and

(e) Remove all remaining wastes at closure, as defined in WAC 173-304-100, to a permitted facility, and remove the drop box from the facility.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-410, filed 10/28/85.]

WAC 173-304-420 Piles used for storage and treatment—Facility standards. (1) Applicability.

(a) This section is applicable to solid wastes stored or treated in piles as defined in WAC 173-304-100 where putrescible wastes (other than garbage) are in place for more than three weeks, other wastes not intended for recycling are in place for more than three months, and garbage is in place for more than three days. These standards are also applicable to composting or storing of garbage and sludge in piles,

and to tire piles where more than eight hundred tires are stored at one facility.

(b) Other solid wastes stored or treated in piles prior to waste recycling including compost piles of vegetative waste, piles of woodwaste used for fuel or raw materials are subject to WAC 173-304-300.

(c) Waste piles stored in fully enclosed buildings are not subject to these standards, provided that no liquids or sludges with free liquids are added to the pile.

(d) Inert wastes and demolition wastes are not subject to these standards.

(2) Requirements. All owners and operators shall:

(a) Comply with the requirements of the General facility requirements, WAC 173-304-405;

(b) Design piles located in a one hundred year flood plain to:

(i) Comply with local flood plain management ordinances and chapter 508-60 WAC, Administration of flood control zones; and

(ii) To avoid washout or restriction of flow; and

(c) Remove all solid wastes from the pile at closure to another permitted facility.

(3) Requirements for putrescible wastes or wastes likely to produce leachate.

(a) Waste piles shall be placed upon a surface such as sealed concrete, asphalt, clay or an artificial liner underlying the pile, to prevent subsurface soil and potential ground water contamination and to allow collection of run-off and leachate. The liner shall be designed of sufficient thickness and strength to withstand stresses imposed by pile handling vehicles and the pile itself;

(b) Run-off systems shall be installed, designed and maintained to handle a twenty-four hour, twenty-five year storm event;

(c) Waste piles having a capacity of greater than ten thousand cubic yards shall have either:

(i) A ground water monitoring system that complies with WAC 173-304-490; or

(ii) A leachate detection, collection and treatment system.

For purposes of this subsection, capacity refers to the total capacity of all putrescible or leachate-generating piles at one facility (i.e., two, five thousand cubic yard piles will subject the facility to the requirements of this subsection).

(d) Run-on prevention systems shall be designed and maintained to handle the maximum flow from a twenty-five year storm event; and

(e) A jurisdictional health department may require that the entire base or liner shall be inspected for wear and integrity and repaired or replaced by removing stored wastes or otherwise providing inspection access to the base or liner; the request shall be in writing and cite the reasons including valid ground water monitoring or leachate detection data leading the jurisdictional health department to request such an inspection, repair or replacement.

(4) Requirements for tire piles. Owners or operators shall:

(a) Control access to the tire pile by fencing;

(b) Limit the tire pile to a maximum of one-half acre in size;

(c) Limit the height of the tire pile to twenty feet;

- (d) Provide for a thirty foot fire lane between tire piles; and
- (e) Provide on-site fire control equipment.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-420, filed 10/28/85.]

WAC 173-304-430 Surface impoundment standards.

(1) Applicability.

(a) These standards are applicable to solid wastes that are liquids or sludges containing free liquids as defined in WAC 173-304-100 and applicable under WAC 173-304-015(2) and are stored or treated in surface impoundments;

(b) These standards are also applicable to sludges and septage stored or treated in surface impoundments; and

(c) These standards are not applicable to:

(i) Surface impoundments whose facilities and discharges are otherwise regulated under federal, state, or local water pollution permits; and

(ii) Retention or detention basins used to collect and store stormwater runoff.

(2) Requirements. All surface impoundments must be designed, constructed, and operated so as to:

(a) Meet the performance standards of WAC 173-304-460(2);

(b) Have an in-place or imported soil liner of at least two feet of 1×10^{-7} cm/sec permeability or an equivalent combination of any thickness greater than two feet and a greater permeability to protect the underlying aquifers or a thirty mil reinforced artificial liner placed on top of a structurally stable foundation to support the liners and solid waste and to prevent settlement that would destroy the liner; natural soils shall be recompacted to achieve an equivalent permeability. Owners or operators shall be allowed to use alternative designs, operating practices and locational characteristics which prevent migration of solid waste constituents or leachate into the ground or surface waters at least as effectively as the liners described in this subsection;

(c) Avoid washout including the use of an extended liner or dikes or restriction of flow in the one hundred year floodplain and to comply with local floodplain management ordinances and chapter 508-60 WAC, Administration of flood control zones;

(d) Have dikes designed with slopes so as to maintain the structural integrity under conditions of a leaking liner and capable of withstanding erosion from wave action;

(e) Have the freeboard equal to or greater than eighteen inches to avoid overtopping from wave action, overfilling, or precipitation;

(f) Have either a ground water monitoring system, or a leachate detection, collection and treatment system, for surface impoundments having a capacity of more than two million gallons unless the jurisdictional health department and the department require either for smaller surface impoundments. For purposes of this subsection, capacity refers to the total capacity of all surface impoundments on-site (i.e., two, one million gallon surface impoundments on one site will trigger these monitoring requirements);

(g) Be closed in a manner which removes all solid wastes including liners, etc. to another permitted facility and the site returned to its original or acceptable topography except that surface impoundments closed with the waste

remaining in place shall meet the requirements of WAC 173-304-407 and 173-304-130;

(h) A jurisdictional health department may require that the liner be inspected for wear and integrity and repaired or replaced by removing stored solid wastes or otherwise inspecting the liner or base at any time. The request shall be in writing and cite the reasons including valid ground water monitoring or leachate detection data leading to such an inspection and repair;

(i) Surface impoundments containing septage will also be subject to the department's "criteria for sewage works design" used to review plans for septage surface impoundments; and

(j) Surface impoundments that have the potential to impound more than ten acre-feet of waste measured from the top of the dike and which would be released by a failure of the containment dike shall be reviewed and approved by the dam safety section of the department.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-430, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-430, filed 10/28/85.]

WAC 173-304-440 Energy recovery and incinerator standards. (1) Applicability. These standards apply to all facilities designed to burn more than twelve tons of solid waste per day, except for facilities burning woodwaste or gases recovered at a landfill.

(2) Requirements for energy recovery facilities and incinerators.

(a) Incinerators and energy recovery facilities storing putrescible wastes shall be confined to storage compartments specifically designed to store wastes temporarily in piles, surface impoundments, tanks or containers. The storage facilities shall meet the facility standards of WAC 173-304-400. Storage of wastes other than in the specifically designed storage compartments is prohibited. Equipment and space shall be provided in the storage and charging areas, and elsewhere as needed, to allow periodic cleaning as may be required in order to maintain the plant in a sanitary and clean condition;

(b) All residues from energy recovery facilities or incinerator facilities shall be used, handled or disposed of as solid or dangerous wastes according to these standards or the standards of the dangerous waste regulation, chapter 173-303 WAC;

(c) Each owner or operator of an energy recovery facility or incinerator facility shall comply with WAC 173-304-405. The plan of operation shall address alternative storage, and/or disposal plans for all breakdowns that would result in overfilling of the storage facility;

(d) Energy recovery facilities and incinerators must be designed, constructed and operated in a manner to comply with appropriate state and local air pollution control authority emission and operating requirements;

(e) Each owner or operator shall close their energy recovery facility or incinerator by removing all ash, solid wastes and other residues to a permitted facility;

(f) Each owner or operator of an energy recovery facility or incinerator shall be required to provide recycling facilities in a manner equivalent to WAC 173-304-460 (4)(f); and

(g) Owners or operators of energy recovery facilities or incinerators shall not knowingly dispose of, treat, store or otherwise handle dangerous waste unless the requirements of chapter 173-303 WAC are met.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-440, filed 10/28/85.]

WAC 173-304-450 Landspreading disposal standards. (1) Applicability. These standards apply to facilities that engage in landspreading disposal of solid wastes. These standards do not apply to:

(a) Facilities utilizing sludge, woodwaste or other primarily organic sludges according to the *Municipal and Domestic Sludge Utilization Guidelines* WDOE 82-11, specified in WAC 173-304-300 (4) and (5);

(b) Agricultural solid wastes resulting from the operation of a farm including farm animal manure and agricultural residues; and

(c) Inert wastes and demolition wastes.

(2) Owners or operators of landspreading disposal facilities shall meet the minimum functional standards for performance of WAC 173-304-460(2) and the general facilities standards of WAC 173-304-405.

(3) Owners or operators of landspreading disposal facilities shall meet the locational standards of WAC 173-304-130.

(4) Minimum functional standard for design. Owners or operators of landspreading disposal facilities shall design landspreading facilities so as to:

(a) Provide interim waste storage facilities that meet the requirements of WAC 173-304-400 standards (i.e., for piles, surface impoundments, etc.);

(b) Collect and treat all run-off from a twenty-four hour, twenty-five year storm, and divert all run-on for the maximum flow of a maximum twenty-five year storm around the active area;

(c) Avoid standing water anywhere on the active area;

(d) Avoid slopes and other features that will lead to soil and waste erosion, unless contour plowing or other measures are taken to avoid erosion;

(e) Monitor ground water according to WAC 173-304-490; and

(f) Control access to site by fencing or other means and erect signs.

(5) Minimum functional standards for maintenance and operation. Owners or operators of landspreading disposal facilities shall maintain and operate the facilities so as to:

(a) Avoid any landspreading disposal of garbage or medical waste;

(b) Analyze solid wastes according to the requirements spelled out in the *Municipal and Domestic Sludge Utilization Guidelines* WDOE 82-11;

(c) Avoid applying wastes at rates greater than ten times agronomic rates using the proposed cover crop, or depths greater than would allow for discing the soil by tracked vehicles;

(d) Provide discing of soils during the growing season and after each application of waste to maintain aerobic soil conditions, minimize odors and lessen run-off;

(e) Avoid applying waste to any active area having standing water;

(f) Conform to the operating plan and the requirements of WAC 173-304-405;

(g) Avoid food chain crops during the active life of the facility and until demonstrated to be safe, after closure, according to the closure and post-closure plans filed with the plan of operation. Specific approval in writing from the jurisdictional health department is required for any landspreading disposal facility that is used to raise food crops after closure. Any new owner or operator of a closed landspreading disposal facility shall notify the jurisdictional health department within sixty days of the purchase; and

(h) Provide for a written contract between landowners, waste generators, waste haulers and waste operators requiring compliance with rules as a condition of the contract.

(6) Minimum functional standards for closure.

(a) All owners or operators of landspreading disposal facilities shall close in such a manner as to comply with WAC 173-304-407;

(b) Financial assurance. All owners or operators of landspreading disposal facilities shall have a written estimate, in current dollars, of the cost of closing the facility. The closure cost estimate must equal the cost of closure at the point in the operating life of the facility when the extent and manner of operation would make closure the most expensive, as indicated by the closure plan.

In addition, all facilities shall have a written post-closure estimate, in current dollars, the cost of post-closure monitoring and maintenance during the post-closure period.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-450, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-450, filed 10/28/85.]

WAC 173-304-460 Landfilling standards. (1) Applicability. These standards apply to facilities that dispose of solid waste in landfills except for:

(a) Inert wastes and demolition wastes landfills, that must meet WAC 173-304-461 standards; and

(b) Woodwaste landfills that must meet WAC 173-304-462 standards.

(2) Minimum functional standards for performance.

(a) Ground water. An owner or operator of a landfill shall not contaminate the ground water underlying the landfill, beyond the point of compliance. Contamination and point of compliance are defined in WAC 173-304-100.

(b) Air quality and toxic air emissions.

(i) An owner or operator of a landfill shall not allow explosive gases generated by the facility whose concentration exceeds:

(A) Twenty-five percent of the lower explosive limit for the gases in facility structures (excluding gas control or recovery system components);

(B) The lower explosive limit for the gases at the property boundary or beyond; and

(C) One hundred parts per million by volume of hydrocarbons (expressed as methane) in off-site structures.

(ii) An owner or operator of a landfill shall not cause a violation of any ambient air quality standard at the property boundary or emission standard from any emission of landfill gases, combustion or any other emission associated with a landfill.

(c) Surface waters. An owner or operator of a landfill shall not cause a violation of any receiving water quality standard or violate chapter 90.48 RCW from discharges of surface run-off, leachate or any other liquid associated with a landfill.

(3) Minimum functional standards for design.

(a) Minimizing liquids. All owners or operators of landfills shall minimize liquids admitted to active areas of landfills by:

(i) Covering according to WAC 173-304-460 (4)(d);

(ii) Prohibiting the disposal of noncontainerized liquids or sludges containing free liquids in landfills unless approved by the jurisdictional health department;

(iii) Designing the landfill to prevent all the run-on of surface waters and other liquids resulting from a maximum flow of a twenty-five year storm into the active area of the landfill;

(iv) Designing the landfill to collect the run-off of surface waters and other liquids resulting from a twenty-four hour, twenty-five year storm from the active area and the closed portions of a landfill;

(b) Leachate systems. All owners or operators of landfills shall:

(i) Install a leachate collection system sized according to water balance calculations or using other accepted engineering methods either of which shall be approved by the jurisdictional health department;

(ii) Install a leachate collection system so as to prevent no more than two feet of leachate developing at the topographical low point of the active area; and

(iii) Install a leachate treatment, or a pretreatment system if necessary in the case of discharge to a municipal waste water treatment plant, to meet the requirements for permitted discharge under chapter 90.48 RCW and the Federal Clean Water Act (PL 95-217).

(c) Liner designs. All owners or operators of landfills shall use liners of one of the following designs:

(i) Standard design. The liner shall be constructed of at least a four feet thick layer of recompacted clay or other material with a permeability of no more than 1×10^{-7} cm/sec and sloped no less than two percent; or

(ii) Alternative design. The design shall have two liners:

(A) An upper liner of at least fifty mils thickness made of synthetic material; and

(B) A lower liner of at least two feet thickness of recompacted clay or other material with a permeability of no more than 1×10^{-6} cm/sec and sloped no less than two percent; or

(iii) Equivalent design. The design shall use alternative methods, operating practices and locational characteristics which will minimize the migration of solid waste constituents or leachate into the ground or surface water at least as effectively as the liners of (c)(i) and (ii) of this subsection; or

(iv) Arid design. This design will apply to locations having less than twelve inches of precipitation annually, and, in lieu of (c)(i), (ii), and (iii) of this subsection, shall consist of vadose zone moisture monitoring, provided that:

(A) Waste material is no less than ten feet above the seasonal high level of ground water in the uppermost aquifer; and

(B) Any evidence of leachate or waste constituents detected in the vadose zone that violates or could be expected to violate the performance standard of WAC 173-304-460(2) shall cause the owner or operator to:

(I) Take corrective action, and either

(II) Close the facility according to these rules, or

(III) For all future expansions at that facility, meet the liner requirement of (c)(i) or (ii) of this subsection.

(v) Small landfill designs. For a landfill whose design and permit allow a total capacity at closure of two hundred thousand cubic yards or less, the need for a liner and leachate collection system shall be determined on a case-by-case basis by the jurisdictional health department in consultation with the department.

(d) Floodplains. All owners or operators of landfills that are located in a one hundred year floodplain shall:

(i) Comply with local floodplain management ordinances and chapter 508-60 WAC, Administration of flood control zones; and

(ii) Design the landfill so that the landfill entrance or exit roads or practices shall not restrict the flow of the base flood, reduce the temporary water storage capacity of the floodplain or result in washout of solid waste, so as to pose a hazard to human life, wildlife, land or water resources.

(e) Closure. All owners and operators shall design landfills so that at closure:

(i) At least two feet of 1×10^{-6} cm/sec or lower permeability soil or equivalent shall be placed upon the final lifts unless the landfill is located in an area having mean annual precipitation of less than twelve inches in which case at least two feet of 1×10^{-5} cm/sec or lower permeability soil or equivalent shall be placed upon the final lifts. Artificial liners may replace soil covers provided that a minimum of fifty mils thickness is used;

(ii) The grade of surface slopes shall not be less than two percent, nor the grade of side slopes more than thirty-three percent; and

(iii) Final cover of at least six inches of topsoil be placed over the soil cover and seeded with grass, other shallow rooted vegetation or other native vegetation.

(f) Gas control.

(i) All owners and operators shall design landfills, having a permitted capacity of greater than ten thousand cubic yards per year, so that methane and other gases are continuously collected, and

(A) Purified for sale;

(B) Flared; or

(C) Utilized for its energy value.

(ii) Collection and handling of landfill gases shall not be required if it can be shown that little or no landfill gases will be produced or that landfill gases will not support combustion; in such cases installation of vents shall be required.

(g) Other requirements. All owners and operators of landfills shall design landfills to:

(i) Be fenced at the property boundary or use other means to impede entry by the public and animals. A lockable gate shall be required at the entry to the landfill;

(ii) Monitor ground water according to WAC 173-304-490 using a design approved by the local jurisdictional health department with the guidance of the department. The jurisdictional health department may also require monitoring of:

- (A) Surface waters, including run-off;
 - (B) Leachate;
 - (C) Subsurface landfill gas movement and ambient air;
- and
- (D) Noise.

(iii) Weigh all incoming waste on scales for landfills having a permitted capacity of greater than ten thousand cubic yards per year or provide an equivalent method of measuring waste tonnage capable of estimating total annual solid waste tonnage to within plus or minus five percent;

(iv) Provide for employee facilities including shelter, toilets, hand washing facilities and potable drinking water for landfills having the equivalent of three or more full-time employees;

(v) Erect a sign at the site entrance that identifies at least the name of site, if applicable, the hours during which the site is open for public use, unacceptable materials and an emergency telephone number. Other pertinent information may be required by the jurisdictional health department;

(vi) Provide on-site fire protection as determined by the local and state fire control jurisdiction;

(vii) Prevent potential rat and other vectors (such as insects, birds, and burrowing animals) harborages in buildings, facilities, and active areas;

(viii) Provide the unloading area(s) to be as small as possible, consistent with good traffic patterns and safe operation;

(ix) Provide approach and exit roads to be of all-weather construction, with traffic separation and traffic control on-site, and at the site entrance; and

(x) Provide communication between employees working at the landfill and management offices on-site and off-site (such as telephones) to handle emergencies.

(4) Minimum functional standards for maintenance and operation.

(a) Operating plans. All owners or operators of landfills shall maintain and operate the facility so as to conform to the approved plan of operation.

(b) Operating details. All owners or operators of landfills shall operate the facility so as to:

(i) Control road dust;

(ii) Perform no open burning unless permitted by the jurisdictional air pollution control agency or the department under the Washington Clean Air Act, chapter 70.94 RCW. Garbage shall not be open burned.

(iii) Collect scattered litter as necessary to avoid a fire hazard or an aesthetic nuisance;

(iv) Prohibit scavenging;

(v) Conduct on-site reclamation in an orderly sanitary manner, and in a way that does not interfere with the disposal site operation;

(vi) Insure that at least two landfill personnel are on-site with one person at the active face when the site is open to the public for landfills with a permitted capacity of greater than fifty thousand cubic yards per year;

(vii) Control insects, rodents and other vectors; and

(viii) Insure that reserve operational equipment shall be available to maintain and meet these standards.

(c) Boundary posts. All owners or operators of landfills shall clearly mark the active area boundaries authorized in the permit, with permanent posts or using equivalent method clearly visible for inspection purposes.

(d) Compaction and daily cover. All owners or operators of landfills shall:

(i) Thoroughly compact the solid waste before succeeding layers are added; and

(ii) Cover compacted waste containing garbage fully with at least six inches of compacted cover material after each day of operation. The jurisdictional health department may allow less frequent covering by considering:

(A) The characteristics of the solid waste;

(B) The climatic and geologic setting;

(C) The size of the facility; and

(D) The potential for nuisance conditions.

(e) Monitoring systems. All owners and operators of landfills shall maintain the monitoring system required in subsection (3)(g)(ii) of this section.

(f) Recycling required.

(i) All owners or operators of landfills at which the general public delivers household solid waste shall provide the opportunity for the general public to recycle cans, bottles, paper and other material for which a market exists and brought to the landfill site:

(A) During the normal hours of operation;

(B) In facilities convenient to the public (i.e., near entrance to the gate).

(ii) Owners or operators may demonstrate alternative means to providing an opportunity to the general public to recycle household solid waste.

(g) Disposal of dangerous waste prohibited. Owners or operators of landfills shall not knowingly dispose, treat, store, or otherwise handle dangerous waste unless the requirements of the dangerous waste regulation, chapter 173-303 WAC are met.

(5) Limited purpose landfill standards.

(a) Limited purpose landfills shall meet the following requirements:

(i) The general facility standards of WAC 173-304-405;

(ii) The general closure and post-closure standards of WAC 173-304-407;

(iii) The performance standards of WAC 173-304-460(2);

(iv) The financial assurance standards of WAC 173-304-467 and 173-304-468; and

(v) The ground water monitoring standards of WAC 173-304-490.

(b) In addition, limited purpose landfills must meet all other standards of WAC 173-304-130 and 173-304-460 unless the owner or operator applies for relief from each of these requirements as part of his permit application and includes evidence or reasons why the nature of the waste, the disposal site and other factors can protect the environment and the public health.

[Statutory Authority: RCW 70.95.215, 88-20-066 (Order 88-28), § 173-304-460, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW, 85-22-013 (Order 85-18), § 173-304-460, filed 10/28/85.]

WAC 173-304-461 Inert waste and demolition waste landfilling facility requirements. (1) Applicability. These standards apply to facilities that landfill more than two thousand cubic yards of inert wastes and demolition wastes, as defined in WAC 173-304-100, including facilities that use inert waste and demolition waste as a component of fill.

Inert wastes and demolition wastes used as road building materials are excluded from this section. These standards do not apply to asbestos containing waste regulated under the federal 40 CFR Part 61 rules and the dangerous waste regulation, chapter 173-303 WAC.

(2) Inert wastes and demolition waste landfilling facilities shall not be subject to the Locational standards for disposal sites, WAC 173-304-130 except for WAC 173-304-130 (2)(f), slope.

(3) Owners or operators of inert waste and demolition waste landfill shall maintain a record of the weights or volumes and types of waste disposed of at each site.

(4) Owners or operators of inert wastes and demolition landfills shall employ measures to prevent emission of fugitive dusts, when weather conditions or climate indicate that transport of dust off-site is liable to create a nuisance. Preventative measures include watering of roads and covering.

(5) Timbers, wood and other combustible waste shall be covered as needed during the summer months to avoid a fire hazard.

(6) Owners or operators of inert wastes and demolition landfills shall close the facility by leveling the wastes to the extent practicable and shall fill any voids posing a physical hazard for persons after closure and to maintain an aesthetic appearance. A minimum of one foot of soil cover shall be used to close landfills.

(7) Owners or operators of inert waste and demolition waste landfills shall obtain a permit, as set forth in WAC 173-304-600 from the jurisdictional health department.

(8) Owners or operators of inert wastes and demolition landfills shall meet the requirements of WAC 173-304-405(7), recording with the county auditor.

(9) Owners or operators of inert waste or demolition waste landfills shall not accept any other form of waste, except inert waste and demolition waste.

(10) Owners or operators of inert waste and demolition waste landfills shall prevent unauthorized disposal during off-hours by controlling entry (i.e., lockable gate or barrier) when the facility is not being used.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-461, filed 10/28/85.]

WAC 173-304-462 Woodwaste landfilling facility requirements. (1) Applicability. These requirements apply to facilities that landfill more than two thousand cubic yards of woodwaste including facilities that use woodwaste as a component of fill. Woodwaste is defined in WAC 173-304-100. These standards are not applicable to woodwaste landfills on forest lands regulated under the Forest Practices Act, chapter 76.09 RCW.

(2) Minimum functional standards.

(a) Woodwaste landfills are not subject to WAC 173-304-130 standards, Locational standards for disposal sites, except for WAC 173-304-130 (2)(e) surface water locational standards and WAC 173-304-130 (2)(b)(iii) down gradient drinking water supply wells. Woodwastes may be used as a component of fill within a shoreline and associated wetlands only if a demonstrated and proven technology to prevent ground and surface water contamination is used.

(b) Owners or operators of woodwaste landfills shall maintain a record of the weights or volumes of waste disposed of at each facility.

(c) Owners or operators of woodwaste landfills shall not accept any other wastes except woodwaste.

(d) Owners or operators of woodwaste landfills shall prevent run-on from a maximum twenty-five year storm.

(e) All wood waste landfills having a capacity of greater than ten thousand cubic yards at closure shall either:

(i) Have a ground water monitoring system that complies with WAC 173-304-490 and the woodwaste landfill meet the performance standards of WAC 173-304-460(2); or

(ii) Have a leachate collection and treatment system.

(f) Owners or operators of woodwaste landfills shall not deposit woodwaste in lifts to a height of more than ten feet per lift with at least one foot of cover material between lifts to avoid hot spots and fires in the summer and to avoid excessive build-up of leachate in the winter, and shall compact woodwaste as necessary to prevent voids.

(g) Owners or operators of woodwaste landfills shall prevent unauthorized disposal during off-hours by controlling entry (i.e., lockable gate or barrier), when the facility is not being used.

(h) Owners or operators of woodwaste landfills shall close the facility by leveling and compacting the wastes and applying a compacted soil cover of at least two feet thickness.

(i) Owners or operators of woodwaste landfills shall obtain a permit as set forth in WAC 173-304-600 from the jurisdictional health department.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-462, filed 10/28/85.]

WAC 173-304-463 Problem waste landfills. (Reserved)

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-463, filed 10/28/85.]

WAC 173-304-467 Financial assurance for public facilities. (1) Applicability.

(a) These standards apply to all new and expanded landfill disposal facilities, and to existing landfill disposal facilities that have not been closed on or before November 27, 1989. Landfill disposal facilities include:

(i) All solid waste facilities operated as landfills under WAC 173-304-460, including limited purpose landfills under WAC 173-304-460(5);

(ii) Facilities operated as surface impoundments under WAC 173-304-430 that are closed with the waste remaining in place and therefore required to meet the requirements of WAC 173-304-407; and

(iii) Woodwaste landfills operated under WAC 173-304-462;

(b) For the purposes of this section, landfill disposal facilities are divided into the following ownership/use categories:

(i) A privately-owned facility that accepts waste from the general public;

(ii) A publicly-owned facility that accepts waste from the general public.

(c) For the purposes of this section, publicly-owned or operated facilities may set up one account for both closure and post-closure care of each facility.

(2) Cost estimate for closure.

(a) Each owner or operator shall prepare a written closure cost estimate as part of the facility closure plan. The closure cost estimate shall be in current dollars and represent the cost of closing the facility in accordance with the closure requirements in WAC 173-304-407.

(i) The cost estimate shall be based on a reasonable cost estimate for completing design, purchase, construction, and other activities as identified in the facility closure plan as required under WAC 173-304-407;

(ii) The closure plan shall project intervals for withdrawal of closure funds from the closure financial assurance instrument to complete the activities identified in the approved closure plan;

(iii) The closure cost estimate shall not be reduced by allowance for salvage value of equipment, waste, or the resale value of property or land;

(b) Each owner or operator shall prepare a new closure cost estimate in accordance with (a) and (c) of this subsection whenever:

(i) Changes in operating plans or facility design affect the closure plan;

(ii) There is a change in the expected year of closure that affects the closure plan; or

(iii) The jurisdictional health department directs the owner or operator to revise the closure plan or closure cost estimate.

(c) Each owner or operator shall review the closure cost estimate annually thirty days prior to the anniversary date of the first closure cost estimate. The review will examine all factors, including inflation, involved in estimating the closure cost. Any cost changes must be factored into a revised closure cost estimate and submit the revised cost estimate to the jurisdictional health department for review and approval.

(d) During the operating life of the facility, the owner or operator shall make the latest closure cost estimate prepared in accordance with (a) and (b) of this subsection, and when this estimate has been adjusted in accordance with (c) of this subsection, made available for review.

(3) Financial assurance account for closure. Each owner or operator of an applicable landfill disposal facility shall establish a financial assurance account in an amount that, over the life of the facility, will accumulate funds to be equal to the closure cost estimate prepared in accordance with subsection (2) of this section unless otherwise specified.

(a) Landfill disposal facilities that accept waste from the general public shall choose from the following options or combination of options for accounting for the financial assurance account:

(i) For landfill disposal facilities owned or operated by municipal corporations, the closure and post-closure reserve account shall be handled in one of the following ways:

(A) Cash and investments accumulated and restricted for closure with an equivalent amount of fund balance reserved in the fund accounting for solid waste activity; or

(B) The cash and investments held in a nonexpendable trust fund.

(C) Other approved method.

(ii) Closure trust fund established with an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a federal or state agency. The wording of the trust agreement must be acceptable to the local health department. The purpose of the closure trust fund is to receive and manage any funds paid by the owner or operator and to disburse those funds only for closure activities as identified in the approved closure plan.

(b) For private disposal facilities that accept public waste, established closure financial assurance accounts shall not constitute an asset of the facility owner or operator.

(c) During the operating life of the facility, the owner or operator must review the closure cost estimate thirty days before each anniversary of the date on which the first closure cost estimate was prepared. The review shall examine all factors, including inflation, involved in estimating the closure cost estimate. Any changes in costs shall be factored into a revised closure cost estimate. The new estimate shall be submitted to the jurisdictional health department for review and approval.

(d) For disposal facilities of this section, any income in excess of the closure cost estimate accruing to the established closure financial assurance account will be at the owner's discretion as to the use of said funds.

(e) Excess moneys remaining in the closure financial assurance account after the completion of all identified closure activities will be released to the facility owner or operator.

(4) Cost estimate for post-closure.

(a) Each owner or operator shall prepare a written post-closure cost estimate as part of the facility post-closure plan. The post-closure cost estimate shall be in current dollars and represent the total cost of completing post-closure activities for the facility for at least a twenty-year post-closure period in accordance with the post-closure requirements in WAC 173-304-407.

(i) The post-closure cost estimate shall be based on a reasonable cost estimate for completing post-closure monitoring, maintenance, and other activities identified in the approved facility post-closure plan as required under WAC 173-304-407;

(ii) The post-closure plan shall project annual or other intervals for withdrawal of post-closure funds from the post-closure financial assurance instrument to complete the activities identified in the approved post-closure plan;

(iii) The post-closure cost estimate shall not be reduced by allowance for salvage, value of equipment, waste, or resale value of property or land.

(b) Each owner or operator shall prepare a new post-closure cost estimate for the remainder of the post-closure care twenty-year period in accordance with (a) and (c) of this subsection, whenever:

(i) Change in the post-closure plan increases or decreases the cost of post-closure care; or

(ii) The jurisdictional health department directs the owner or operator to revise the post-closure plan or post-closure cost estimate.

(c) During the operating life of the facility, the owner or operator shall review the post-closure cost estimate thirty days prior to each anniversary of the date on which the first post-closure cost estimate was prepared. The review shall

examine all factors, including inflation, involved in estimating the post-closure cost estimate. Any changes in costs must be factored into a revised post-closure cost estimate. The new estimate must be submitted to the jurisdictional health department for approval.

(d) During the operating life of the facility, the owner or operator shall keep the latest post-closure cost estimate prepared in accordance with (a) and (b) of this subsection, available for review.

(5) Financial assurance account for post-closure. Each owner or operator of a landfill disposal facility shall establish a financial assurance account in an amount equal to the post-closure cost estimate prepared in accordance with subsection (4) of this section.

(a) Applicable landfill disposal facilities that accept waste from the general public shall choose from the following options or combinations of options for accounting for the financial assurance account:

(i) For landfill disposal facilities owned or operated by municipal corporations, the post-closure reserve shall be handled in one of the following ways:

(A) Cash and investments accumulated and restricted for post-closure with an equivalent amount of fund balance reserved in the fund accounting for solid waste activity;

(B) Cash and investments held in a nonexpendable trust fund.

(C) Other approved method.

(ii) Post-closure trust fund established with an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a federal or state agency. The wording of the trust agreement must be acceptable to the department of ecology. The purpose of the post-closure trust fund is to receive and manage any funds paid by the owner or operator and to disburse those funds only for post-closure activities as identified in the approved post-closure plan.

(b) For disposal facilities as categorized in subsection (1)(b) of this section, established post-closure financial assurance accounts shall not constitute an asset of the facility owner or operator.

(c) For applicable disposal facilities of this section any income accruing to the established post-closure financial assurance account will be at the owner's discretion as to the use of said excess funds.

(d) Excess moneys remaining in the post-closure financial assurance account after the completion of all identified post-closure activities shall be released to the facility owner or operator.

(6) Closure/post-closure financial assurance account establishment and reporting.

(a) Closure and post-closure financial assurance funds shall be generated at each facility by transferring a percentage of the facility user fees to the selected financial assurance instrument at the schedule specified in the closure and post-closure plans, such that adequate closure and post-closure funds will be generated to ensure full implementation of the approved closure and post-closure plans.

(b) Each facility owner or operator must establish a procedure with the financial assurance instruments trustee for notification of nonpayment of funds to be sent to the jurisdictional health department and the department of ecology.

(c) Each owner or operator shall file with the department of ecology an annual audit of the financial assurance accounts established for closure and post-closure activities, and a statement of the percentage of user fees, as applicable, diverted to the financial assurance instruments.

(i) For landfill disposal facilities owned and operated by municipal corporations, the closure reserve account shall be audited according to the audit schedule of the office of state auditor and shall be filed with the department of ecology, including each of the post-closure care years.

(ii) For landfill disposal facilities not owned or operated by municipal corporations:

(A) Annual audits shall be conducted by a certified public accountant licensed in the state of Washington, and shall be filed with the department of ecology no later than March 31 of each year for the previous calendar year, including each of the post-closure care years.

(B) The audit shall also include calculations demonstrating the proportion of closure completed during the preceding year as specified in the closure and post-closure plans.

(d) Existing landfill disposal facilities may submit a written request with their annual audit to the department of ecology requesting a waiver from utilizing user fees to generate the moneys necessary for the closure and/or post-closure financial assurance account.

(i) The waiver request should provide documentation to demonstrate the facility user fees are prohibitively high, and include alternate method(s) for funding the facility's closure and/or post-closure financial assurance account;

(ii) The waiver request review procedure will be according to WAC 173-304-700.

(7) Authorization for financial assurance account fund withdrawal for closure and post-closure activities.

(a) Each owner or operator will withdraw funds from the closure and/or post-closure financial assurance instrument as specified in the approved closure/post-closure plans;

(b) If the withdrawal of funds from the financial assurance instrument exceeds by more than five percent the withdrawal schedule stated in the approved closure and/or post-closure plan, the closure and/or post-closure plan shall be amended.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-467, filed 10/4/88.]

WAC 173-304-468 Financial assurance for private landfill disposal facilities. (1) Applicability.

(a) For the purposes of this regulation private landfill disposal facilities are privately-owned facilities that do not accept waste from the general public and dispose of only their own generated waste.

(b) These standards apply to all new and expanded landfill disposal facilities, and to existing landfill disposal facilities that have not been closed on or before November 27, 1989. Landfill disposal facilities include:

(i) Facilities operated as surface impoundments under WAC 173-304-430 that are closed with waste remaining in place and therefore required to meet the requirements of WAC 173-304-407; and

(ii) Woodwaste landfills operated under WAC 173-304-462.

(2) Cost estimates for closure and post-closure.

(a) Each owner or operator shall prepare separate written closure and post-closure cost estimates as part of the facility closure and post-closure plans. The cost estimates shall be in current dollars and represent the cost of closing or post-closure care of the facility for a period of twenty years in accordance with the closure requirements in WAC 173-304-407.

(i) The cost estimate shall be based on a reasonable cost estimate for completing design, purchase, construction, and other activities as identified in the facility closure or post-closure plan as required under WAC 173-304-407;

(ii) The closure and post-closure plans shall project intervals for withdrawal of funds from the closure or post-closure financial assurance instrument to complete the activities identified in the approved closure or post-closure plan;

(iii) The closure and post-closure cost estimate shall not be reduced by allowance for salvage value of equipment, waste, or the resale value of property or land.

(b) Each owner or operator shall prepare a new closure or post-closure cost estimate in accordance with (a) and (c) of this subsection whenever:

(i) Changes in operating plans or facility design affect the closure or post-closure plans;

(ii) There is a change in the expected year of closure that affects the closure plan; or

(iii) The jurisdictional health department directs the owner or operator to revise the closure or post-closure plan or closure or post-closure cost estimate.

(c) Each owner or operator shall review the closure and post-closure cost estimate thirty days prior to the anniversary date of the date on which the first closure and post-closure cost estimate was prepared. The review shall examine all factors, including inflation, involved in estimating the closure and post-closure cost. Any cost changes shall be factored into a revised closure or post-closure cost estimate and submit the revised cost estimate to the jurisdictional health department and the department of ecology.

(d) During the operating life of the facility, the owner or operator must keep the latest closure and post-closure cost estimate prepared in accordance with (a) and (b) of this subsection, and when this estimate has been adjusted in accordance with (c) of this subsection, available for review.

(e) The department of ecology will evaluate each cost estimate for completeness, and may accept, or require a revision of the cost estimate in accordance with its evaluation.

(3) Financial assurance mechanism for closure and post-closure. Each owner or operator of an applicable landfill disposal facility shall establish financial assurance mechanisms in an amount equal to the closure cost estimate and post-closure cost estimate prepared in accordance with subsection (2) of this section.

(a) Applicable landfill disposal facilities shall provide one or more of the following financial assurance instruments:

(i) Closure and post-closure trust funds established with an entity which has authority to act as a trustee and whose trust operations are regulated and examined by a federal or state agency. The wording of the trust agreement must be acceptable to the department of ecology. The purpose of the closure and post-closure trust funds is to receive and manage any funds paid by the owner or operator and to disburse

those funds only for closure or post-closure activities as identified in the approved closure and post-closure plan;

(ii) Surety bond guaranteeing payment into a closure and post-closure trust fund issued by a surety company listed as acceptable in Circular 570 of the United States Treasury Department or as hereafter amended. The wording of the surety bond(s) must be acceptable to the department. A standby closure and post-closure trust fund must also be established by the permittee. The purpose of the standby closure or post-closure trust fund is to receive any funds that may be paid by the operator or surety company. The bond must guarantee that the permittee will either fund the standby closure or post-closure trust in an amount equal to the penal sum of the bond before the site stops receiving waste. The surety shall become liable on the bond obligation if the permittee fails to perform as guaranteed by the bond. The surety may not cancel the bond until at least one hundred twenty days after the notice of cancellation has been received by both the permittee and the local health department. If the permittee has not provided alternate financial assurance acceptable under this section within ninety days of the cancellation notice, the surety must pay the amount of the bond into the standby closure or post-closure trust account;

(iii) Surety bond guaranteeing performance of closure or post-closure issued by a surety company listed as acceptable in Circular 570 of the United States Treasury Department or as hereafter amended. The wording of the surety bond must be acceptable to the department of ecology. A standby closure and post-closure trust fund must also be established by the permittee. The purpose of the standby closure or post-closure trust fund is to receive any funds that may be paid by the surety company. The bond must guarantee that the permittee will perform final closure or post-closure activities. The surety shall become liable on the bond obligation if the permittee fails to perform as guaranteed by the bond. The surety may not cancel the bond until at least one hundred twenty days after the notice of cancellation has been received by the permittee and the local health department. If the permittee has not provided alternative financial assurance acceptable under this section within ninety days of the cancellation notice, the surety must pay the amount of the bond into the standby closure or post-closure trust account;

(iv) Closure or post-closure irrevocable letter of credit issued by an entity which has the authority to issue letters of credit and whose letter-of-credit operations are regulated and examined by a federal or state agency. The wording of the letter of credit must be acceptable to the department. Standby closure and post-closure trust funds must also be established by the permittee. The purpose of the standby trust funds is to receive any funds deposited by the issuing institution resulting from a draw on the letter of credit. The letter of credit must be irrevocable and issued for a period of at least one year unless the issuing institution notifies both the permittee and the local health department at least one hundred twenty days before the current expiration date. If the permittee fails to perform closure and post-closure activities according to the closure or post-closure plan and permit requirements, or if the permittee fails to provide alternate financial assurance acceptable to the department within ninety days after notification that the letter of credit

will not be extended, the local health department may draw from the letter of credit;

(v) Closure and post-closure insurance policies issued by an insurer who is licensed to transact the business of insurance or is eligible as an excess or surplus lines insurer in one or more states. The working of the certificate of insurance must be acceptable to the department. Each insurance policy must guarantee that the funds will be available to complete those activities identified in the approved closure and post-closure plans. The policy must also guarantee that the insurer will be responsible for paying out funds for activities identified in either the closure or post-closure plan. The policy must provide that the insurance is automatically renewable and that the insurer may not cancel, terminate, or fail to renew the policy except for failure to pay the premium. If there is a failure to pay the premium, the insurer may not terminate the policy until at least one hundred twenty days after the notice of cancellation has been received by both the permittee and the local health department. Termination of the policy may not occur and the policy must remain in full force and effect if: The local health department determines the facility has been abandoned; or closure has been ordered by the local health department or a court of competent jurisdiction, or the permittee has been named as debtor in a voluntary or involuntary proceeding under Title 11 U.S.C. (Bankruptcy); or the premium due is paid. The permittee is required to maintain the policy in full force and until an alternative financial assurance guarantee is provided or when the permit is terminated.

(vi) Financial test and corporate guarantee for closure and post-closure. A private corporation meeting the financial test may provide a corporate guarantee that closure and post-closure activities will be completed according to the approved closure and post-closure plans and permit requirements. To qualify, a private corporation must meet the criteria of either (a)(vi)(A) or (B) of this subsection:

(A) Financial test. To pass the financial test the permit must have:

(I) Two of the following three ratios: A ratio of total liabilities to net worth less than 2.0; a ratio of the sum of net income plus depreciation, depletion, and amortization to total liabilities greater than 0.1; or a ratio of current assets to current liabilities greater than 1.5;

(II) Net working capital and tangible net worth each at least six times the sum of the current closure and post-closure cost estimates;

(III) Tangible net worth of at least ten million dollars; and

(IV) Assets in the United States amounting to at least ninety percent of its total assets or at least six times the sum of the current closure and post-closure cost estimates.

(B) Alternative financial test. To pass the alternative financial test, the permittee must have:

(I) A current rating of AAA, AA, A, or BBB as issued by *Standard and Poor's* or Aaa, Aa, A, or Bbb as issued by *Moody's*;

(II) Tangible net worth at least six times the sum of the current closure and post-closure cost estimates;

(III) Tangible net worth of at least ten million dollars; and

(IV) Assets in the United States amounting to at least ninety percent of its total assets or at least six times the sum of the current closure and post-closure cost estimates.

(C) The permittee shall demonstrate that it passes the financial test at the time the closure plan is filed and reconfirm that annually ninety days after the end of the corporation's fiscal year by submitting the following items to the department of ecology:

(I) A letter signed by the permittee's chief financial officer that provides the information necessary to document that the permittee passes the financial test; that guarantees that the funds to finance closure and post-closure activities according to the closure or post-closure plan and permit requirements are available; that guarantees that the closure and post-closure will be completed according to the closure or post-closure plan and permit requirements; that guarantees that within thirty days after written notification from the jurisdictional health department that the permittee no longer meets the criteria of the financial test the permittee shall provide an alternative form of financial assurance consistent with the requirements of this section; that guarantees that the permittee's chief financial officer will notify the jurisdictional health department within fifteen days any time that the permittee no longer meets the criteria of the financial test or is named as debtor in a voluntary or involuntary proceeding under Title 11 U.S.C. (Bankruptcy); and that acknowledges that the corporate guarantee is a binding obligation on the corporation and that the chief financial officer has the authority to bind the corporation to the guarantee;

(II) A copy of the independent certified public accountant's report on examination of the permittee's financial statements for the latest completed fiscal year;

(III) A special report from the permittee's independent certified public accountant (CPA) stating that the CPA has compared the data which the letter from the permittee's chief financial officer specifies as having been derived from the independently audited year end financial statements for the latest fiscal year with the amounts in such financial statement and that no matters came to the CPA's attention which caused the CPA to believe that the specified data should be adjusted;

(IV) The jurisdictional health department may, based on a reasonable belief that the permittee no longer meets the criteria of the financial test, require reports of the financial condition at any time from the permittee in addition to the annual report. If the jurisdictional health department finds, on the basis of such reports or other information that the permittee no longer meets the criteria of the financial test, the permittee shall provide an alternative form of financial assurance consistent with the requirements of this section, within thirty days after notification by the jurisdictional health department.

(b) For applicable disposal facilities of this section, any income in excess of the cost estimate(s) accruing to the established closure or post-closure financial assurance account will be at the owner's discretion as to the use of said surplus funds.

(c) A permittee may meet the requirements of this section by obtaining a written guarantee from the parent corporation of the permittee. The guarantor must meet one of the financial tests described in (a)(vi)(A) or (B) of this subsection, and must provide the documentation required by

(a)(vi)(C) of this subsection. The terms of the guarantee must provide that:

(i) If the permittee fails to perform final closure and, where required, provide post-closure care of a facility covered by the guarantee in accordance with the approved closure and post-closure plans, the guarantor will do so or establish a trust fund as specified in (a)(i) of this subsection in the name of the permittee.

(ii) The guarantee will remain in force unless the guarantor sends notice of cancellation by certified mail to the permittee, to the jurisdictional health department and to the department of ecology. Cancellation may not occur, however, during the one hundred twenty days beginning on the date of receipt of the notice of cancellation by both the permittee and the department of ecology, as evidenced by the return receipts.

(iii) If the permittee fails to provide alternate financial assurance as specified in this section and obtain the written approval of such alternate assurance from the jurisdictional health department or the department of ecology within ninety days after receipt by both the permittee, the jurisdictional health department, and the department of ecology of a notice of cancellation of the guarantee from the guarantor, the guarantor will provide such alternative financial assurance in the name of the permittee.

(4) Closure/post-closure trust fund account establishment and reporting.

(a) Each owner or operator shall file with the local health department an annual audit of the financial assurance accounts established for closure and post-closure activities.

(b) Annual audits shall be conducted by a certified public accountant licensed in the state of Washington, and shall be filed with the department of ecology no later than March 31 of each year for the previous calendar year, including each of the post-closure care years.

(c) The audit shall also include calculations demonstrating the proportion of closure completed during the preceding year as specified in the closure and post-closure plans.

(5) Authorization for financial assurance account fund withdrawal for closure and post-closure activities.

(a) Each owner or operator shall withdraw funds from the closure and/or post-closure financial assurance instrument as specified in the approved closure/post-closure plans;

(b) If the withdrawal of funds from the financial assurance instrument exceeds by more than five percent the withdrawal schedule stated in the approved closure and/or post-closure plan the closure and/or post-closure plan shall be amended.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-468, filed 10/4/88.]

WAC 173-304-470 Other methods of solid waste handling. (1) Applicability. This section applies to other methods of solid waste handling such as a material resource recovery system for municipal waste not specifically identified elsewhere in this regulation, nor excluded from this regulation.

(2) Requirements. Owners and operators of other methods of solid waste handling shall:

(a) Comply with the requirements in WAC 173-304-405;

(b) Obtain a permit under WAC 173-304-600 from the jurisdictional health department, by submitting an application containing information required in WAC 173-304-600 (3)(a), and such other information as may be required by the jurisdictional health department and the department, including:

(i) Preliminary engineering reports and plans and specifications; and

(ii) A closure plan.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-470, filed 10/28/85.]

WAC 173-304-490 Ground water monitoring requirements. (1) Applicability. These requirements apply to owners and operators of landfills, piles, landspreading disposal facilities, and surface impoundments that are required to perform ground water monitoring under WAC 173-304-400.

(2) Ground water monitoring requirements.

(a) The ground water monitoring system must consist of at least one background or upgradient well and three down gradient wells, installed at appropriate locations and depths to yield ground water samples from the upper most aquifer and all hydraulically connected aquifers below the active portion of the facility.

(i) Represent the quality of background water that has not been affected by leakage from the active area; and

(ii) Represent the quality of ground water passing the point of compliance. Additional wells may be required by the jurisdictional health department in complicated hydrogeological settings or to define the extent of contamination detected.

(b) All monitoring wells must be cased in a manner that maintains the integrity of the monitoring well bore hole. This casing must allow collection of representative ground water samples. Wells must be constructed in such a manner as to prevent contamination of the samples, the sampled strata, and between aquifers and water bearing strata and in accordance with chapter 173-160 WAC, Minimum standards for construction and maintenance of water wells.

(c) The ground water monitoring program must include at a minimum, procedures and techniques for:

(i) Decontamination of drilling and sampling equipment;

(ii) Sample collection;

(iii) Sample preservation and shipment;

(iv) Analytical procedures and quality assurance;

(v) Chain of custody control; and

(vi) Procedures to ensure employee health and safety during well installation and monitoring.

(d) Sample constituents.

(i) All facilities shall test for the following parameters:

(A) Temperature;

(B) Conductivity;

(C) pH;

(D) Chloride;

(E) Nitrate, nitrite, and ammonia as nitrogen;

(F) Sulfate;

(G) Dissolved iron;

(H) Dissolved zinc and manganese;

(I) Chemical oxygen demand;

(J) Total organic carbon; and

(K) Total coliform.

(ii) The jurisdictional health department in consultation with the department may specify additional or fewer constituents depending upon the nature of the waste; and

(iii) Test methods used to detect the parameters of (d)(i) of this subsection shall be EPA Publication Number SW-846, *Test Methods for Evaluating Solid Waste - Physical/Chemical Methods* except for total coliform which shall use the latest edition of *Standard Methods for the Examination of Water and Wastewater*.

(e) The ground water monitoring program must include a determination of the ground water surface elevation each time ground water is sampled.

(f) The owner or operator shall use a statistical procedure for determining whether a significant change over background has occurred. The jurisdictional health department will approve such a procedure with the guidance of the department.

(g) The owner or operator must determine ground water quality at each monitoring well at the compliance point at least quarterly during the life of an active area (including the closure period) and the postclosure care period. The owner or operator must express the ground water quality at each monitoring well in a form necessary for the determination of statistically significant increases.

(h) The owner or operator must determine and report the ground water flow rate and direction in the uppermost aquifer at least annually.

(i) If the owner or operator determines that there is a statistically significant increase for parameters or constituents at any monitoring well at the compliance point, the owner or operator must:

(i) Notify the jurisdictional health department of this finding in writing within seven days of receipt of the sampling data. The notification must indicate what parameters or constituents have shown statistically significant increases;

(ii) Immediately resample the ground water in all monitoring wells and determine the concentration of all constituents listed in the definition of contamination in WAC 173-304-100 including additional constituents identified in the permit and whether there is a statistically significant increase such that the ground water performance standard has been exceeded, and notify the jurisdictional health department within fourteen days of receipt of the sampling data.

(j) The jurisdictional health department may require corrective action programs including facility closure if the performance standard of WAC 173-304-460 (2)(a) is exceeded and, in addition, may revoke any permit and require reapplication under WAC 173-304-600.

(3) Corrective action program. An owner or operator required to establish a corrective action program under this section must, at a minimum with the approval of the jurisdictional health officer:

(a) Implement a corrective action program that reduces contamination and if possible prevents constituents from exceeding their respective concentration limits at the compliance point by removing the constituents, treating them in place, or other remedial measures;

(b) Begin corrective action according to a written schedule after the ground water performance standard is exceeded;

(c) Terminate corrective action measures once the concentrations of constituents are reduced to levels below the limits under WAC 173-304-460 (2)(a).

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-490, filed 10/28/85.]

WAC 173-304-600 Permit requirements for solid waste facilities. (1) Applicability.

(a) All facilities which are subject to the standards of WAC 173-304-130, 173-304-300, and 173-304-400 are required to obtain permits. Permits are not required for single family residences and single family farms dumping or depositing solid waste resulting from their own activities on to or under the surface of land owned or leased by them when such action does not create a nuisance, violate statutes, ordinances, or regulations, including this regulation.

(b) Permits are not required for corrective actions at solid waste handling facilities performed by the state and/or in conjunction with the United States Environmental Protection Agency to implement the Comprehensive Environmental Response Compensation and Liability Act of 1980 (CERCLA), or corrective actions taken by others to comply with a state and/or federal cleanup order provided that:

(i) The action results in an overall improvement of the environmental impact of the site;

(ii) The action does not require or result in additional waste being delivered to the site or increase the amount of waste or contamination present at the site;

(iii) The facility standards of WAC 173-304-400 are met; and

(iv) The jurisdictional health department is informed of the actions to be taken and is given the opportunity to review and comment upon the proposed corrective action plans.

(c) Effective dates. The effective dates are as follows:

(i) The permit requirements of this section apply to all existing waste handling facilities eighteen months after the effective date of this regulation.

(ii) Between the effective date of this regulation and eighteen months thereafter, existing facilities will operate under the terms and conditions of existing permits valid on the effective date of this regulation. Jurisdictional health departments shall incorporate compliance schedules into valid existing permits; such compliance schedules shall insure that existing facilities meet the effective dates of WAC 173-304-400(3).

(iii) New and expanded waste handling facilities shall meet the requirements of this section on the effective date of this regulation.

(2) Procedures for permits.

(a) Any owner or operator subject to the permit requirements who intends to operate a facility must apply for a permit with the jurisdictional health department. Filing shall not be complete until two copies of the application have been signed by the owner and operator and received by the jurisdictional health department, and the applicant has filed an environmental checklist required under the State Environmental Policy Act rules, chapter 197-11 WAC.

(b) Applications for a permit must contain the information set forth in subsection (3) of this section.

(c) Once the jurisdictional health department determines that an application for a permit is factually complete, it shall refer one copy to the appropriate regional office of the department for review and comment.

(d) The jurisdictional health department shall investigate every application to determine whether the facilities meet all applicable laws and regulations, conforms with the approved comprehensive solid waste handling plan and complies with all zoning requirements.

(e) The jurisdictional health department may establish reasonable fees for permits and renewal of permits. All permit fees collected by the health department shall be deposited in the county treasury in the account from which the health department's operating expenses are paid.

(f) The department shall report to the jurisdictional health department its findings on each permit application within forty-five days of receipt of a complete application or inform the jurisdictional health department as to the status of the application. Additionally, the department shall recommend for or against the issuance of each permit by the jurisdictional health department.

(g) When the jurisdictional health department has evaluated all pertinent information, it may issue a permit. Every completed solid waste permit application shall be approved or disapproved within ninety days after its receipt by the jurisdictional health department or the applicant shall be informed as to the status of the application.

(h) Except for applications specified in subsection (3)(h) of this section every permit issued by a jurisdictional health department shall be on a format prescribed by the department and shall contain specific requirements necessary for the proper operation of the permitted site or facility including the requirement that final engineering plans and specifications be submitted for approval to the jurisdictional health department.

(i) All issued permits must be filed with the department no more than seven days after the date of issuance.

(j) The owner or operator of a facility shall apply for renewal of the facility's permit annually. The jurisdictional health department shall annually:

(i) Review the original application for compliance with these regulations and submit such additional information as spelled out in subsection (4) of this section;

(ii) Review information collected from inspections, complaints, or known changes in the operations;

(iii) Collect the renewal fee;

(iv) Renew the permit; and

(v) File the renewed permit with the department no more than seven days after the date of issuance. The department shall review and may appeal the renewal as set forth in RCW 70.95.185 and 70.95.190.

(3) Application contents for permits for new or expanded facilities.

(a) All permit applications except for inert waste, demolition waste, special purpose landfills, woodwaste landfill and recycling facilities applications, which are specified in (h) of this subsection, shall contain the following:

(i) A general description of the facility;

(ii) The types of waste to be handled at the facility;

(iii) The plan of operation required by WAC 173-304-405(2);

(iv) The form used to record weights or volumes required by WAC 173-304-405(3);

(v) An inspection schedule and inspection log required by WAC 173-304-405(5); and

(vi) Documentation to show that any domestic or industrial waste water treatment facility, such as a leachate treatment system, is being reviewed by the department under chapter 173-240 WAC.

(b) Application contents for permits for new or expanded landfill facilities. In addition to the requirements of (a) of this subsection, each landfill application for a permit must contain:

(i) A geohydrological assessment of the facility that addresses:

(A) Local/regional geology and hydrology, including faults, unstable slopes and subsidence areas on site;

(B) Evaluation of bedrock and soil types and properties;

(C) Depths to ground water and/or aquifer(s);

(D) Direction and flow rate of local ground water;

(E) Direction of regional ground water;

(F) Quantity, location and construction (where available) of private and public wells within a two thousand foot radius of site;

(G) Tabulation of all water rights for ground water and surface water within a two thousand foot radius of the site;

(H) Identification and description of all surface waters within a one-mile radius of the site;

(I) Background ground and surface water quality assessment, and for expanded facilities, identification of impacts of existing facilities of the applicant to date upon ground and surface waters from landfill leachate discharges;

(J) Calculation of a site water balance;

(K) Conceptual design of a ground water and surface water monitoring system, including proposed installation methods for these devices and where applicable a vadose zone monitoring plan;

(L) Land use in the area, including nearby residences; and

(M) Topography of the site and drainage patterns.

(ii) Preliminary engineering report/plans and specifications that address:

(A) How the facility will meet the locational standards of WAC 173-304-130;

(B) Relationship of facility to county solid waste comprehensive plan and the basis for calculating the facility's life;

(C) The design of bottom and side liners;

(D) Identification of borrow sources for daily and final cover, and soil liners;

(E) Interim/final leachate collection, treatment, and disposal;

(F) Landfill gas control and monitoring;

(G) Trench design, fill methods, elevation of final cover and bottom liner, and equipment requirements; and

(H) Closure/post-closure design, construction, maintenance, and land use.

(iii) An operation plan that addresses:

(A) Operation and maintenance of leachate collection, treatment, and disposal systems;

(B) Operation and maintenance of landfill gas control systems;

(C) Monitoring plans for ground water, surface water, and landfill gases to include sampling technique, frequency, handling, and analyses requirements;

(D) Safety and emergency accident/fire plans;

(E) Routine filling, grading, cover, and housekeeping;

(F) Record system to address records on weights (or volumes), number of vehicles and the types of waste received;

(G) Vector control plans; and

(H) Noise control.

(iv) Closure plan to address:

(A) Estimate of closure season/year;

(B) Capacity of site in volume and tonnage;

(C) Maintenance of active fill versus completed, final covered acreage;

(D) Estimated closure construction timing and notification procedures;

(E) Inspection by regulatory agencies.

(v) Post-closure plan to address:

(A) Estimated time period for post-closure activities;

(B) Site monitoring of landfill gas, ground water, and surface water;

(C) Deed clause changes, land use, and zoning restrictions;

(D) Maintenance activities to maintain cover and run-off systems; and

(E) Identification of final closure costs including cost calculations and the funding mechanism.

(c) Application contents for new or expanded transfer stations, drop box facilities, and baling and compaction systems requiring a permit. In addition to the requirements of (a) of this subsection, each applicable application for a permit must contain preliminary engineering report/plans and specifications that address:

(i) The proposed facility's zoning status;

(ii) The relationship to the county solid waste comprehensive plan and the area to be served by the facility; and

(iii) The facility design to address how the facility shall meet requirements of WAC 173-304-410, including closure.

(d) Application contents for new or expanded surface impoundments requiring a permit. In addition to the requirements of (a) of this subsection, each applicable application for a permit must contain:

(i) A geohydrological assessment of the facility that addresses all of the factors of (b)(i) of this subsection;

(ii) Preliminary engineering report/plans and specifications that address, where applicable:

(A) How the proposed facility will meet the locational standards of WAC 173-304-130;

(B) The relationship of facility to the county solid waste comprehensive plan;

(C) The design of liners and foundation to be incorporated in the facilities design including the design leachate of collection and treatment systems;

(D) The design of ground water monitoring;

(E) The design of dikes including calculations on dike stability analyses under conditions of liner failure;

(F) Other design details, including sludge cleanout and disposal, overfilling alarms and inlet design; and

(G) Closure/post-closure design, construction maintenance and land use.

(iii) An operation plan that addresses:

(A) Operation and maintenance of leachate collection system, or ground water monitoring;

(B) Operation and maintenance of overfilling equipment or details of filling and emptying techniques;

(C) Inspection of dikes and liners for integrity; and

(D) Safety and emergency plans.

(iv) A closure plan to address:

(A) Estimate of closure year and cost;

(B) Methods of removing wastes, liners and any contaminated soils, and location of final disposal;

(C) Closure timing and notification procedures; and

(D) Final inspection by regulatory agencies.

(e) Application contents for new or expanded piles requiring a permit. In addition to the requirements of (a) of this subsection, each application for a permit must contain:

(i) Preliminary engineering reports/plans and specifications that address:

(A) How the proposed facility will meet the locational standards of WAC 173-304-130;

(B) The relationship of the facility to the county solid waste comprehensive plan and zoning;

(C) The design of the liner or sealed surface upon which the liner rests, including an analysis of the liners ability to withstand the stress;

(D) The design of the run-on and run-off system;

(E) The design to avoid washout when the pile is located in a one hundred year floodplain; and

(F) Maximum elevation and boundaries of the waste pile.

(ii) An operation plan that addresses:

(A) Methods of adding or removing wastes from the pile and equipment used;

(B) Inspection of the liner for integrity; and

(C) Safety and emergency plans.

(iii) A closure plan to address:

(A) Estimate of closure year and cost;

(B) Methods of removing wastes, liners and any contaminated soils, and location of final disposal;

(C) Closure timing and notification procedures; and

(D) Final inspection by regulatory agencies.

(f) Application contents for new or expanded energy recovery and incinerator facilities requiring a permit. In addition to the requirements of (a) of this subsection, each application for a permit must contain:

(i) Preliminary engineering reports/plans and specifications that address:

(A) The relationship of the facility to the county solid waste comprehensive plan and zoning;

(B) The design of the storage and handling facilities on-site for incoming waste as well as fly ash, bottom ash and any other wastes produced by air or water pollution controls; and

(C) The design of the incinerator or thermal treater, including changing or feeding systems, combustion air systems, combustion or reaction chambers, including heat recovery systems, ash handling systems, and air pollution and water pollution control systems. Instrumentation and monitoring systems design shall also be included.

(ii) An operation plan that addresses:

(A) Cleaning of storage areas as required by WAC 173-304-440 (2)(a);

(B) Alternative storage plans for breakdowns as required in WAC 173-304-440 (2)(c);

(C) Inspection to insure compliance with state and local air pollution laws and to comply with WAC 173-304-405(5). The inspection log or summary must be submitted with the application; and

(D) How and where the fly ash, bottom ash and other solid wastes will be disposed of.

(iii) A closure plan to address:

(A) Estimate of closure year and cost;

(B) Methods of closure and methods of removing wastes, equipment, and location of final disposal;

(C) Closure timing and notification procedures; and

(D) Final inspection by regulatory agencies.

(g) Application contents for new or expanded landspreading disposal facilities requiring a permit. In addition to the requirements of (a) of this subsection, each application for a permit must contain:

(i) A geohydrological assessment of the facility that addresses all of the factors of (b)(i) of this subsection;

(ii) Preliminary engineering reports/plans and specifications that address:

(A) How the proposed facility will meet the locational standards of WAC 173-304-130;

(B) The relationship of the facility to the county solid waste comprehensive plan and the basis for calculating the facility's life;

(C) Waste analyses and methods to periodically sample and analyze solid waste;

(D) Design of interim waste storage facilities if such facilities are not otherwise permitted by the department;

(E) Design of run-on and run-off systems;

(F) A contour map of the active area showing contours to the nearest foot;

(G) A ground water and surface water monitoring program; and

(H) Access barriers such as fences, and warning signs.

(iii) An operation plan that addresses:

(A) Operation and maintenance of run-off and run-on systems;

(B) Methods of taking ground water samples and for maintaining ground water monitoring systems;

(C) Methods of applying wastes to meet the requirements of WAC 173-304-450 (2)(d):

(I) Estimated multiples of agronomic rates;

(II) Frequency of discing; and

(III) Avoidance of standing water.

(D) The written contract required between landowners, waste generators and waste operators.

(iv) Closure plan to address:

(A) Estimate of closure season/year;

(B) Capacity of site in volume and tonnage;

(C) Year-to-year maintenance of the active area versus completed, final covered acreage;

(D) Closure construction timing and notification procedures; and

(E) Final inspection by regulatory agencies.

(v) Post-closure plan to address:

(A) Estimated time period for post-closure activities;

(B) Site monitoring of ground water;

(C) Deed clause changes, land use, and zoning restrictions;

(D) Maintenance activities to maintain cover and run-off systems;

(E) Plans for food chain crops being grown on the active areas, after closure; and

(F) Identification of final closure costs including cost calculations and the funding mechanism.

(h) Application contents for new or expanded inert waste and demolition waste, special purpose landfill, woodwaste landfills, and recycling facilities.

Applications for permits subject to the standards of WAC 173-304-300, 173-304-460(5), 173-304-461, and 173-304-462 shall be on forms whose content shall be specified by the jurisdictional health department.

(4) Application contents for existing facilities renewing permits. All owners or operators of existing facilities shall renew permits or application forms specified in subsection (3) of this section. Previous information submitted to the jurisdictional health department may be referred to on the application forms. Changes in operating methods or other changes must be noted on the application in order to be authorized by permit.

(5) Inspections. As a minimum, annual inspections of all permitted solid waste facilities shall be performed by the jurisdictional health department. Any duly authorized officer, employee, or representative of the jurisdictional health officer or his designee having jurisdiction may enter and inspect any property, premises or place at any reasonable time for the purpose of determining compliance with this chapter, and relevant laws and regulations. Findings shall be noted and kept on file. A copy of the inspection report or annual summary shall be furnished to the site operator.

[Statutory Authority: RCW 70.95.215. 88-20-066 (Order 88-28), § 173-304-600, filed 10/4/88. Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-600, filed 10/28/85.]

WAC 173-304-700 Variances. (1) Any person who owns or operates a solid waste facility may apply to the jurisdictional health officer for a variance from any section of this regulation. The application shall be accompanied by such information as the jurisdictional health department may require. The jurisdictional health department may grant such variance, but only after due notice or a public hearing if requested, if it finds that:

(a) The solid waste handling practices or location do not endanger public health, safety or the environment; and

(b) Compliance with the regulation from which variance is sought would produce hardship without equal or greater benefits to the public.

(2) No variance shall be granted pursuant to this section until the jurisdictional health department has considered the relative interests of the applicant, other owners of property likely to be affected by the handling practices and the general public.

(3) Any variance or renewal shall be granted within the requirements of subsection (1) of this section and for time period and conditions consistent with the reasons therefor, and within the following limitations:

(a) If the variance is granted on the ground that there is no practicable means known or available for the adequate prevention, abatement, or control of pollution involved, it shall be only until the necessary means for prevention, abatement or control become known and available and subject to the taking of any substitute or alternative measures that the jurisdictional health department may prescribe;

(b) The jurisdictional health department may grant a variance conditioned by a time table if:

(i) Compliance with the regulation will require spreading of costs over a considerable time period; and

(ii) The time table is for a period that is needed to comply with the regulation.

(4) Any variance granted pursuant to this section may be renewed on terms and conditions and for periods which would be appropriate on initial granting of a variance. No renewal thereof shall be granted, unless following a public hearing on the complaint or due notice, the jurisdictional health department finds the renewal is justified. No renewal shall be granted except on application. Any such application shall be made at least sixty days prior to the expiration of the variance. Immediately upon receipt of an application for renewal, the jurisdictional health department shall give public notice of such application in accordance with rules and regulations of the jurisdictional health department.

(5) An application for a variance, or for the renewal thereof, submitted to the jurisdictional health department shall be approved or disapproved by the jurisdictional health department within ninety days of receipt unless the applicant and the jurisdictional health department agree to a continuance.

(6) No variance shall be granted by a jurisdictional health department except with the approval and written concurrence of the department prior to action on the variance by the jurisdictional health department.

(7) Variances granted by a jurisdictional health department will be accepted as variances under this regulation.

(8) Public notice shall be given by mailing a notice of the variance application to persons who have written to the jurisdictional health department asking to be notified of all variance requests.

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-700, filed 10/28/85.]

WAC 173-304-9901 Maximum contaminant levels for ground water. Maximum contaminant levels for ground water shall be those specified in chapter 248-54 WAC, as the primary drinking water standards. Analytical methods for these contaminants may be found in the Code of Federal Regulations 40 CFR Part 141. (These contaminant levels are to be considered interim levels for the purpose of regulating solid waste handling facilities and shall be used until such time as the department establishes ground water quality standards for all types of activities impacting ground water.)

[Statutory Authority: Chapter 43.21A RCW. 85-22-013 (Order 85-18), § 173-304-9901, filed 10/28/85.]

Chapter 173-305 WAC HAZARDOUS WASTE FEE REGULATION

WAC

PART A GENERAL

173-305-010	Purpose.
173-305-015	Applicability.
173-305-020	Definitions.
173-305-030	Penalty for failure to pay the fee.
173-305-040	Adjustment of fees.
173-305-050	General administrative provisions.

PART B BASE FEE

173-305-110	Fees.
173-305-120	Responsibilities of the departments of ecology and revenue.

PART C ADDITIONAL FEE

173-305-210	Imposition of fee.
173-305-220	Additional fee.
173-305-230	Due dates.
173-305-240	Responsibilities of the departments of ecology and revenue.

DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER

173-305-060	Facility fees. [Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-060, filed 2/7/84.] Repealed by 92-10-043 (Order 92-09), filed 5/5/92, effective 6/5/92. Statutory Authority: Chapter 70.95E RCW.
173-305-070	Schedule of facility fees. [Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-070, filed 2/7/84.] Repealed by 92-10-043 (Order 92-09), filed 5/5/92, effective 6/5/92. Statutory Authority: Chapter 70.95E RCW.
173-305-080	Assessments for combined sites. [Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-080, filed 2/7/84.] Repealed by 92-10-043 (Order 92-09), filed 5/5/92, effective 6/5/92. Statutory Authority: Chapter 70.95E RCW.
173-305-090	Adjustment of fees and limits. [Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-090, filed 2/7/84.] Repealed by 92-10-043 (Order 92-09), filed 5/5/92, effective 6/5/92. Statutory Authority: Chapter 70.95E RCW.

PART A GENERAL

WAC 173-305-010 Purpose. This rule implements the provisions of chapter 70.95E RCW, establishing a means for funding technical assistance and compliance education assistance to hazardous substance users and waste generators in this state. Technical assistance includes but is not limited to assistance in the preparation of plans and review of plans and related documents. The purpose of this chapter is to describe the methods by which the department of ecology will assess certain fees, to whom fees will be assessed, the amount of such fees, provisions for exemption from and enforcement of fee assessments, responsibilities of the departments of ecology and revenue, and procedures for adjusting the fee. Copies of all rules, regulations, or statutes cited in this chapter are available from the Department of Ecology, Mailstop PV-11, Olympia, WA, 98504-8711.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-010, filed 4/1/91, effective 5/2/91. Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-010, filed 2/7/84.]

WAC 173-305-015 Applicability. The requirements of WAC 173-305-010 through 173-305-120 apply to all persons who are known or potential generators, including state and local entities as well as instrumentalities of the United States. The requirements of WAC 173-305-010 through 173-305-050 and 173-305-210 through 173-305-240 apply to all persons required to prepare plans under RCW 70.95C.200.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-015, filed 4/1/91, effective 5/2/91. Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-015, filed 2/7/84.]

WAC 173-305-020 Definitions. Any terms not specifically defined in this section shall, for the purposes of this chapter, have the same meaning as given in WAC 173-303-040. The following terms are defined for the purposes of this chapter:

"Additional fee" means the annual fee imposed under chapter 70.95E RCW against hazardous generators and hazardous substance users required to prepare plans;

"Base fee" means the annual fee imposed under chapter 70.95E RCW against known and potential generators of hazardous waste doing business in the state of Washington;

"Business activities" means activities of any person who is "engaging in business" as the term is defined in chapters 82.04 and 82.16 RCW;

"Dangerous waste" means any discarded, useless, unwanted, or abandoned nonradioactive substances, including but not limited to certain pesticides, or any residues or containers of such substances which are disposed of in such quantity or concentration as to pose a substantial present or potential hazard to human health, wildlife, or the environment because such wastes or constituents or combinations of such wastes:

Have short-lived, toxic properties that may cause death, injury, or illness or have mutagenic, teratogenic, or carcinogenic properties; or

Are corrosive, explosive, flammable, or may generate pressure through decomposition or other means.

Dangerous wastes shall specifically include those wastes designated as dangerous by chapter 173-303 WAC;

"Department" means the department of ecology;

"Emissions" means the substances released to the environment which must be reported under toxic chemical release reporting, 40 CFR Part 372;

"EPA/state identification number" means the number assigned by the environmental protection agency (EPA) or by the department of ecology to each generator and/or transporter and treatment, storage, and/or disposal facility;

"Extremely hazardous waste" means any dangerous waste which:

Will persist in a hazardous form for several years or more at a disposal site and which in its persistent form:

Presents a significant environmental hazard and may be concentrated by living organisms through a food chain or may affect the genetic make-up of man or wildlife; and

Is highly toxic to man and wildlife;

If disposed of at a disposal site in such quantities as would present an extreme hazard to man or the environment.

Extremely hazardous waste shall specifically include those wastes designated as extremely hazardous by chapter 173-303 WAC;

"Facility" means any geographical area that has been assigned an EPA/state identification number or in the case of a hazardous substance user, means all buildings, equipment, structures, and other stationary items located on a single site or on contiguous or adjacent sites and owned or operated by the same person;

"Generate" means any act or process which produces hazardous waste or first causes a hazardous waste to become subject to regulation;

"Hazardous waste" means and includes all dangerous and extremely hazardous wastes but for the purposes of this chapter excludes all radioactive wastes or substances composed of both radioactive and hazardous components;

"Interrelated facility" means multiple facilities owned or operated by the same person;

"Known generators" means persons that have notified the department, have received an EPA/state identification number and generate quantities of hazardous waste regulated under chapter 70.105 RCW.

"Person" means an individual, trust, firm, joint stock company, partnership, association, state, public or private or municipal corporation, commission, political subdivision of a state, interstate body, the federal government including any agency or officer thereof, and any Indian tribe or authorized tribal organization;

"Plan" means the plan provided for in RCW 70.95C.200;

"Potential generators" means all persons whose primary business activities are identified by the department to be likely to generate any quantity of hazardous wastes.

"Price deflator" means the United States Department of Commerce Bureau of Economic Analysis, "Implicit Price Deflator for Gross National Product" for "Government Purchases of Goods and Services," for "State and Local Government."

"Primary business activity" means a business activity which accounts for more than fifty percent of a business' total gross receipts or in the case of more than two business activities, the activity which has the largest gross receipts. Where a business engages in multiple activities and one or more of those activities generate hazardous waste, the gross receipts from all waste generating activities will be combined to determine their ratio to the total gross receipts of the business.

"Recycled for beneficial use" means the use of hazardous waste, either before or after reclamation, as a substitute for a commercial product or raw material, but does not include:

Use constituting disposal;

Incineration; or

Use as a fuel.

"Substantially similar processes" means processes that are essentially interchangeable, inasmuch as they use similar equipment and materials and produce similar products or services and generate similar wastes.

"Waste generation site" means any geographical area that has been assigned an EPA/state identification number.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-020, filed 4/1/91, effective 5/2/91. Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-020, filed 2/7/84.]

WAC 173-305-030 Penalty for failure to pay the fee. If a known or potential generator or a person required to prepare a plan fails to pay all or any part of a fee imposed under this chapter, the department of revenue shall charge a penalty of three times the amount of the unpaid fee. The department of revenue shall waive any penalty in accordance with RCW 82.32.105. Note: See WAC 458-20-228 for a discussion of the circumstances under which a penalty may be waived.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-030, filed 4/1/91, effective 5/2/91. Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-030, filed 2/7/84.]

WAC 173-305-040 Adjustment of fees. On an annual basis, the department shall adjust the fees provided for by this chapter, including the maximum annual fee and the maximum total fees, by conducting the calculation in subsection (1) of this section and taking the actions set forth in subsection (2) of this section:

(1) In November of each year, the base fee and the additional fee, or the fees as subsequently adjusted by this section, shall be multiplied by a factor equal to the most current quarterly "price deflator" available, divided by the "price deflator" used in the numerator the previous year. However, the "price deflator" used in the denominator for the first adjustment shall be divided by the second quarter "price deflator" for 1990.

(2) Each year by March 1, the schedule, as adjusted in subsection (1) of this section, will be published. The department will round the published fees to the nearest dollar.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-040, filed 4/1/91, effective 5/2/91. Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-040, filed 2/7/84.]

WAC 173-305-050 General administrative provisions. The review provisions contained in chapter 82.32 RCW, except RCW 82.32.050 and 82.32.090, apply to the collection and enforcement of fees imposed pursuant to this chapter. Requests for administrative review should be directed to the Department of Revenue, Taxpayer Accounts Administration, Mailstop AX-02, Olympia, Washington 98504-0090. The review provisions of chapter 43.21B RCW do not apply to the administration of these fees.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-050, filed 4/1/91, effective 5/2/91. Statutory Authority: Chapter 70.105A RCW. 84-05-012 (Order DE 83-38), § 173-305-050, filed 2/7/84.]

PART B BASE FEE

WAC 173-305-110 Fees. (1) The fee imposed is a thirty-five dollar (or as adjusted by WAC 173-305-040) annual fee payable by known and potential generators of hazardous waste. The fee for the 1990 fee period shall be due on October 1, 1990, for any known or potential generator operating in Washington after March 22, 1990. The fee

for the 1991 calendar year, and the 1990 fee period for any known or potential generator who began business after October 1, 1990, shall be due February 28, 1992. The annual fee for calendar year 1992 and each calendar year thereafter shall be due on February 28 of the next succeeding year.

(2) The department will determine known generators based on the most current verified information available to the department.

(3) The department has determined potential generators to be those persons engaged in any of the following primary business activities:

Table 1

Primary Business Activities of Potential Generators

Primary business activities, Description

Soil preparation services: Includes establishments primarily engaged in application of fertilizer, seed bed preparation, and other services for improving the soil for crop planting such as weed control.

Crop protecting services: Includes establishments primarily engaged in performing crop protecting services such as disease, weed, and insect control.

Metal mining: Includes establishments primarily engaged in mining, developing mines, or exploring for metallic minerals. These ores are valued chiefly for the metals contained, to be recovered for use as such or as constituents of alloys, chemicals, pigments, or other products. Includes mills which crush, grind, wash, dry, sinter, calcine, or leach ore, or perform gravity separation or flotation operations.

General building contractors: Includes general contractors and operative builders primarily engaged in the construction of nonresidential buildings.

Heavy construction, excluding buildings: Includes general contractors primarily engaged in heavy construction other than building, such as highways and streets, bridges, sewers, railroads, irrigation products, flood control products and marine construction, and special trade contractors primarily engaged in activities of a type that are clearly specialized to such heavy construction and are not normally performed on buildings or building-related projects.

Painting: Includes special trade contractors primarily engaged in painting.

Floor laying and other floor work, not elsewhere classified: Includes special trade contractors primarily engaged in the installation of asphalt tile, linoleum, and resilient flooring, in laying, scraping, and finishing parquet and other hardwood flooring.

Beverages: Includes establishments primarily engaged in manufacturing malt beverages or malt byproducts; manufacturing wines, brandy, and brandy spirits including the blending of wines; manufacturing alcoholic liquors by distillation or by mixing liquors and other ingredients; manufacturing soft drinks and carbonated waters; and manufacturing flavoring extracts, syrups, powders, and related products.

Textile mill products: Includes establishments primarily engaged in performing any of the following operations: (1)

preparation of fiber and subsequent manufacturing of yarn, thread, braids, twine, and cordage; (2) manufacturing broadwoven fabrics, narrow woven fabrics, knit fabrics, and carpets and rugs from yard; (3) dyeing and finishing fiber, yarn, fabrics, and knit apparel; (4) coating, waterproofing, or otherwise treating fabrics; (5) the integrated manufacture of knit apparel and other finished articles from yarn; and (6) the manufacture of felt goods, lace goods, nonwoven fabrics, and miscellaneous textiles.

Sawmills and planing mills, general: Includes establishments primarily engaged in sawing rough lumber and timber from logs and bolts, or resawing cants and flitches into lumber, including box lumber and softwood cut stock; planing mills combined with sawmills; and separately operated planing mills which are engaged primarily in producing surfaced lumber and standard workings or patterns of lumber. This industry includes establishments primarily engaged in sawing lath and railroad ties and in producing tobacco hoghead stock, wood chips, and snow fence lath.

Hardwood dimension and flooring mills: Includes establishments primarily engaged in manufacturing hardwood dimension lumber and workings therefrom; and other hardwood dimension, semifabricated or ready for assembly; hardwood flooring; and wood frames for household furniture.

Millwork: Includes establishments primarily engaged in manufacturing fabricated wood millwork, including wood millwork covered with materials such as metal and plastics. Planing mills primarily engaged in producing millwork are included in this industry.

Wood kitchen cabinets: Includes establishments primarily engaged in manufacturing wood kitchen cabinets and wood bathroom vanities, generally for permanent installation.

Hardwood veneer and plywood: Includes establishments primarily engaged in producing commercial hardwood veneer and those primarily engaged in manufacturing commercial plywood or prefinished hardwood plywood. This includes nonwood backed or faced veneer and nonwood faced plywood.

Softwood veneer and plywood: Includes establishments primarily engaged in producing commercial softwood veneer and plywood, from veneer produced in the same establishment or from purchased veneer.

Wood preserving: Includes establishments primarily engaged in treating wood, sawed or planed in other establishments, with creosote or other preservatives to prevent decay and to protect against fire and insects. This industry also includes the cutting, treating, and selling of poles, posts and piling, but establishments primarily engaged in manufacturing other wood products, which they may also treat with preservatives, are not included.

Reconstituted wood products: Includes establishments primarily engaged in manufacturing reconstituted wood products. Important products of this industry are hardboard, particleboard, insulation board, medium density fiberboard, waferboard, and oriented strandboard.

Wood products, not elsewhere classified: Includes establishments primarily engaged in manufacturing wood

products, not elsewhere classified, and products from rattan, reed, splint, straw, veneer, veneer strips, wicker, and willow.

Furniture and fixtures: Includes establishments primarily engaged in manufacturing household, office, public building, and restaurant furniture; and office and store fixtures.

Paper and allied products: Includes establishments primarily engaged in the manufacture of pulps from wood and other cellulose fibers, and from rags; the manufacture of paper and paperboard; and the manufacture of paper and paperboard into converted products, such as paper coated off the paper machine, paper bags, paper boxes, and envelopes. Also included are establishments primarily engaged in manufacturing bags of plastics film and sheet.

Printing and publishing: Includes establishments primarily engaged in printing by one or more common processes, such as letterpress; lithography (including offset), gravure, or screen; and those establishments which perform services for the printing trade, such as bookbinding and platemaking and also includes establishments engaged in publishing newspapers, books, and periodicals.

Chemicals and allied products: Includes establishments primarily engaged in producing basic chemicals, and establishments manufacturing products by predominantly chemical processes.

Petroleum refining and related industries: Includes establishments primarily engaged in petroleum refining, manufacturing paving and roofing materials, and compounding lubricating oils and greases from purchased materials.

Rubber and miscellaneous plastic products: Includes establishments primarily engaged in manufacturing products from plastics resins and from natural, synthetic, or reclaimed rubber, gutta percha, balata, or butta siak.

Stone, clay, and glass products: Includes establishments primarily engaged in manufacturing flat glass and other glass products, cement, structural clay products, pottery, concrete and gypsum products, cut stone, abrasive and asbestos products, and other products from materials taken principally from the earth in the form of stone, clay, and sand.

Primary metal industries: Includes establishments primarily engaged in smelting and refining ferrous and nonferrous metals from ore, pig, or scrap; in rolling, drawing, and alloying metals; in manufacturing castings and other basic metal products; and in manufacturing nails, spikes, and insulated wire and cable. This group includes the production of coke.

Fabricated metal products: Includes establishments primarily engaged in fabricating ferrous and nonferrous metal products, such as metal cans, tinware, handtools, cutlery, general hardware, nonelectric heating apparatus, fabricated structural metal products, metal forgings, metal stampings, ordnance (except vehicles and guided missiles), and a variety of metal and wire products, not elsewhere classified.

Industrial and commercial machinery and computer equipment: Includes establishments primarily engaged in manufacturing industrial and commercial machinery and equipment and computers.

Electronic and other electrical equipment and components, except computer equipment: Includes establishments primarily engaged in manufacturing machinery, apparatus, and supplies for the generation, storage, transmission, transformation, and utilization of electrical energy. Included are the manufacturing of electricity distribution equipment; electrical industrial apparatus; household appliances; electrical lighting and writing equipment; radio and television receiving equipment; communications equipment; electronic components and accessories; and other electrical equipment and supplies.

Transportation equipment: Includes establishments primarily engaged in manufacturing equipment for transportation of passengers and cargo by land, air, and water. Important products produced by establishments classified in this major group include motor vehicles, aircraft, guided missiles, and space vehicles, ships, boats, railroad equipment, and miscellaneous transportation equipment, such as motorcycles, bicycles, and snowmobiles.

Instruments; measuring, analyzing, and controlling photographic, medical, and optical goods; watches and clocks: Includes establishments primarily engaged in manufacturing instruments (including professional and scientific) for measuring, testing, analyzing, and controlling, and their associated sensors and accessories; optical instruments and lenses; surveying and drafting instruments; hydrological, hydrographic, meteorological, and geophysical equipment; search, detection, navigation, and guidance systems and equipment; surgical, medical, and dental instruments, equipment, and supplies; ophthalmic goods; photographic equipment and supplies; and watches and clocks.

Jewelry, silverware, and plated ware: Includes establishments primarily engaged in manufacturing jewelry and other articles made of precious metals with or without stones; and includes manufacturing flatware, hollowware, ecclesiastical ware, trophies, trays, and related products made of sterling silver; of metal plated with silver, gold, or other metal; of nickel silver; or of pewter; or of stainless steel.

Toys and sporting goods: Includes establishments primarily engaged in manufacturing: Sporting and athletic goods such as fishing tackle, golf and tennis goods, skis and skiing equipment.

Signs and advertising specialties: Includes establishments primarily engaged in manufacturing electrical, mechanical, cutout, or plate signs and advertising displays, including neon signs, and advertising specialties.

Railroad transportation: Includes establishments furnishing transportation by line-haul railroad, and switching and terminal establishments.

Local and interurban passenger transit: Includes establishments primarily engaged in furnishing local and suburban passenger transportation.

Water transportation: Includes establishments primarily engaged in freight and passenger transportation on the open seas or inland waters, and establishments furnishing such incidental services as lighterage, towing, and canal operation.

This major group also includes excursion boats, sightseeing boats, and water taxis.

Transportation by air: Includes establishments primarily engaged in furnishing domestic and foreign transportation by air and also those operating airports and flying fields and furnishing terminal services.

Electric services: Includes establishments primarily engaged in the generation, transmission, and/or distribution of electric energy for sale.

Combination electric and gas, and other utility services: Includes establishments providing electric or gas services in combination with other services.

Sanitary services: Includes establishments primarily engaged in the collection and disposal of wastes conducted through a sewer system; and includes establishments primarily engaged in the collection and disposal of refuse by processing or destruction or in the operation of incinerators, waste treatment plants, landfills, or other sites for disposal of such materials.

Motor vehicles, parts, and supplies: Includes establishments primarily engaged in the wholesale distribution of new and used passenger automobiles, trucks, trailers, and other motor vehicles, including motorcycles, motor homes, and snowmobiles; the wholesale distribution of motor vehicle supplies, accessories, tools and equipment except tires; and new motor vehicle parts; the distribution at wholesale or retail of used motor vehicle parts and those primarily engaged in dismantling motor vehicles for the purpose of selling parts.

Electrical apparatus and equipment, wiring supplies, and construction materials: Includes establishments primarily engaged in the wholesale distribution of electrical power equipment for the generation, transmission, distribution, or control of electric energy; electrical construction materials for outside power transmission lines and for electrical systems; and electric light fixtures and bulbs.

Machinery, equipment, and supplies: Includes establishments primarily engaged in the wholesale distribution of construction or mining cranes, excavating machinery and equipment, power shovels, road construction and maintenance machinery, tractor-mounting equipment and other specialized machinery and equipment used in the construction, mining, and logging industries; distribution of agricultural machinery and equipment for use in the preparation and maintenance of the soil, the planting and harvesting of crops, and other operations and processes pertaining to work on the farm or the lawn or garden; and dairy and other livestock equipment; wholesale distribution of industrial machinery and equipment.

Miscellaneous durable goods: Includes establishments primarily engaged in assembling, breaking up, sorting, and wholesale distribution of scrap and waste materials.

Chemicals and allied products: Includes establishments primarily engaged in the wholesale distribution of plastics materials, and of unsupported plastics film, sheets, sheeting, rods, tubes, and other basic forms and shapes; whole distribution of chemicals and allied products, such as acids,

industrial and heavy chemicals, dye stuffs, industrial salts, rosin, and turpentine.

Petroleum and petroleum products: Includes establishments primarily engaged in the wholesale distribution of crude petroleum and petroleum products, including liquefied petroleum gas, from bulk liquid storage facilities; wholesale distribution of petroleum and petroleum products, except those with bulk liquid storage facilities. Included are packaged and bottled petroleum products distributors, truck jobbers, and others marketing petroleum and its products at wholesale, but without bulk liquid storage facilities.

Farm supplies: Includes establishments primarily engaged in the wholesale distribution of fertilizers, agricultural chemicals, and pesticides.

New and used car dealers: Includes establishments primarily engaged in the retail sale of new automobiles or new and used automobiles. These establishments frequently maintain repair departments and carry stocks of replacement parts, tires, batteries, and automotive accessories.

Gasoline service stations: Includes gasoline service stations primarily engaged in selling gasoline and lubricating oils.

Laundry, cleaning, and garment services: Includes establishments primarily engaged in operating mechanical laundries with steam or other power; linen supply; coin-operated laundries and drycleaning; drycleaning plants, except rug cleaning; carpet and upholstery cleaning; and industrial launderers. Establishments that solely operate coin-operated washing machines and dryers and establishments that solely clean carpets or rugs are not included.

Disinfecting and pest control services: Includes establishments primarily engaged in disinfecting dwelling and other buildings, and in termite, insect, rodent, and other pest control, generally in dwellings or other buildings.

Truck rental and leasing, without drivers: Includes establishments primarily engaged in short-term rental or extended-term leasing of trucks, truck tractors, or semitrailers without drivers.

Automotive repair shops: Includes establishments primarily engaged in the repair of automotive tops, bodies, and interiors, or automotive painting and refinishing; customizing automobiles, trucks, and vans except on a factor basis; the installation, repair, or sale and installation of automotive exhaust systems; the repairing and retreading of automotive tires; installation, repair, or sales and installation of automotive transmission; general automotive repair; specialized automotive repair, such as fuel service (carburetor repair), brake relining, front end and wheel alignment, and radiator repair.

Miscellaneous repair shops and related services: Includes establishments primarily engaged in general repair work by welding, including automotive welding; rewinding armatures and rebuilding or repairing electric motors; specialized repair services, such as bicycle repair, leather goods repair; lock and gun repair, including the making of lock parts or gun parts to individual order; musical instrument repair; septic tank cleaning; farm machinery repair; furnace cleaning;

motorcycle repair; tank truck cleaning; taxidermists; tractor repair; and typewriter repair.

Hospitals: Includes establishments primarily engaged in providing diagnostic services, extensive medical treatment including surgical services, and other hospital services, as well as continuous nursing services; providing general medical and surgical services and other hospital services; providing diagnostic medical services and inpatient treatment for the mentally ill; providing diagnostic services, treatment, and other hospital services for specialized categories of patients, except mental.

Medical laboratories: Includes establishments primarily engaged in providing professional analytic or diagnostic services to the medical profession, or to the patient on prescription of a physician.

Colleges, universities, professional schools, and junior colleges: Colleges, universities, and professional schools furnishing academic courses and granting academic degrees; or junior colleges and technical institutes furnishing academic, or academic and technical, courses, and granting associate academic degrees, certificates, or diplomas.

Research and testing services: Includes establishments primarily engaged in commercial physical and biological research and development on a contract or fee basis; or performing noncommercial research into and dissemination of, information for public health, education, or general welfare; or providing testing services.

Environmental quality: Government establishments primarily engaged in regulation, planning, protection and conservation of air and water resources; solid waste management; water and air pollution control and prevention; flood control; drainage development, and consumption of water resources; coordination of these activities at intergovernmental levels; research necessary for air pollution abatement and control and conservation of water resources; and government establishments primarily engaged in regulation, supervision and control of land use, including recreational areas; conservation and preservation of natural resources; control of wind and water erosion; and the administration and protection of publicly and privately owned forest lands, including pest control. Planning, management, regulation, and conservation of game, fish, and wildlife populations, including wildlife management areas and field stations; and other matters relating to the protection of fish, game, and wildlife. Establishments which only provide information and education services to others are not included.

National security: Includes establishments of the armed forces, including the National Guard, primarily engaged in national security and related activities.

(4) A potential generator shall be exempt from the fee if the potential generator is entitled to the exemption in RCW 82.04.300 in the current calendar year.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-110, filed 4/1/91, effective 5/2/91.]

WAC 173-305-120 Responsibilities of the departments of ecology and revenue. (1) The legislature has provided that the primary responsibilities of the department

of ecology are to provide the department of revenue with a list of known generators and to determine the primary business activities of potential generators.

(2) The legislature has provided that the primary responsibility of the department of revenue is to collect the fees from known and potential generators as identified in subsection (1) of this section.

(3) The department of ecology will periodically amend the list of primary business activities of potential generators by reviewing the most current verified information that is available to the department.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-120, filed 4/1/91, effective 5/2/91.]

PART C ADDITIONAL FEE

WAC 173-305-210 Imposition of fee. (1) The fee is imposed on hazardous waste generators and hazardous substance users required to prepare plans under RCW 70.95E.030. The department may waive the fee for individual facilities when the amount owed is less than the estimated cost of collection. This provision does not waive the requirement to prepare a plan.

(2) The department will determine who specifically has to pay the fee each year and the amount of the fee based on the most current verified information available to the department. Note: Information collected on toxic emissions will not be verified.

(3) The total fees collected under RCW 70.95E.030 shall not exceed the department's cost of implementing RCW 70.95C.200.

(4) A person that develops a plan covering more than one interrelated facility as provided for in RCW 70.95C.200 shall be assessed fees only for the number of plans prepared. In instances where a person has interrelated facilities without substantially similar processes, a single document may be prepared for the convenience of management but the document must contain separate detailed plans for each facility. In these cases, each detailed plan within the document shall be assessed a fee.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-210, filed 4/1/91, effective 5/2/91.]

WAC 173-305-220 Additional fee. (1) The department shall calculate the adjusted fees, annual fee, and maximum total fees using the formula in subsection (3) of this section. The formula uses a risk factor of one for dangerous waste and emissions, and a multiplication factor of ten for extremely hazardous waste. For purposes of this section, hazardous waste reported on the annual dangerous waste generator report as having been either recycled on-site or recycled for beneficial use off-site, including initial amounts of hazardous substances introduced into a process and subsequently recycled for beneficial use, shall not be used in the calculation of hazardous waste generated. A facility may petition the director to exclude hazardous wastes recycled for beneficial use even if they were not reported as such on the annual dangerous waste generator report. Documentation from the hazardous waste handling facility

that the hazardous waste was recycled for beneficial use must be submitted along with the petition.

(2) Fees in subsection (3) of this section are based on the following definitions:

(Note: The terms "dangerous waste" and "extremely hazardous waste" as used in this subsection utilize the same basic definition as in WAC 173-305-020, but are modified as follows for the fee calculation only.)

Dangerous waste is the number of pounds of dangerous waste reported which is not recycled for beneficial use, calculated so that wastewater discharged under permit by rule pursuant to WAC 173-303-802 is excluded.

Emissions is the number of pounds of emission reported under Toxic Chemical Release Reporting, 40 CFR Part 372, by a company. If emissions are reported in ranges, the middle value of the reported range will be used in the calculation.

Extremely hazardous waste is the number of pounds of extremely hazardous waste reported which is not recycled for beneficial use, calculated so that wastewater discharged under permit by rule pursuant to WAC 173-303-802 is excluded.

The priced deflator is the "Implicit Price Deflator for Gross National Product" for "Government Purchases of Goods and Services" for "State and Local Government."

The total risk pounds for a facility or set of interrelated facilities is equal to ten times the number of pounds of extremely hazardous waste generated plus the number of pounds of dangerous waste generated plus the number of pounds of emission reported by that facility.

(3) The annual fee for a facility or set of interrelated facilities shall be equal to the rate per risk pound times the total risk pounds. The rate for the risk pounds shall be calculated by the department so that the maximum total fee in (a) of this subsection can be obtained. The annual fee for each facility or set of interrelated facilities shall be subject to the limitations in (b) and (c) of this subsection.

(a) The maximum total fees collected shall be determined based on the maximum total fee for the previous year multiplied by the most current price deflator and divided by the price deflator used in the numerator for the previous year. The price deflator used in the denominator for the first adjustment shall be the second quarter price deflator for 1990. The maximum total fees for 1990 shall be one million dollars.

(b) The maximum fee for any facility or interrelated facility shall be determined based on the maximum total fee for the previous year multiplied by the most current price deflator and divided by the price deflator used in the numerator for the previous year. The price deflator used in the denominator for the first adjustment shall be the second quarter price deflator for 1990. The maximum annual fee for 1990 shall be ten thousand dollars.

(c) The maximum annual fee for a generator that generates between two thousand six hundred forty and four thousand pounds of dangerous and extremely hazardous waste shall be determined based on the maximum total annual fee for the previous year multiplied by the most current price deflator and divided by the price deflator used in the numerator for the previous year. The price deflator used in the denominator for the first adjustment shall be the

second quarter price deflator for 1990. The maximum annual fee for 1990 shall be fifty dollars.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-220, filed 4/1/91, effective 5/2/91.]

WAC 173-305-230 Due dates. (1) Fees imposed by RCW 70.95E.030 shall be first due on July 1, 1991, for facilities that are required to prepare plans in 1992, on July 1, 1992, for facilities that are required to prepare plans in 1993, and on July 1, 1993, for facilities that are required to prepare plans in 1994. Fees for facilities that are required to prepare plans following 1994 shall be first due on July 1 of the year following the first year that they generate more than two thousand six hundred forty pounds of hazardous waste and/or are required to report under Section 313 of Title III of the Superfund Amendments and Reauthorization Act.

(2) If a facility pays a fee in anticipation of preparing a plan the following year, and circumstances change so that the facility is no longer required to prepare a plan, the facility may request a refund of the fee from the department and, upon verification of the information submitted, it shall be granted. This request is made by letter to the department.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-230, filed 4/1/91, effective 5/2/91.]

WAC 173-305-240 Responsibilities of the departments of ecology and revenue. (1) The legislature has provided that the primary responsibility of the department of ecology is to provide the department of revenue by April 30 of each year with a list of persons subject to the fee and the amount of their fee. The fees shall be calculated based on the formulas in WAC 173-305-220(3).

(2) The department of ecology shall subtract any overpayment of the fee in the previous year from the fee for the current year. The department shall also subtract any interest accrued on an overpayment from the fee for the current year if the overpayment was made due to an error which was the responsibility of the department or an over estimate of rate per risk pound for the prior year.

(3) If there are resubmissions of hazardous waste annual reports and/or toxic release inventory reports, the department shall add any underpayment of the fee in previous years to the fee for the current year.

(4) The legislature has provided that the primary responsibility of the department of revenue is to collect the fees from those identified in subsection (1) of this section.

[Statutory Authority: Chapter 70.95E RCW. 91-08-040 (Order 90-56), § 173-305-240, filed 4/1/91, effective 5/2/91.]

Chapter 173-306 WAC

SPECIAL INCINERATOR ASH MANAGEMENT STANDARDS

WAC

173-306-010	Authority and purpose.
173-306-050	Applicability.
173-306-100	Definitions.
173-306-150	Prohibition of surface impoundments, land treatment and municipal solid waste codisposal of ash.
173-306-200	Generator management plans.
173-306-300	Permit requirements for disposal facilities.
173-306-310	Permit procedures.

(1992 Ed.)

173-306-320	Demonstration and class-use permits.
173-306-330	Application contents for permits.
173-306-340	Engineering reports, plans and specifications required in permits.
173-306-345	Construction quality assurance plan.
173-306-350	Incinerator ash siting standards for disposal facilities.
173-306-400	Ash disposal facility standards.
173-306-405	General facility operational standards.
173-306-410	General closure and post-closure requirements.
173-306-440	Ash monofill facility standards.
173-306-450	Liner and final cap design and construction standards.
173-306-470	Financial assurance.
173-306-480	Treatment (including solidification and stabilization) standards.
173-306-490	Ash utilization standards.
173-306-495	Other methods of ash disposal.
173-306-500	Monitoring and sampling methods.
173-306-900	Variations.
173-306-9901	Maximum contaminant levels for ground water.

WAC 173-306-010 Authority and purpose. This chapter is promulgated under the authority of chapter 70.138 RCW, to protect human health, the environment, and employees during the management and disposal of special incinerator ash. It is also the purpose of this chapter to enhance and encourage the higher waste management priorities as spelled out in chapter 70.138 RCW. This chapter is intended to establish consistent, enforceable management requirements for special incinerator ash that otherwise would be regulated as hazardous waste under chapter 70.105 RCW, the Hazardous Waste Management Act. This chapter is not intended to address ash residues that are classed as hazardous waste under federal regulations, 40 CFR Part 261, unless the Environmental Protection Agency decides such wastes are not subject to Subtitle C of the Resource Conservation and Recovery Act.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-010, filed 4/30/90, effective 5/31/90.]

WAC 173-306-050 Applicability. This chapter applies to municipal solid wastes intended for incineration or energy recovery and special incinerator ash as those terms are defined in WAC 173-306-100. (Incinerator ash whose designation status is unknown shall be considered special incinerator ash until data developed under WAC 173-306-500(4) is submitted to the department.) This chapter shall not apply to the following wastes:

(1) Solid waste as defined in WAC 173-306-100 that is not regulated as hazardous waste under chapter 70.105 RCW and that is not intended for incineration or energy recovery;

(2) Hazardous wastes regulated under the Federal Resource Conservation and Recovery Act, 42 U.S.C. sec. 6901 et seq.;

(3) Incinerator ash from the operation of incineration or energy recovery facilities burning only tires, woodwaste, infectious waste, sewage sludge, or any other single type of refuse other than municipal solid waste; and

(4) Incinerator ash from the operation of incineration or energy recovery facilities burning municipal solid waste at a rate of twelve tons of municipal solid waste per day or less.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-050, filed 4/30/90, effective 5/31/90.]

WAC 173-306-100 Definitions. Unless the context clearly requires otherwise, the definitions in this section apply throughout this chapter.

(1) "Active area" means that portion of a facility where ash disposal operations are being, are proposed to be, or have been conducted. Buffer zones shall not be considered part of the active area of a facility.

(2) "Aquifer" means a geologic formation, group of formations, or part of a formation capable of yielding a significant amount of ground water to wells or springs.

(3) "Ash" means special incinerator ash.

(4) "Ash cell" or "cell" means an active disposal phase of the site which shall be divided into a series of phases to minimize the active ash disposal area.

(5) "Beneficial use" means the water uses as defined by the water resources management program established by the Water Resources Act of 1971 and chapter 173-500 WAC.

(6) "Bottom ash" means ash residues remaining on the incineration or energy recovery facility grates or in the combustion chambers after combustion. Bottom ash may or may not be a special incinerator ash.

(7) "Buffer zone" means that part of a facility that lies between the active area and the property boundary.

(8) "Closure" means those actions taken by the owner or operator of an ash facility to cease disposal operations. A closure notice will be provided to the department with the exact date to ensure that all such facilities are closed in conformance with applicable regulations at the time of such closures and to prepare the site for the post-closure period and using best engineering practices.

(9) "Construction quality assurance plan" means a plan describing the methods by which the professional engineer in responsible charge of inspection of the project will determine that the facilities were constructed without significant change from the department approved plans and specifications.

(10) "Contaminate" means to discharge a substance into ground water that would cause:

(a) The concentration of that substance in the ground water to exceed the maximum contamination level specified in WAC 173-306-9901;

(b) A statistically significant increase in the concentration of that substance in the ground water where the existing concentration of that substance exceeds the maximum contaminant level specified in WAC 173-306-9901; or

(c) A statistically significant increase above background in the concentration of a substance which:

(i) Is not specified in WAC 173-306-9901; and

(ii) Is present in the ash; and

(iii) Has been determined to present a substantial risk to human health or the environment in the concentration found at the point of compliance by the department in consultation with the department of health.

(11) "Critical habitat" means habitat defined as critical by the Endangered Species Act of 1973 (P.L. 93-205).

(12) "Department" means the department of ecology.

(13) "Department's approval" means an approval letter by the director after the review of all engineering reports, plans and specifications, and any other engineering documents by a registered engineer.

(14) "Director" means the director of the department of ecology or the director's designee.

(15) "Displacement" means the relative movement of any two sides of a fault measured in any direction.

(16) "Dispose" or "disposal" means the treatment, utilization, processing, or final deposit of special incinerator ash.

(17) "Disposal facility" means all structures, other appurtenances, improvements and land used for recycling, storing, treating, or disposing of special incinerator ash.

(18) "Domestic water" means any water used for human consumption, other domestic activities, livestock watering or for any use for which a water right has been granted.

(19) "Energy recovery" means the recovery of energy in a usable form from mass burning, fluidized bed or refuse-derived fuel incineration, pyrolysis, or any other means of using the heat of combustion of solid waste that involves high temperature (above twelve hundred degrees Fahrenheit) processing.

(20) "Existing disposal facility" means a disposal facility which is owned or leased and in operation, or for which construction has begun, on or before the effective date of this chapter and the owner or operator has obtained permits or approvals necessary under federal, state and local statutes, regulations, and ordinances.

(21) "Existing residential development" means any existing development of residential dwelling units with a density of at least one unit per acre and a total of more than ten dwellings at time of permit application.

(22) "Expanded disposal facility" means a disposal facility adjacent to an existing facility for which the land is purchased and approved by the department after the effective date of this chapter. A vertical expansion approved and permitted after the effective date of this chapter shall be considered an expanded disposal facility.

(23) "Fault" means a fracture along which rocks or soils on one side have been displaced with respect to those on the other side.

(24) "Facility" means disposal facility.

(25) "Flyash" or "flyash/scrubber residue" means ash swept from the incineration or energy recovery facility combustion chamber and collected from the boilers, economizers, and air pollution control devices such as scrubbers, baghouses, and electro-static precipitators. Flyash or flyash/scrubber residues may or may not be special incinerator ash.

(26) "Generate" means any act or process which produces special incinerator ash or which first causes special incinerator ash to become subject to regulation.

(27) "Generator" means any incineration facility owner/operator who generates a special incinerator ash. An existing generator is any generator whose facility is in operation on the effective date of this chapter.

(28) "Holocene" means the most recent epoch of the Quaternary period extending from the end of the Pleistocene to the present.

(29) "Incineration" means reducing the volume of solid wastes by use of an enclosed device using controlled flame combustion.

(30) "Independent third party" means, for the purpose of liner construction, a person, approved by the department, with demonstrated experience in successful liner installation or inspection, who is financially and organizationally independent of the generator or facility owner/operator, the raw material producer (such as the resin manufacturer or the

bentonite producer), the liner manufacturer, the liner installer, or any other person who might have a financial or organizational connection to the facility.

(31) "Land treatment" means the practice of applying ash waste onto or incorporating into the soil surface. If the waste will remain after the facility is closed, this practice is disposal.

(32) "Management" means the handling, storage, collection, transportation, and disposal of special incinerator ash.

(33) "Monofill" means a disposal facility or part of a facility, which is not a land treatment facility, at which only special incinerator ash is finally deposited in or on.

(34) "New disposal facility" means a facility which begins operation or construction after the effective date of this chapter.

(35) "One hundred year flood" means a flood that has a one percent chance of being equalled or exceeded in any given year.

(36) "Perennial surface water bodies" are normally continuous bodies of water with natural flows throughout the year including lakes, rivers, ponds, irrigation canals, streams, reservoirs, inland waters, salt waters, and all other waters of the state (not to include man-made lagoons or impoundments for waste treatment or storage) within the jurisdiction of the state of Washington as defined by chapter 90.48 RCW, the Water Pollution Control Act.

(37) "Permeability" means the ability with which a porous material allows liquid or gaseous fluids to flow through it.

(38) "Permit" means a special incinerator ash disposal permit.

(39) "Person" means any person, firm, association, county, public, municipal, or private corporation, agency, or other entity whatsoever.

(40) "Pile" means any noncontainerized accumulation of ash that is used for treatment or utilization.

(41) "Plans and specifications" means the detailed drawings and specifications used in the construction or modification of ash disposal facilities.

(42) "Point of compliance" means that part of ground water that lies beneath the perimeter of a disposal facility's active area as that active area would exist at the closure of the facility.

(43) "Post-closure" means the requirements placed upon disposal facilities after closure to ensure their environmental safety for a thirty-year period or until the site becomes stabilized (i.e., cap integrity maintained, little or no settlement or leachate generation).

(44) "Processing" means an operation to convert ash into a useful product or to prepare it for disposal.

(45) "Reclamation" means to process an ash waste in order to recover usable products.

(46) "Utilization" means consuming, expending, exhausting or using an ash waste.

(47) "Sole source aquifer" means an aquifer designated by the Environmental Protection Agency pursuant to section 1424e of the Safe Drinking Water Act (P.L. 93-523).

(48) "Solid waste" means all putrescible and nonputrescible solid and semisolid wastes, including but not limited to garbage, rubbish, ashes, industrial wastes, swill, demolition and construction wastes, abandoned vehicles or

parts thereof, and recyclable commodities. This includes all liquid, solid, and semisolid materials which are not the primary products of public, private, industrial, commercial, mining, and agricultural operations. Solid waste includes, but is not limited to, sludge from wastewater treatment plants, septage from septic tanks, woodwaste, dangerous waste, and problem wastes.

(49) "Special incinerator ash" means ash residues resulting from the operation of incineration or energy recovery facilities managing municipal solid waste from residential, commercial, and industrial establishments, if the ash residues (a) would otherwise be regulated as hazardous wastes under chapter 70.105 RCW; and (b) are not regulated as a hazardous waste under the Federal Resource Conservation and Recovery Act, 42 U.S.C. Sec 6901 et seq.

(50) "Spill" means any accidental discharges or overflow of fluids or processed water from contained areas or holding tanks to floor drains or a municipal sewer system.

(51) "Stabilization" or "solidification" means a technique that limits the solubility and mobility of waste constituents. Solidification immobilizes a waste through physical means and stabilization immobilizes a waste by bonding or chemically reacting with the stabilizing material.

(52) "Storage" means the temporary holding (no longer than forty-five days from date of production) of a limited amount (not to exceed thirty days worth of daily production) of special incinerator ash.

(53) "Subsidence" means a sinking of the land surface due to the removal of solid mineral matter or fluids from the subsurface.

(54) "Surface impoundment" means a facility or part of a facility which is a natural topographic depression, man-made excavation, or diked area formed primarily of earthen materials (although it may be lined with man-made materials) designed to hold an accumulation of liquids or sludges. The term includes holding, storage, settling and aeration pits, ponds or lagoons, but does not include injection wells.

(55) "Treatment" means those engineered physical or chemical processes to make special incinerator ash safer for transport, amenable for energy or material resource recovery, amenable for storage or disposal, or reduced in volume.

(56) "Unstable slopes" means any area where the mass movement of earthen materials i.e., landslides, rockfalls, mudslides, slumps, earth flows, or debris flow is likely to occur.

(57) "Vadose zone" means that portion of a geologic formation in which soil pores contain some water, the pressure of that water is less than atmospheric pressure, and the formation occurs above the zone of saturation.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-100, filed 4/30/90, effective 5/31/90.]

WAC 173-306-150 Prohibition of surface impoundments, land treatment and municipal solid waste codisposal of ash. No person shall manage any special incinerator ash in a surface impoundment, land treatment facility as defined in WAC 173-306-100, or codispose with municipal solid waste.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-150, filed 4/30/90, effective 5/31/90.]

WAC 173-306-200 Generator management plans.

(1) Applicability. These standards apply to special incinerator ash generators, incinerating more than twelve tons of municipal solid waste per day. Existing generators shall meet the requirements of this section within six months after the effective date of this chapter.

(2) Management plans procedures.

(a) Prior to generating or managing any special incinerator ash, any generator subject to this section shall submit a generator management plan to the department for review and approval. The department may publish guidelines on the form and content of management plans consistent with this chapter. Within thirty days of receipt, the department shall determine if the plan is factually complete and so notify the generator.

(b) Upon receipt of a complete generator management plan, the department shall give notice of its receipt of a proposed management plan to the public and to interested persons for public comment for thirty days after the date of publication.

(c) The department shall also perform the following additional public notification requirements:

(i) Mailing the notice to persons who have expressed an interest in being notified;

(ii) Mailing the notice to other state agencies and local governments with a regulatory interest in the proposal;

(iii) The public notice shall include a statement that any person may express their views in writing to the department within thirty days of the last date of publication;

(iv) Any person submitting written comment or any other person may, upon request, obtain a copy of the department's final decision;

(v) The department shall add the name of any person, upon request, to a mailing list to receive copies of notices for all applications within the state or within a geographical area.

(d) The department shall review each generator management plan to determine whether the generator management plan complies with this chapter and chapter 70.138 RCW, including whether the necessary ash disposal permit has been or is likely to be issued.

(e) Within sixty days of receipt of a complete generator management plan, the department shall approve, approve with conditions, or reject the submitted generator management plan. Approval may be conditioned upon additional requirements necessary to protect employees, human health, and the environment, including special management requirements such as waste and ash segregation, or treatment techniques such as neutralization, detoxification, and solidification/stabilization.

(f) All generators shall comply with their approved management plan. No generator may construct and operate an incineration or energy recovery facility without an approved management plan.

(g) Any generator operating under an approved generator management plan shall notify the department and the department may require resubmission of the generator management plan when there is a proposed material change in the ash management of the special incinerator ash collection and/or handling system.

Upon receipt of the revised generator management plan, the department shall proceed according to subsection (2) of this section.

(3) Generator management plan requirements. Prior to managing special incinerator ash, all applicable generators shall develop generator management plans. Generator management plans shall show how the following requirements are met:

(a) Planning requirements:

(i) All generators shall demonstrate how the management of ash, including disposal, has complied with the city and county comprehensive solid waste management plan of RCW 70.95.080, as applicable.

(ii) All generators shall demonstrate how ash management areas comply with or are a part of the spill prevention plans.

(b) Requirements for managing solid waste to reduce ash toxicity and ash quantity. All generators shall:

(i) Conduct annual municipal solid waste compositional studies to identify kinds and amounts of toxic metals, including cadmium and lead, other hazardous materials, halogenated plastics, and other substances that contribute to the toxicity of special incinerator ash;

(ii) Establish policies, procedures, incentives, and treatment methods to remove toxic metals in municipal solid waste prior to incineration or energy recovery;

(iii) Establish procedures to insure that dangerous wastes are not knowingly accepted at the incineration or energy recovery facility including developing lists of consumer or commercial items that may or may not be acceptable for incineration;

(iv) Establish a timetable for implementing (b)(i), (ii), and (iii) of this subsection, and a method for evaluating the effectiveness of the program in reducing the toxicity and volume of special incinerator ash.

(c) Collection and handling requirements.

(i) All incineration or energy recovery facilities shall be designed and operated to prevent fugitive dust emissions and direct exposure of the ash to the weather. Special incinerator ash shall be collected, stored, and handled in enclosed buildings or the equivalent (e.g., covered conveyors and transfer points). This requirement is not applicable to ferrous metal separated from bottom ash.

(ii) Floor or surface drains serving ash collection, storage, and handling areas shall not be connected to uncontaminated storm water run-off drains. Spills and process waters shall be handled in one or more of the following methods:

(A) Reused in the process;

(B) Discharged to surface waters under a National Pollution Discharge Elimination System Permit issued pursuant to chapter 173-220 WAC;

(C) Discharged to surface water, ground water, or a municipal sewer system under a state discharge permit issued pursuant to chapter 173-216 WAC;

(D) Injected through wells under an underground injection control permit issued pursuant to chapter 173-218 WAC; or

(E) Managed in another method approved by the department.

(iii) All incineration and energy recovery facilities shall be designed and operated to comply with chapter 296-62 WAC, the general occupational health standards.

(iv) The percentage of carbon in bottom ash shall not exceed six percent by weight, dry, as determined by ASTM D3178-84 or other methods approved by the department. Alternative carbon content limits may be established by the department, upon a demonstration by the owner or operator that methane generation and settlement shall not exceed levels associated with bottom ash meeting the six percent carbon standard. Representative samples shall be taken according to the guidelines established by the department.

(d) Storage requirements.

(i) Storage of ash shall be in totally-enclosed buildings, in leak-proof containers, or in tanks;

(ii) Storage shall not exceed forty-five days from the date of generation of the ash, and/or the storage amount shall not exceed thirty days of daily production;

(iii) Storage shall be in an area served by the floor and surface drain requirements in (c)(ii) of this subsection.

(e) Transport of ash from an incineration or energy recovery facility to an off-site or on-site disposal facility shall be in covered and sealed vehicles or containers to avoid wind dispersal or fluid leakage. Owners and operators shall prevent ash trackout onto the site and the public right-of-way by employing tire washing or any equivalent means. Contaminated washwaters shall be disposed of according to (c)(ii) of this subsection.

(f) Waste management accountability. All owners or operators of incineration or energy recovery facilities shall:

(i) Establish procedures acceptable to the department for tracking movements of special incinerator ash from the point of generation and/or handling to the site of final deposit or disposal. Such tracking method may include inventory control and tracking systems, scale/ticket/receipt tracking, gate logs, operating logs, or material balances;

(ii) File a report with the department if the owner or operator has not confirmed that an ash waste has been received at the intended destination within forty-five days of the date the waste was accepted by the transporter. The report must include:

(A) A legible copy of the shipping paper or manifest for which the owner or operator does not have confirmation of delivery; and

(B) A cover letter signed by the generator or his representative explaining the efforts taken to locate the waste and the results of these efforts.

(g) Other state and local requirements. All generators shall comply with all federal, state, and local environmental and industrial hygiene right-to-know laws and regulations, including chapter 197-11 WAC, the State Environmental Policy Act rules; chapter 173-304 WAC, the Minimum Functional Standards for Solid Waste Handling; and chapter 173-434 WAC, the air emission rules for incinerators.

(4) Annual report requirements. All generators shall submit annual reports to the department by March 1 of the following calendar year on forms specified by the department specifying:

(a) Annual amounts, in tons, of:

(i) Municipal solid waste incinerated;

(ii) Bottom ash generated; and

(iii) Flyash/scrubber residue generated.

(b) Disposal sites for all special incinerator ash. For multiple disposal sites, the amounts of disposal that are occurring in tons per year;

(c) Permittee's name, address, telephone number, date of permit issuance and expiration date for the disposal sites listed in (b) of this subsection;

(d) Designation test results. The results of testing bottom ash and flyash/scrubber residues separately and combined flyash and bottom ash on representative samples taken each quarter of the year and subjected to the criteria of WAC 173-303-100, and results of testing bottom ash quarterly for carbon residue according to subsection (3)(c)(iv) of this section unless otherwise approved by the department. After one year of testing, the department may reduce this requirement if a less frequent program can provide adequate data to determine the effectiveness of an ash toxicity reduction program. Representative sampling methods shall follow guidelines specified by the department;

(e) Toxics separation test results. The results of testing bottom ash and flyash separately for toxic metals from samples taken in (d) of this subsection, in order to judge the progress made in toxic metals separation and reduction;

(f) Special test results. The results of testing bottom ash and flyash separately for dioxins and dibenzo-furans on a composite sample made from the eight quarterly samples taken in (d) of this subsection; and

(g) Ambient lead and cadmium samples taken in the air and soil respectively at the property boundary to demonstrate compliance with the performance standard of WAC 173-306-440 (2)(b) and (c). The samples shall be taken annually for cadmium and quarterly for lead, unless otherwise approved by the department.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-200, filed 4/30/90, effective 5/31/90.]

WAC 173-306-300 Permit requirements for disposal facilities. (1) Applicability. The permit standards of WAC 173-306-300 through 173-306-330 apply to disposal facilities as defined in WAC 173-306-100. These standards do not apply to generators of special incinerator ash who only handle, store and collect ash on-site and transport ash off-site, nor to facilities specifically excluded under WAC 173-306-400 through 173-306-490.

(2) No disposal facility shall be established, constructed, altered, expanded, or closed, until the owner or operator has obtained a permit issued pursuant to this chapter or a modified permit issued pursuant to WAC 173-306-310(3).

(3) Effective dates for permit requirements. The permit requirements of this section apply to all applicable existing, new or expanding disposal facilities within six months after the effective date of this chapter.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-300, filed 4/30/90, effective 5/31/90.]

WAC 173-306-310 Permit procedures. (1) Application procedures.

(a) Persons owning or operating new or expanded ash disposal facilities shall apply to the department for a permit, prior to accepting any special incinerator ash for disposal. These procedures apply for permit renewal. Monofill owners who have successfully complied with the require-

ments for Type B design in WAC 173-306-450 (4)(a)(i) during the eighteen-month demonstration period shall apply for a permit prior to using the Design B liner. Applicants shall file two copies of the application with the department that have:

(i) Been signed and notarized as correct by the owner and operator; and

(ii) Attached evidence of compliance with the requirements of chapter 197-11 WAC, the State Environmental Policy Act rules.

(b) Permit applications must contain the information set forth in WAC 173-306-330 in order to be considered complete. Upon receipt of a permit application, the department shall review the application for completeness and notify the permit applicant accordingly.

(c) Within thirty days of receipt of a complete application, the department shall give notice of its receipt of a proposed complete permit application to the public and to interested persons for public comment for thirty days after the date of publication.

(d) The department will perform the following additional public notification requirements:

(i) Mailing the notice to persons who have expressed an interest in being notified;

(ii) Mailing the notice to other state agencies and local governments with a regulatory interest in the proposal;

(iii) The public notice shall include a statement that any person may express their views in writing to the department within thirty days of the last date of publication;

(iv) Any person submitting written comment or any other person may, upon request, obtain a copy of the department's final decision; and

(v) The department shall add the name of any person, upon request, to a mailing list to receive copies of notices for all applications within the state or within a geographical area.

(2) Issuance procedures.

(a) The department shall review each completed application to determine:

(i) Whether the disposal facility meets the requirements of this chapter;

(ii) Whether the disposal facility has been adequately addressed in the city and county comprehensive solid waste management plan as applicable; and

(iii) Whether the disposal facility complies with other environmental laws and regulations.

(b) The department shall approve, deny, or conditionally approve a completed permit application within sixty days of receipt of the department's notice.

(c) The department shall issue up to five-year term permits for ash disposal; applications for reissuance of permits shall be made at least six months prior to permit expiration. The applicant and the department shall follow the procedures of WAC 173-306-310 (1) and (2) in applying for and reissuing permits.

(3) Modification and revocation procedures. When the department obtains any information justifying, or the applicant applies for modification of an existing permit, the department may modify or revoke and reissue the permit according to the procedures of this section. An updated application may be requested if necessary. When a permit is modified only the conditions subject to modification are

reopened. If a permit is revoked and reissued the entire permit is reopened and subject to revision and the permit is reissued for a new term.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-310, filed 4/30/90, effective 5/31/90.]

WAC 173-306-320 Demonstration and class-use permits. (1) Demonstration permits. Demonstration permits must be required for persons utilizing ash (see WAC 173-306-490 (2)(b)). In addition, persons applying for a utilization permit demonstrate that the proposed utilization will successfully meet the requirements of WAC 173-306-490 (2)(b)(ii) before full scale reuse or utilization is practiced.

(a) The demonstration permit will be issued in accordance with the procedures of WAC 173-306-310;

(b) The demonstration permit shall address those requirements necessary to meet the standards of WAC 173-306-490 (2)(b)(ii) and (iii), and show that a disposal facility meeting the requirements of this chapter is available in case the demonstration fails or this permit is revoked;

(c) The demonstration permit shall provide a specific time period and a limit on the quantity of ash which will be used for the demonstration; the department may extend the demonstration period as a modification of the demonstration permit;

(d) Unless otherwise approved by the department, the permittee shall submit a report to the department within ninety days of the end of the demonstration. The report shall contain the results of all field tests and laboratory analyses and all data developed during the demonstration period. The department shall then use the information to determine whether or not there is adequate information to issue a class-use permit which will incorporate conditions sufficient to provide compliance with all requirements of WAC 173-306-490 (2)(b)(ii) and (iii). If the information is adequate, the department will proceed to issue a class-use permit under the provisions of this section. If the information is inadequate, the department may, as the situation warrants, either issue a modification to the demonstration permit in accordance with the procedures of WAC 173-306-310(3) and this subsection, or deny the class-use permit application.

(2) Class-use permits. Class-use permits are required for persons who distribute utilized ash on the land in a manner constituting disposal; the permit is issued to the seller or distributor of utilized ash or ash products to a class of users.

(a) The class-use permit will be issued in accordance with the procedures of WAC 173-306-310;

(b) The class-use permit shall contain those requirements necessary to meet the standards of WAC 173-306-490 (2)(b), including reporting requirements; and

(c) The department will place limitations on the class of users of utilized ash or ash products if it is shown that such limits are necessary to protect human health and the environment.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-320, filed 4/30/90, effective 5/31/90.]

WAC 173-306-330 Application contents for permits.

(1) Application contents for permits for new or expanded facilities.

(a) All permit applications shall contain the following:

(i) A general description of the facility;

(ii) The types of ash to be handled at the facility;

(iii) The plan of operation required by WAC 173-306-405(3) (except for demonstration and class-use permits, WAC 173-306-320);

(iv) The operating log required by WAC 173-306-405(4) (except for demonstration and class-use permits, WAC 173-306-320);

(v) The inspection schedule and inspection log required by WAC 173-306-405.

(b) Application contents for monofill facilities. In addition to the requirements of (a) of this subsection, each monofill application for a permit must contain:

(i) A hydrogeological assessment of the facility that addresses:

(A) Local/regional geology and hydrology, including holocene faults within two hundred feet of the active area and three thousand feet of all other faults, unstable slopes, and subsidence areas on site; or a department approved geologic hazard assessment study;

(B) Evaluation of bedrock and soil types and properties;

(C) Depths to ground water and/or aquifer(s);

(D) Direction and flow rate of the uppermost aquifer;

(E) Direction of regional ground water;

(F) Quantity, location, and construction (where available) of private and public wells within a two thousand foot radius of site;

(G) Tabulation of all water rights for ground water and surface water within a two thousand foot radius of the site;

(H) Identification and description of all surface waters within a one-mile radius of the site;

(I) Background and surface water quality assessment, and for expanded facilities, identification of impacts to date of applicant's existing facilities upon ground and surface waters from monofill leachate discharges;

(J) Calculation of a site water balance;

(K) Conceptual design of a ground water and surface water monitoring system, including proposed installation methods for these devices and, where applicable, a vadose zone monitoring plan;

(L) Land use in the area, including nearby residences;

(M) Topography of the site and surrounding areas;

(N) Drainage pattern of the site and surrounding areas.

(ii) Preliminary engineering report/plans and specifications that address:

(A) How the facility will meet the siting standards of WAC 173-306-350;

(B) Relationship of facility to city and county solid waste comprehensive plan as applicable and the basis for calculating the facility's life;

(C) The design of bottom and side liners;

(D) Identification of materials for daily cover and borrow sources for final cover and soil liners;

(E) Interim/final leachate collection, treatment, and disposal;

(F) Leachate detection where applicable;

(G) Fugitive dust controls;

(H) Trench design, fill methods, elevation of final cover and bottom liner, and equipment requirements;

(I) The run-on and run-off system;

(J) The design to avoid washout;

(K) Filling phases, interim cover and final cap elevation; interim cover should be minimized depending on site specific topography and projected filling phases;

(L) Closure/post-closure design, construction, maintenance, and land use;

(M) Signs, fencing, and road paving; and

(N) Scales, employee amenities, communication, and unloading areas.

(iii) An operation plan that addresses:

(A) Operation and maintenance of leachate collection, treatment, and disposal systems;

(B) Operation and maintenance of fugitive dust controls;

(C) Monitoring plans for ground water, surface water, soils and ambient air to include sampling technique, frequency, handling, and analysis requirements;

(D) Safety and emergency accident/fire plans;

(E) Routine filling, grading, cover, and housekeeping; and

(F) Record system to address records on weights (or volumes), number of vehicles, and the types of waste received.

(iv) A closure plan that addresses:

(A) Estimate of closure season/year;

(B) Capacity of site in volume and tonnage;

(C) Maintenance of active fill versus completed, final covered acreage;

(D) Estimated closure construction timing and notification procedures;

(E) Inspection by regulatory agencies;

(F) Items required in WAC 173-306-410(3); and

(G) Identification of final closure cost including cost calculations and funding mechanisms.

(v) A post-closure plan that addresses:

(A) Estimated time period for post-closure activities;

(B) Site monitoring of ash monofill, soil, air, ground water, and surface water;

(C) Deed clause changes, land use, and zoning restrictions;

(D) Maintenance activities to maintain cover and run-off systems;

(E) Items required in WAC 173-306-410(6);

(F) Identification of post-closure costs including cost calculations and funding mechanisms; and

(vi) Other information as required by the department.

(c) Application contents for treatment (including solidification and stabilization) standards. In addition to the requirements of (a) of this subsection, each application for a treatment permit must contain:

(i) Preliminary engineering reports/plans and specifications that address:

(A) The chemical and physical principle(s) upon which the treatment is based, including laboratory, pilot plant, prototype, or full-scale data with sufficient detail to assure the department that the treatment process is feasible and to allow the department to specify capacity and operating conditions;

(B) Tank, reaction vessel, furnace, total-enclosed treatment facility and container designs and the basis for

selecting the materials of construction and the thickness of the treatment device (such as corrosion data) or protective lining;

(C) Fugitive dust controls, including conveyor, transport, unloading, and building design;

(D) Instrumentation and process control design to assure operating within conditions specified in the permit;

(E) Warning signs and occupational health and safety engineering controls;

(F) Monitoring equipment; and

(G) Other factors as required by the department.

(ii) An operation plan that addresses:

(A) Operation and maintenance of the treatment device;

(B) Operation and maintenance of fugitive dust controls;

(C) Monitoring as required in WAC 173-306-500 and the department on a case-by-case basis; and

(D) Safety, occupational health, and emergency accident/fire plans.

(iii) A closure plan that addresses:

(A) Estimate of closure year and cost;

(B) Methods of removing wastes and cleaning or decontaminating reaction devices and final disposal of both;

(C) Closure timing and notification procedures;

(D) Final inspection by regulatory agencies;

(E) Items required in WAC 173-306-410(3); and

(iv) Other information as required by the department.

(d) Application contents for utilization facilities. In addition to the requirements of (a) of this subsection, each application for utilization must contain:

(i) For accumulation prior to utilization facilities:

(A) The method of calculating the percent of ash being reused within a calendar year; and

(B) Compliance with the generator management plan storage requirements of WAC 173-306-200 (3)(d)(i) and (ii) if accumulation is by the generator; or

(C) Compliance with the monofill facility standards of WAC 173-306-440 if accumulation is by a disposal facility.

(ii) For reuse constituting disposal facilities:

(A) Information supplied by the applicant pertaining to the factors of WAC 173-306-490 (2)(b)(iii); and

(B) Other information as required by the department.

(2) Application contents for permits for existing facilities. Existing facilities applying for a permit to comply with the requirements of WAC 173-306-310 shall:

(a) Include the information required in subsection (1)(a) of this section; and

(b) Other information as required by the department.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-330, filed 4/30/90, effective 5/31/90.]

WAC 173-306-340 Engineering reports, plans and specifications required in permits. (1) Prior to construction or modification of disposal facilities, final engineering reports, plans and specifications shall be submitted to and approved by the department according to a compliance schedule specified in the permit. The engineering report for a disposal facility shall be sufficiently final so that plans and specifications can be developed from it without substantial changes.

(2) All final engineering reports, plans and specifications should be submitted by the owner or operator consistent with

the compliance schedule in the permit and at least thirty days prior to the time approval is needed. The department will review and either approve (or conditionally approve), comment on, or disapprove such plans and reports within the thirty-day period unless circumstances prevent, in which case the owner or operator will be notified and informed of the reason for the delay.

(3) The final engineering report may be submitted prior to or concurrently with the final plans and specifications.

(4) The department will review the documents to ascertain that the proposed facility will be:

(a) Designed, constructed, operated, maintained, and closed to meet the requirements of the permit issued pursuant to this chapter; and

(b) Consistent with good engineering practices.

(5) Within thirty days following acceptance by the owner or operator of or modification to an ash disposal facility, a professional engineer in responsible charge of inspection of the project shall submit to the department one complete set of record drawings or as-builts, and a declaration stating the facilities were constructed in accordance with the provisions of the construction quality assurance plan and without significant change from the department approved plans and specifications.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-340, filed 4/30/90, effective 5/31/90.]

WAC 173-306-345 Construction quality assurance plan. (1) Prior to construction or modification, a detailed plan must be submitted to and approved by the department, showing how adequate and competent construction inspection will be provided to insure compliance with the requirements of this chapter and the approved engineering documents. Submission of the plan shall be according to a schedule specified in the permit.

(2) The construction quality assurance plan shall include:

(a) A construction schedule summarizing planned construction activities, noting sequence interrelationships, durations, and terminations;

(b) Description of construction management, organization management procedures, lines of communication, and responsibility;

(c) Description of anticipated quality control testing, including type of test, frequency, and who will perform the tests;

(d) Description of construction inspection program including inspection responsibilities, anticipated inspection frequency, deficiency resolution, and inspector qualifications; and

(e) For monofills, how WAC 173-306-440 (4)(d) is to be met.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-345, filed 4/30/90, effective 5/31/90.]

WAC 173-306-350 Incinerator ash siting standards for disposal facilities. (1) Applicability. These standards apply to all new or expanded monofills. These standards do not apply to:

(a) Existing monofills or monofills that have closed before the effective date of this chapter; or

(b) Treatment, utilization, or processing facilities.

(2) Siting standards.

All applicable disposal facilities shall at the time of permit application meet the following locational standards:

(a) Geology. No facility shall be located within two hundred feet, measured horizontally, from a fault that has had displacement in holocene times, and all faults within three thousand feet of a facility must be identified and evaluated in WAC 173-306-330(1), where such existing geologic information is available or can be obtained with reasonable effort. For sites for which fault information cannot reasonably be obtained, a geologic hazard assessment performed by an experienced, qualified geologist may be substituted for this siting criteria, if the study methods are reviewed and approved by the department prior to the investigation.

(b) Ground water.

(i) No facility shall be located where the depth from the lowest point of the bottom liner to the seasonal high water level of the upper most aquifer of beneficial use is less than ten feet or 120 days travel time hydraulically, whichever is greater.

(ii) No facility shall be located over a sole source aquifer.

(iii) No facility's active area shall be located closer than one thousand feet to the nearest downgradient ground water intake for domestic water in use and existing at the time of permit application unless the owner or operator can show that the active area is no less than one hundred twenty days travel time hydraulically to the nearest downgradient ground water intake for domestic water.

(c) Natural soils. No facility shall be located:

(i) Where known subsidence exists within the facility boundary;

(ii) In an area where unstable slopes may impact the active area of the facility;

(iii) Where weak or unstable soils exist within the proposed facility boundary, unless the structural stability of the soils is mitigated through engineering practices. (The following soils or conditions are defined as weak or unstable: Organic soils, expansive soils, liquefaction sands, soft clays, sensitive clays, loess and quick conditions.)

(d) Flooding. No facility's active area shall be located within the one hundred-year flood elevation as indicated in the most current Federal Emergency Management Agency maps.

(e) Surface water. No facility's active area shall be located within five hundred feet, measured horizontally, of the ordinary high water mark of any perennial surface water body.

(f) Sensitive areas. No facility shall be located:

(i) In an area that would result in the taking of species or the direct elimination of critical habitat for federal or state listed threatened or endangered species;

(ii) In a wetland as defined by the United State Fish and Wildlife Service (Cowardin et al. 1979);

(iii) In a shoreline of the state under the jurisdiction of the Shoreline Management Act;

(iv) In an area classified as a wilderness area as defined by the Wilderness Act of 1964 (P.L. 88-577);

(v) In a state or federally designated wildlife refuge or a game farm;

(vi) In an area with city, county, state, or federal designation as a park or recreation area or any area provided for under chapter 79.70 RCW, natural area preserves; and

(vii) In an area with city, county, state, or federal designation as an archaeological or historic area or a national monument.

(g) Land use. No facility shall be located so that its active area is closer than two hundred feet to the facility property line. The active area may be no closer than one thousand feet to the nearest housing unit in an existing residential development. The one thousand-foot rule may be evaluated on a case-by-case basis in rural areas and unincorporated towns.

(h) Climatic factors. No facility shall be located in an area that has a history of severe climatic factors without engineered protection to mitigate those factors. Severe climatic factors, include but are not limited to, high annual rainfall, extreme temperatures (high or low), and high winds.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-350, filed 4/30/90, effective 5/31/90.]

WAC 173-306-400 Ash disposal facility standards.

(1) Applicability. The standards of WAC 173-306-405 through 173-306-470 are the ash disposal standards and apply to all disposal facilities except ash disposal facilities that have engaged in closure or have closed before the effective date of this chapter.

(2) Standards for permits. The standards of WAC 173-306-405 through 173-306-470 shall be used as the basis for permitting as required in WAC 173-306-300.

(3) Effective dates.

(a) All existing ash disposal facilities not in conformance with these standards shall be placed upon compliance schedules as part of the permit issued in WAC 173-306-300. Full compliance shall be within three years of the effective date of this chapter; however, the following facility standards shall be met within eighteen months of the effective date of this chapter:

(i) The general facility standards of WAC 173-306-405;

(ii) The operating and maintenance standards of WAC 173-306-440(5); and

(iii) The monitoring requirements of WAC 173-306-500.

(b) All new and expanded facilities shall meet the ash disposal facility standards of WAC 173-306-405 to 173-306-470 after the effective date of this chapter.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-400, filed 4/30/90, effective 5/31/90.]

WAC 173-306-405 General facility operational standards. (1) Applicability. All special incinerator ash disposal facilities shall meet the requirements of this section.

(2) Imminent hazard. Notwithstanding any provisions of this chapter, enforcement actions may be brought in the event that the management practices of an ash disposal facility present an imminent and substantial hazard to the health of employees, the public health or the environment.

(3) Plan of operation. Each owner or operator shall develop and use the plan of operation required during the permitting process in WAC 173-306-300. The plan shall describe the facility's operation and shall convey to the operating personnel the concept of operation intended by the

designer. The facility shall be operated in accordance with the plan; modifications to the plan must be approved by the department. The plan of operation shall be available for inspection at the request of the department. Each plan of operation shall include:

- (a) Ash management during the facility's active life;
- (b) Frequency and methods of inspections and monitoring;
- (c) Employee safety and training, addressing protection from exposure and contact with ash, employee training, and medical monitoring; also a safety plan or procedure;
- (d) Actions to take for sudden release of ash to surface water or dispersal by wind;
- (e) Modifications to the plan permit and/or plan of operation in the event of ground water contamination;
- (f) Equipment maintenance, particularly for leachate collection and treatment; and
- (g) Other such details as required by the department.

(4) Recordkeeping. The facility owner or operator shall keep a written operating record at his facility that must be furnished upon request and made available at all reasonable times, to any employee of the department.

(a) The following information shall be recorded, as it becomes available, and maintained in the operating record until closure of the facility:

- (i) The type and quantity of each ash shipment received or managed on-site and the method(s) and date(s) of management at the facility;
- (ii) Records and inspection results as required by subsections (5) and (6) of this section;
- (iii) Monitoring, testing, or analytical data where required by WAC 173-306-500;
- (iv) All closure and, for final deposit, post-closure cost estimates required for the disposal facility; and
- (v) Deviations from the plan of operation specified in subsection (3) of this section.

(b) The retention period for all facility records required under this chapter is extended automatically during the course of any unresolved enforcement action regarding the facility or as requested by the department.

(5) Reporting. Each owner or operator shall prepare and submit a copy of the annual report to the department by March 1 of the following year. The annual report shall cover facility activities during the previous year and must include the following information:

- (a) The name and address of the disposal facility;
- (b) The calendar year covered by the report;
- (c) Annual quantity in tons and the type of ash accepted by the disposal facility and the method of management;
- (d) Results of soil, air quality, and ground water monitoring required in WAC 173-306-440;
- (e) The most recent closure cost estimate and, for final deposit monofills, post-closure cost estimates under WAC 173-306-410; and
- (f) Other information required by the department.

(6) Inspections. The owner or operator shall inspect the facility to prevent malfunctions and deterioration, operator errors, and discharges which may cause or lead to the release of ash to the environment or a threat to human health. The owner or operator must conduct these inspections often enough to identify problems in time to correct them before they harm human health or the environment. The owner or

operator shall keep an inspection log or summary including, at a minimum, the date and time of inspection, the printed name and the hand-written signature of the inspector, a notation of observations made and the date and nature of any repairs or corrective action. The log or summary must be kept at the facility or other convenient location if permanent office facilities are not on-site, for at least three years from the date of inspection. Inspection records shall be made available to the department upon request.

(7) Other state and local requirements. All ash disposal facilities shall comply with all state and local laws and regulations such as zoning, land use, fire protection, industrial safety and hygiene, water pollution, air pollution, nuisance and aesthetics.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-405, filed 4/30/90, effective 5/31/90.]

WAC 173-306-410 General closure and post-closure requirements. (1) Applicability. The closure requirements of subsections (2), (3), and (4) of this section apply to all disposal facilities. The post-closure requirements of subsections (5), (6), and (7) apply to monofills subject to WAC 173-306-440.

(2) Closure performance requirements. Each owner and operator shall close their facility in a manner that:

- (a) Minimizes the need for further maintenance;
- (b) Controls, minimizes, or eliminates threats to human health and the environment from post-closure escape of ash constituents, leachate, monofill gases, contaminated rainfall or ash decomposition products to the ground or soil, ground water, surface water, and the atmosphere; and
- (c) Prepares the facility for the post-closure period.

(3) Closure plan and amendment. Closure as defined in WAC 173-306-100 includes, but is not limited to, grading, seeding, landscaping, contouring and screening.

(a) Each owner or operator shall develop and use a plan of closure approved by the department as part of the permitting process of WAC 173-306-310.

(b) The closure plan shall project time intervals at which closure activities are to be implemented, identify estimated closure costs and project fund withdrawal intervals from the approved financial assurance instrument, where applicable.

(c) No owner or operator shall commence disposal operations in any part of a facility until a closure plan for the entire facility has been approved by the department, and until a financial assurance instrument has been provided, as required by WAC 173-306-470.

(d) The department may determine at its discretion and for cause that a facility closure plan is invalid and require an owner or operator to:

- (i) Amend the facility closure plan and obtain the department's written approval; and/or
- (ii) Cease facility operation or closure activities in whole or in part until an approved closure plan is obtained.

(e) Each owner or operator shall close the facility in accordance with the approved closure plan and all approved amendments.

(4) Closure procedures.

(a) Each owner or operator shall notify the department and, where applicable, the financial assurance instrument trustee, of the intent to implement the closure plan in whole

or in part, no later than one hundred eighty days prior to the projected final receipt of waste at part of or at the entire facility.

(b) The owner or operator shall commence implementation of the closure plan in part or whole within thirty days after receipt of a final volume of ash and/or attaining the final monofill elevation at part of or at the entire facility as identified in the approved facility closure plan.

(c) Ash shall not be accepted for use in closure except as identified in the closure plan approved by the department, as required in subsection (3)(a) of this section.

(d) When facility closure is completed in part or whole, each owner or operator shall submit to the department:

(i) Facility closure plan sheets signed by a professional engineer registered in the state of Washington. The plan shall reflect all as-built changes to final closure construction as approved in the closure plan; and

(ii) An affidavit signed by the owner or operator and a professional engineer registered in the state of Washington that the site has been closed in accordance with the approved closure plan.

(e) Maps and a statement of fact concerning the location of the final ash disposal shall be recorded as part of the deed with the county auditor not later than three months after closure. Records and plans specifying ash amounts, locations and periods of operation shall be submitted to the local zoning authority or the authority with jurisdiction over land use and be made available for inspection.

(f) When the department finds the facility has been closed in accordance with the specifications of the approved closure plan and the closure requirements of this section, the department shall:

(i) Issue a certificate of closure for the site to the owner or operator and the department; and

(ii) Notify the owner or operator and the department that the facility post-closure period has begun in whole or in part on a specified date.

(5) Post-closure performance standard. Monofill owners or operators shall provide post-closure activities as needed to protect human health and the environment.

(6) Post-closure plan and amendment. Post-closure includes monitoring of ground water, surface water, and air quality; maintenance of the facility, facility structures, and monitoring systems; and other activities deemed appropriate by the department.

(a) The owner or operator shall develop and use a post-closure plan approved as a part of the permitting process in WAC 173-306-310. The post-closure plan shall address facility maintenance and monitoring activities for a thirty-year period.

(b) The post-closure plan shall project time intervals at which post-closure activities are to be implemented, and identify post-closure cost estimates and projected fund withdrawal intervals from the selected financial assurance instrument, where applicable, for the associated post-closure costs.

(c) No owner or operator shall commence disposal operations in any part of a facility until a post-closure plan for the entire facility has been approved by the department, and until a financial assurance instrument has been provided, where applicable, as required by WAC 173-306-470. Facility post-closure activities must be completed in accor-

dance with the approved post-closure plan or the plan must be so amended with the approval of the department.

(d) The department may determine at its discretion and for cause that a facility post-closure plan is invalid and require an owner or operator to:

(i) Amend the facility post-closure plan and obtain the department's written approval; and/or

(ii) Cease facility operation or closure activities in part or wholly until an approved post-closure plan is obtained.

(7) Post-closure procedures.

(a) Each owner or operator shall commence post-closure activities after completion of closure activities outlined in subsection (4)(d)(i) and (ii) of this section. The department may direct that post-closure activities cease until the owner or operator has received the department's certification of closure and a notice to proceed with post-closure activities.

(b) When post-closure activities are complete, the owner or operator shall submit an affidavit to the department, signed by the owner or operator and a professional engineer registered in the state of Washington, stating why post-closure activities are no longer necessary.

(c) If the department finds that post-closure activities have stabilized the facility, the department may, at its discretion, authorize the owner or operator to gradually reduce or discontinue post-closure maintenance and monitoring activities. The department shall certify the end of the post-closure care period by issuance of a certificate of post-closure completion to the facility owner or operator.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-410, filed 4/30/90, effective 5/31/90.]

WAC 173-306-440 Ash monofill facility standards.

(1) Applicability. This section applies to owners and operators of facilities that monofill special incinerator ash, except as WAC 173-306-400 provides otherwise.

(2) Minimum standards for performance.

(a) Ground water. Monofill owners or operators shall not contaminate underlying ground water beyond the point of compliance. Contamination and point of compliance are defined in WAC 173-306-100.

(b) Soil. Soils at the property boundary shall not exceed the following limits for cadmium due to the facility based upon annual samples:

(i) The annual increase in cadmium loading in the upper six inches of soil with a pH equal to or greater than 6.5 shall not exceed 0.5 kilograms per hectare annually or a total accumulation of 20 kilograms per hectare; and

(ii) The annual increase in cadmium loading in the upper six inches of soil with a pH less than 6.5 shall not exceed a total accumulation of 5.0 kilograms per hectare.

(c) Air quality. Monofill owners or operators shall not cause a violation of an emission standard from any emission of particulates, dusts or gases associated with the operation and/or closure/post-closure of the landfill nor any ambient air quality standard at the property boundary including the following ambient lead standard:

The level of lead and its compounds measured as elemental lead in suspended particulate matter measured during a twenty-four hour sample taken at the downwind facility boundary shall not exceed 1.5 micrograms per cubic meter of air due to the facility's operation or the latest

national ambient air quality standards. The sampling frequency will be monthly unless otherwise approved by the department.

(d) Surface waters. Monofill owners or operators shall not cause a violation of any receiving water quality standard or violate chapter 90.48 RCW from discharges of surface run-off, leachate, or any other liquid associated with a monofill.

(3) Siting standards. Monofill owners or operators receiving special incinerator ash shall comply with incinerator ash siting standards of WAC 173-306-350(2).

(4) Minimum design standards.

(a) Minimizing liquids. Monofill owners or operators shall minimize liquids admitted to active areas by:

(i) Covering according to subsection (5)(e) of this section.

(ii) Disposing of no ash containing free liquids unless approved by the department;

(iii) Designing, constructing, and maintaining run-off controls to restrict the chance of a run-off event from releasing contaminated run-off waters to an annual probability of one percent or less (one hundred-year event or greater). In meeting this requirement the following items are to be considered:

(A) The design of the containment structure(s) should be selected based on the ability of the facility to store, test, and/or treat the run-off during a twenty-four hour or longer storm event.

(B) The design storm event occurs during the final year of the active life of the monofill or at a time when the facility is most vulnerable to a storm which could produce the release of contaminated waters. The method of placement of the ash should be considered when determining the volume available for storage of run-off.

(C) A minimum of one foot of freeboard (measured from the invert of the emergency spillway) should be maintained following the occurrence of the design storm.

(D) An emergency spillway is to be constructed for the containment structure to provide controlled release of excess run-off waters in the case where the design storm is exceeded.

(iv) Design, construct, and maintain diversion channels, channel containment berms, culverts, pipes, and other drainage control features to pass and/or store run-on to restrict the chance of failure of the drainage control features to an annual probability of one percent or less (one hundred-year event or greater). In meeting this requirement the following items are to be considered:

(A) For those cases where the run-on waters are to be stored and/or treated, selection of the design storm should be based on the appropriate procedures governing run-off controls.

(B) For those cases where the run-on waters are to be diverted around the facility, the drainage control features should be sized to pass the run-on peak discharge (design flood) of a magnitude having an annual exceedance probability of one percent or less (one hundred-year flood peak discharge or greater).

(C) Sufficient erosion protection and freeboard (one foot minimum) are to be provided for all drainage control features to preclude failure of those features during passage of the design flood.

(v) Submit engineering plans and specifications for any containment barrier equalling or exceeding as storage capacity of ten acre-feet to the department's dam safety section for review under RCW 90.03.350.

(b) Leachate systems. Monofill owners or operators shall:

(i) Install a department-approved leachate collection system sized according to water balance calculations or using other accepted engineering methods;

(ii) Install a leachate collection system so as to prevent no more than one foot of leachate developing at the topographical low point of the active area; and

(iii) Install a leachate treatment to meet requirements of WAC 173-306-200 (3)(c)(ii)(B) through (E).

(c) Liner and final cap design. Ash monofill owners or operators shall comply with the requirements of WAC 173-306-450.

(d) Liner construction and inspection. Ash monofill owners or operators shall:

(i) Comply with the requirements of WAC 173-306-450.

(ii) Employ an independent third party as defined in WAC 173-306-100 to inspect the liners during construction and installation for uniformity, damage and imperfections (e.g., holes, cracks, thin spots, foreign materials) and quality of construction; immediately after construction and installations inspect:

(A) Synthetic liners and covers for tight seams and joints and the absence of tears, punctures or blisters; and

(B) Soil-based and admixed liners and covers for imperfections (e.g., lenses, cracks, channels, root holes) or structural nonuniformities that may affect liner permeability.

(e) Filling requirements for ash cells. Monofill owners or operators shall design and fill ash monofills in phases or cells, as defined in WAC 173-306-100. Only one cell shall be open and in use at one time; each cell shall be graded and covered with a flexible high density polyethylene liner or other material of equivalent mechanical strength and chemical resistance during the interim period before reaching final elevation. The liner shall be 60 mils and have the ability to withstand weather conditions. The owner or operator shall provide, as part of the interim cover, a method of detecting and/or monitoring/inspecting the integrity and any possible failure of the interim cover.

(f) Fugitive dust controls. Monofill owners and operators shall:

(i) Employ tire washing for all ash-carrying vehicles as they leave the site or any equivalent method to prevent the trackout of ash onto the site and the public right of way. Contaminated wash-waters shall be disposed of according to WAC 173-306-200 (3)(c);

(ii) Orient the major axis of the active area of the monofill with respect to the prevailing wind directions so as to minimize the effect of wind upon dispersion of special incinerator ash unless engineering designs can provide equivalent protection; and

(iii) Provide for paved approach and exit roads outside the active area with traffic separation and traffic control on-site and at the site entrance.

(g) Other design requirements. Monofill owners and operators shall:

(i) Post signs at each entrance to the active portion and at other locations, in sufficient numbers to be seen from any

approach to the active portion. Signs must bear the legend "Danger - unauthorized personnel keep out" or an equivalent legend, and must be legible from a distance of twenty-five feet;

(ii) Have either:

(A) A twenty-four-hour surveillance system which continuously monitors and controls entry onto the active portion of the facility; or

(B) An artificial or natural barrier; or

(C) A combination of both, which completely surrounds the active portion of the facility, with a means to control access through gates or other entrances to the active portion of the facility at all times.

(iii) Provide for monitoring according to WAC 173-306-500 using a design approved by the department;

(iv) Weigh all incoming ash on scales or provide an equivalent method of measuring ash tonnage;

(v) Provide for employee facilities including shelter, toilets, handwashing facilities, and potable drinking water;

(vi) Provide for unloading area(s) to be as small as possible, consistent with traffic patterns and safe operation; and

(vii) Provide communication (such as telephones) between employees working at the monofill and on-site or off-site management offices to handle emergencies.

(5) Standards for operation and maintenance. All owners and operators shall:

(a) Prohibit the co-disposal of any other solid or hazardous waste in a special incinerator ash landfill;

(b) Comply with the requirements of the general operation standards, WAC 173-306-405;

(c) Control fugitive dust by wetting, by the use of dust suppressing substances, covering, compacting, or otherwise managing the active area of the monofill to control wind dispersal and prevent visible emissions of windblown dust. Road dust on unpaved roads shall also be similarly controlled.

(d) Clearly mark the active area boundaries authorized in the permit, with permanent posts or using an equivalent method clearly visible for inspection purposes.

(e) Compact and cover ash daily prior to adding successive layers according to the requirements of WAC 173-306-450.

(f) Maintain the monitoring systems required in subsection (4)(g)(iii) of this section;

(g) Inspect the monofill weekly while it is in operation and after major storms to detect evidence of any of the following:

(i) Deterioration, malfunctions, or improper operation of run-on and run-off control systems and interim cover;

(ii) The presence of liquids in leak detection systems, where installed to comply with subsection (4)(b) of this section. The department shall be notified of any leaks into the leak detection system within seven days after detecting the leak and immediately remove any accumulated liquid. Notification shall include a schedule for determining the cause of the leak and any remedial measures or increased ground water monitoring to assure that the performance standards of subsection (2)(a) of this section are met;

(iii) The presence of leachate in, and proper functioning of, leachate collection and removal systems; and

(iv) Proper functioning of engineered wind dispersal control systems.

(h) Record the inspections in the log as required in WAC 173-306-405(6).

(6) Closure and post-closure requirements.

(a) At final closure of the monofill or upon closure of any cell, the owner or operator must cover the monofill or cell with a final cover designed and constructed according to subsection (4)(d) of this section and comply with all closure requirements of WAC 173-306-410;

(b) After final closure, the owner or operator must comply with all post-closure requirements of WAC 173-306-410, and must:

(i) Maintain the integrity and effectiveness of the final cover, including making repairs to the cap as necessary to correct the effects of settling, subsidence, erosion, or other events;

(ii) Prevent run-on and run-off from eroding or otherwise damaging the final cover;

(iii) Maintain and monitor the leak detection system in accordance with subsection (4)(b) of this section, where such a system is present; the owner or operator shall immediately remove any accumulated liquid and notify the department of any leaks into the leak detection system within seven days after detecting the leak. Notification shall include a schedule for determining the cause of the leak and any remedial measures or increased ground water monitoring to assure that the performance standards of subsection (2)(a) of this section are met;

(iv) Operate the leachate collection and removal system; and

(v) Maintain and operate the monitoring systems of WAC 173-306-500.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-440, filed 4/30/90, effective 5/31/90.]

WAC 173-306-450 Liner and final cap design and construction standards. (1) Applicability. This section applies to owners or operators of facilities that monofill combined or separated special incinerator ash, except as WAC 173-306-400 provides otherwise.

(2) Liner design.

(a) Owners or operators that monofill combined or separated fly ash and bottom ash shall comply with the requirements of Design A, subsection (3) of this section.

(b) Owners or operators that demonstrate ability to maintain the permeability requirements of Design B during an eighteen-month demonstration period may seek approval to use Design B following the demonstration period.

(3) Design A.

(a) General requirements. Owners or operators shall comply with the liner inspection requirements of WAC 173-306-440 (4)(d) and siting and design requirements of WAC 173-306-440 (3) and (4). In addition, owners or operators shall:

(i) Thoroughly compact ash residues. Owners or operators shall compact ash residues thoroughly by using compaction equipment.

(ii) Provide daily cover to prevent fugitive dust emissions and run-on and run-off discharges. Cover material

may include high density polyethylene or any department approved equivalent material.

(b) Liner design. The liner shall be an engineered liner of the following design from bottom to top:

(i) A foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settlement, compression, or uplift; foundation slope shall be a minimum of two percent;

(ii) Next, a single composite liner consisting of an engineered soil liner at least two feet thick having permeability of 1×10^{-7} cm/sec or the equivalent upon which a synthetic liner of sixty mils high density polyethylene or other material of equivalent mechanical strength and chemical resistance is placed; liner slopes shall be a minimum of four percent;

(iii) Next, a leachate detection system consisting of a minimum of twelve inches of sand or equivalent material with a permeability greater than or equal to 1×10^{-2} cm/sec with drain pipes;

(iv) Next, a synthetic liner of sixty mils high density polyethylene or other material of equivalent mechanical strength and chemical resistance;

(v) Next, a leachate collection and removal system consisting of a minimum of twelve inches of sand or equivalent material with a permeability greater than or equal to 1×10^{-2} cm/sec with drain pipes; and

(vi) A fabric filter placed between the drainage layer and the first lift of special incinerator ash.

(4) Design B. Owners or operators that monofill combined or separated fly and bottom ash shall comply with these design criteria.

(a) General requirements. Owners or operators shall comply with the liner inspection requirements of WAC 173-306-440 (4)(d) and siting and design requirements of WAC 173-306-440 (3) and (4). In addition, owners or operators shall:

(i) Compact ash residues to a permeability of 1×10^{-5} cm/sec. All ferrous material will be removed using magnetic separation or an equivalent method approved by the department so that the pozzolanic effect of compacted ash will not be impeded.

(ii) Lifts will be tested for ash permeability using guidance established by the department. Lift thickness prior to compaction shall not exceed one foot.

(A) Design B liner design may be used as long as lift permeability tests at 1×10^{-5} cm/sec or less.

(B) If the ash permeability requirement cannot be maintained, the owner or operator shall immediately close the Design B cell according to the closure requirements of WAC 173-306-410 and subsection (5) of this section and recommence disposal activities using the Design A liner.

(iii) Provide daily cover to prevent fugitive dust emissions and run-on and run-off discharges. Cover material may include high density polyethylene or any department approved equivalent material.

(b) Liner design. The liner shall be an engineered liner of the following design:

(i) A foundation or base capable of providing support to the liner and resistance to pressure gradients above and below the liner to prevent failure of the liner due to settle-

ment, compression, or uplift; foundation slope shall be a minimum of two percent;

(ii) Next, a single composite liner consisting of an engineered soil liner at least two feet thick having a permeability of 1×10^{-7} cm/sec or the equivalent upon which a synthetic liner of sixty mils high density polyethylene or other material of equivalent mechanical strength and chemical resistance rests; liner slopes shall be a minimum of four percent;

(iii) Next, a leachate collection system consisting of a minimum of twelve inches of sand or equivalent material with a permeability greater than or equal to 1×10^{-2} cm/sec with drain pipes; and

(iv) A fabric filter placed between the drainage layer and the first layer of special incinerator ash.

(5) Final cap design. All owners or operators of special incinerator ash monofills shall comply with the following design requirements.

(a) The final cap shall maintain a surface slope between two and five percent and side slope of no more than thirty-three percent and consist, from bottom to top, of:

(i) Two feet of ash, well graded (with ferrous material removed and having proportional size distribution of ash particles) and thoroughly compacted;

(ii) Next, a layer, system or mechanism capable of detecting cap failure;

(iii) Next, a fabric filter overlaid by at least two feet of clay having a permeability of 1×10^{-7} cm/sec upon which a synthetic liner of sixty mils high density polyethylene or other material of equivalent mechanical strength and chemical resistance rests; and

(iv) Eighteen inches of native soil covered by six inches of topsoil.

(b) Final cap inspections shall be done in accordance with the liner inspection requirements of WAC 173-306-440 (4)(d).

(c) In case of cap failure, immediately notify the department with a plan for remedial action.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-450, filed 4/30/90, effective 5/31/90.]

WAC 173-306-470 Financial assurance. (1) Applicability.

These standards apply to all new and expanded monofill facilities, and to existing monofill facilities that have not closed before or within twelve months after the effective date of this chapter.

(2) Cost estimate for closure.

(a) Each owner or operator shall prepare a written closure cost estimate as part of the facility closure plan. The closure cost estimate must be in current dollars and represent the cost of closing the facility in accordance with the closure requirements in WAC 173-306-410.

(i) The cost estimate shall be based on a reasonable cost estimate for completing design, purchase, construction, and other activities as identified in the facility closure plan as required under WAC 173-306-410;

(ii) The closure plan shall project intervals for withdrawal of closure funds from the closure financial assurance instrument to complete the activities identified in the approved closure plan;

(iii) The closure cost estimate shall not be reduced by allowance for salvage value of equipment, ash or the resale value of property or land.

(b) Each owner or operator must prepare a new closure cost estimate in accordance with (a) and (c) of this subsection whenever:

(i) Changes in operating plans or facility design affect the closure plan;

(ii) There is a change in the expected year of closure that affects the closure plan; or

(iii) The department directs the owner or operator to revise the closure plan or closure cost estimate.

(c) Each owner or operator shall review the closure cost estimate thirty days prior to the anniversary date of the date on which the first closure cost estimate was prepared. The review shall examine all factors, including inflation, involved in estimating the closure cost. Any cost changes shall be factored into a revised closure cost estimate and the revised cost estimate submitted to the department.

(d) During the operating life of the facility, the owner or operator shall make available for review the closure cost estimate prepared in accordance with (a) and (b) of this subsection, and when this estimate has been adjusted in accordance with (c) of this subsection.

(e) The department shall evaluate each cost estimate and may accept, or at its discretion require revision of, the cost estimate in accordance with its evaluation.

(f) The department may require the facility owner or operator to adjust the cost estimate in accordance with the department's review and direction.

(3) Financial assurance account for closure. Each owner or operator of special incinerator ash monofill facility shall establish a financial assurance account in an amount that, over the life of the facility, will accumulate funds at a rate that will enable premature closure during the monofill life. The total amount shall be equal to the closure cost estimate prepared in accordance with subsection (2) of this section.

(a) Applicable monofill facilities that accept special incinerator ash must choose from the following financial assurance account options or combination of options:

(i) For monofill disposal facilities owned or operated by municipal corporations, the closure and post-closure reserve account shall be handled in one of the following ways:

(A) Cash and investments accumulated and restricted for closure with an equivalent amount of fund balance reserved in the fund accounting for special incinerator ash activity; or published Budget Accounting Reporting System Manual; or

(B) The cash and investments held in a nonexpendable trust fund.

(ii) Closure trust fund established with an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a federal or state agency. The wording of the trust agreement must be acceptable to the department. The purpose of the closure trust fund is to receive and manage any funds paid by the owner or operator and to disburse those funds only for closure activities as identified in the approved closure plan.

(b) For private disposal facilities that accept public waste, established closure financial assurance accounts shall not constitute an asset of the facility owner or operator.

(c) Any income in excess of the closure cost estimate accruing to the established closure financial assurance

account will be at the owner's discretion as to the use of said funds.

(d) Excess moneys remaining in the closure financial assurance account after the department has certified the completion of closure as identified in WAC 173-306-410 (4)(f)(i) shall be returned to the owner or operator.

(4) Cost estimate for post-closure.

(a) Each owner or operator shall prepare a written post-closure cost estimate as part of the facility post-closure plan. The post-closure cost estimate must be in current dollars and represent the total cost of completing post-closure activities for the facility for a thirty-year post-closure period in accordance with the post-closure requirements in WAC 173-306-410.

(i) The post-closure cost estimate shall be based on a reasonable cost estimate for completing post-closure monitoring, maintenance, and other activities identified in the approved facility post-closure plan as required under WAC 173-306-410;

(ii) The post-closure plan shall project intervals for withdrawal of post-closure funds from the post-closure financial assurance instrument to complete the activities identified in the approved post-closure plan;

(iii) The post-closure cost estimate shall not be reduced by allowance for salvage, value of equipment, ash, or the resale value of property or land.

(b) Each owner or operator shall prepare a new post-closure costs estimate for the remainder of the post-closure care thirty-year period in accordance with (a) and (c) of this subsection, whenever:

(i) Change in the post-closure plan increases the cost of post-closure care; or

(ii) The department directs the owner or operator to revise the post-closure plan or post-closure cost estimate.

(c) Each owner or operator shall review the post-closure cost estimate thirty days prior to the annual date on which the first post-closure cost estimate was prepared. The review shall examine all factors, including inflation, involved in estimating the post-closure cost. Any cost changes shall be factored into a revised post-closure cost estimate and the revised cost estimate submitted to the department.

(d) During the operating life of the facility, the owner or operator shall keep the latest post-closure cost estimate prepared in accordance with (a) and (b) of this subsection available for review.

(5) Financial assurance account for post-closure. Each owner or operator of an applicable monofill facility shall establish a financial assurance account in an amount equal to the post-closure cost estimate prepared in accordance with subsection (4) of this section.

(a) Applicable monofill facilities that accept special incinerator ash shall choose from the following options or combinations of options for accounting for the financial assurance account:

(i) For monofill disposal facilities owned or operated by municipal corporations, the post-closure reserve shall be handled in one of the following ways:

(A) Cash and investments accumulated and restricted for post-closure with an equivalent amount of fund balance reserved in the fund accounting for special incinerator ash activity; or

(B) Cash and investments held in a nonexpendable trust fund.

(ii) Post-closure trust fund established with an entity which has the authority to act as a trustee and whose trust operations are regulated and examined by a federal or state agency. The wording of the trust agreement must be acceptable to the department. The purpose of the post-closure trust fund is to receive and manage any funds paid by the owner or operator and to disburse those funds only for post-closure activities as identified in the approved post-closure plan.

(b) For private disposal facilities that accept public waste, established post-closure financial assurance accounts shall not constitute an asset of the facility owner or operator.

(c) Any income accruing to the established post-closure financial assurance account will be at the owner's discretion as to the use of said excess funds.

(d) Excess moneys remaining in the post-closure financial assurance account after the department has certified the completion of post-closure as identified in WAC 173-306-410 (7)(c) shall be returned to the owner or operator.

(6) Closure/post-closure financial assurance account establishment and reporting.

(a) Closure and post-closure financial assurance funds shall be generated at each facility by transferring a percentage of the facility user fees to the selected financial assurance instrument at the agreed upon rate to be specified in the closure and post-closure plans, such that adequate closure and post-closure funds will be generated to ensure full implementation of the approved closure and post-closure plans.

(b) Each applicable facility owner or operator shall establish a procedure with the financial assurance instrument trustee for notification of nonpayment of funds to be sent to the Department of Ecology, Solid and Hazardous Waste Program, Mailstop PV-11, Olympia, WA 98504-8711.

(c) Each owner or operator shall file with the department an annual audit of the financial assurance accounts established for closure and post-closure activities, and a statement of the percentage of user fees, diverted to the financial assurance instruments.

(i) For monofill disposal facilities owned and operated by municipal corporations, the closure reserve account shall be audited according to the audit schedule of the office of state auditor and shall be filed with the department of ecology, including each of the post-closure care years.

(ii) For monofill disposal facilities not owned or operated by municipal corporations:

(A) Annual audits shall be conducted by a certified public accountant licensed in the state of Washington, and shall be filed with the department no later than March 31 of each year for the previous calendar year, including each of the post-closure care years.

(B) The audit shall also include calculations demonstrating the proportion of closure completed during the preceding year as specified in the closure and post-closure plans.

(d) Existing monofill disposal facilities may submit a written request with their annual audit to the department requesting a waiver from utilizing user fees to generate the moneys necessary for the closure and/or post-closure financial assurance account.

(i) The waiver request should provide documentation to demonstrate the facility user fees are prohibitively high, and include alternate method(s) for funding the facility's closure and/or post-closure financial assurance account;

(ii) The waiver request review procedure will be according to WAC 173-306-900.

(7) Authorization for financial assurance account fund withdrawal for closure and post-closure activities.

(a) Each owner or operator will withdraw funds from the closure and/or post-closure financial assurance instrument as specified in the approved closure/post-closure plans;

(b) If the withdrawal of funds from the financial assurance instrument exceeds by more than five percent the withdrawal schedule stated in the approved closure and/or post-closure plan, the closure and/or post-closure plan shall be amended.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-470, filed 4/30/90, effective 5/31/90.]

WAC 173-306-480 Treatment (including solidification and stabilization) standards. (1) Applicability. The standards of this section apply to treatment, as defined in WAC 173-306-100, of any special incinerator ash subject to this chapter. These standards do not apply to the manual or mechanical removal of ferrous metal from ash residues.

(2) Requirements. All owners and operators shall design, construct, operate, maintain, and close treatment facilities so as to:

(a) Meet the general facility standards of WAC 173-306-405;

(b) Only treat special incinerator ash in tanks, reaction vessels, furnaces (such as glass furnaces), containers, or totally enclosed treatment facilities (such as pipelines). No treatment process shall be designed to occur in ash piles, surface impoundments, or land treatment facilities;

(i) The department shall review and approve tank and reaction vessel design. All tanks and reaction vessels will be closed or otherwise designed to avoid emissions of dusts or vapors to the atmosphere. Tanks and reaction vessels shall be of sufficient thickness and corrosion resistance to prevent rupture;

(ii) Totally enclosed treatment facilities in good condition and of a design and construction to avoid rupture under maximum operating conditions and capable of being inspected periodically; and

(iii) Furnaces in good condition structurally, designed and operated to accept only special incinerator ash and capable of being inspected periodically. The department may review and approve furnace design.

(c) Meet the performance standards of WAC 173-306-440(2). The department shall specify the type and frequency of all sampling and monitoring necessary to assure compliance.

(d) Assure that treatment of special incinerator ash occurs under conditions spelled out in prototype, pilot plant or full scale operation. The department shall approve the design and specify operating conditions.

(e) Control fugitive dust emissions in the handling of special incinerator ash by:

(i) Collecting and handling in enclosed buildings or the equivalent (e.g., covered conveyors and transfer points); and

(ii) Adding moisture, dust suppressants, or other methods as necessary.

(f) Comply with chapter 296-62 WAC, the general occupational health standards.

(g) Assure that treated special incinerator ash is disposed of according to this chapter or chapter 173-304 WAC, the minimum functional standards for solid waste, if the residues are designated as solid waste.

(h) Close the treatment facility according to the requirements of WAC 173-306-410.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-480, filed 4/30/90, effective 5/31/90.]

WAC 173-306-490 Ash utilization standards. (1) Applicability.

(a) These standards apply to persons who utilize special incinerator ash including:

- (i) Generators of special incinerator ash;
- (ii) Owners and operators of disposal facilities; and
- (iii) Persons who neither generate nor dispose of special incinerator ash but are involved in the reuse or utilization of special incinerator ash.

(b) These standards do not apply to the following wastes and waste processes:

- (i) Ferrous metal separation from ash;
- (ii) Special incinerator ash that is reinjected into the incinerator or energy-recovery facility from which it was produced;
- (iii) Reclamation of nonferrous metals.

(2) Standards.

(a) Accumulation prior to reuse or utilization.

(i) All ash for utilization shall be stored in totally enclosed buildings.

(ii) Floor or surface drains serving storage areas shall not be connected to uncontaminated storm water run-off drains. Contaminated water shall be processed according to WAC 173-306-200 (3)(c)(ii).

(iii) All ash not utilized within one calendar year of generation shall be subject to:

(A) The management plan requirements of WAC 173-306-200 if a generator is accumulating the ash; or

(B) The permitting and facility standard requirements of WAC 173-306-300 and 173-306-400, if a disposal facility is accumulating the ash.

(b) Use constituting disposal. Use constituting disposal is applying ash to the land or placing ash on the land in a manner constituting disposal, or applying ash contained in a product to the land or placing ash products on the land in a manner constituting disposal. Placement on the land includes placement in water (such as in reef construction).

(i) Persons wishing to reuse or utilize ash in a manner constituting disposal shall apply for a permit under WAC 173-306-310.

(ii) Persons reusing or utilizing ash in a manner constituting disposal are subject to the following sections of the general facility standards:

- (A) WAC 173-306-405(2);
- (B) WAC 173-306-405 (3)(b);
- (C) WAC 173-306-405 (5)(a), (b), (c), and (f); and
- (D) WAC 173-306-405(7).

(iii) The department will base its decision on whether to issue a permit upon the following factors:

(A) The effectiveness of the utilized ash or ash product for the claimed use;

(B) The degree to which the utilized ash is like an analogous product;

(C) The extent to which the utilized ash or ash product minimizes loss or escape to the environment;

(D) The extent to which the utilized ash or ash product impacts public health, the environment and employee health given a reasonable worst case exposure, risk assessment analyses and compliance with the performance standards of WAC 173-306-440(2);

(E) The extent to which an end market for the utilized ash and ash product is guaranteed;

(F) The time period between generating the ash and utilization;

(G) The degree to which the end uses (and users) can be tracked and recorded; and

(H) Other factors as appropriate.

(iv) The department may require that applicants apply for a demonstration permit or class use permit under WAC 173-306-320, if available information exists to satisfy the informational requirements of (b)(ii) and (iii) of this subsection.

(c) Utilization as ingredients in industrial products, or as effective substitutes. The utilization of ash in industrial products or as effective substitutes for commercial products are activities that ordinarily are not considered to be waste management because they are like normal production processes and/or the products are used like commercial products. (E.g., ash as a substitute in cement construction blocks is an example.)

(i) The department may grant requests for classifying such reuse or utilization for solely commercial purposes, if:

(A) The applicant shows that the ash or ash products are recycled in a manner such that they closely resemble products or raw materials rather than waste; and

(B) The applicant addresses the factors of (b)(iii) of this subsection (except for (2)(b)(iii)(G)).

(ii) Public review of the decision to grant or deny such request shall be according to WAC 173-306-900 (4), (5), and (6).

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-490, filed 4/30/90, effective 5/31/90.]

WAC 173-306-495 Other methods of ash disposal.

(1) Applicability. This section applies to other methods of ash disposal not specifically identified elsewhere in this chapter, nor excluded from this chapter.

(2) Requirements. Owners and operators of other methods of ash disposal shall:

(a) Comply with the requirements in WAC 173-306-405;

(b) Obtain a permit under WAC 173-306-300 from the department, by submitting an application containing information required in WAC 173-306-330, and such other information as may be required by the department including:

(i) Preliminary engineering reports and plans and specifications; and

(ii) A closure plan.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-495, filed 4/30/90, effective 5/31/90.]

WAC 173-306-500 Monitoring and sampling methods. (1) Applicability. These requirements apply to owners and operators of incinerators, energy recovery facilities, disposal facilities, and management facilities that are required to perform ash sampling, analyses and testing, ground water and air quality monitoring under this chapter.

(2) Ground water monitoring requirements.

(a) The ground water monitoring system:

(i) Must consist of at least one background or up-gradient well and three down-gradient wells, installed at appropriate locations and depths to yield ground water samples from the uppermost aquifer and all hydraulically connected aquifers below the active portion of the facility.

(ii) Must represent the quality of background water that has not been affected by leakage from the active area; and

(iii) Must represent the quality of ground water passing the point of compliance. Additional wells may be required by the department in complicated hydrogeological settings or to define the extent of contamination detected.

(b) All monitoring wells must be cased in a manner that maintains the integrity of the monitoring well bore hole. This casing must allow collection of representative ground water samples. Wells must be constructed in such a manner as to prevent contamination of the samples, the sampled strata, other substrata aquifers and waterbearing strata. Construction shall be in accordance with chapter 173-160 WAC, minimum standards for construction and maintenance of water wells.

(c) The ground water monitoring program shall include, at a minimum, procedures and techniques for:

- (i) Decontamination of drilling and sampling equipment;
- (ii) Sample collection;
- (iii) Sample preservation and shipment;
- (iv) Analytical procedures and quality assurance;
- (v) Chain of custody control; and
- (vi) Procedures to ensure employee health and safety during well installation and monitoring.

(d) Sample constituents.

(i) All facilities shall test for the following parameters:

- (A) Temperature;
- (B) Conductivity;
- (C) pH;
- (D) Chloride;
- (E) Nitrate, nitrite, and ammonia as nitrogen;
- (F) Sulfate;
- (G) Dissolved iron, cadmium, lead, and mercury;
- (H) Dissolved zinc and manganese;
- (I) Chemical oxygen demand;
- (J) Total organic carbon;
- (K) Calcium and sodium; and
- (L) Gamma radiation.

(ii) The department may specify additional or fewer constituents depending upon the leachate analyses, the composition of the ash, and other information.

(iii) Test methods used to detect the parameters of (d)(i) of this subsection shall be EPA Publication Number SW-846, "Test Methods for Evaluating Solid Waste Physical/Chemical Methods."

(e) The ground water monitoring program must include a determination of the ground water surface elevation each time ground water is sampled.

(f) The owner or operator shall use a department-approved statistical procedure for determining whether a significant change over background has occurred.

(g) The owner or operator must determine ground water quality at each monitoring well at the compliance point at least quarterly from start-up through the post-closure care period. The owner or operator must express the ground water quality at each monitoring well in a form necessary for the determination of statistically significant increases.

(h) The owner or operator must determine and report the ground water flow rate and direction in the uppermost aquifer at least annually.

(i) If the owner or operator determines that there is a statistically significant increase for parameters or constituents at any monitoring well at the compliance point, the owner or operator must:

(i) Notify the department of this finding in writing within seven days of receipt of the sampling data. The notification must indicate what parameters or constituents have shown statistically significant increases;

(ii) Immediately resample the ground water in all monitoring wells and determine the concentration of all constituents listed in the definition of contamination in WAC 173-306-100 including additional constituents identified in the permit and whether there is a statistically significant increase such that the ground water performance standard has been exceeded. The department shall be notified within fourteen days of receipt of the sampling data.

(j) The department may require modifications to the disposal facility, the plan of operation or the permit including facility closure if the performance standard of WAC 173-306-440 (2)(a) is exceeded and, in addition, may revoke any permit and require reapplication under WAC 173-306-310.

(3) Modifications. An owner or operator required to modify the facility or plan of operation under this section must first obtain approval from the department and must at a minimum:

(a) Implement modifications that reduce contamination and, if possible, prevents constituents from exceeding their respective concentration limits at the compliance point by removing the constituents, treating them in place or other remedial measures; and

(b) Begin modifications according to a written schedule after the ground water performance standard is exceeded.

(4) Ash and soil sampling, and analysis.

(a) Ash residue samples taken for the purpose of determining their designation status as a special incinerator ash waste shall follow guidance and/or guidelines established by the department. Ash samples taken for the purpose of determining carbon residue and for determining dioxins and dibenzofuran content, if different from samples taken for designation status under chapter 173-303 WAC, shall also follow guidance and/or guidelines established by the department. Representative sampling as developed by guidelines of the department shall be employed.

(b) Ash samples shall be analyzed as follows:

(i) For designation purposes, as a special incinerator ash waste, the samples shall be analyzed according to:

(A) "Chemical testing methods for complying with the state of Washington dangerous waste regulation," WDOE 83-13;

(B) "Biological testing methods," WDOE 80-12;

(C) "Test methods for evaluating solid waste, physical/chemical methods," SW 846.

(ii) For chlorinated-p-dioxins and dibenzofurans, 40 CFR Part 261 Appendix X is adopted by reference.

(iii) For cadmium in soil, method 7130 or 7131 cited in "Test methods for evaluating solid waste, physical/chemical methods," SW 846.

(5) Ambient air quality sampling for lead. Ambient lead concentrations shall be according to 40 CFR Part 50 Appendix G, which is adopted by reference, except that the sampling frequency will be determined by the department.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-500, filed 4/30/90, effective 5/31/90.]

WAC 173-306-900 Variances. (1) Any person applying for an ash disposal permit or who owns or operates an ash generation or disposal facility may apply to the department for a variance from any section of this chapter. The application shall be accompanied by such information as the department may require.

(2) The applicant shall provide usual and reasonable public notification within the area that will be impacted, including publication in the area's major general circulation newspaper and mailing notices to surrounding property owners. Proof of compliance shall be submitted with the variance application.

(3) The department shall give public notice of an application and allow a thirty-day public comment period. Notice shall be mailed to persons who have written to the department asking to be notified of all variance requests and indicate that a public hearing may be requested.

(4) In considering a variance request, the department shall consider:

(a) The relative interests of the applicant, other property owners likely to be affected by the applicant's activity and the general public;

(b) If the ash handling practices or facility location protect public health, worker health, safety or the environment to a degree equal to or greater than the standard from which a variance is requested;

(c) Whether compliance with the regulation from which the variance is sought would produce hardship without equal or greater benefits to the public;

(d) Whether compliance with the regulation will require spreading of costs over a considerable time period; and

(e) If the timetable is for a period that is needed to comply with this chapter.

(5) The department shall approve or disapprove a variance request within ninety days of receipt unless the applicant and the department agree to a continuance.

(6) Any variance granted pursuant to this section may be renewed. Application for a variance renewal shall be made at least sixty days prior to the expiration of the variance and follow the application process of subsections (1) through (5) of this section.

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-900, filed 4/30/90, effective 5/31/90.]

WAC 173-306-9901 Maximum contaminant levels for ground water. Maximum contaminant levels for ground water shall be those specified in chapter 248-54 WAC, as the primary drinking water standards. Analytical methods for these contaminants may be found in the Code of Federal Regulations, 40 CFR Part 141. (These contaminant levels are to be considered interim levels for the purpose of regulating disposal facilities and shall be used until such time as the department establishes ground water quality standards for all types of activities impacting ground water.)

[Statutory Authority: Chapter 70.138 RCW. 90-10-047, § 173-306-9901, filed 4/30/90, effective 5/31/90.]

Chapter 173-307 WAC

PLANS

WAC

173-307-010	Purpose.
173-307-015	Applicability.
173-307-020	Definitions.
173-307-030	Plan requirements.
173-307-040	Executive summary.
173-307-050	Due dates.
173-307-060	Plan availability.
173-307-070	Plan amendments and updates.
173-307-080	Progress reports.
173-307-090	Review process.
173-307-100	Penalties.
173-307-110	Appeals.
173-307-120	Exemptions.
173-307-130	Public disclosure.
173-307-140	Records.

WAC 173-307-010 Purpose. This chapter implements chapter 70.95C RCW, an act relating to hazardous waste reduction. The act encourages voluntary efforts to redesign industrial, commercial, production, and other processes to result in the reduction or elimination of hazardous waste by-products and to maximize the in-process reuse or reclamation of valuable spent material. The act establishes a legislative policy to encourage reduction in the use of hazardous substances and reduction in the generation of hazardous waste whenever economically and technically practicable. It also adopts as a policy goal for Washington state the reduction of hazardous waste generation, through hazardous substance use reduction and waste reduction techniques, by fifty percent by 1995. Some individual facilities may have the ability to reduce the use of hazardous materials and the generation of hazardous wastes by far greater than fifty percent while others may not be able to reduce by as much as fifty percent. Therefore, the fifty percent reduction goal is not applied as a regulatory requirement. The plans provided for in this chapter are intended to achieve, for each facility, the greatest reduction economically and technically practicable. The intent of the department of ecology is to provide technical assistance, to the greatest extent possible, to those required to prepare facility plans. The purpose of this chapter is to establish the specific elements required to be included in the documents required of hazardous waste generators and hazardous substance users under the act. The regulation also establishes completion dates and implements other requirements in the act. Copies of all rules, regulations, or statutes cited in this chapter are

available from the Department of Ecology, Mailstop PV-11, Olympia, Washington 98504-8711.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-010, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-010, filed 4/1/91, effective 5/2/91.]

WAC 173-307-015 Applicability. (1) The requirements of WAC 173-307-010 through 173-307-140 apply to all hazardous substance users as defined in this chapter and to hazardous waste generators who generate more than two thousand six hundred forty pounds of hazardous waste per year, except for those facilities that are primarily treatment, storage, and disposal facilities or recycling facilities. Used oil to be re-refined or burned for energy or heat recovery shall not be used in the calculation of hazardous wastes generated for purposes of this regulation, and is not required to be addressed by plans prepared under this regulation. For purposes of this section, hazardous waste reported on the annual dangerous waste generator report as having been either recycled on-site or recycled for beneficial use off-site and/or amounts of hazardous substances introduced into a process and subsequently recycled for beneficial use, shall not be used in the calculation of hazardous waste generated. A facility may petition the director to exclude hazardous wastes recycled for beneficial use even if they were not reported as such on the annual dangerous waste generator report. Documentation from the hazardous waste handling facility that the hazardous waste was recycled for beneficial use must be submitted along with the petition.

(2) Except as noted in subsection (3) of this section, each hazardous substance user and hazardous waste generator identified above must prepare one plan for each facility owned or operated.

(3) A person with multiple interrelated facilities where a significant majority of the processes are substantially similar, as defined in this chapter, may prepare a single plan covering one or more of those facilities.

(a) A person desiring to submit a single plan under this provision must first submit to the director documentation that a significant majority of the processes at the facilities are substantially similar processes in order to obtain approval prior to plan development. This documentation must be submitted by May 1 of the year prior to the plan due date.

(b) If a single plan is being prepared for two or more interrelated facilities with substantially similar processes, the sum total of the hazardous waste generated and the hazardous substances used by these facilities must be considered when applying any of the thresholds and/or percentages required by this chapter.

(c) In instances where a person has interrelated facilities without substantially similar processes, a single document may be prepared, but it must contain separate detailed plans for each facility.

(4) Facilities required by this chapter to prepare plans are also required to pay a hazardous waste fee, as described in chapter 173-305 WAC. The requirements of WAC 173-305-010 through 173-305-050 and 173-305-210 through 173-305-240 specifically apply.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-015, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-015, filed 4/1/91, effective 5/2/91.]

WAC 173-307-020 Definitions. As used in this chapter, the following terms have the meanings indicated unless the context clearly requires otherwise.

"Closed-loop recycling" means that the entire process through completion of any reclamation is closed by being entirely connected with pipes or other comparable enclosed means of conveyance. Recycled materials are returned to the original process or processes.

"Dangerous waste" means any discarded, useless, unwanted, or abandoned nonradioactive substances, including but not limited to certain pesticides, or any residues or containers of such substances which are disposed of in such quantity or concentration as to pose a substantial present or potential hazard to human health, wildlife, or the environment because such wastes or constituents or combinations of such wastes:

Have short-lived, toxic properties that may cause death, injury, or illness or have mutagenic, teratogenic, or carcinogenic properties; or

Are corrosive, explosive, flammable, or may generate pressure through decomposition or other means.

Dangerous wastes shall specifically include those wastes designated as extremely hazardous by rules adopted pursuant to chapter 70.105 RCW.

"Department" means the department of ecology.

"Director" means the director of the department of ecology or the director's designee.

"EPA/state dangerous waste identification number" means the number assigned by the EPA (Environmental Protection Agency) or by the department of ecology to each generator and/or transporter and treatment, storage, and/or disposal facility.

"Extremely hazardous waste" means any dangerous waste which:

Will persist in a hazardous form for several years or more at a disposal site and which in its persistent form:

Presents a significant environmental hazard and may be concentrated by living organisms through a food chain or may affect the genetic make-up of man or wildlife; and

Is highly toxic to man and wildlife;

If disposed of at a disposal site in such quantities as would present an extreme hazard to man or the environment.

Extremely hazardous waste shall specifically include those wastes designated as extremely hazardous by rules adopted pursuant to chapter 70.105 RCW.

"Facility" means any geographical area that has been assigned an EPA/state dangerous waste identification number. In the case of a hazardous substance user not having an EPA/state dangerous waste identification number, facility means all buildings, equipment, structures, and other stationary items located on a single site or on contiguous or adjacent sites and owned or operated by the same person.

"Fee" means the annual hazardous waste fees imposed under RCW 70.95E.020 and 70.95E.030.

"Generate" means any act or process which produces hazardous waste or which first causes a hazardous waste to become subject to regulation.

"Hazardous substance" means any hazardous substance listed as a hazardous substance as of the effective date of this section pursuant to Section 313 of Title III of the

Superfund Amendments and Reauthorization Act and any further updates, and all ozone depleting compounds as defined by the Montreal Protocol of October 1987 and any further updates of the Montreal Protocol.

"Hazardous substance use reduction" means the reduction, avoidance, or elimination of the use, toxicity, or production of hazardous substances without creating substantial new risks to human health or the environment. "Hazardous substance use reduction" includes proportionate changes in the usage of hazardous substances as the usage of a hazardous substance or hazardous substances changes as a result of production changes or other business changes.

"Hazardous substance user" means any facility required to report under Section 313 of Title III of the Superfund Amendments and Reauthorization Act, except for those facilities which only distribute or use fertilizers or pesticides intended for commercial agricultural applications.

Note: This definition refers to those SARA Title III, Section 313 reporters who must prepare a plan, whereas the definition of hazardous substance refers to the substances that must be addressed in the plan.

"Hazardous waste" means and includes all dangerous and extremely hazardous wastes, but does not include radioactive wastes or a substance composed of both radioactive and hazardous components and does not include any hazardous waste generated as a result of a remedial action under state or federal law.

"Hazardous waste generator" or "generator" means any person generating hazardous waste(s) which are subject to regulation by the department.

"Hazardous waste reduction" means all in-facility practices that reduce, avoid, or eliminate the generation of hazardous wastes or the toxicity of hazardous wastes, prior to generation, without creating substantial new risks to human health or the environment.

"Interrelated facilities" means multiple facilities owned or operated by the same person.

"Office" means the office of waste reduction.

"Plan" means the plan provided for in RCW 70.95C.200.

"Person" means an individual, trust, firm, joint stock company, partnership, association, state, public or private or municipal corporation, commission, political subdivision of a state, interstate body, the federal government, including any agency or officer thereof, and any Indian tribe or authorized tribal organization.

"Process" means one or a number of steps which produces an end product or service, or a component which is to be incorporated into an end product or service.

"Product" means any hazardous substance or mixture containing hazardous substances which is used by a facility in a production or service process. Metals or metal alloys used by the facility are not considered "products" if they do not become incorporated into the hazardous waste streams and have no known pathway for the release of metals to the environment, either at the facility or subsequent to their use at the facility, such as from ultimate disposal by the consumer. Facilities will have to decide whether to group similar products (for example with different brand names) and list them as a single product. While some flexibility is left to the facility, products must be identified as a single product

if they have similar chemical composition and may be used interchangeably by the facility.

Note: The term "product" as defined here and used throughout this chapter is not to be confused with the term "end product" which specifically refers to the "output" of a production process.

"Recycled for beneficial use" means the use of hazardous waste, either before or after reclamation, as a substitute for a commercial product or raw material, but does not include:

Use constituting disposal;
Incineration; or
Use as a fuel.

"Recycling" means reusing waste materials and extracting valuable materials from a waste stream. Recycling does not include burning for energy recovery.

Note: While burning for energy recovery may be preferable to disposal, burning for energy recovery does not count as recycling for the purpose of chapter 70.95C RCW.

"Remedial action wastes" means hazardous wastes which result from the cleanup of sites under state or federal hazardous waste laws.

"Shifting of risks" means changing the character, location, or receptor of a toxic material without achieving a substantial reduction in the overall risk to health and safety or the environment.

"Substantially similar processes" means processes that are essentially interchangeable, inasmuch as they use similar equipment and materials and produce similar products or services and generate similar wastes.

"Treatment" means the physical, chemical, or biological processing of waste to render it completely innocuous, produce a recyclable by-product, reduce toxicity, or substantially reduce the volume of material requiring disposal as described in the priorities established in RCW 70.105.150. Treatment does not include incineration.

"Used oil" means: Lubricating fluids that have been removed from an engine crankcase, transmission, gearbox, hydraulic device, or differential of an automobile, bus, truck, vessel, plane, heavy equipment, or machinery powered by an internal combustion engine; any oil that has been refined from crude oil, used, and as a result of use, has been contaminated with physical or chemical impurities; and any oil that has been refined from crude oil and, as a consequence of extended storage, spillage, or contamination, is no longer useful to the original purchaser. "Used oil" does not include used oil to which hazardous wastes have been added.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-020, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-020, filed 4/1/91, effective 5/2/91.]

WAC 173-307-030 Plan requirements. This section establishes the specific elements required to be included in a plan. The purpose of a plan is to require serious consideration of ways in which processes and procedures may be modified to reduce dependence upon hazardous substances and/or the generation of hazardous wastes. All plans must consider opportunities based on the following priorities: Hazardous substance use reduction and hazardous waste reduction, recycling, and treatment. The plans shall consist of the following parts:

(1) Part one. Part one shall include:

(a) A written policy articulating management and corporate support for the plan and a commitment to implement planned activities and achieve established goals.

(b) The plan scope and objectives.

(c) A description of the facility type, a description of product(s) made and/or services provided, and a statement or listing of the current level(s) of production or service activity in units of measure appropriate to the industry or activity;

(d) A general overview of the processes used in production or service activities (a schematic drawing may be included);

(e) A statement providing, for the last calendar year, the total pounds of extremely hazardous waste and total pounds of dangerous waste reported on Form 4, Generator Annual Dangerous Waste Report, and, if applicable, the total pounds of toxic releases reported on Form R under SARA Title III, Section 313; and

(f) A description of current reduction, recycling, and treatment activities and documentation of hazardous substance use reduction and hazardous waste reduction efforts completed prior to the first plan due date specified in WAC 173-307-050. Clearly separate the explanations of reduction activities from recycling and other management activities.

(2) Part two. Part two shall include an identification of hazardous substances used and hazardous wastes generated by the facility, a description of the facility processes, an identification of reduction, recycling, and treatment opportunities, an evaluation of those opportunities, a selection of proposed options, a policy to prevent shifting of risks, performance goals, and an implementation schedule. Specifically, Part two shall include:

(a) An identification of products containing hazardous substances used and hazardous wastes generated. This is to be based on actual usage and generation during the most recent calendar year for which records are available. This task can be accomplished by choosing one of two approaches. The approaches are identified as the "pounds approach" and the "percentage approach." Look at the following descriptions and requirements of each of these and determine which one you wish to use.

(i) "Pounds approach."

This approach requires you to identify the types and amounts, in either weight or volume, of hazardous waste generated and products containing hazardous substances used up to these threshold levels:

(A) All dangerous waste streams five hundred pounds or greater, any smaller dangerous waste streams which individually represents ten percent or more of the total annual hazardous wastes, and all extremely hazardous waste streams subject to regulation by the department. If this combination equals less than ninety percent of the total hazardous wastes generated, then additional dangerous wastes generated at the facility shall be included until ninety percent of the total is reached; and

(B) Each product used which contains a total of fifty percent or more of any combination of hazardous substances if one thousand pounds or more was used; each product used which contains a total of between twenty-five percent and forty-nine percent of hazardous substances if four thousand pounds or more was used; and each product used which contains a total of between ten and twenty-four percent of hazardous substances if ten thousand pounds or more was

used. Any product which contains less than ten percent of any hazardous substances need not be included in the list regardless of the amount of the product used.

(C) Office products and products which are used at the facility for nonprocess routine janitorial or grounds maintenance related activities may be excluded from this list.

(D) Hazardous substances used and hazardous wastes generated in laboratory research need not be listed. Note: See Part two, (k) of this subsection for discussion on this issue.

(ii) "Percentage approach."

This approach requires you to identify the types and amounts, in either weight or volume, of hazardous waste generated and products containing hazardous substances used up to these threshold levels;

(A) All extremely hazardous waste and enough additional dangerous waste to reach ninety percent of all the hazardous waste generated; and

(B) Ninety percent of all the products used which contain hazardous substances. This selection of products should attempt to include those that contain the highest concentrations of hazardous substances and the most toxic hazardous substances.

(C) Office products and products which are used at the facility for nonprocess routine janitorial or grounds maintenance related activities may be excluded from this list.

(D) Hazardous substances used and hazardous wastes generated in laboratory research need not be listed. Note: See Part two, (k) of this subsection for discussion on this issue.

(iii) Determinations of whether these quantities are met or exceeded for either approach shall be based on the best available information. This information may be included or referenced in the plan. Available information may include any or all of the following as necessary to determine quantities of hazardous substances contained in products; information available from material safety data sheets, information furnished upon request from manufacturers or suppliers of hazardous substances or products containing hazardous substances, information obtained from the department, and information otherwise known by the facility owner or operator.

An explanation of the procedures used to determine that the thresholds were met or exceeded must be included in this section of the plan.

(iv) The above thresholds shall only be used for plans required to be completed prior to September 2, 1996. Plans or plan updates completed from that date on must identify the types and amounts, in either weight or volume, of hazardous waste generated and hazardous substances used up to the following threshold levels;

(A) The "pounds approach" can only be used for identifying hazardous waste after September 2, 1996. This approach cannot be used for products containing hazardous substances. The thresholds for hazardous waste are:

All dangerous waste streams five hundred pounds or greater, any smaller dangerous waste streams which individually represents ten percent or more of the total annual hazardous wastes, and all extremely hazardous waste streams subject to regulation by the department. If this combination equals less than ninety-five percent of the total hazardous wastes generated, then additional dangerous wastes generated

at the facility shall be included until ninety-five percent of the total is reached.

(B) The "percentage approach" remains an optional approach for hazardous waste, but it is the only approach that can be used for products. The thresholds for this approach are:

All extremely hazardous waste and enough additional hazardous waste to reach ninety-five percent of all the hazardous waste generated; and

Ninety-five percent of all the products used which contain hazardous substances.

(C) The exemptions in subitems (C) and (D) of item (ii) of this subdivision remain in effect.

(b) A detailed description of each process in the facility that generates hazardous waste or uses products containing hazardous substances as identified in the chosen approach in (a) of this subsection. This description may include a schematic drawing.

(c) For the hazardous waste and products containing hazardous substances identified in (a) of this subsection within each of the processes identified in (b) of this subsection, an identification, based on thorough research, of all reasonable opportunities for further hazardous substance use reduction, hazardous waste reduction, recycling, and treatment. Thorough research shall include, at a minimum, a review of literature commonly available to that industry or trade. The full range of potentially feasible opportunities is to be identified without regard to possible impediments to implementing the opportunities. In identifying opportunities, consideration shall be given to alternative approaches which, in the judgment of the facility management, satisfy the same demand for end products or services but use substantially less hazardous substances or result in the generation of substantially less hazardous waste;

(d) An evaluation of the identified opportunities. Opportunities shall be grouped by priority and evaluated according to these priorities. The priorities are, in descending order: Hazardous substance use and hazardous waste reduction; recycling; and, treatment. Opportunities of a lower priority shall be given consideration only after a determination is made that the higher priority opportunities are inappropriate due to impediments to their implementation. Impediments that shall be considered acceptable include, but are not limited to: Adverse impacts on product quality, legal or contractual obligations, economic and technical practicality, safety considerations, and the creation of substantial new risks to human health or the environment.

Except with respect to the use and distribution of fertilizers or pesticides intended for commercial agricultural applications, the evaluation of hazardous waste reduction opportunities must include an evaluation of hazardous substance use reduction opportunities for those hazardous substances which subsequently result in hazardous waste streams as well as an evaluation of other opportunities for the reduction of hazardous waste.

The evaluation required under this subsection shall include an economic analysis, a technical evaluation, an identification of whether, and if so how, the identified opportunity would result in a shifting of risk(s) from one part of a process, environmental medium, or product to another and an identification of all impediments to implementing the opportunities. The economic analysis shall seek

to identify the total costs associated with the current hazardous substance use and hazardous waste generation, management and disposal, compared with comparable costs associated with implementing the alternatives.

Evaluation of each opportunity may be considered complete when enough information is available to select or reject the opportunity for implementation. For opportunities rejected, the reason(s) for rejecting them shall be stated.

(e) A selection of opportunities to be implemented in accordance with the evaluation conducted in (d) of this subsection. For each selected opportunity, the process(es) it affects shall be identified, and estimates of the amount, by weight, of the reduction of hazardous substances or products containing hazardous substances and hazardous waste reduction which would be achieved through implementation shall be stated, as well as the amount of hazardous wastes recycled or treated as a result of implementation shall be included;

(f) A written policy stating that in implementing the selected options whenever technically and economically practicable, risks will not be shifted from one part of a process, environmental medium, or product to another;

(g) Specific performance goals in each of the following categories, expressed in numeric terms:

(i) Hazardous substances or products containing hazardous substances to be reduced or eliminated from use;

(ii) Hazardous wastes to be reduced or eliminated through hazardous waste reduction techniques;

(iii) Materials or hazardous wastes to be recycled; and

(iv) Hazardous wastes to be treated.

If the establishment of numeric performance goals is not practicable, the performance goals shall include a clearly stated list of objectives designed to lead to the establishment of numeric goals as soon as is practicable. Goals shall be set for a five-year period from the first reporting date (see (h) of this subsection regarding implementation activities that will take longer than five years);

(h) A five-year implementation schedule, which shall display planned implementation activities for each of the five calendar years following completion of the plan. Information to be provided shall include, but is not limited to, the opportunities (or phases of opportunities) being implemented and related milestones. Where complete implementation of a selected opportunity will take longer than five years, the schedule shall contain relevant milestones within a five-year period and an estimated date of completion. The schedule may be in table form and organized by opportunities within processes, if desired.

(i) A description of how those hazardous wastes that are not recycled or treated and the residues from recycling and treatment processes are managed may be included in the plan.

(j) Documentation of any research conducted in fulfillment of any of the above subdivisions of this subsection shall be available to the department upon request.

(k) For research laboratories, the plan may include, in lieu of all the detailed requirements of this subsection, a description of policies and procedures to be followed by laboratory personnel regarding the use of hazardous substances and the generation of hazardous wastes through laboratory research. These policies and procedures must be

consistent with the waste reduction priorities as defined in this chapter.

(3) Part three. Part three shall provide a financial description of the plan, which shall identify costs and benefits realized from implementing selected opportunities to the extent reasonably possible. Part three shall also include a description of accounting systems which will be used to identify hazardous substance use and hazardous waste management costs. Liability, compliance, and oversight costs must be components of these accounting systems.

(4) Part four. Part four of the plan shall include a description of personnel training and employee involvement programs. Each facility required to write a plan is encouraged to advise its employees of the planning process and solicit comments or suggestions from its employees on hazardous substance use and waste reduction opportunities.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-030, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-030, filed 4/1/91, effective 5/2/91.]

WAC 173-307-040 Executive summary. Upon completion of a plan, the owner, chief executive officer, or other person with the authority to commit management to the plan, such as a facility manager, shall sign and submit an executive summary of the plan to the department. This summary shall be available from the department for public inspection upon request. The facility may elect to submit the complete plan to the department rather than prepare an executive summary. In that event, the complete plan shall also be available for public inspection.

Executive summaries shall include the following information from the plan:

(1) A written policy articulating management and corporate support for the plan and a commitment to implement planned activities and achieve established goals.

(2) The plan scope and objectives.

(3) A description of the facility type and a summary of product(s) made and/or services provided.

(4) A list of the type and amount of each hazardous waste and products containing hazardous substances as identified in WAC 173-307-030 (2)(a).

(5) A brief description of each process in the facility that generates hazardous waste or uses products containing hazardous substances as listed in subdivision (d).

(6) A description of current reduction, recycling, and treatment activities, and documentation of hazardous substance use reduction and hazardous waste reduction activities completed before the first reporting date specified in WAC 173-307-050.

(7) A summary of all further hazardous substance use reduction, hazardous waste reduction, recycling, and treatment opportunities identified. Opportunities shall be identified first for hazardous substance use reduction and hazardous waste reduction, secondly for recycling, and lastly for treatment. A statement of the reason(s) for rejecting any opportunity from further consideration and a summary of all identified impediments to implementing opportunities shall be included.

(8) A description of the opportunities selected to be implemented, process(es) affected, and estimated reductions to be achieved.

(9) Specific performance goals, expressed in numeric terms for each of the categories listed below (assumptions on changing production or service activity levels during the period covered by the plan must be described):

(a) Hazardous substances to be reduced or eliminated from use;

(b) Hazardous wastes to be reduced or eliminated through waste reduction techniques;

(c) Materials or hazardous wastes to be recycled; and

(d) Hazardous wastes to be treated.

If the establishment of numeric performance goals is not practicable, the performance goals shall include a clearly stated list of objectives designed to lead to the establishment of numeric goals as soon as is practicable. Goals shall be set for a five-year period from the first reporting date.

(10) The five-year implementation schedule identified in WAC 173-307-030 (2)(h) which shall display planned implementation activities for each of the five calendar years following completion of the plan.

(11) A summary of costs and benefits realized from implementing selected opportunities.

(12) For research labs, the executive summary may include, in lieu of all the detailed requirements of this section, a description of policies and procedures to be followed by laboratory personnel regarding the use of hazardous substances and the generation of hazardous waste through laboratory research. These policies and procedures must be consistent with the waste reduction priorities as defined in this chapter.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-040, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-040, filed 4/1/91, effective 5/2/91.]

WAC 173-307-050 Due dates. Plans shall be completed and executive summaries submitted in accordance with the following schedule:

(1) Hazardous waste generators who generated more than fifty thousand pounds of hazardous waste in calendar year 1991 and hazardous substance users who were required to report in 1991, by September 1, 1992;

(2) Hazardous waste generators who generated between seven thousand and fifty thousand pounds of hazardous waste in calendar year 1992 and hazardous substance users who were required to report for the first time in 1992, by September 1, 1993;

(3) Hazardous waste generators who generated between two thousand six hundred forty and seven thousand pounds of hazardous waste in 1993 and hazardous substance users who were required to report for the first time in 1993, by September 1, 1994;

(4) Hazardous waste generators who have not been required to complete a plan on or prior to September 1, 1994, must complete a plan by September 1 of the year following the first year that they generate more than two thousand six hundred forty pounds of hazardous waste; and

(5) Hazardous substance users who have not been required to complete a plan on or prior to September 1, 1994, must complete a plan by September 1 of the year following the first year that they are required to report under Section 313 of Title III of the Superfund Amendments and Reauthorization Act.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-050, filed 4/1/91, effective 5/2/91.]

WAC 173-307-060 Plan availability. Plans developed under chapter 173-307 WAC shall be kept at the facility and made available for review to authorized representatives of the department. The plan is not a public record under the public disclosure laws of the state of Washington contained in chapter 42.17 RCW, unless submitted in lieu of an executive summary as provided for in WAC 173-307-040.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-060, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-060, filed 4/1/91, effective 5/2/91.]

WAC 173-307-070 Plan amendments and updates.

(1) A plan must be kept reasonably current and may be amended in response to changes in facility operations, substances used, or wastes generated.

(a) Users or generators shall notify the department of an amended plan and submit amendments to their plan or executive summary, whichever was originally submitted, including an identification of which sections are being amended. The implementation schedule of the amended plan and/or new executive summary shall be within the original five-year timeline initiated by completion of the original plan.

(b) Even if a plan is amended, a five-year plan update will still be required five years from completion of the first plan, or from the last five-year update.

(2) Every five years, each plan shall be updated, and the plan or a new executive summary shall be submitted to the department. A plan update shall conform to the requirements for preparing reduction plans as specified in this chapter.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-070, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-070, filed 4/1/91, effective 5/2/91.]

WAC 173-307-080 Progress reports. Progress reports shall be submitted to the department annually on September 1 following the due date of the plan. The purpose of the progress report is to provide information on quantities of hazardous waste and hazardous substances or products containing hazardous substances reduced in the prior twelve-month period.

(1) Progress reports shall include a discussion of:

(a) Performance goals. If numeric performance goals were listed in the plan, progress toward these goals shall be discussed. If numeric performance goals were not listed in the plan, progress made toward establishing numeric goals shall be discussed, and also progress made towards achieving the goals as stated in the plan. This discussion shall include:

(i) A description of reduction, recycling, and treatment opportunities which were implemented.

(ii) A description of the process(es) impacted by each opportunity.

(iii) A description of the quantities, by weight, of hazardous substances or products containing hazardous substances reduced and hazardous waste reduced by each option. Estimation techniques, and any assumptions used shall be described. Quantities reduced must be displayed in relation to changing production levels. The description shall

(1992 Ed.)

also include a statement of the level of production or service activity in relation to the level of production or service activity stated in the plan at the time the plan was prepared.

Note: Factors not resulting in actual reductions, such as new estimating techniques, delistings of substances or hazardous wastes, and reclassifications of waste management techniques cannot be counted or claimed as reductions.

(iv) If measurement or estimation techniques are changed from the prior reports such that reductions are not additive for the five-year planning period, a methodology for converting prior reported reductions must be described and recalculations provided.

(b) Problems encountered in the implementation process. Problems shall be clearly identified and include a discussion of steps taken or proposed to resolve problems. An update on problems reported in previous progress reports shall be included.

(2) Upon the request of two or more users or generators belonging to similar industrial classifications, the department may aggregate data contained in their annual progress reports for the purpose of developing a public record.

[Statutory Authority: Chapter 70.95C RCW. 91-20-131 (Order 91-35), § 173-307-080, filed 10/1/91, effective 11/1/91; 91-08-041 (Order 90-57), § 173-307-080, filed 4/1/91, effective 5/2/91.]

WAC 173-307-090 Review process. A user or generator required to prepare a plan shall permit the director or a representative of the director to review the plan to determine its adequacy.

(1) The department may review a plan, executive summary, or an annual progress report to determine whether the plan, executive summary, or annual progress report is adequate and shall base its determination solely on whether the plan, executive summary, or annual progress report is complete and prepared in accordance with the provisions of this chapter and the requirements of chapter 70.95C RCW.

(2) If a hazardous substance user or hazardous waste generator fails to complete an adequate plan, executive summary, or annual progress report, the department shall notify the user or generator of the inadequacy, identifying specific deficiencies. For the purposes of this section, a deficiency may include failure to develop a plan, failure to submit an executive summary, or failure to submit an annual progress report. The department shall specify a reasonable time frame, of not less than ninety days, within which the user or generator shall complete a modified plan, executive summary, or annual progress report addressing the specified deficiencies.

(3) If the department determines that a modified plan, executive summary, or annual progress report is inadequate, the department may, within its discretion, either require further modification or enter an order pursuant to WAC 173-307-100.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-090, filed 4/1/91, effective 5/2/91.]

WAC 173-307-100 Penalties. (1) If, after having received a list of specified deficiencies from the department, a hazardous substance user or hazardous waste generator required to prepare a plan fails to complete modification of

a plan, executive summary, or annual progress report within the time period specified by the department, the department may enter an order pursuant to chapter 34.05 RCW finding the user or generator not in compliance with the requirements of RCW 70.95C.200. When the order is final, the department shall notify the department of revenue to charge a penalty fee. The penalty fee shall be the greater of one thousand dollars or three times the amount of the user's or generator's previous year's fee, in addition to the current year's fee. If no fee was assessed the previous year, the penalty shall be the greater of one thousand dollars or three times the amount of the current year's fee. The penalty assessed under this subsection shall be collected each year after the year for which the penalty was assessed until an adequate plan, executive summary, or annual progress report is completed.

(2) If a hazardous substance user or hazardous waste generator required to prepare a plan fails to complete an adequate plan, executive summary, or annual progress report after the department has levied against the user or generator the penalty provided in subsection (1) of this section, the user or generator shall be required to pay a surcharge to the department whenever the user or generator disposes of a hazardous waste at any hazardous waste incinerator or hazardous waste landfill facility located in Washington state, until a plan, executive summary, or annual progress report is completed and determined to be adequate by the department. The surcharge shall be equal to three times the fee charged for disposal. The department shall furnish the incinerator and landfill facilities in Washington state with a list of Environmental Protection Agency/state identification numbers of the hazardous waste generators that are not in compliance with the requirements of RCW 70.95C.200.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-100, filed 4/1/91, effective 5/2/91.]

WAC 173-307-110 Appeals. A user or generator may appeal from a department order or a surcharge under RCW 70.95C.220 to the pollution control hearings board pursuant to chapter 43.21B RCW.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-110, filed 4/1/91, effective 5/2/91.]

WAC 173-307-120 Exemptions. A person required to prepare a plan because of the quantity of hazardous waste generated may petition the director to be excused from this requirement. The person must demonstrate to the satisfaction of the director that the quantity of hazardous waste generated was due to unique circumstances not likely to be repeated and that the person is unlikely to generate sufficient hazardous waste to require a plan in the next five years.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-120, filed 4/1/91, effective 5/2/91.]

WAC 173-307-130 Public disclosure. (1) The department shall make available for public inspection any executive summary or annual progress report submitted to the department. Any hazardous substance user or hazardous waste generator required to prepare an executive summary or annual progress report who believes that disclosure of any information contained in the executive summary or annual

progress report may adversely affect the competitive position of the user or generator may request the department pursuant to RCW 43.21A.160 to delete from the public record those portions of the executive summary or annual progress report that may affect the user's or generator's competitive position. The department shall not disclose any information contained in an executive summary or annual progress report pending a determination of whether the department will delete any information contained in the report from the public record. This determination will be made within sixty days following a request for public inspection.

(2) Any ten persons residing within ten miles of a hazardous substance user or hazardous waste generator required to prepare a plan may file with the department a petition requesting the department to examine a plan to determine its adequacy. The department shall report its determination of adequacy to the petitioners and to the user or generator within a reasonable time. The department may deny a petition if the department has within the previous year determined the plan of the user or generator named in the petition to be adequate.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-130, filed 4/1/91, effective 5/2/91.]

WAC 173-307-140 Records. The department shall maintain a record of each plan, executive summary, or annual progress report it reviews, and a list of all plans, executive summaries, or annual progress reports the department has determined to be inadequate, including descriptions of corrective actions taken. This information shall be made available to the public.

[Statutory Authority: Chapter 70.95C RCW. 91-08-041 (Order 90-57), § 173-307-140, filed 4/1/91, effective 5/2/91.]

Chapter 173-309 WAC

HAZARDOUS WASTE CLEANUP ACT—LOCAL TOXICS CONTROL ACCOUNT—INTERIM FINANCIAL ASSISTANCE PROGRAM

WAC

173-309-010	Reserved.
173-309-020	Reserved.
173-309-030	Reserved.
173-309-040	Reserved.
173-309-050	Reserved.
173-309-060	Reserved.
173-309-070	Reserved.
173-309-080	Reserved.
173-309-090	Reserved.

WAC 173-309-010 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-010, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-010, filed 8/5/88.]

WAC 173-309-020 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-020, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-020, filed 8/5/88.]

WAC 173-309-030 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-030, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-030, filed 8/5/88.]

WAC 173-309-040 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-040, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-040, filed 8/5/88.]

WAC 173-309-050 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-050, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-050, filed 8/5/88.]

WAC 173-309-060 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-060, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-060, filed 8/5/88.]

WAC 173-309-070 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-070, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-070, filed 8/5/88.]

WAC 173-309-080 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-080, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-080, filed 8/5/88.]

WAC 173-309-090 Reserved.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-309-090, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220(4). 88-17-009 (Order 88-61), § 173-309-090, filed 8/5/88.]

Chapter 173-310 WAC LITTER RECEPTACLES

WAC

173-310-010	Purpose.
173-310-020	Definitions.
173-310-030	Responsibility to procure and place litter receptacle.
173-310-040	Litter receptacles, where required.
173-310-050	Number of litter receptacles required.
173-310-060	Minimum standards.
173-310-070	Anti-litter symbol.
173-310-080	Prohibited acts.
173-310-090	Penalties.
173-310-100	Effective date and compliance.
173-310-990	Appendix A—Anti-litter symbol.

WAC 173-310-010 Purpose. By the provisions of chapter 70.93 RCW, the department of ecology has been delegated authority to conduct a permanent and continuous program to control and remove litter from this state to the maximum practical extent possible. The purpose of this

chapter is to provide minimum standards for litter receptacles and to prescribe the use, placement and distribution of litter receptacles throughout the state, pursuant to the authority set forth in RCW 70.93.040 and 70.93.090.

[Order 72-10, § 173-310-010, filed 5/15/72, effective 9/1/72.]

WAC 173-310-020 Definitions. The following words and phrases as used herein shall have the following meanings, unless context clearly dictates otherwise:

(1) "Anti-litter symbol" means the standard symbol adopted herein by the department.

(2) "Department" means the Washington state department of ecology.

(3) "Litter" means all waste materials including, but not limited to, disposable packages or containers susceptible to being dropped, deposited, discarded or otherwise disposed of upon any property in the state, but not including the wastes of primary processes of mining, logging, sawmilling, farming or manufacturing.

(4) "Litter receptacle" means containers for the disposal of litter of not more than 60-gallon capacity: *Provided*, That special containers of larger capacity such as those referred to as "dumpsters," and garbage containers or other waste containers serving single or multifamily residences are not included within this definition and their use is in no way regulated or affected by this chapter.

(5) "Person" shall mean any industry, public or private corporation, copartnership, association, firm, individual, or other entity whatsoever.

(6) "Public place" means any area that is used or held out for the use of the public whether owned and operated by public or private interests, but not including indoor areas. An indoor area shall be construed to mean any enclosed area covered with a roof and protected from moisture and wind.

[Order 72-10, § 173-310-020, filed 5/15/72, effective 9/1/72.]

WAC 173-310-030 Responsibility to procure and place litter receptacle. It shall be the responsibility of any person owning or operating any establishment or public place in which litter receptacles are required by this chapter to procure, place and maintain such receptacles at their own expense on the premises in accordance with the provisions of this chapter.

[Order 72-10, § 173-310-030, filed 5/15/72, effective 9/1/72.]

WAC 173-310-040 Litter receptacles, where required. Litter receptacles meeting the standards established by this chapter shall be placed in the following public places in the state:

- (1) Along public highways lying outside the limits of incorporated cities and towns;
- (2) Parks;
- (3) Campgrounds;
- (4) Trailer park facilities for transient habitation;
- (5) Drive-in restaurants;
- (6) Gasoline service stations;
- (7) Tavern parking lots;
- (8) Shopping centers;
- (9) Grocery store parking lots;
- (10) Marinas;

- (11) Boat launching areas;
- (12) Boat moorage and fueling stations;
- (13) Public and private piers
- (14) Beaches and bathing areas;
- (15) Outdoor parking lots, other than those specifically designated above, having a capacity of more than 50 automobiles;
- (16) Fairgrounds;
- (17) Schoolgrounds;
- (18) Racetracks;
- (19) Sporting event sites with seating capacity for more than 200 spectators;
- (20) Sites for carnivals, festivals, circuses, shows or events of any kind to which the public is invited;
- (21) Business district sidewalks.

Litter receptacles need be placed in the above public places only during times such places or events held at them are open to the public.

Placement of litter receptacles shall be in conformance with laws, ordinances, resolutions and regulations pertaining to fire, safety, public health or welfare.

[Order 73-7, § 173-310-040, filed 4/23/73; Order 72-10, § 173-310-040, filed 5/15/72, effective 9/1/72.]

WAC 173-310-050 Number of litter receptacles required. The minimum number of receptacles meeting the standards established by this chapter required in public places listed in the preceding section is as follows:

- (1) Along public highways lying outside the limits of incorporated cities and towns - one receptacle at each rest area, view point or similar turnout, officially designated as such by the primary jurisdictional authority;
- (2) Parks, campgrounds and trailer park facilities for transient habitation - one receptacle at each public restroom facility, and one receptacle at each established trailhead giving access by foot, motorcycle, bicycle or similar trail for excursion or exploration out of or away from the central activity area;
- (3) Gasoline service stations - one litter receptacle placed in plain view of each gasoline service island, with a minimum of one receptacle for each side of the station on which gasoline pumps are located.
- (4) Drive-in restaurants, tavern parking lots, shopping centers, grocery store parking lots and outdoor parking lots having a capacity of more than 50 automobiles - one receptacle, plus one additional receptacle for each 200 parking spaces in excess of 50 spaces;
- (5) Marinas, boat launching areas, boat moorage and fueling stations and public and private piers - one receptacle at each such area;
- (6) Beaches and bathing areas - one receptacle at each public restroom facility, and one receptacle at each access point officially designated as such by the primary jurisdictional authority;
- (7) Schoolgrounds - one receptacle at each schoolground bus loading zone officially designated as such by the primary jurisdictional authority;
- (8) Racetracks and sporting event sites with seating capacity for more than 200 spectators - one receptacle, plus one additional receptacle for each 1000 seating capacity in excess of 200.

(9) Fairgrounds and sites for carnivals, festivals, circuses, shows or events of any kind to which the public is invited - one receptacle at the entrance to each ride, and one receptacle at each end of walk-through exhibit buildings;

(10) Along the sidewalks of business districts of incorporated cities and towns - one receptacle per 800 feet of sidewalk curbing.

No variance from the provisions of this section shall be allowed except upon the express permission of the department of ecology.

Notwithstanding the minimum requirements of this section, any public place in which litter receptacles meeting the standards of this chapter are required that is found to have an accumulation of uncontained litter under circumstances that the person responsible for placing receptacles could have reasonably anticipated the litter shall be deemed to have an insufficient number of receptacles to be in compliance with this regulation.

[Order DE 76-34, § 173-310-050, filed 9/13/76; Order 73-7, § 173-310-050, filed 4/23/73; Order 72-10, § 173-310-050, filed 5/15/72, effective 9/1/72.]

WAC 173-310-060 Minimum standards. Litter receptacles procured and placed in public places as required by this chapter shall meet the following minimum standards:

- (1) General specifications.
 - (a) The body of each litter receptacle shall be constructed of a minimum of 24-gauge galvanized metal or other material of equivalent strength, that will with normal wear and tear, reasonably resist corrosion and acts of vandalism.
 - (b) All outside edges of each litter receptacle shall be rounded.
 - (c) Openings in covered litter receptacles shall be readily identifiable and readily accessible for the deposit of litter.
 - (d) Construction and general configuration of litter receptacles shall be in conformance with all pertinent laws, ordinances, resolutions or regulations pertaining to fire, safety, public health or welfare.
- (2) Color and marking.
 - (a) The entire outer surface of each litter receptacle shall be colored medium green conforming with Federal Color Standard No. 595A, Color No. 24424, or Color No. 34424.
 - (b) Each litter receptacle shall bear the official anti-litter symbol, as adopted herein. The symbol shall be colored deep blue conforming with Federal Color Standard No. 595A, Color No. 15180. The symbol shall not be distorted as to proportion and shall not be incorporated into a commercial advertisement on the receptacle. For litter receptacles along the right-of-way of public highways, the symbol shall be of a size so as to be distinguishable from a minimum distance of 75 feet.
 - (c) The words "**Deposit Litter**" shall be placed on the litter receptacle. Lettering used for these two words shall be block-type capital letters to be readily legible at a distance of 30 feet.
 - (d) No commercial advertisement shall be placed on any litter receptacle. However, the person owning any receptacle may place a single line on the receptacle identifying his ownership, and a single credit line designating any donor of the litter receptacle other than the owner may also be placed on the receptacle: *Provided*, That the lettering does not

exceed the size specified for the words "Deposit Litter," and does not interfere with or distract from the prominence of the anti-litter symbol.

(3) Maintenance. Compliance with these minimum standards shall include proper upkeep, maintenance and repair of litter receptacles sufficient to permit such receptacles to serve the functions for which they were designed and to prevent the appearance of such receptacles from becoming unsightly. Inadequately maintained or unsightly litter receptacles shall be in violation of these minimum standards.

(4) Wherever litter receptacles are placed in any public place other than where required by this chapter, such receptacles shall conform to the provisions of this chapter.

[Order 72-10, § 173-310-060, filed 5/15/72, effective 9/1/72.]

WAC 173-310-070 Anti-litter symbol. The official state anti-litter symbol shall be the symbol depicted in Appendix A to this chapter conforming to the Federal Color Standard No. 595A, Color No. 15180, which appendix is hereby incorporated into this chapter and made part hereof. Permission to use this symbol in the manner required by this chapter has been obtained from the copyright holder and any other use without the express permission of the copyright holder is prohibited.

[Order 72-10, § 173-310-070, filed 5/15/72, effective 9/1/72.]

WAC 173-310-080 Prohibited acts. (1) No person shall damage, deface, abuse or misuse any litter receptacle not owned by him so as to interfere with its proper function or to detract from its proper appearance.

(2) No person shall deposit leaves, clippings, prunings or gardening refuse in any litter receptacle.

(3) No person shall deposit household garbage in any litter receptacle: *Provided*, That this subsection shall not be construed to mean that wastes of food consumed on the premises at any public place may not be deposited in litter receptacles.

[Order 72-10, § 173-310-080, filed 5/15/72, effective 9/1/72.]

WAC 173-310-090 Penalties. Penalties for violation of this chapter shall be in accordance with chapter 70.93 RCW.

[Order 72-10, § 173-310-090, filed 5/15/72, effective 9/1/72.]

WAC 173-310-100 Effective date and compliance.

(1) This chapter shall become effective on September 1, 1972.

(2) All litter receptacles in any public place designated in this chapter which are placed after the effective date hereof shall conform to the provisions of this chapter.

(3) Litter receptacles in any public place designated in this chapter which were in place prior to the effective date hereof shall be modified to conform with marking requirements of this chapter [WAC 173-310-060 (2)(b)(c)] no later than January 1, 1973.

(4) All litter receptacles in any public place designated in this chapter shall be modified or replaced so as to fully conform with all requirements of this chapter no later than July 1, 1975.


(1992 Ed.)

[Order 72-10, § 173-310-100, filed 5/15/72, effective 9/1/72.]

Reviser's note: RCW 34.05.395 requires the use of underlining and deletion marks to indicate amendments to existing rules. The bracketed material in the above section does not appear to conform to this rule.

WAC 173-310-990 Appendix A—Anti-litter symbol.

Appendix A

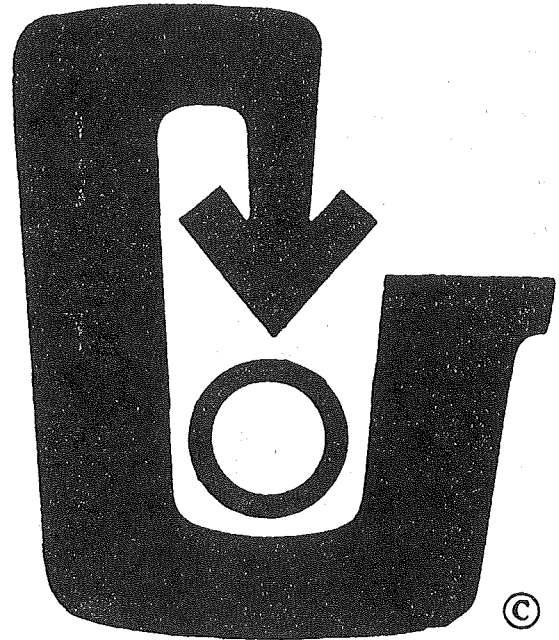

[Order 72-10, Appendix A (codified as WAC 173-310-990), filed 5/15/72, effective 9/1/72.]

Chapter 173-311 WAC MODERATE RISK WASTE GRANTS

WAC

173-311-010	Purpose and authority.
173-311-020	Definitions.
173-311-030	Relation to other legislation and administrative rules.
173-311-040	General.
173-311-050	Moderate risk waste grants.

WAC 173-311-010 Purpose and authority. The purpose of this chapter is to set forth eligibility criteria and requirements for the conduct of a financial assistance program to provide grants to local governments pursuant to section 19, chapter 114, Laws of 1990 (Engrossed Substitute House Bill No. 2390). The department shall provide grants to local governments for small quantity generator technical assistance and compliance education components of their local hazardous waste plans as required by RCW 70.105.220.

Note: Copies of all cited RCWs, WACs and guidelines are available at the Department of Ecology, Mailstop: PV-11, Olympia, Washington, 98504.

[Statutory Authority: RCW 43.21A.080, chapter 70.105D RCW and 1990 c 114 § 19. 90-18-066 (Order 90-22), § 173-311-010, filed 9/4/90, effective 10/5/90.]

[Title 173 WAC—p 683]

WAC 173-311-020 Definitions. (1) "Department" means the Washington state department of ecology.

(2) "Local government" means any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county.

(3) "Moderate risk waste" means:

(a) Any waste that exhibits any of the properties of hazardous waste but is exempt from regulation under chapter 70.105 RCW solely because the waste is generated in quantities below the threshold for regulation; and

(b) Any household wastes which are generated from the disposal of substances identified by the department as hazardous household substances.

[Statutory Authority: RCW 43.21A.080, chapter 70.105D RCW and 1990 c 114 § 19. 90-18-066 (Order 90-22), § 173-311-020, filed 9/4/90, effective 10/5/90.]

WAC 173-311-030 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous and solid waste management and disposal.

(2) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

(3) The obligation of the department to make grant payments is contingent upon the availability of funds through allotment or appropriation, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums, the obligation of the department is contingent upon the allotment of funds during the next biennium.

[Statutory Authority: RCW 43.21A.080, chapter 70.105D RCW and 1990 c 114 § 19. 90-18-066 (Order 90-22), § 173-311-030, filed 9/4/90, effective 10/5/90.]

WAC 173-311-040 General. (1) The department shall consider the following factors in calculating grant allocations:

(a) Revenue collections;

(b) The number of businesses that are subject to the fee imposed in section 12 of ESHB 2390;

(c) The needs of local governments to carry out the small quantity generator technical assistance and compliance education components of their local hazardous waste plans as required by RCW 70.105.220.

(2) No costs incurred prior to the effective date of the grant are eligible unless specific provision is made in the grant agreement for such costs.

(3) The department shall develop guidelines to assist in interpreting the provisions of this chapter.

[Statutory Authority: RCW 43.21A.080, chapter 70.105D RCW and 1990 c 114 § 19. 90-18-066 (Order 90-22), § 173-311-040, filed 9/4/90, effective 10/5/90.]

WAC 173-311-050 Moderate risk waste grants. (1) An applicant must be a local government.

(2) Grant awards will be subject to the completeness of the application and the technical adequacy of the project.

(3) Eligible projects must be part of a department approved local hazardous waste plan as required by RCW 70.105.220.

(4) Eligible project costs include those necessary for a local government to provide a small quantity generator technical assistance and compliance education program as defined in a department-approved local hazardous waste plan.

(5) Grants will be made for up to seventy-five percent of the total eligible project costs.

[Statutory Authority: RCW 43.21A.080, chapter 70.105D RCW and 1990 c 114 § 19. 90-18-066 (Order 90-22), § 173-311-050, filed 9/4/90, effective 10/5/90.]

Chapter 173-312 WAC COORDINATED PREVENTION GRANTS

WAC

173-312-010	Purpose and authority.
173-312-020	Definitions.
173-312-030	Relation to other legislation and administrative rules.
173-312-040	Applicant eligibility.
173-312-050	Project eligibility.
173-312-060	Application process.
173-312-070	Application evaluation.
173-312-080	Allocation of grant funding.
173-312-090	State assistance share and local cash match.
173-312-100	Grant administration.

WAC 173-312-010 Purpose and authority. (1) The purpose of this chapter is to set forth requirements for the conduct of a financial assistance program to provide grants to local governments for local hazardous waste plans and programs and solid waste plans and programs, pursuant to the Model Toxics Control Act, RCW 70.105D.070(3). The plans and programs referenced in RCW 70.105D.070(3) are designed to prevent or minimize environmental contamination. Therefore, the grants are designated "coordinated prevention grants" under this chapter.

(2) A further purpose of this chapter is to establish a structure for the administration of coordinated prevention grants funded from the local toxics control account authorized by RCW 82.21.030. The administrative structure may be extended to other waste management grant programs using other funding sources including the 1972 waste disposal facilities bonds authorized by chapter 43.83A RCW, the 1980 waste disposal facilities bonds authorized by chapter 43.99 RCW, the litter control account authorized by chapter 70.93 RCW, the vehicle tire recycling account authorized by chapter 70.95 RCW, the solid waste management account authorized by chapter 70.95 RCW, the hazardous waste assistance account authorized by chapter 70.95E RCW, and other waste management funding sources that may be established in the future by the legislature.

(3) The purposes of the coordinated prevention grants program are to:

(a) Consolidate all grant programs funded from the local toxics control account, and such other programs in subsection (2) of this section as may be selected, into a single program, except for remedial action, public participation, and citizen proponent negotiations grants.

(b) Promote regional solutions and intergovernmental cooperation.

(c) Prevent or minimize environmental contamination by providing financial assistance to local governments to help them comply with state solid and hazardous waste laws and regulations.

(d) Provide funding assistance for local solid and hazardous waste planning and for implementation of some programs and projects in those plans.

(e) Encourage local responsibility for solid and hazardous waste management.

(f) Improve efficiency, consistency, reliability, and accountability of grant administration.

Note: Copies of all cited statutes, rules, and guidelines are available at the Department of Ecology, Mailstop: PV-11, Olympia, Washington 98504.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-010, filed 5/21/91, effective 6/21/91. Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-312-010, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220 and 70.95.220. 88-17-001 (Order 88-26), § 173-312-010, filed 8/4/88.]

WAC 173-312-020 Definitions. "Cash expenditure" means any cash outlay by the recipient, regardless of the source of funds, for direct costs of goods and/or services; salaries and benefits of recipient employees, including force account; overhead cash; and payments made to contractors.

"Class one areas" means the counties of Spokane, Snohomish, King, Pierce, and Kitsap and all the cities therein.

"Class two areas" means the counties located west of the crest of the Cascade Mountains and all the cities therein, except Snohomish, King, Pierce, and Kitsap counties.

"Class three areas" means the counties east of the crest of the Cascade Mountains and all the cities therein, except Spokane County.

"Department" means the department of ecology.

"Grant" means the portion of the project costs borne by the department.

"In-kind contributions" are property or services that benefit a project and that are contributed by a third party, without direct monetary compensation, to the recipient (or to any contractor under the agreement). In-kind contributions include donated or loaned real or personal property, volunteer services, and employee services donated by a third party.

"Incineration" means a process of reducing the volume of solid waste by use of an enclosed device using controlled flame combustion, operating under federal and state environmental laws and regulations.

"Interlocal costs" are in-kind contributions made to a project by another local government pursuant to a valid written agreement between the recipient and the other government which details the work to be accomplished, the goods and services to be provided, and the value thereof. If the recipient reimburses another governmental entity for any portion of its contributions, the amount paid to the other entity is not an interlocal cost. It is a cash expenditure on the part of the recipient. Only the nonreimbursed portion of the other governmental entity's contributions is an interlocal cost.

"Landfill" means a disposal facility or part of a facility at which solid waste is permanently placed in or on land and which is not a landspreading disposal facility.

"Lead implementation agency" means the agency designated in the adopted local solid or hazardous waste plan as having the principal responsibility for the execution of all or most of the plan, and/or the coordinating agency which delegates responsibility to other agencies to execute portions of the plan.

"Local government" means any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county.

"Local hazardous waste plan" means the plan to manage moderate-risk waste that a local government is required to prepare pursuant to RCW 70.105.220.

"Match" means that portion of the cash expenditures borne by recipient funds and interlocal costs.

"Moderate-risk waste" means (a) any waste that exhibits any of the properties of hazardous waste but is exempt from regulation under chapter 70.105 RCW solely because the waste is generated in quantities below the threshold for regulation, and (b) any household wastes which are generated from the disposal of substances identified by the department as hazardous household substances or substances that exhibit any of the properties of hazardous waste.

"Recipient" means the entity to which the funding is awarded and which is accountable for the use of the funds provided. The recipient is the entire legal entity even if only one component or department is designated in the agreement document.

"Recyclable materials" means those solid wastes separated for recycling or reuse, such as papers, metals and glass, that are identified as recyclable material pursuant to a local comprehensive solid waste plan.

"Recycling" means transforming or remanufacturing waste materials into usable or marketable materials for use other than landfill disposal or incineration.

"Solid waste" or "wastes" means all putrescible and nonputrescible solid and semisolid wastes including, but not limited to, garbage, rubbish, ashes, industrial wastes, swill, demolition and construction wastes, abandoned vehicles or parts thereof, and recyclable materials.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-020, filed 5/21/91, effective 6/21/91. Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-312-020, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220 and 70.95.220. 88-17-001 (Order 88-26), § 173-312-020, filed 8/4/88.]

WAC 173-312-030 Relation to other legislation and administrative rules. (1) This rule shall, together with chapters 173-322 and 173-321 WAC, and WAC 173-303-902, fulfill the requirement for rule making set forth in RCW 70.105D.070(7).

(2) The local government receiving a grant shall comply fully with all applicable federal, state, and local laws, orders, regulations, and permits.

(3) Grants will be awarded within the limits of available funds. The obligation of the department to make grant payments is contingent upon the availability of funds through

legislative appropriation and allotment, and such other conditions not reasonably foreseeable by the department which may render performance impossible.

(4) Nothing in this chapter shall influence, affect, or modify existing department programs, regulations, or enforcement of applicable laws relating to solid and hazardous waste management and cleanup.

(5) All grants shall be subject to existing applicable accounting and auditing requirements of state laws and regulations.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-030, filed 5/21/91, effective 6/21/91. Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-312-030, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220 and 70.95.220. 88-17-001 (Order 88-26), § 173-312-030, filed 8/4/88.]

WAC 173-312-040 Applicant eligibility. (1) Eligibility for solid waste planning grants. Counties that are required by chapter 70.95 RCW to adopt or update local solid waste plans, are eligible to apply for coordinated prevention grants to help pay for such plans. This eligibility extends to cities that have submitted an independent city plan, a joint city plan, or joint city-county plan to the department by the effective date of this rule. This eligibility also extends to any city subsequently requesting funding for the preparation of an independent plan, if such city provides for disposal sites wholly within its jurisdiction.

(2) Eligibility for solid waste enforcement grants. Jurisdictional health departments/districts are eligible to apply for coordinated prevention grants to pay for the enforcement of rules and regulations promulgated under chapter 70.95 RCW.

(3) Eligibility for solid waste implementation grants. Counties whose solid waste plans are adopted, approved, and updated by the department as required by chapter 70.95 RCW are eligible to apply for coordinated prevention grants to help pay for the implementation of projects in the most recently approved and adopted plan, provided that such projects are eligible as defined in WAC 173-312-050. This eligibility also extends to cities that are eligible for funding to do local solid waste plans or updates as provided by subsection (1) of this section.

If such adopted plans designate lead implementation agencies to implement the plans, such agencies are also eligible to apply for coordinated prevention grants.

Solid waste plan updates must be submitted to the department no later than July 1, 1991, for class one areas; July 1, 1992, for class two areas; and July 1, 1994, for class three areas; unless an extension is granted by the department. Local governments that do not comply will not be eligible for coordinated prevention grant funding for solid waste project implementation until the required plan updates are submitted to the department.

(4) Eligibility for hazardous waste planning grants. Local governments that are required by chapter 70.105 RCW to adopt or update local hazardous waste plans are eligible to apply for coordinated prevention grants to help pay for such plans.

(5) Eligibility for hazardous waste plan implementation grants. Local governments with department-approved local hazardous waste plans as required by chapter 70.105 RCW

are eligible to apply for coordinated prevention grants to help pay for the implementation of projects in the plan. If such plans designate lead implementation agencies to implement the plans, such agencies are also eligible to apply for coordinated prevention grants.

(6) Any grant-eligible entities as defined in this section may submit their requests in a unified application as described in WAC 173-312-060 (4)(a), or may submit separate applications in a package application as provided in WAC 173-312-060 (4)(b).

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-040, filed 5/21/91, effective 6/21/91. Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-064 (Order 90-17), § 173-312-040, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220 and 70.95.220. 88-17-001 (Order 88-26), § 173-312-040, filed 8/4/88.]

WAC 173-312-050 Project eligibility. (1) Eligible project costs are those costs that are necessary and reasonable to fund required local planning and the implementation of some projects and programs contained in those plans, including innovative approaches implementing policies of the plan. These are:

(a) Local hazardous waste planning as required by chapter 70.105 RCW.

(b) Local solid waste planning as required by chapter 70.95 RCW.

(c) Local hazardous waste plan implementation projects.

(d) Local solid waste enforcement by the jurisdictional health departments/districts.

(e) Local solid waste plan implementation projects, which are limited to:

(i) Projects that implement the requirements of chapter 173-304 WAC for closure of publicly-owned municipal solid waste landfills will be eligible for grant funding provided all of the following criteria are met:

(A) The jurisdictional health department/district has required the landfill to reach postclosure no later than September 30, 1995;

(B) Financial assurance accounts for closure and postclosure have been established and maintained as required by chapter 173-304 WAC for landfills closed after November 27, 1989;

(C) The landfill has an approved closure plan as required by chapter 173-304 WAC;

(D) Local governments that have disposed of significant quantities of waste at the landfill make reasonable financial contribution to the costs of closure and postclosure; and

(E) The landfill is not eligible for remedial action grants under chapter 173-322 WAC or identified by the department as potentially requiring remedial action.

The total amount expended from the local toxics control account for solid waste landfill closure shall not exceed fifteen million dollars and no funds shall be expended for this purpose after December 31, 1995. No single landfill closure project shall be eligible for more than five hundred thousand dollars from the local toxics control account.

(ii) Ground water monitoring well projects to meet the requirements of WAC 173-304-490.

(iii) Waste reduction and recycling projects and programs.

(2) Eligible project costs do not include:

(a) Solid waste incinerator feasibility studies, construction, maintenance, or operation.

(b) Landfill closure as required by chapter 173-304 WAC, except for ground water monitoring wells or projects which meet the requirements of subsection (1)(e)(i) of this section.

(c) New landfill construction or landfill expansion, or landfill upgrading at an operating facility to meet the requirements of chapter 173-304 WAC.

(d) Garbage collection and disposal, except start-up costs for waste reduction and recycling programs.

(e) Solid and hazardous waste expenses not directly related to compliance with state solid and hazardous waste laws and regulations.

[Statutory Authority: RCW 43.21A.080, 91-11-090 (Order 90-65), § 173-312-050, filed 5/21/91, effective 6/21/91. Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW, 90-18-064 (Order 90-17), § 173-312-050, filed 9/4/90, effective 10/5/90. Statutory Authority: RCW 70.105B.220 and 70.95.220, 88-17-001 (Order 88-26), § 173-312-050, filed 8/4/88.]

WAC 173-312-060 Application process. (1) The department shall set forth in its grant guidelines the base funding levels estimated to be available for each county for coordinated prevention grants and the process by which applications will be submitted.

(2) The application shall be submitted by the county agency or department having responsibility for solid waste, unless the county executive department shall select another agency or department to submit the application.

(3) Coordinated prevention grant applications must:

(a) Include a commitment by the applicant(s) to use local funds to match grant funds according to the requirements of WAC 173-312-090.

(b) Be for eligible projects as defined in WAC 173-312-050.

(c) Include a scope of work that is sufficiently detailed for the department to monitor grant performance.

(d) Include documentation that all cities in the county and lead implementation agencies which have approved the adopted local hazardous waste plan or solid waste plan have had the opportunity to request that projects that meet the requirements of WAC 173-312-050 be included in the application.

(4) To obtain coordinated prevention grant funding, a county shall submit either a unified application or a package application, as defined herein:

(a) A unified grant application means that the county, the health department/district and any other grant eligible entities as defined in WAC 173-312-040 have reached agreement regarding the requested projects and funding allocations for both local solid and local hazardous waste plans and projects. The submittal will consist of a single county application with specific projects identified to be executed by the county and other local governments. Unified applications will receive financial incentives for administrative coordination set forth in WAC 173-312-090.

The unified application shall include a maximum grant request for no more than the base funding level for the county, plus the selected financial incentive.

The application shall be signed, indicating approval by responsible officials from the county, local health depart-

ment/district and any other grant-eligible entities as defined in WAC 173-312-040.

(b) A package application means that the county, the local health department/district and any other grant-eligible entities as defined in WAC 173-312-040 have not reached agreement regarding the requested projects and funding allocations, or choose to submit individual applications. The maximum grant request may exceed the base funding level. A package application is not eligible for the financial incentives for administrative coordination set forth in WAC 173-312-090. A package application must be submitted by the county. A package application may consist of individual signed applications from the county, the health department/district and other grant-eligible entities as defined in WAC 173-312-040; requests from other cities will be submitted as part of the county application.

[Statutory Authority: RCW 43.21A.080, 91-11-090 (Order 90-65), § 173-312-060, filed 5/21/91, effective 6/21/91.]

WAC 173-312-070 Application evaluation. (1) In evaluating coordinated prevention grant applications, the department may require that funding of certain projects take precedence over other projects. The department will refer to the following priority order in evaluating projects:

(a) Required hazardous waste planning under chapter 70.105 RCW and required solid waste planning under chapter 70.95 RCW.

(b) Programs and projects to implement adopted local hazardous waste plans, including waste reduction and recycling.

(c) Solid waste enforcement programs.

(d) Programs and projects to implement adopted local solid waste plans, including waste reduction and recycling, ground water monitoring wells meeting the requirements of WAC 173-304-490, and publicly owned municipal solid waste landfill closure meeting the requirements of WAC 173-312-050 (1)(e)(i).

(2) The department will evaluate each application according to the extent to which it:

(a) Conforms to the adopted local hazardous waste and solid waste plans.

(b) Advances regional solutions and intergovernmental cooperation.

(c) Supports the state's goal to achieve a fifty percent recycling rate by 1995.

(d) Confers broad benefit on residents of the county, whether they reside in incorporated areas or unincorporated areas.

(e) Meets the needs of local government for projects that prevent environmental contamination from solid and hazardous waste.

(f) Uses the state's resources efficiently.

(g) For solid waste enforcement funding, takes into account the number of disposal sites and the geographic area requiring enforcement activity.

(3) The department may fund all or portions of a coordinated prevention grant application.

(4) The department may award grants to any local government in order to execute all or portions of a coordinated prevention grant program.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-070, filed 5/21/91, effective 6/21/91.]

WAC 173-312-080 Allocation of grant funding. (1) The department shall consider the following factors in calculating base funding levels, supplemental grant levels, and maximum grant amounts for recipients:

(a) Projected and actual revenue to the local toxics control account, and other funding sources cited in WAC 173-312-010(2), as determined by the department.

(b) The number of people served by a local government.

(2) Grants that may be awarded to eligible cities pursuant to WAC 173-312-040 may not exceed a city's proportionate share, based on population, of a county's base funding level as defined in subsection (3)(a) of this section, unless the department, the county, the health department/district and the grant-eligible entities as defined in WAC 173-312-040 agree otherwise.

(3) Projected revenues to the local toxics control account that are available each biennium for coordinated prevention grant purposes shall be divided into two portions. After administrative costs have been deducted, allocations will be calculated as follows:

(a) The base funding level shall be calculated for each county by means of a formula which shall consist of two elements:

(i) A fixed amount for each county, regardless of size; and

(ii) A per capita amount based on county population size as determined by the United States census data or by the official estimates of the state office of financial management.

(b) The smaller portion, as well as unused funds in (a) of this subsection, shall become supplemental funds and shall be used for the following purposes:

(i) Financial incentives to local governments for administrative centralization and efficiency;

(ii) Remedial action grants issued pursuant to chapter 173-322 WAC, if the need exceeds administrative allocations;

(iii) Landfill closure projects meeting the requirements of WAC 173-312-050 (1)(e)(i);

(iv) Reserve funds for grants to deal with unanticipated or immediate threats to human health and the environment; and

(v) Supplemental grants, to be awarded based on the criteria set forth in WAC 173-312-070(2).

(4) Applicants must meet the requirements of this chapter to the satisfaction of the department in order to secure grant awards.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-080, filed 5/21/91, effective 6/21/91.]

WAC 173-312-090 State assistance share and local cash match. (1) Costs eligible under WAC 173-312-050 will be considered for grant funding of up to sixty percent. At least forty percent of eligible costs must be provided as local cash match. Counties which submit unified applications as defined in WAC 173-312-060 (4)(a) either will be considered for grant funding of up to sixty-five percent, provided that at least thirty-five percent of eligible costs is

provided as local cash match, or will be eligible for a grant amount level ten percent greater than the base funding level.

(2) Counties, and grant-eligible jurisdictions within such counties, that are determined to be economically disadvantaged will be eligible for an increased state share and a reduced local cash match. For projects proposed by such jurisdictions, costs eligible under WAC 173-312-050 will be considered for grant funding of up to seventy-five percent. At least twenty-five percent of eligible costs must be provided as local cash match.

Economically disadvantaged counties that submit unified grant applications as defined in WAC 173-312-060 (4)(a) will be eligible for a grant amount ten percent greater than the base funding level.

(3) A county is considered economically disadvantaged if it meets both of the following criteria:

(a) Per capita income, as measured by the latest official estimate of the state office of financial management, is in the lower twenty counties in the state; and

(b) Economic distress exists as defined by chapter 43.165 RCW.

(4) The department will include a list of economically disadvantaged counties as defined in this section in the guidelines for coordinated prevention grants.

(5) Local cash match may be met by cash expenditures and interlocal costs. Interlocal costs are the only type of in-kind contributions that may be used for local cash match.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-090, filed 5/21/91, effective 6/21/91.]

WAC 173-312-100 Grant administration. (1) The department shall prepare guidelines to facilitate compliance with and interpretation of this rule.

(2) The coordinated prevention grants shall operate on a biennial funding cycle. Such cycle will consist of:

(a) A base grant phase, during which eligible applicant governments apply for grant funds up to the base funding level set forth in WAC 173-312-080 (3)(a) plus the selected administrative incentives; and

(b) A supplemental grant phase, during which grant recipients request grant amendments including supplemental funding requests for additional funds to assist ongoing or new projects. The supplemental grant phase will be contingent on the availability of funds to the local toxics control account.

(3) The department will obligate coordinated prevention grant funds to a recipient for a maximum period of two years. If the recipient has not accomplished the scope of work in the time period set forth in the agreement, the recipient must use a portion of its next biennial base funding level to complete the project(s).

(4) No costs incurred prior to the effective date of a grant agreement are eligible unless specific provision is made in the grant agreement for such costs.

[Statutory Authority: RCW 43.21A.080. 91-11-090 (Order 90-65), § 173-312-100, filed 5/21/91, effective 6/21/91.]

Chapter 173-313 WAC

LOCAL SOLID WASTE ENFORCEMENT GRANT
REGULATION

WAC

173-313-010	Introduction.
173-313-020	Purpose and authority.
173-313-030	Applicant eligibility.
173-313-040	Application.
173-313-050	Criteria for allocation of funds.

WAC 173-313-010 Introduction. RCW 70.95.220 provides that any jurisdictional health department may apply to the department of ecology for financial aid for the enforcement of rules and regulations promulgated under chapter 70.95 RCW. RCW 70.95.220 further provides that after receipt of such applications, the department may allocate available funds according to criteria established by regulation. Such criteria shall consider or be based upon population, urban development, the number of disposal sites, and geographical area.

[Statutory Authority: RCW 70.95.220 and 1989 c 2. 89-17-073 (Order 89-12), § 173-313-010, filed 8/17/89, effective 9/17/89.]

WAC 173-313-020 Purpose and authority. The purpose of this regulation is to establish criteria by which the department of ecology shall allocate financial aid, pursuant to the Model Toxics Control Act, to jurisdictional health departments for enforcement of rules and regulations promulgated under chapter 70.95 RCW.

[Statutory Authority: RCW 70.95.220 and 1989 c 2. 89-17-073 (Order 89-12), § 173-313-020, filed 8/17/89, effective 9/17/89.]

WAC 173-313-030 Applicant eligibility. In order to be eligible for grant funding, the local health department must:

- (1) Be a "jurisdictional health department" as defined by RCW 70.95.030;
- (2) Have a program to achieve the goals of chapter 70.95 RCW;
- (3) Have a solid waste ordinance per chapter 70.95 RCW, or be in the process of adoption.

[Statutory Authority: RCW 70.95.220 and 1989 c 2. 89-17-073 (Order 89-12), § 173-313-030, filed 8/17/89, effective 9/17/89.]

WAC 173-313-040 Application. Application for funds shall be made on forms provided by the department and shall include detailed information specified in a guidance document also provided by the department. This detailed information shall include a confirmation of the applicant's eligibility, and a description of the program and budget.

[Statutory Authority: RCW 70.95.220 and 1989 c 2. 89-17-073 (Order 89-12), § 173-313-040, filed 8/17/89, effective 9/17/89.]

WAC 173-313-050 Criteria for allocation of funds. As specified in RCW 70.95.220, first priority will be to provide funds exclusively for solid waste inspection activities, including staff for administration of the local inspection program. The following criteria will be used to assist in the allocation of those funds:

- (1) Protection of public health and environment.

(2) Cost to residential ratepayers without state assistance.

(3) Actions required under federal, state and local regulations, and consent decrees.

(4) Commitment/readiness to proceed.

(5) Degree of local solid waste problems, as measured by these factors:

(a) Number of existing disposal sites, open and closed;

(b) Environmental sensitivity of the geographical area;

(c) Disposal sites and other waste management facilities, open and closed;

(d) Current enforcement actions;

(e) Extent of urban development and its relationship to industrial, commercial, and residential development; and

(f) Population.

[Statutory Authority: RCW 70.95.220 and 1989 c 2. 89-17-073 (Order 89-12), § 173-313-050, filed 8/17/89, effective 9/17/89.]

Chapter 173-314 WAC

WASTE TIRE CARRIER AND STORAGE SITE
LICENSES

WAC

173-314-010	Authority and purpose.
173-314-100	Definitions.
173-314-200	Waste tire carrier license.
173-314-210	Enforcement for waste tire carriers.
173-314-220	Storage, disposal, and utilization.
173-314-300	Waste tire storage site license.
173-314-310	Variations.
173-314-320	Enforcement for waste tire storage sites.
173-314-330	Records.
173-314-340	Reports.

WAC 173-314-010 Authority and purpose. By the provision of RCW 70.95.555 and 70.95.263, the department of ecology has been delegated authority to conduct a licensing program for waste tire carriers and storage site owners. The purpose of this chapter is to provide minimum standards for waste tire carriers and site owners that will result in the safe and proper storage, control, recovery, and recycling of tires throughout the state.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-010, filed 1/13/89.]

WAC 173-314-100 Definitions. The following words, terms, and phrases shall, for the purposes of this chapter, have the meanings given below:

(1) "Cab cards" means a license carried in a vehicle that authorizes that vehicle to legally pick up waste tires and haul to a permitted, licensed facility or an exempt facility for deposit.

(2) "Commission" means the Washington utilities and transportation commission.

(3) "County permit" means a permit issued by a local health district that allows for storage of waste tires at a place of business that does not constitute final disposal of the waste tires.

(4) "Department of licensing" means the Washington state department of licensing.

(5) "Director" means the director of the department of ecology.

(6) "Disposal site" means the location where any final treatment, utilization, processing, or depository of solid waste occurs.

(7) "Dispose" means to deposit, dump, spill, or place any waste tire onto or under the surface of the ground or into the waters of this state.

(8) "Ecology" means the Washington state department of ecology.

(9) "Financial assurance" means a performance bond, a letter of credit, cash deposit, or insurance policy in favor of the state of Washington.

(10) "Landfill" means a disposal facility or part of a facility at which waste is placed in or on land and which is not a land treatment facility.

(11) "License" means the license issued by the department of licensing and approved by ecology as authorized by RCW 70.95.555 for any person engaged in the business of transporting or storing waste tires.

(12) "Person" means any individual, firm, association, copartnership, political subdivision, government agency, municipality, industry or private corporation, or any other entity whatever.

(13) "Retreader" means a person engaged in the business of recapping tire casings to produce recapped tires for sale to the public.

(14) "Solid waste" means all putrescible and nonputrescible solid and semisolid wastes, including, but not limited to, garbage, rubbish, ashes, industrial wastes, swill, demolition and construction wastes, abandoned vehicles or parts thereof, and discarded commodities.

(15) "Solid waste handling" means the management, storage, collection, transportation, treatment, utilization, processing, and final disposal of solid wastes, including the recovery and recycling of materials from solid wastes, the recovery of energy resources from such wastes, or the conversion of the energy in such wastes to more useful forms or combinations thereof.

(16) "State" means the state of Washington.

(17) "Storage" or "storing" means the placing of waste tires at a county permitted facility under conditions established in WAC 173-304-420 and chapter 70.95 RCW.

(18) The terms "motor vehicle," "public highway," "common carrier," "contract carrier," "private carrier," and "garbage and refuse collection companies" shall have the meaning when used herein given to them by section 2, chapter 295, Laws of 1961, and by chapter 105, Laws of 1965 ex. sess.

(19) "Tire" means a continuous solid, semipneumatic, or pneumatic rubber covering encircling the wheel of a vehicle.

(20) "Tire derived products" means any usable materials with a market value produced from the physical processing of tires.

(21) "Tire retailer" means a person in the business of selling new replacement tires.

(22) "Transportation" or "transporting" means picking up or transporting waste tires for the purpose of storage or final disposal.

(23) "Unified business identifier service locations" means:

(a) The field offices of the departments of revenue and labor and industries.

(b) The tax offices of employment security.

(c) The Olympia office of the secretary of state.

(d) The business license service office of the department of licensing.

(24) "Vehicle" means every device capable of being moved under its own power upon a public highway and in, upon, or by which any person or property is or may be transported or drawn upon a public highway, except devices moved by human or animal power or used exclusively upon stationary rails or tracks.

(25) "Waste tires" means tires that are no longer suitable for their original intended purpose because of wear, damage, or defect.

(26) "Waste tire carrier" means a person who picks up or transports waste tires for the purpose of storage or disposal. This does not include the following:

(a) Any person transporting five tires or less.

(b) Any person transporting tire-derived products.

(c) Any person transporting used tires back to a retail tire outlet for repair or exchange.

(d) Any person regulated by the utilities and transportation commission.

(e) Solid waste collectors operating under a license or franchise from any local government unit and transporting tires as part of solid waste handling activities.

(f) The United States, the state of Washington, any county, city, town, or municipality in this state, when involved in the clean up of illegal waste tire piles.

(g) Tire retailers associated with retreading facilities who use company-owned vehicles to transport waste tires for the purpose of retreading.

(27) "Waste tire storage site owner" means any person that owns a waste tire facility with a county solid waste permit.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-100, filed 1/13/89.]

WAC 173-314-200 Waste tire carrier license. (1) Applicability. All waste tire carriers are required to obtain a waste tire carrier license from the department of licensing.

(2) After April 1, 1989, all waste tire carriers must obtain a waste tire carrier license from the department of licensing. The department of licensing will process and issue licenses as quickly as possible after receiving a completed application.

(3) Application forms for a waste tire carrier license will be available at unified business identifier service locations located throughout the state.

(4) An application for a waste tire carrier license and a cab card for one vehicle shall include a two hundred fifty dollar application fee, fifty dollars of which shall be nonrefundable. Each additional vehicle cab card to be used by the licensee requires an additional fifty dollar fee. The application fee may be refunded following submittal of an application under the following conditions.

(a) Ecology determination that a license is not required.

(b) The applicant withdraws the application before ecology has approved or denied the application.

(5) The application shall include a bond in the sum of ten thousand dollars in favor of the state of Washington, or other financial assurance.

(6) A waste tire carrier license shall be valid for one year from the time of application. Licensees who want to renew their licenses will be notified forty-five days prior to their expiration date in order to maintain a current license.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-200, filed 1/13/89.]

WAC 173-314-210 Enforcement for waste tire carriers. (1) All waste tire carriers shall be subject to penalties as described in RCW 70.95.560 and 9A.20.010(2). Furthermore, any person who transports waste tires without a license is in violation of WAC 173-314-200(2) and RCW 9A.20.020(2).

(2) Any violation of the prescribed waste tire carrier license rules may result in revocation of the license under rules defined by RCW 70.95.560 and 9A.20.020(2) or any other enforcement action provided by law. Each day that a violation occurs is a separate violation and may be the subject of separate penalties.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-210, filed 1/13/89.]

WAC 173-314-220 Storage, disposal, and utilization. After April 1, 1989, all waste tires that are being transported by a waste tire carrier must be deposited in one of the following locations:

(1) A business that is actively retreading or recycling tires and if required under conditions set forth in WAC 173-304-420 has a county tire storage permit.

(2) Any business that has an outside storage of less than the maximum number of tires allowed in accordance with WAC 173-304-420.

(3) A county permitted waste tire storage facility that has an ecology-approved waste tire storage site owner's license.

(4) A site that has been declared exempt by local health departments and ecology under WAC 173-314-310.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-220, filed 1/13/89.]

WAC 173-314-300 Waste tire storage site license.

(1) Applicability. After April 1, 1989, any person in the business of storing waste tires in accordance with WAC 173-304-420 is required to have an ecology-approved waste tire storage site owner's license for that site issued by the department of licensing.

(2) All owners of county permitted waste tire storage sites shall apply to the department of licensing for a waste tire storage site owner's license. Licenses will be issued within ninety days of acceptance of a complete application following review and approval by ecology.

(3) Application forms for a waste tire storage site license will be available from unified business identifier service locations located throughout the state.

(4) Submit an application fee of two hundred fifty dollars. Fifty dollars of the application fee shall be nonrefundable. The remainder of the application fee may be refunded if either of the following conditions exists:

(a) Ecology determines that no license will be required.

(b) The applicant withdraws the application before ecology has approved or denied the application.

(1992 Ed.)

(5) The application shall include a performance bond in the sum of ten thousand dollars in favor of the state of Washington, or other financial assurance.

(6) A waste tire storage site license shall be valid for one year from the date of approval. The license holder shall have the option to renew annually. Licensees who want to renew their licenses will be sent a renewal notice forty-five days prior to the expiration date.

(7) In order to obtain a waste tire storage license, the site operator or owner must first satisfy the following requirements:

(a) Obtain a solid waste disposal site permit for the storage of waste tires from the jurisdictional health department of the county in which the site is located.

(b) Satisfy all of the requirements of the minimum functional standards for tire pile storage sites (WAC 173-304-420).

(c) Satisfy other requirements deemed appropriate by ecology.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-300, filed 1/13/89.]

WAC 173-314-310 Variances. (1) Any person who owns or operates a waste tire storage facility may apply to the jurisdictional health officer for a variance from WAC 173-304-420. The application shall be accompanied by such information as the jurisdictional health department may require. The jurisdictional health department may grant such variance, but only after due notice or a public hearing if requested, if it finds that:

(a) The waste tire handling practices or location do not endanger public health, safety, or the environment; and

(b) Compliance with the regulation from which variance is sought would produce hardship without equal or greater benefits to the public.

(2) No variance shall be granted pursuant to this section until the jurisdictional health department has considered the relative interests of the applicant, other owners of property likely to be affected by the handling practices and the general public.

(3) Any variance or renewal shall be granted within the requirements of subsection (1) of this section and for time periods and conditions consistent with the reasons therefore, and within the following limitations:

(a) If the variance is granted on the ground that there is no practicable means known or available for the adequate prevention, abatement, or control of pollution involved, it shall be only until the necessary means for prevention, abatement, or control become known and available and subject to the taking of any substitute or alternative measures that the jurisdictional health department may prescribe;

(b) The jurisdictional health department may grant a variance conditioned by a time table if:

(i) Compliance with the regulation will require spreading of costs over a considerable time period; and

(ii) The time table is for a period that is needed to comply with WAC 173-304-420.

(4) Any variance granted pursuant to this section may be renewed on terms and conditions and for periods which would be appropriate on initial granting of a variance. No renewal thereof shall be granted, unless following a public

[Title 173 WAC—p 691]

hearing on the complaint or due notice, the jurisdictional health department finds the renewal is justified. No renewal shall be granted except on application. Any such application shall be made at least sixty days prior to the expiration of the variance. Immediately upon receipt of an application for renewal, the jurisdictional health department shall give public notice of such application in accordance with rules and regulations of the jurisdictional health department.

(5) An application for a variance, or for the renewal thereof, submitted to the jurisdictional health department shall be approved or disapproved by the jurisdictional health department within ninety days of receipt unless the applicant and the jurisdictional health department agree to a continuance.

(6) No variance shall be granted by a jurisdictional health department except with the approval and written concurrence of ecology prior to action on the variance by the jurisdictional health department.

(7) Variances granted by a jurisdictional health department will be accepted as variances under this section.

(8) Public notice shall be given by mailing a notice of the variance application to persons who have written to the jurisdictional health department asking to be notified of all variance requests.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-310, filed 1/13/89.]

WAC 173-314-320 Enforcement for waste tire storage sites. Failure to conduct storage of waste tires according to the conditions, limitations, or terms of a county issued permit or this chapter, or failure to obtain a waste tire storage site owner's license is a violation of this chapter and shall be subject to civil penalties as provided in chapter 70.95 RCW and RCW 9A.20.020(2) or to any other enforcement action provided by law. Each day that a violation occurs is a separate violation and may be the subject of separate penalties.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-320, filed 1/13/89.]

WAC 173-314-330 Records. Each owner of a waste tire storage site whose site accepts waste tires after April 1, 1989, shall as a condition of the license:

(1) Maintain records of numbers of waste tires received and shipped.

(2) The licensee shall issue written receipts upon receiving loads of waste tires. Quantities may be measured by aggregate loads or cubic yards, if the licensee documents the approximate number of tires included in each. These records shall be maintained for a period of three years, and shall be available for inspection by ecology after reasonable notice.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-330, filed 1/13/89.]

WAC 173-314-340 Reports. Starting on first anniversary of license issuance, and thereafter, as a requirement for license renewal, license reapplication by the owner, or license application by a new owner, the waste tire storage site owner shall submit a report through licensing for ecology review stating the following:

[Title 173 WAC—p 692]

(1) The names and business addresses, and business licenses (if available) of all waste tire carriers that have delivered waste tires to the site, and shipped waste tires from the site, together with the quantity of waste tires shipped with those carriers.

(2) An accounting of the approximate total number of tires deposited at the site during the previous year.

(3) An accounting of the approximate total number of tires removed from the site.

(4) The number of waste tires located at the site at the time of the report.

The report form will be mailed to you by the department of licensing along with the license renewal notification forty-five days prior to the date of license renewal. The report shall be returned along with the license renewal application to the department of licensing.

[Statutory Authority: RCW 70.95.555. 89-03-047 (Order 88-33), § 173-314-340, filed 1/13/89.]

Chapter 173-315 WAC

MODEL TOXICS CONTROL ACT—LOCAL TOXICS CONTROL ACCOUNT—INTERIM FINANCIAL ASSISTANCE PROGRAM

WAC

173-315-010	Purpose and authority.
173-315-020	Definitions.
173-315-030	Relation to other legislation and administrative rules.
173-315-040	General.
173-315-050	Reserved.
173-315-060	Hazardous waste planning and program grants.
173-315-070	Solid waste planning and program grants.

WAC 173-315-010 Purpose and authority. The purpose of this chapter is to set forth eligibility criteria and requirements for the conduct of an interim financial assistance program to provide grants to local government pursuant to the Model Toxics Control Act. The department may provide grants to local government for:

(1) Remedial actions, as specified in chapter 173-322 WAC;

(2) Hazardous waste plans and programs under chapter 70.105 RCW;

(3) Solid waste plans and programs under chapter 70.95 RCW.

This chapter recognizes the burden placed upon ratepayers due to the high costs of cleanups, and solid and hazardous waste management, and consistent with the Model Toxics Control Act, provides financial assistance to mitigate such hardships.

This chapter recognizes the importance of a strong preventive program to alleviate future contamination through proper solid and hazardous waste planning and management. It is designed to provide assistance to local governments in carrying out these vital functions pursuant to the requirements of chapters 70.95 and 70.105 RCW, and the Model Toxics Control Act.

The interim financial assistance program will provide financial assistance to local governments in the form of grants.

The authority to provide financial assistance to local government is granted under the Model Toxics Control Act.

[Statutory Authority: Chapter 70.105D RCW. 90-10-058 (Order 89-42), § 173-315-010, filed 5/1/90, effective 6/1/90. Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-010, filed 8/17/89, effective 9/17/89.]

WAC 173-315-020 Definitions. (1) "Collection events" means events such as, but not limited to, projects in which household hazardous wastes are collected at centralized location(s) for subsequent packaging and transport to a permitted treatment storage or disposal facility.

(2) "Department" means the Washington state department of ecology.

(3) "Existing facility" means an owned or leased landfill in operation, or for which construction has begun, on or before the effective date of chapter 173-304 WAC for which the owner or operator has obtained permits or approvals necessary under federal, state and local statutes, regulations and ordinances. A facility has commenced construction if either:

(a) A continuous on-site physical construction program has begun; or

(b) The owner or operator has entered into contractual obligations which cannot be cancelled or modified without substantial financial loss. Physical construction of the facility is to be completed within a reasonable time.

Lateral extensions of a landfill's active area on land purchased and permitted by the jurisdictional health department for the purpose of landfilling before the effective date of chapter 173-304 WAC shall be considered existing facilities.

(4) "Hazard ranking system" means the system for ranking and prioritizing hazardous waste sites to be adopted by the department pursuant to the Model Toxics Control Act.

(5) "Household hazardous wastes" means any liquid, solid, contained gas or sludge, including any material, substance, product, commodity or waste used or generated in the household, regardless of quantity, that exhibits any of the characteristics of dangerous waste as set forth in chapter 173-303 WAC

(6) "Local governments" means any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county.

(7) "Minimum functional standards" means the requirements of chapter 173-304 WAC, Minimum functional standards for solid waste handling.

(8) "Moderate-risk waste" means:

(a) Any waste that exhibits any of the properties of hazardous waste but is exempt from regulation under this chapter solely because the waste is generated in quantities below the threshold for regulation; and

(b) Any household wastes which are generated from the disposal of substances identified by the department as hazardous household substances.

(9) "Remedial action" means any action or expenditure, to identify, eliminate, or minimize any threat or potential threat posed by hazardous substances to human health or the environment, including any investigative and monitoring activities with respect to any release or threatened release of a hazardous substance as well as any health assessments or health effects studies conducted in order to determine the risk or potential risk to human health.

(10) "Settlement agreement" means any consent decree entered into pursuant to RCW 70.105B.080, the Model Toxics Control Act, or any consent order or decree with the department in effect October 16, 1987.

[Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-020, filed 8/17/89, effective 9/17/89.]

WAC 173-315-030 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous and solid waste management and disposal.

(2) The remedial action grants shall be used to supplement local government funding to carry out required remedial actions.

(3) Hazardous waste planning and program grants shall be awarded to local government to implement chapter 70.105 RCW, and the Model Toxics Control Act.

(4) Solid waste planning and program grants shall be awarded to implement chapter 70.95 RCW, and the Model Toxics Control Act.

(5) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

[Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-030, filed 8/17/89, effective 9/17/89.]

WAC 173-315-040 General. (1) Apportionment of funds.

For purposes of implementing the interim financial assistance program, the local toxics account shall be apportioned between the following categories as follows:

(a) Remedial actions, as specified in chapter 173-322 WAC.

(b) Hazardous waste plans and programs.

(c) Solid waste plans and programs.

(2) Adjustment of funds. Based on a periodic internal review of grant applications received, grant obligations, grant fund balances, and revenue projections, the department may allocate funds by grant category or readjust the amount of funds that may be allocated under any and all grant categories.

(3) Grant application process. Grant application deadlines and schedules will be announced based upon funding allocations for each of the funding priority grant programs.

Grant application packages which include grant application deadlines, guidelines, application forms, and detailed information will be provided to all interested parties.

When applications are received by the department, they will be reviewed and scored if it is a competitive grant program by a committee consisting of department personnel. Applications need to include all required elements, as outlined in the guidelines, in order to be competitive.

After an application is reviewed and/or scored and an award notice letter is sent out, the department will contact the applicant to negotiate the final details of the scope of work, budget, and any other items of concern.

A grant offer is made by the department to the applicant in the form of a grant contract when all applicant and project eligibility requirements have been met, funds are available,

and the formal application has been completed to the mutual satisfaction of the applicant and the department.

A grant award is made when a grant agreement has been signed by both the applicant and the department. The grant agreement becomes effective on the date the program manager of the solid and hazardous waste program of the department signs the contract. This also establishes the beginning date of the project. No costs incurred prior to that date are grant eligible unless specific provision is made in the grant agreement for such costs.

(4) Appropriation and allotment of funds. The obligation of the department to make grant payments is contingent upon the availability of funds through legislative appropriation and allotment, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums, the obligation of the department is contingent upon the allotment of funds during the next biennium.

(5) Administrative practices. All grants under this chapter shall be consistent with the provisions of *Financial Guidelines for Grants Management*, WDOE 80-6, May 1980, reprinted March 1982, or subsequent guidelines adopted thereafter.

(6) The department encourages cooperation and coordination among units of local government and any funds granted under this chapter may be used by any unit of local government through interagency agreements.

(7) The department may issue grants to local governments that applied for funding assistance authorized by chapter 70.105B RCW and chapter 173-309 WAC.

(8) A maximum of fifty percent of the grantee cost share may be from in-kind contributions.

(9) A maximum indirect cost rate of ten percent of direct labor will be allowed unless the grantee has an indirect rate approved by a federal or state audit agency. The department reserves the right to determine the amount of indirect allowance in each grant agreement.

[Statutory Authority: Chapter 70.105D RCW. 90-10-058 (Order 89-42), § 173-315-040, filed 5/1/90, effective 6/1/90. Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-040, filed 8/17/89, effective 9/17/89.]

WAC 173-315-050 Reserved.

[Statutory Authority: Chapter 70.105D RCW. 90-10-058 (Order 89-42), § 173-315-050, filed 5/1/90, effective 6/1/90. Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-050, filed 8/17/89, effective 9/17/89.]

WAC 173-315-060 Hazardous waste planning and program grants. (1) Applicant eligibility.

(a) Hazardous waste planning. Eligible local governments under this section are cities, towns, or counties pursuant to RCW 70.105.010(16).

(b) Implementation projects. The applicant must be a local government.

(c) Collection events. The applicant must be a local government.

(2) Eligible project costs.

(a)(i) Hazardous waste planning.

Eligible project costs include activities and tasks to develop or update local hazardous waste management plans, if they are consistent with the department's *Planning*

Guidelines for Local Hazardous Waste Plans, July 1987, WDOE 87-18.

In-depth planning studies to provide detailed analysis of specific plan elements may be undertaken as a part of an overall planning grant, or separately if it can be demonstrated that the planning requirements are otherwise being met.

(ii) Retroactive funding. Funding retroactive to October 16, 1987, will be allowed for costs incurred which are directly related to the preparation of local hazardous waste plans and are in conformance with *Planning Guidelines for Local Hazardous Waste Plans*, July 1987, WDOE 87-18 and subsequent addenda.

(b) Collection events. Eligible project costs include activities and tasks required to plan and carry out hazardous waste collection events for household and/or small quantity generator hazardous waste.

(c) Implementation projects. Eligible moderate risk waste implementation project costs include activities, tasks, or facilities for information and education, technical assistance, collection and disposal, compliance and enforcement, and plan evaluation.

(3) Matching requirements.

(a) Hazardous waste planning. Grants will be made for up to seventy-five percent of the total eligible project cost, however, based on prior department approval, direct local costs of hazardous household substance pilot or collection projects conducted between June 30, 1985, and June 30, 1988, may be subtracted from the twenty-five percent local share of total project costs, therefore the department may make grants up to one hundred percent of the total project cost in these cases.

(b) Collection events. Grants will be made for up to fifty percent of the total eligible project cost, or fifteen thousand dollars per grant or local government, whichever is the lesser amount.

(c) Implementation projects. Grants will be made for up to seventy-five percent of the total eligible project cost.

(4) Priority for allocation of grant funds.

(a) Hazardous waste planning. It is the department's intent that grants be awarded for all local hazardous waste plan development state-wide. The grants will be awarded on a first-come first-served basis, subject to availability of funds, technical adequacy, and application completeness.

(b) Collection events. The grants will be awarded on a first-come first-served basis, subject to availability of funds, technical adequacy, and application completeness.

(c) Implementation projects.

(i) Grant applications will be evaluated according to the following criteria:

(A) All eligible projects must be part of a department-approved local hazardous risk waste plan as required by RCW 70.105.220.

(B) Grant awards will be subject to the completeness of the application and the technical adequacy of the project.

(ii) The department shall consider the following factors in setting funding priorities and calculating grant allocations:

(A) Population in the county;

(B) Amount of funding available; and

(C) Local government needs to carry out the recommended programs of their local hazardous waste plans as required by RCW 70.105.220.

The department will develop guidelines to assist in interpreting the provisions of this section relating to implementation projects.

[Statutory Authority: RCW 43.21A.080, chapter 70.105D RCW and 1990 c 114 § 19. 90-18-066 (Order 90-22), § 173-315-060, filed 9/4/90, effective 10/5/90. Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-060, filed 8/17/89, effective 9/17/89.]

WAC 173-315-070 Solid waste planning and program grants. (1) Applicant eligibility.

(a) Solid waste planning. Eligible local governments under this section are counties and cities pursuant to RCW 70.95.130.

(b) Waste reduction and recycling. The applicant must be a local government.

(c) Groundwater monitoring. The applicant must be a local government.

(2) Eligible project costs.

(a) Solid waste planning.

(i) General. Costs for developing or updating local solid waste management plans are grant eligible if:

(A) They are necessary to conduct the project;

(B) They are consistent with department's solid waste-planning guidelines and subsequent addenda.

(ii) Retroactive. Funding retroactive to October 16, 1987, will be allowed for costs incurred which are directly related to the preparation of local solid waste plans and are in conformance with the state Solid Waste Planning Guidelines, May 1986, WDOE 86-4 and subsequent addenda.

(b) Waste reduction and recycling.

(i) Waste reduction and recycling activities and facilities are eligible provided that:

(A) It is demonstrated that the proposed waste reduction and recycling activity, facility, or service is not reasonably available to persons within the locale from private enterprise; and

(B) It is demonstrated that the project is economically feasible and suitable for successful implementation.

(ii) General. Costs are grant eligible if:

(A) They are necessary to conduct the project;

(B) They are consistent with the department's grant guidelines for waste reduction and recycling.

(iii) Waste reduction and recycling facilities. Eligible project activities include:

(A) Planning and feasibility studies, environmental impact statements, and permitting costs;

(B) Preparation of design documents;

(C) Facility construction;

(D) Purchase of specialized equipment.

(iv) Waste reduction and recycling activities. Eligible project activities include:

(A) Public education;

(B) Public involvement;

(C) Program development.

(c) Groundwater monitoring.

(i) A groundwater monitoring project is eligible provided that it is addressed within a facility maintenance and operation plan, as required by chapter 173-304 WAC.

(ii) General. Costs are grant eligible if:

(A) They are necessary to conduct the project;

(B) They are consistent with the department's grant guidelines for groundwater monitoring.

(iii) Groundwater monitoring. Eligible costs include costs incurred by grantees that are owners and operators of landfills, piles, landspreading disposal facilities, and surface impoundments that are required to perform groundwater monitoring pursuant to WAC 173-304-400. Direct costs involved in design and installation of groundwater monitoring wells at existing facilities as defined by WAC 173-304-100 (27)(a) and (b), will be eligible for funding.

(iv) Retroactive funding may be allowed for all eligible costs incurred since October 16, 1987.

(3) Matching requirements.

(a) Solid waste planning. Grants will be made up to fifty percent of the total eligible project cost.

(b) Waste reduction and recycling. Grants will be made up to seventy-five percent of the total eligible project cost.

(c) Groundwater monitoring. Grants will be made up to fifty percent of the total eligible project costs, not to exceed a maximum of fifty thousand dollars per project.

(4) Priority for allocation of grant funds.

(a) Solid waste planning. It is the department's intent that grants be awarded for developing or updating local solid waste management plans state-wide. Subject to the limits of available funds, those applications that meet eligibility requirements will be approved for funding on a first-come first-served basis.

(b) Waste reduction and recycling. Grant applications will be ranked according to how each application meets the criteria set forth below. Grants will be awarded, within the limits of available funds, to the highest ranking applications that otherwise meet provisions for completeness and technical adequacy. The project ranking criteria are as follows:

(i) How the project or activity integrates with the current and planned solid waste management system and local comprehensive plans.

(ii) How the project or activity will contribute to increased waste reduction and recycling.

(iii) The probable success of the project or activity.

(iv) Demonstration that the project or activity scope is compatible with the cost and needs of the project or activity.

(v) How the project or activity will be operated, maintained, or continued beyond the grant funding period.

(vi) Other criteria as may be defined in the waste reduction and recycling grant guidelines.

(c) Groundwater monitoring. Grant applications will be ranked according to how each project application meets the criteria set forth below. Grants will be awarded within the limits of available funds to the highest ranking project applications that otherwise meet provisions for completeness and technical adequacy. The ranking criteria are as follows:

(i) Ability to pay. Priority will be given to local governments in economically distressed areas.

(ii) How, or if, the project will contribute directly to the identification or solution of an existing environmental or public health problem.

(iii) Other criteria as may be defined in the groundwater monitoring grant guidelines.

[Statutory Authority: 1989 c 2. 89-17-072 (Order 89-11), § 173-315-070, filed 8/17/89, effective 9/17/89.]

Chapter 173-318 WAC
PHASE ONE—WASTE REDUCTION AND
RECYCLING GRANTS

WAC

173-318-010	Purpose and authority.
173-318-020	Relation to other legislation and administrative rules.
173-318-030	Definitions.
173-318-040	Funding.
173-318-050	Procedures.
173-318-060	Eligibility and grantee match requirements.
173-318-070	Waste reduction/recycling best management practices study demonstration project grants.
173-318-080	Preimplementation program design grants for waste reduction/recycling projects.

WAC 173-318-010 Purpose and authority. The purpose of this chapter is to set forth eligibility criteria and requirements for the first phase of a financial assistance program that provides grants to further the state's waste management priorities. The department shall provide grants for:

- (1) Waste reduction/recycling demonstration projects in urban and rural areas.
- (2) Preimplementation program designs for waste reduction and recycling projects.

The authority to provide financial assistance is granted under chapters 43.83A and 43.99F RCW.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-010, filed 9/5/89, effective 10/6/89.]

WAC 173-318-020 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous and solid waste management and disposal.

(2) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-020, filed 9/5/89, effective 10/6/89.]

WAC 173-318-030 Definitions. For the purposes of this chapter, the following words and phrases shall have the meanings described herein.

(1) "Best management practices study" means the analysis and evaluation of solid waste management in the state of Washington conducted by the Washington state department of ecology, as required by RCW 70.95.280.

(2) "Buy-back center" means a facility where source separated recyclable materials are delivered for compensation.

(3) "Collection box" means a container or device used to temporarily hold recyclable material before collection.

(4) "Collection system" means the complete system employed to collect recyclable materials, which may include curbside collection, drop-box recycling facilities, buy-back centers, or other methods or combinations thereof, and includes operations and maintenance, and methods to encourage participation.

(5) "Commercial waste substream" means garbage and recyclable materials generated at places of business except manufacturing.

[Title 173 WAC—p 696]

(6) "Composting" means biological stabilization of organic matter through aerobic digestion.

(7) "Curbside collection" means the collection of source-separated recyclable materials from residences and places of business.

(8) "Department" means the Washington state department of ecology.

(9) "Drop-box recycling facility" means a facility accessible to the public to leave recyclable material, without remuneration, consisting of separate receptacles for each recyclable material collected.

(10) "Energy recovery or incineration" means reducing the volume of wastes by use of an enclosed device using controlled flame combustion.

(11) "Equipment" means those items with a life expectancy of one year or more and a cost of over one thousand dollars that are necessary to implement the waste reduction and recycling system, excluding office equipment such as desks, chairs, and bookcases.

(12) "Indirect costs" means costs that are incurred for (a) common or joint purpose benefiting more than one cost objective and (b) not readily assignable to the cost objectives specifically benefited, without effort disproportionate to the results achieved.

(13) "In-kind costs" means contributions and services used as a portion of the grantee's matching share of the project costs.

(14) "Intermediate processing center" means a facility where source-separated recyclable materials are prepared for marketing to end users.

(15) "Landfill" means a disposal facility or part of a facility at which solid waste is placed in or on land and which is not a land treatment facility.

(16) "Manufacturing waste substream" means garbage and recyclable materials generated by persons engaged in creating products.

(17) "Market" means an end user for recyclable materials.

(18) "Material recovery facility" means a facility where recyclable materials are extracted from mixed wastes and prepared for marketing to end users.

(19) "Operations costs" means costs associated with implementing a project or program, including but not limited to, staff and associated costs, goods and services, and contracted services.

(20) "Operations plan" means a design for system functions, including but not limited to, staffing and maintenance needs and a funding mechanism.

(21) "Organic matter" means material originating from plants or animals, limited to food wastes, food processing wastes, wastes from farming or gardening, sewage sludges, logging and milling residues, pulp and paper products, and yard debris that are found in the solid waste stream.

(22) "Organics processing" means the processing of yard debris or other organic matter to produce usable soil conditioners or amendments through composting, fermentation, anaerobic digestion, or other processes.

(23) "Preimplementation program design" means a document detailing a waste reduction and/or recycling system unique to the needs of a geographical area that includes, but is not limited to, all information about the system plans and specifications, staffing plans, implementa-

tion schedules, operations and maintenance plans and costs, SEPA compliance, and permitting costs.

(24) "Recyclable materials" means those solid wastes that can be diverted for recycling or reuse, which otherwise would be disposed of through landfill, energy recovery, or incineration.

(25) "Recycling" means the collection of recyclable material, followed by the transformation of the material into potentially usable materials for use other than landfill disposal, energy recovery or incineration, followed by consumption by an end-user that transforms the material into a product for consumer use.

(26) "Residential waste substream" means garbage and recyclable materials generated by households.

(27) "Solid waste substream" means garbage, refuse and recyclable materials, and is made up of four substreams including residential, commercial, manufacturing, and self-haul.

(28) "Source separation" means separation of recyclable materials and garbage at the point of generation.

(29) "Waste reduction" means all practices that reduce, avoid, or eliminate the amount of toxicity of waste generated, including reuse of materials.

(30) "Yard debris" means vegetation from homes and businesses that can be converted through biological processes into usable soil amendments or other usable products.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-030, filed 9/5/89, effective 10/6/89.]

WAC 173-318-040 Funding. For purposes of implementing the financial assistance program under this chapter, four million one hundred fifty thousand dollars shall be available and shall be apportioned as follows:

- (1) Grants for waste reduction/recycling demonstration projects. (chapter 43.99F RCW) \$3,112,500
- (2) Grants for preimplementation program design for waste reduction and recycling projects. (chapter 43.83A RCW) \$1,037,500

Based on an internal review of grant applications received, grant obligations and grant fund balances, the department may reallocate funds by grant category or readjust the amount of funds that may be allocated under any and all grant fund categories.

The obligation of the department to make grant payments is contingent upon the availability of funds through allotment or appropriation, and such other conditions not reasonably foreseeable by the department rendering performance impossible.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-040, filed 9/5/89, effective 10/6/89.]

WAC 173-318-050 Procedures. (1) Grant application packages, which include administrative guidelines, application forms, and detailed information, will be provided to all interested parties.

(2) Applicants may seek technical assistance from the department.

(3) Applications submitted to the department will be reviewed and scored by the department. Applications must

(1992 Ed.)

include all required elements as outlined in the guidelines to be considered for funding. Applications will be ranked competitively.

(4) Award letters will be sent to applicants selected for funding after which final details regarding the scope of work, budget, and other items of concern will be negotiated.

(5) A grant offer is made by the department to the applicant in the form of a grant agreement when all applicant and project eligibility requirements have been met, funds are available, and the formal application has been completed to the mutual satisfaction of the applicant and the department.

(6) A grant award is made when a grant offer has been signed by both the applicant and the department. No costs incurred prior to the effective date of the grant are eligible unless specific provision is made in the grant agreement for such costs.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-050, filed 9/5/89, effective 10/6/89.]

WAC 173-318-060 Eligibility and grantee match requirements. (1) Eligible grantees include the state of Washington or any agency, political subdivision, taxing district or municipal corporation thereof, an agency of the federal government, and those Indian tribes now or hereafter recognized as such by the federal government for participation in the federal land and water conservation program and which may constitutionally receive grants or loans from the state of Washington.

(2) The department will provide up to seventy-five percent of the total eligible project costs for demonstration projects, pursuant to chapter 43.99F RCW.

(3) The department will provide up to eighty-five percent of the total eligible project costs for preimplementation program designs, pursuant to chapter 43.83A RCW, but will not provide more than one hundred thousand dollars.

(4) A maximum of fifty percent of the grantee cost share may be from in-kind contributions.

(5) A maximum indirect cost rate of ten percent of direct labor will be allowed unless the grantee has an indirect rate approved by a federal or state audit agency. The department reserves the right to determine the amount of indirect allowance in each grant agreement.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-060, filed 9/5/89, effective 10/6/89.]

WAC 173-318-070 Waste reduction/recycling best management practices study demonstration project grants. (1) Eligible projects include comprehensive waste reduction and recycling systems that test the findings of the best management practices study related to methods and systems for achieving maximum levels of waste reduction and recycling.

(2) This may include the complete system employed to collect, process and market recyclable materials, including yard debris and organic matter. Eligible project costs include equipment and facilities for curbside collection programs, drop-box recycling programs, buy-back centers, composting, organics processing, material recovery, intermediate processing and marketing, or other methods or combinations thereof. Eligible costs also include operation and

maintenance costs as well as methods to encourage participation.

(3) The system will include the participation of private enterprise where it has a demonstrated ability and current capacity to provide needed services. Eligible project costs shall not include the support of solid waste recycling activity or service in a locale if the department determines that the activity or service is reasonably available to persons within that locale from private enterprise.

(4) Priority for allocation of grants: Grant applications will be ranked according to how each application meets the criteria set forth below. Grants will be awarded, within the limits of available funds, to the highest ranking applications that otherwise meet provisions for completeness and technical adequacy. The demonstration project ranking criteria are as follows:

(a) Extent to which the waste stream will be reduced. Priority will be given to those projects emphasizing reduction and recycling through curbside collection or its equivalent.

(b) The extent to which the project will test the findings of the best management practices study.

(c) Applicant's degree of compliance with solid waste management planning requirements.

(d) Integration of the project with the existing solid waste system and recycling operations in the geographical area to be served.

(e) Comprehensiveness of the operations, maintenance, and implementation plans.

(f) Inclusion of evaluation criteria that, if met, would result in continuation of the project with local funding beyond the demonstration period.

(g) Proposed evaluation methodology.

(h) Transferability of methods and systems to other jurisdictions.

(i) Appropriateness of project size to meet the needs of the area to be served.

(j) Extent to which the project serves more than one geographical area.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-070, filed 9/5/89, effective 10/6/89.]

WAC 173-318-080 Preimplementation program design grants for waste reduction/recycling projects.

(1) Eligible projects include the design of a waste reduction and/or recycling program or project unique to the needs of a geographical area. It should include the participation of private enterprise where there is a demonstrated ability and current capacity to provide needed services.

(2) Program designs include detailed information about, but are not limited to, the program or project plans and specifications, staffing plans, implementation schedules, operations and maintenance plans and costs, compliance with SEPA, and permitting costs. The program design may also include development of RFPs and RFQs, analysis of specific program elements to determine those that can best meet the needs of the community as identified in the local comprehensive solid waste management plan, and preparation of funding proposals.

(3) Eligible costs shall not include the design of programs that support a solid waste recycling activity or

service in a locale if the department determines that the activity or service is reasonably available from private enterprise to persons within that locale.

(4) Priority for allocation of grants: Grant applications will be ranked according to how each application meets the criteria set forth below. Grants will be awarded, within the limits of available funds, to the highest ranking applications that otherwise meet provisions for completeness and technical adequacy. The program design project evaluation criteria are as follows:

(a) Priority will be given to those projects that have a demonstrated financial commitment and ability to support the designed system.

(b) Integration of program or project with local comprehensive solid waste management plan.

(c) Ability to carry out the proposed work.

(d) Approach to project management including management of consultants, if applicable.

(e) Approach to community involvement.

(f) Extent to which the program or project will serve the needs of more than one jurisdictional area.

[Statutory Authority: Chapters 43.83A and 43.99F RCW. 89-18-070 (Order 89-29), § 173-318-080, filed 9/5/89, effective 10/6/89.]

**Chapter 173-319 WAC
COMPREHENSIVE WASTE REDUCTION/
RECYCLING GRANTS PROGRAM**

WAC

173-319-010	Purpose and authority.
173-319-020	Relation to other legislation and administrative rules.
173-319-030	Definitions.
173-319-040	General.
173-319-050	Compost study grants.
173-319-060	Waste reduction and recycling public information and education grants.

WAC 173-319-010 Purpose and authority. The purpose of this chapter is to set forth eligibility criteria and requirements for a financial assistance program that provides grants to local governments for: (1) Food and yard waste compost studies as authorized by RCW 70.95.810, and (2) waste reduction and recycling public information and education as authorized by RCW 70.95.100.

[Statutory Authority: RCW 43.21A.080. 90-22-084 (Order 90-39), § 173-319-010, filed 11/6/90, effective 12/7/90.]

WAC 173-319-020 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous and solid waste management and disposal.

(2) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

(3) The obligation of the department to make grant payments is contingent upon the availability of funds through allotment or appropriation, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums,

the obligation of the department is contingent upon the allotment of funds during the next biennium.

(4) The organization receiving a grant shall comply fully with all applicable federal, state, and local laws, orders, regulations, and permits.

[Statutory Authority: RCW 43.21A.080. 90-22-084 (Order 90-39), § 173-319-020, filed 11/6/90, effective 12/7/90.]

WAC 173-319-030 Definitions. For the purpose of this chapter, the following words and phrases shall have the meanings described herein.

"Composting" means controlled aerobic degradation of organic solid waste, other than sewage sludge, for primary uses other than energy recovery. The presence of anaerobic zones within the composting material will not cause the process to be classified as other than composting. Natural decay of organic solid waste under uncontrolled conditions is not composting.

"Department" means the department of ecology.

"Food waste" means residual food from residences, institutions, or commercial facilities, or unusable portions of fruit or vegetable material resulting from food production.

"Land clearing debris" means grass clippings, leaves, weeds, prunings, stumps, or any combination thereof, resulting from land clearing operations.

"Local government" means a city, town, or county.

"Market assessment" means an examination and evaluation of conditions affecting the ability to market a product or service.

"Marketing" means the commercial functions involved in transferring goods from producer to consumer.

"Mixed waste paper" means low-grade, potentially compostable paper, including, but not limited to, noncorrugated paperboard, paperback books, telephone books, paper towels, and paper food containers.

"Quality assurance project plan" means a document of detailed and specific procedures that explains how data of known and acceptable quality are produced for a specific project.

"Recycling" means transforming or remanufacturing waste materials into usable or marketable materials for use other than landfill disposal or incineration.

"Source separated organic solid waste" means yard waste, food waste, land clearing debris, and mixed waste paper. Wood waste and animal manure may be used as supplements in the composting process.

"Source separation" means the separation of different kinds of solid waste at the place where the waste originates.

"Waste reduction" means reducing the amount or toxicity of waste generated or reusing materials.

"Yard waste" means grass clippings, leaves, weeds, and prunings six inches or less in diameter.

[Statutory Authority: RCW 43.21A.080. 90-22-084 (Order 90-39), § 173-319-030, filed 11/6/90, effective 12/7/90.]

WAC 173-319-040 General. (1) No costs incurred prior to the effective date of a grant agreement are eligible for reimbursement unless specific provision is made in the grant agreement for such work.

(2) The department shall develop guidelines to assist in interpreting the provisions of this chapter.

(1992 Ed.)

[Statutory Authority: RCW 43.21A.080. 90-22-084 (Order 90-39), § 173-319-040, filed 11/6/90, effective 12/7/90.]

WAC 173-319-050 Compost study grants. (1) Eligibility and grantee match requirements.

(a) The grantee must be a local government.

(b) The grantee match requirements:

(i) Compost study market development grants. The department will provide up to eighty percent of the total eligible project costs for compost study market development projects.

(ii) Compost study product quality testing grants. The department will provide up to eighty percent of the total eligible project costs for compost study product quality testing projects.

(iii) Compost study testing and marketing grants. The department will provide up to eighty percent of the total eligible project costs for compost study testing and marketing projects.

(iv) Compost study collection, processing, and testing grants.

(A) The department will provide up to seventy-five percent of the total eligible project costs for compost study collection, processing, and testing projects where food waste is composted.

(B) The department will provide up to sixty percent of the total eligible project costs for compost study collection, processing, and testing projects where yard waste is composted.

(2) General requirements. As used in this section:

(a) Projects should result in new information for local governments about market development, product quality testing, and collection and processing of source separated organic solid waste.

(b) Local governments should have the ability to perform or sponsor these projects.

(c) Information collected by these projects should be transferable and useful to other local governments.

(d) Projects must involve source separated organic solid waste.

(e) Projects must result in a final written report.

(f) All compost facilities that produce compost products under this grant program shall comply with the requirements of chapter 173-304 WAC, Minimum functional standards for solid waste handling.

(3) Compost study market development grants.

(a) Eligible projects are those that obtain information about how to enhance current markets and uses and develop new markets and uses for compost products from source separated organic solid waste. These projects include, but are not limited to, projects that demonstrate proven uses of compost products, develop and demonstrate new uses for compost products, or develop and implement marketing strategies for compost products.

(b) Eligible costs include, but are not limited to, salaries and benefits, demonstrations, advertisements, mailings, brochures, contractor services, and project management.

(c) Requirements for market development projects are:

(i) A local market assessment must be conducted prior to or during the project.

(ii) Information about compost product quality must be obtained prior to or during the project. This information

about compost product quality includes, but is not limited to, results of chemical tests, biological tests, physical tests, and field tests.

(d) Priority for allocation of grants. Grants will be awarded, within the limits of available funds, to the highest ranking application(s) that meet provisions for completeness and technical adequacy. Compost study market development grant applications will be ranked according to how well each application meets the following criteria:

(i) Priority will be given to projects that involve yard waste.

(ii) How soon the compost product will be available for marketing and use.

(iii) Extent to which the project will increase awareness of potential consumers about the uses of compost products, especially potential consumers of large quantities of compost products. Potential consumers of large quantities of compost include, but are not limited to, landscapers, local governments, the general public, horticulturists, and agricultural interests.

(iv) Extent to which the project will increase overall public awareness about the use of compost products.

(v) Extent to which new markets and uses for compost products will be created or investigated.

(4) Compost study product quality testing grants.

(a) Eligible projects are those that obtain technical information about product quality and test appropriate applications for compost products of source separated organic solid waste.

(b) Eligible costs include, but are not limited to, salaries and benefits, contractor services, laboratory and field testing, and project management.

(c) Requirements for product quality testing projects are:

(i) Each project must describe the collection and processing methods used to produce the compost products tested.

(ii) Each project shall test for those parameters of composting which are essential to protect public health and to increase the marketability of compost products. These parameters include, but are not limited to, tests for heavy metal content, pesticides, organic matter, size distribution, nitrogen, and seed germination.

(iii) A quality assurance project plan must be submitted as part of each project.

(iv) Each project must sample and test compost products using sampling and testing methods approved by the department.

(v) Each project must conduct laboratory and field tests of compost products. Data from previous laboratory tests may be substituted if the testing methods used are approved by the department.

(vi) Each project must develop a market and use plan describing planned distribution of compost products tested.

(d) Priority for allocation of grants. Grants will be awarded, within the limits of available funds, to the highest ranking application(s) that meet provisions for completeness and technical adequacy. Product quality testing grant applications will be ranked according to how well each application meets the following criteria:

(i) Priority will be given to projects that involve yard waste.

(ii) How soon the compost product will be available for testing.

(iii) How many of those parameters of composting which are essential to protect public health and to increase the marketability of compost products will be tested.

(iv) Preference will be given to projects that test compost products from locations across Washington state with various climates, collection methods, or waste streams.

(5) Compost study testing and marketing grants. A local government may submit an application that includes both a compost study market development project and a compost study product quality testing project. The eligible projects, eligible costs, requirements, and evaluation criteria for compost study testing and marketing grants will be the same as those for compost study market development grants and compost study product quality testing grants.

(6) Compost study collection, processing, and testing grants.

(a) Eligible projects are those that result in new information by addressing unanswered questions about collection and processing for local governments, and by testing for those parameters essential to protect public health and to increase the marketability of compost products. These parameters include, but are not limited to, tests for heavy metal content, pesticides, organic matter, size distribution, nitrogen, and seed germination. Unanswered questions about collection and processing include, but are not limited to:

(i) How can food waste from residential and commercial sources be collected and processed?

(ii) How can mixed waste paper be composted?

(iii) What are the environmental impacts of a compost facility?

(iv) Are decentralized composting facilities for yard waste efficient and economically feasible?

(v) What are appropriate low-technology, low-impact collection and processing methods?

(vi) What are appropriate methods for collection of yard waste in areas with low population density?

(b) Eligible project costs include, but are not limited to, salaries and benefits, contractor services, collection equipment, facility plans and specifications, facility construction, limited operating costs, laboratory and field testing, and project management.

(c) Requirements for collection, processing, and testing projects are as follows:

(i) Each application must address the economic viability of the project.

(ii) Each project must develop a market and use plan describing the planned distribution of the compost product produced.

(iii) Each project must address the environmental impacts of collection and processing, including, but not limited to, odor, leachate, and surface water runoff.

(iv) Each project must test for those parameters essential to protect public health and to increase the marketability of compost products. These parameters include, but are not limited to, tests for heavy metal content, pesticides, organic matter, size distribution, nitrogen, and seed germination.

(v) Each project must conduct laboratory and field tests of compost products.

(vi) A quality assurance project plan must be submitted as part of each project.

(vii) Each project must sample and test compost products using sampling and testing methods approved by the department.

(d) Priority for allocation of grants. Grants will be awarded, within the limits of available funds, to the highest ranking application(s) that meet provisions for completeness and technical adequacy. Collection, processing, and testing grant applications will be ranked according to how well each application meets the following criteria:

(i) The department's intent is to fund at least one collection, processing, and testing project where food waste is composted.

(ii) Extent to which the project will result in new information by addressing unanswered questions about collection and processing for local governments, and by testing for those parameters essential to protect public health and to increase the marketability of compost products.

(iii) Transferability of collection and processing methods used and product quality information obtained in the project to other local governments.

(iv) Extent to which the waste stream will be reduced.

(v) Completeness of the analysis of the proposed economic viability of the project.

(vi) Economic viability of the proposed project.

[Statutory Authority: RCW 43.21A.080. 90-22-084 (Order 90-39), § 173-319-050, filed 11/6/90, effective 12/7/90.]

WAC 173-319-060 Waste reduction and recycling public information and education grants. (1) Grantee eligibility and match requirements.

(a) The grantee must be a local government.

(b) The grantee match requirements are:

(i) Coordinated state and local public information and education program grants. The department will provide up to seventy-five percent of the total eligible project costs for coordinated state and local public information and education grants.

(ii) Local public information and education program grants. The department will provide up to fifty percent of the total eligible project costs for local public information and education program grants.

(2) General.

(a) The department will only provide funds for the duplication and distribution of public information and educational materials that educate and encourage the public to reduce waste, perform source separation, and recycle.

(b) The department shall consider the following factors in calculating grant allocations and maximum grant amounts for grantees:

(i) The amount of funds available.

(ii) The needs of local governments to carry out public information and education programs.

(iii) The media service area of the grantee.

(iv) The population and/or geographical size of the grantee.

(c) The department will award grants on a first-come, first-served basis.

(d) The department shall give priority funding consideration to grantees that:

(i) Use department-developed materials that are a part of a coordinated statewide campaign on waste reduction and recycling; and

(ii) Have a comprehensive waste reduction and recycling information and education program incorporated in a department-approved local comprehensive solid waste management plan.

(3) Coordinated state and local public information and education program grants.

(a) Eligible projects are those that are part of a coordinated state and local government program developed by the department to educate and inform the public about waste reduction, source separation, and recycling.

(b) Eligible project costs include the duplication, distribution, or use of department-developed materials, including but not limited to:

(i) Video programs;

(ii) Public service announcements;

(iii) Business cards;

(iv) Billboards;

(v) Clip art;

(vi) Point-of-purchase displays;

(vii) "How to" brochures;

(viii) Posters;

(ix) Newspaper display advertisements; and

(x) Portable displays.

(4) Local public information and education program grants.

(a) Eligible projects are those that implement a waste reduction, source separation, and recycling information and education program.

(b) Eligible project costs include the duplication, distribution, or use of existing materials or programs, including but not limited to:

(i) Video programs;

(ii) Public service announcements;

(iii) Business cards;

(iv) Billboards;

(v) Clip art;

(vi) Point-of-purchase displays;

(vii) "How to" brochures;

(viii) Posters;

(ix) Newspaper display advertisements; and

(x) Portable displays.

[Statutory Authority: RCW 43.21A.080. 90-22-084 (Order 90-39), § 173-319-060, filed 11/6/90, effective 12/7/90.]

Chapter 173-320 WAC

BEVERAGE CONTAINERS—DETACHABLE PULL TABS

WAC

173-320-010	Authority.
173-320-020	Declaration of purpose.
173-320-030	Applicability.
173-320-040	Definitions.
173-320-050	Prohibition.
173-320-060	Return requirement.
173-320-070	Complaints.
173-320-080	Enforcement.

WAC 173-320-010 Authority. Pursuant to chapter 113, Laws of 1982, the department of ecology is given authority to adopt rules interpreting the chapter.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-010, filed 6/1/83.]

WAC 173-320-020 Declaration of purpose. This chapter prohibits sale or offers to sell at retail levels beverage containers with detachable pull tabs for opening after July 1, 1983. The department of ecology is designated the state agency responsible for the administration and enforcement of this chapter.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-020, filed 6/1/83.]

WAC 173-320-030 Applicability. The provisions of this chapter shall apply statewide to any retailer or wholesaler who engages in the distribution of beverages in sealed containers intended to be offered for sale at retail outlets within the state of Washington.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-030, filed 6/1/83.]

WAC 173-320-040 Definitions. (1) "Department" means the department of ecology created under chapter 43.21A RCW.

(2) "Beverage" means beer or other malt beverage or mineral water, soda water, or other drink in liquid form intended for human consumption.

(3) "Beverage container" means a separate and sealed can containing a beverage.

(4) "Sell or offer to sell" means to advertise, display or set out in such a way to make available for purchase to any other outlet or person.

(5) "Retail outlet" means any business which engages in sale of any products to the general public within the state of Washington.

(6) "Wholesale outlet" means any business or organization that sells any products to retail outlets for eventual resale to the general public within the state of Washington.

(7) "Violation" means for a retailer or wholesaler to sell or offer to sell any number of beverage containers with illegal, detachable metal rings or tabs during any one day period. Each day of continuing violation constitutes a separate violation.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-040, filed 6/1/83.]

WAC 173-320-050 Prohibition. No person may sell or offer to sell at retail in this state any beverage containers so designed and constructed that under normal conditions a metal part of the container is detachable in opening the container through the use of a metal ring or tab. Nothing in this section prohibits the sale of a beverage container which is opened by use of pressure sensitive or metallic tape.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-050, filed 6/1/83.]

WAC 173-320-060 Return requirement. Any wholesale or distributor who delivers beverage containers

within the state of Washington which are in violation of this chapter on or after June 1, 1983, to any retail outlet shall be required to retrieve any illegal containers remaining at the retail sites after June 30, 1983, at his own expense, with full refund to the retailer of the price paid by that retailer. Failure to remove said containers from retail premises constitutes a violation of the act.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-060, filed 6/1/83.]

WAC 173-320-070 Complaints. Complaints of alleged violation of this chapter may be made to the department by any person. Complaints shall be in writing and shall contain an allegation of violation accompanied by a receipt or affidavit of purchase indicating location and date of purchase and/or by the offending items or a photo of the item.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-070, filed 6/1/83.]

WAC 173-320-080 Enforcement. The department shall have the authority to initiate investigations and complaints and require corrective action by the retailer or wholesaler.

Response by the department to allegations of violation may consist of:

(1) Verification of allegation which may include visit to the site to ascertain extent of violation, and

(2) Written warning to violator giving seven days from date of receipt.

Failure by the retailer to comply with written warning may require a written notice of violation from the department, allowing seven more days for the violator to remove the illegal container(s).

Failure by the retailer to comply with notice of violation may require assessment of a civil penalty not exceeding five hundred dollars per day for each violation, upon written order of the director of the department.

[Statutory Authority: Chapter 113, Laws of 1982 [chapter 70.132 RCW]. 83-12-062 (Order DE 82-39), § 173-320-080, filed 6/1/83.]

Chapter 173-321 WAC PUBLIC PARTICIPATION GRANTS

WAC

173-321-010	Purpose and authority.
173-321-020	Definitions.
173-321-030	Relationship to other legislation and administrative rules.
173-321-040	Applicant eligibility.
173-321-050	Application evaluation criteria.
173-321-060	Eligible project costs.
173-321-070	Grant funding.
173-321-080	Grant administration.

WAC 173-321-010 Purpose and authority. (1) The department is directed by the Model Toxics Control Act to provide grants up to fifty thousand dollars to persons who may be adversely affected by a release or threatened release of a hazardous substance and to not-for-profit public interest groups. These grants shall be used to facilitate public participation in the investigation and remediation of a release

or threatened release of a hazardous substance and to facilitate public participation in the implementation of the state's solid and hazardous waste management priorities.

(2) The purpose of this chapter is to set forth eligibility criteria and funding requirements for grant projects.

[Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-010, filed 10/17/89, effective 11/17/89.]

WAC 173-321-020 Definitions. As used in this chapter:

(1) "Department" means the department of ecology.

(2) "Director" means the director of the department of ecology or such person authorized to act for the director.

(3) "Expendable personal property" means all tangible personal property other than nonexpendable personal property.

(4) "Facility" means:

(a) Any building, structure, installation, equipment, pipe or pipeline (including any pipe into a sewer or publicly owned treatment works), well, pit, waste pile, pond, lagoon, impoundment, ditch, landfill, tank, storage container, motor vehicle, rolling stock, vessel, or aircraft; or

(b) Any site or area where a hazardous substance, other than a consumer product in consumer use, has been deposited, stored, disposed of, or placed, or otherwise come to be located.

(5) "Grant applicant" means any person requesting a public participation grant.

(6) "Hazardous substance" means:

(a) Any dangerous or extremely hazardous waste as defined in RCW 70.105.010 (5) and (6) or any dangerous or extremely hazardous waste designated by rule pursuant to chapter 70.105 RCW;

(b) Any hazardous substance as defined in RCW 70.105.010(14) or any hazardous substance as defined by rule pursuant to chapter 70.105 RCW;

(c) Any substance that, on March 1, 1989, is a hazardous substance under 101 (14) of the Federal Cleanup Law, 42 U.S.C. Sec. 960(14);

(d) Petroleum or petroleum products; and

(e) Any substance or category of substances including solid waste decomposition products, determined by the director by rule to present a threat to human health or the environment if released into the environment. Except that:

The term hazardous substance does not include any of the following when contained in an underground storage tank from which there is not a release: Crude oil or any fraction thereof or petroleum, if the tank is in compliance with all applicable federal, state, and local laws.

(7) "Hazardous waste management priorities" as defined in RCW 70.105.150 are the priorities in the management of hazardous waste which should be followed in descending order as applicable:

(a) Waste reduction;

(b) Waste recycling;

(c) Physical, chemical, and biological treatment;

(d) Incineration;

(e) Solidification/stabilization treatment;

(f) Landfill.

(8) "Nonexpendable personal property" means tangible personal property having a useful life of more than one year

and an acquisition cost of three hundred dollars or more per unit.

(9) "Not-for-profit public interest organization" means any corporation, trust, association, cooperative, or other organization which:

(a) Is operated primarily for scientific, educational, service, charitable, or similar purposes in the public interest;

(b) Is not organized primarily for profit; and

(c) Uses its net proceeds to maintain, improve, and/or expand its operations.

(10) "Owner/operator" means:

(a) Any person with any ownership interest in the facility or who exercises any control over the facility; or

(b) In the case of an abandoned facility, any person who had owned, operated, or exercised control over the facility any time before its abandonment;

The term does not include:

(i) An agency of the state or unit of local government which acquired ownership or control involuntarily through bankruptcy, tax delinquency, abandonment, or other circumstances in which the government involuntarily acquires title, unless that agency of the state or unit of local government has caused or contributed to the release or threatened release of hazardous substances from the facility; or

(ii) A person who, without participation in the management of a facility, holds identification of ownership primarily to protect the person's security interest in the facility.

(11) "Person" means an individual, firm, corporation, association, partnership, consortium, joint venture, commercial entity, state government agency, unit of local government, federal government agency, or Indian tribe.

(12) "Personal property" means property of any kind except real property. It may be tangible (having physical existence) or intangible (having no physical existence), such as patents, inventions, and copyrights.

(13) "Potentially liable person" means any person whom the department finds, based on credible evidence, to be liable under section 4 of the Model Toxics Control Act. The department shall give notice to any such person and allow an opportunity for comment before making the finding, unless an emergency requires otherwise.

(14) "Real property" means land, land improvements, structures, and appurtenances thereto, excluding moveable machinery and equipment.

(15) "Release" means any intentional or unintentional entry of any hazardous substance into the environment, including but not limited to the abandonment or disposal of containers of hazardous substances.

(16) "Remedy, remediation, or remedial action" means any action or expenditure consistent with the purposes of this chapter to identify, eliminate, or minimize any threat or potential threat posed by hazardous substances to human health or the environment including any investigative and monitoring activities with respect to any release or threatened release of a hazardous substance and any health assessments or health effects studies conducted in order to determine the risk or potential risk to human health.

(17) "Solid waste management priorities" as defined in chapter 70.95 RCW are the priorities in the management of solid waste which should be followed in order of descending priority as applicable:

(a) Waste reduction;

(b) Recycling with source separation of recyclable materials as the preferred method;

(c) Energy recovery, incineration, or landfill of separated waste;

(d) Energy recovery, incineration, or landfill of mixed waste.

[Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-020, filed 10/17/89, effective 11/17/89.]

WAC 173-321-030 Relationship to other legislation and administrative rules. (1) The organization receiving a grant shall comply fully with all applicable federal, state, and local laws, orders, regulations, and permits.

(2) Nothing in this chapter shall influence, affect, or modify existing department programs, regulations, or enforcement of applicable laws relating to solid and hazardous waste management and cleanup.

(3) All grants shall be subject to the existing, applicable accounting and auditing requirements of state laws and regulations.

(4) The department will prepare a guidance manual to facilitate compliance with these regulations.

[Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-030, filed 10/17/89, effective 11/17/89.]

WAC 173-321-040 Applicant eligibility. (1) Public participation grants may only be awarded to groups of three or more unrelated persons or to not-for-profit public interest organizations.

(2) All applicants must demonstrate their ability to appropriately administer grant funds.

(3) Applications for a hazardous substance release grant must include information on:

(a) The nature of the release or threatened release of the hazardous substance;

(b) The location of the release or threatened release of the hazardous substance;

(c) How the applicant group may be adversely affected by the release or threatened release of the hazardous substance;

(d) How the applicant group will promote public participation in the investigation or remediation of the release or threatened release of the hazardous substance;

(e) A complete project description;

(f) How the applicant group represents the environmental, health, and economic interests of individuals affected by the release or threatened release of the hazardous substance;

(g) The applicant group's history and experience, if any, in conducting activities similar to those described in the grant application;

(h) Any other information specified by the department as needed to award a grant.

(4) Applications for a waste management priorities grant must include information on:

(a) How the applicant group will promote or implement the state solid or hazardous waste management priorities;

(b) How the applicant group will promote public participation in the grant project described in the application;

(c) A complete project description;

(d) The applicant group's history and experience, if any, in conducting activities similar to those described in the grant application;

(e) Any other information specified by the department as needed to award a grant.

(5) The following persons or groups of persons shall be ineligible for grant funding:

(a) Any person potentially liable, as defined under RCW 70.105D.040;

(b) Local governments including any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county;

(c) Federal and state governments, or agencies thereof;

(d) Federally recognized Indian tribes, as a governing body. Individual tribe members of three or more persons are eligible to apply for a public participation grant;

(e) Organizations sustained by public funding;

(f) Public and private universities.

(6) Grant applications failing to qualify may be resubmitted.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-065 (Order 90-20), § 173-321-040, filed 9/4/90, effective 10/5/90. Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-040, filed 10/17/89, effective 11/17/89.]

WAC 173-321-050 Application evaluation criteria.

(1) All grant applications received will be reviewed and evaluated by the department. Incomplete applications will not be evaluated. Applications will be ranked according to how each application meets the criteria set forth below. Grants will be awarded, within the limits of available funds, to the highest ranking applications. The department may fund all or portions of eligible grant applications.

(2) Priority consideration for public participation grant funding will be given to applicants requesting a hazardous substance release grant.

(3) General criteria. All public participation grants will be evaluated against the following criteria:

(a) The type and extent of the applicant group's past history and experience conducting activities similar to those described in the grant application;

(b) The group's basic funding, with consideration given to groups with limited resources;

(c) The group's ability to appropriately manage grant funds;

(d) If more than one group is interested in the same project, priority consideration will be given to groups who consolidate.

(4) Special criteria.

(a) Hazardous substance release grants. Hazardous substance release grants will be evaluated against the following criteria:

(i) The degree to which the applicant group may be adversely or potentially adversely impacted by the release or threatened release of the hazardous substance, including but not limited to adverse or potential adverse impacts to surface and drinking waters, soils, flora or fauna, species diversity, air quality, property values, marketability of agricultural crops, and recreational areas;

(ii) The degree to which the applicant group represents the environmental, health, and economic interests of individual group members;

(iii) The degree to which the proposed project will promote public participation in the investigation or remediation of the release or threatened release of the hazardous substance.

(b) Waste management priorities grants. Waste management priorities grants will be evaluated against the following criteria:

(i) The degree to which the proposed public participation activity will promote or implement the state solid or hazardous waste management priorities;

(ii) The degree to which the proposed project will facilitate public understanding of the state solid and hazardous waste management priorities;

(iii) The degree to which the proposed public participation activities are consistent with or improve upon existing solid or hazardous waste management plans.

[Statutory Authority: RCW 43.21A.080 and chapter 70.105D RCW. 90-18-065 (Order 90-20), § 173-321-050, filed 9/4/90, effective 10/5/90. Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-050, filed 10/17/89, effective 11/17/89.]

WAC 173-321-060 Eligible project costs. (1) Eligible project costs for substance release grants shall include but not be limited to:

(a) Hiring technical assistants to review and interpret documents;

(b) Public involvement and public education activities;

(c) Reviewing specific plans for environmental testing and analysis, reviewing reports summarizing the results of such plans and making recommendations for modifications to such plans.

(d) Expendable personal property;

(e) Other public participation activities as determined by the department on a case-by-case basis.

(2) Eligible project costs for waste management priority grants shall include but not be limited to:

(a) Assisting in developing and implementing programs that promote or improve state or local solid or hazardous waste management plans;

(b) Assisting in developing programs or activities that promote and are consistent with the state solid or hazardous waste management priorities;

(c) Expendable personal property;

(d) Other public participation activities as determined by the department on a case-by-case basis.

(3) Ineligible projects and grant costs shall include but not be limited to:

(a) Independently collecting or analyzing samples at facility sites;

(b) Hiring attorneys for legal actions against potentially liable persons, facility owners, or the department;

(c) Legislative lobbying activities;

(d) Real property;

(e) Nonexpendable personal property.

[Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-060, filed 10/17/89, effective 11/17/89.]

WAC 173-321-070 Grant funding. (1) The department may fund up to one hundred percent of eligible project costs.

(2) The maximum grant allowance shall be fifty thousand dollars.

(3) Public participation grants may be renewed annually. A new grant application must be submitted each year to be evaluated and ranked for additional funding.

(4) The department reserves the right to refuse funding to any and all applications failing to meet the grant eligibility criteria and may reopen the application period for additional applications.

[Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-070, filed 10/17/89, effective 11/17/89.]

WAC 173-321-080 Grant administration. (1) The department shall establish grant application funding cycles each year.

(2) Public notice of application funding cycles shall be published state-wide.

(3) A grant application package will be sent to all persons interested in applying for public participation grants. Grant application packages will include notice of grant application deadlines, grant guidelines, and application forms.

(4) Grant applications will be evaluated by the department. To be funded, applications must include all required elements as outlined in the guidelines.

(5) The obligation of the department to make grant payments is contingent upon the availability of funds through legislative appropriation, and such other conditions not reasonably foreseeable which may preclude awarding such grants.

(6) The department, on at least a biennial basis, will determine the amount of funding available for public participation grants and establish an application and funding cycle. The minimum amount of money available for public participation grants established by the Model Toxics Control Act shall be one percent of the moneys deposited into the state and the local toxics control accounts.

(7) The department shall not be held responsible for payment of salaries, consultant fees, or other costs related to a contract of the grantee.

(8) To the extent that the Constitution and laws of the state of Washington permit, the grantee shall indemnify and hold the department harmless, from and against, any liability for any or all injuries to persons or property arising from the negligent act or omission of the grantee arising out of a grant contract.

(9) All grants under this chapter shall be consistent with the provisions of "Financial Guidelines for Grant Management" WDOE 80-6, May 1980, Reprinted March 1982, or such subsequent guidelines.

[Statutory Authority: 1989 c 2. 89-21-072 (Order 89-26), § 173-321-080, filed 10/17/89, effective 11/17/89.]

Chapter 173-322 WAC
REMEDIAL ACTION GRANTS

WAC

173-322-010	Purpose and authority.
173-322-020	Definitions.
173-322-030	Relation to other legislation and administrative rules.
173-322-040	General.
173-322-050	Applicant eligibility.
173-322-060	Applicant screening and evaluation process.
173-322-070	Eligible costs.
173-322-080	State assistance share.
173-322-090	Grants to economically disadvantaged local governments.
173-322-100	Grants for site hazard assessments.
173-322-110	Fiscal controls.
173-322-120	Grant administration.

WAC 173-322-010 Purpose and authority. This chapter recognizes that the state contains hundreds of hazardous waste sites which threaten the state's water resources, including those used for public drinking water; that many of our municipal landfills are current or potential hazardous waste sites and present serious threats to human health and the environment; and that the costs of eliminating these threats in many cases are beyond the financial means of local governments and ratepayers.

The purpose of this chapter is to establish requirements for a program of grants to local governments for remedial action pursuant to RCW 70.105D.070 (3)(a) and (7). The department shall provide grants to local governments for remedial actions including site hazard assessments, remedial investigations, feasibility studies, pilot studies, remedial designs, interim actions, and cleanup actions at hazardous waste sites.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-010, filed 5/1/90, effective 6/1/90.]

WAC 173-322-020 Definitions. (1) Unless otherwise defined in this chapter, words and phrases used in this chapter shall be defined according to WAC 173-340-200.

(2) "Act" means the "Model Toxics Control Act," chapter 70.105D RCW

(3) "Agreed order" means an order issued under WAC 173-340-530.

(4) "Cleanup action" means any remedial action, except interim actions, taken at a site to eliminate, render less toxic, stabilize, contain, immobilize, isolate, treat, destroy, or remove a hazardous substance that complies with cleanup standards, utilizes permanent solutions to the maximum extent practicable, and includes adequate monitoring to ensure the effectiveness of the cleanup action.

(5) "Consent order" means an order issued under chapter 90.48 or 70.105B RCW.

(6) "Decree" means consent decree under WAC 173-340-520. "Consent decree" is synonymous with decree.

(7) "Department" means the department of ecology.

(8) "Enforcement order" means an order issued under WAC 173-340-540.

(9) "Grant agreement" means a binding agreement between the local government and the department that authorizes the transfer of funds to the local government to

reimburse it for a portion of expenditures in support of a specified scope of services.

(10) "Hazard ranking" means the ranking for hazardous waste sites to be used by the department pursuant to chapter 70.105D RCW.

(11) "Hazardous waste site" means any facility where there has been confirmation of a release or threatened release of a hazardous substance that requires remedial action.

(12) "Independent remedial actions" means remedial actions conducted without department oversight or approval and not under an order or decree.

(13) "Interim action" means a remedial action conducted under WAC 173-340-430 that partially addresses the cleanup of a site.

(14) "Local government" means any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county.

(15) "Minimum functional standards" means the requirements of chapter 173-304 WAC, the minimum functional standards for solid waste handling.

(16) "National Priority List (NPL)" means a list of hazardous waste sites at which the United States Environmental Protection Agency intends to proceed with enforcement or cleanup action.

(17) "Oversight costs" are remedial action costs of the department or the United States Environmental Protection Agency reasonably attributable to the administration of an order or decree for remedial action at a hazardous waste site.

(18) "Pilot study" means an experiment in remedial action method, with the purpose of testing the suitability of a particular cleanup technology or process for remedial action at a particular site.

(19) "Potentially liable person (PLP)" means any person whom the department finds, based on credible evidence, to be liable under RCW 70.105D.040.

(20) "Remedial action" means any action or expenditure to identify, eliminate, or minimize any threat or potential threat posed by hazardous substances to human health or the environment including any investigative and monitoring activities with respect to any release or threatened release of a hazardous substance and any health assessments or health effects studies conducted in order to determine the risk or potential risk to human health.

(21) "Remedial design (RD)" means an engineering study during which technical plans and specifications are developed to guide subsequent cleanup action at a hazardous waste site.

(22) "Remedial investigation/feasibility study (RI/FS)" means a study intended to collect, develop, and evaluate sufficient information regarding a site to enable the selection of a cleanup action.

(23) "Routine cleanup action" means a remedial action that consists of a cleanup action meeting the requirements in WAC 173-340-130(7).

(24) "Site hazard assessment" means a remedial action that consists of an investigation performed under WAC 173-340-320.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-020, filed 5/1/90, effective 6/1/90.]

WAC 173-322-030 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous waste investigation and cleanup.

(2) Nothing in this chapter shall modify the legal settlements and enforcement orders the department has secured with potentially liable parties for remedial action. The execution of remedies pursuant to court order or decree shall in no way be contingent upon the availability of grant funding.

(3) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-030, filed 5/1/90, effective 6/1/90.]

WAC 173-322-040 General. (1) Appropriation and allocation of funds. Grants will be awarded within the limits of available funds. The obligation of the department to make grant payments is contingent upon the availability of funds through legislative appropriation and allotment, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums, the obligation of the department is contingent upon the allotment of funds during the next biennium.

(2) Remedial action grants shall be used to supplement local government funding and funding from other sources to carry out required remedial action.

(3) The department may fund all or portions of eligible grant applications.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-040, filed 5/1/90, effective 6/1/90.]

WAC 173-322-050 Applicant eligibility. (1) All applicants must be local governments as defined in this chapter.

(2) Any local government is eligible to apply for a remedial action grant, except that only a local health district may apply for a site hazard assessment grant.

(3) Eligibility for all remedial action grants except site hazard assessment grants is limited to applicants that meet the following standards.

(a) The applicant must be a local government which is a potentially liable person (PLP) at a hazardous waste site. The local government may be the sole PLP, or there may be other PLPs at the site.

(b) The local government must meet one of the following standards:

(i) The department must have required the local government to perform some phase of remedial action. That requirement may take any of the following forms, hereinafter referred to as "order or decree": A consent decree under chapter 70.105D or 70.105B RCW requiring remedial action at the site, or an enforcement order or an agreed order under chapter 70.105D or 70.105B RCW requiring remedial action at the site, or an enforcement order or a consent order under chapter 90.48 RCW requiring remedial action at the site

prior to March 1, 1989, or an amendment to such an order subsequent to March 1, 1989.

(ii) The local government which is also a potentially responsible party under the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (CERCLA) as amended by the Superfund Amendments and Reauthorization Act of 1986 (SARA) must have entered into a decree requiring remedial action at a hazardous waste site with the United States Environmental Protection Agency, provided that such agreement has been signed or acknowledged by the department in writing as a sufficient basis for remedial action grant funding.

(iii) The local government must have signed an agreement with the department requiring another PLP to perform remedial action at a landfill site and that agreement must take one of the forms specified in (b)(i) of this subsection. The local government must also have entered into an agreement with that PLP to reimburse the PLP for a portion of incurred remedial action costs with the sole purpose of providing relief to ratepayers and/or taxpayers from some remedial action costs.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-050, filed 5/1/90, effective 6/1/90.]

WAC 173-322-060 Applicant screening and evaluation process. (1) Remedial action grant applications, except those for site hazard assessments, will be evaluated by the department on a first-come, first-served basis. If pending grant applications exceed available funding, then the department may prioritize applications in accordance with subsection (4) of this section.

(2) Remedial action grant applications must:

(a) Include a commitment by the local government for local funds to match grant funds according to the requirements of WAC 173-322-080.

(b) Include a scope of work which accomplishes the requirements of an order or decree with the department except for the site hazard assessments, which must include a scope of work which conforms to the requirements of WAC 173-340-320(4).

(3) Routine cleanup actions must meet the criteria under WAC 173-340-130(7).

(4) When pending grant applications, except those for site hazard assessments, exceed the amount of funds available, the department may prioritize applications based upon the following criteria:

(a) Relative hazard ranking as determined by the department in accordance with WAC 173-340-330 or the United States Environmental Protection Agency's National Priority List ranking. Higher ranking sites will receive a higher funding priority, except that routine cleanup actions may have lower ranking.

(b) Continuity of commitment. Higher priority will be given to projects which continue cleanup work at a hazardous waste site where the department has previously provided grant funding assistance.

(c) Evidence that the grant will expedite cleanup.

(d) Readiness of the applicant to proceed promptly to accomplish the scope of work.

(5) Until June 30, 1991, those local governments that applied for remedial action grants during the 1988 applica-

tion period, and that meet the eligibility requirements of WAC 173-322-050(3), will be given funding priority for all remedial action grants, except site hazard assessment grants.

(6) Site hazard assessment grants will be evaluated and prioritized for funding based upon the following criteria:

(a) Potential public health or environmental threat from the site.

(b) Ownership of the site. Publicly-owned sites will receive priority over privately-owned sites.

(c) Evidence that the assessment will expedite cleanup.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-060, filed 5/1/90, effective 6/1/90.]

WAC 173-322-070 Eligible costs. (1) Costs for remedial action at landfills.

(a) Eligible costs include reasonable costs incurred in performing:

(i) Site hazard assessments.

(ii) Remedial investigations.

(iii) Feasibility studies.

(iv) Remedial designs.

(v) Pilot studies.

(vi) Interim actions.

(vii) Cleanup actions required by order or decree with the department, including costs of activities to close a landfill in excess of the requirements of chapter 173-304 WAC.

(viii) Capital costs of long-term monitoring systems.

(ix) Operating and maintenance costs incurred during the first year of accomplishing the cleanup action after facilities and equipment have been installed or constructed.

(x) At a landfill which has been closed according to the requirements of chapter 173-301 WAC, costs to upgrade the landfill closure that are required by the department as part of cleanup action at the site.

(xi) For economically disadvantaged local governments, costs to close a landfill that are required for cleanup by order or decree with the department, including costs of the closure requirements of chapter 173-304 WAC.

(b) Ineligible costs.

(i) Costs to close a landfill according to the requirements of chapter 173-304 WAC, except for landfills of economically disadvantaged local governments.

(ii) Retroactive costs except as limited by WAC 173-322-110.

(iii) Legal fees and penalties.

(iv) Oversight costs.

(v) Operating and maintenance costs after the first year of accomplishing the remedial action.

(vi) Operating and maintenance costs of long-term monitoring.

(vii) Costs incurred in conducting independent remedial actions.

(2) Costs for remedial actions at sites other than landfills.

(a) Eligible costs will include, in addition to costs listed in subsection (1)(a) of this section, costs incurred to perform remedial action required by order or decree with the department.

(b) Ineligible costs will include, in addition to costs listed in subsection (1)(b) of this section, costs incurred to

meet departmental requirements for source control and prevention.

(3) Costs for site hazard assessments. Eligible costs include activities performed pursuant to WAC 173-340-320.

(4) Costs must be eligible under this section and must be approved by the department in order to be eligible for reimbursement.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-070, filed 5/1/90, effective 6/1/90.]

WAC 173-322-080 State assistance share. (1) Costs eligible under WAC 173-322-070 (1)(a) and (2)(a) will be considered for grant funding at up to fifty percent.

(2) Costs eligible under WAC 173-322-070 (1)(a) and (2)(a) and that are for routine cleanup actions will be considered for grant funding of up to one hundred percent for the first fifty thousand dollars of eligible costs. No grant for routine cleanup action shall exceed fifty thousand dollars.

(3) Costs for site hazard assessments which are eligible under WAC 173-322-070(3) will be considered for grant funding of up to one hundred percent for the initial twenty-five thousand dollars of costs, and up to fifty percent for the next fifty thousand dollars of eligible costs. No grant for site hazard assessment shall exceed fifty thousand dollars.

(4) In addition to grant funding under this section, economically disadvantaged local governments may apply for up to twenty-five percent supplemental funding, not to exceed seventy-five percent of eligible costs. This additional funding will be contingent on satisfactory demonstration of extraordinary financial need.

(5) If a decree or order requires a PLP other than a local government to conduct remedial action, the financial contribution of that PLP will be deducted from the amount eligible for grant funding.

(6) For applicants eligible under WAC 173-322-050 (3)(b)(iii), funding from either the local government or the PLP may be used to match remedial action grant funds.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-080, filed 5/1/90, effective 6/1/90.]

WAC 173-322-090 Grants to economically disadvantaged local governments. (1) This section authorizes a program of grants to assist economically disadvantaged local governments to pay for remedial action required by the department at landfill sites.

(2) A local government is considered economically disadvantaged if it is a county, or a local government within a county, which meets both of the following criteria:

(a) Per capita income, as measured by the latest official estimate of the Washington state office of financial management, is in the lower twenty counties in the state; and

(b) It is economically distressed as defined by chapter 43.165 RCW.

(3) The department will include a list of counties which are economically disadvantaged as defined herein in the guidelines for remedial action to be published on a biennial basis.

(4) The department will consider applications from economically disadvantaged local governments which meet the applicant eligibility requirements of WAC 173-322-050(3).

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-090, filed 5/1/90, effective 6/1/90.]

WAC 173-322-100 Grants for site hazard assessments. (1) This section authorizes a program of grants to local health districts to perform site hazard assessments at suspected hazardous waste sites. The purposes of this program are to supplement department efforts to rank hazardous waste sites, to encourage local government initiative in the cleanup of hazardous waste sites, and to expedite cleanup actions.

(2) The grant may assist hazard assessment at any site, but public sites will receive priority.

(3) The scope of work for a site hazard assessment will conform to WAC 173-340-320 and prescribed guidelines issued by the department.

(4) The department retains the authority to review and verify the results of a site hazard assessment.

(5) The assessment must be for a site not previously assessed by the department or the United States Environmental Protection Agency.

(6) No local health district may receive more than one site hazard assessment grant per biennium.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-100, filed 5/1/90, effective 6/1/90.]

WAC 173-322-110 Fiscal controls. (1) Cap on site funding. After the remedial investigation and feasibility study have been completed and a final remedial action plan has been developed by an eligible applicant, the department and the applicant will establish a final cleanup budget and negotiate a grant agreement. The grant amount in this agreement will be the final department remedial action grant fund commitment for cleanup at that hazardous waste site. Grant agreements may be amended, but requests to increase the remedial action grant budget at that site will receive a lower priority than other applications.

(2) Retroactive funding. Grant funding of costs already incurred prior to the date of the grant agreement may be allowed to local governments where the order or decree with the department postdates March 1, 1989, under one or more of the following circumstances:

(a) If the grant application period is closed when the order or decree becomes effective;

(b) If the department unreasonably delays the processing of a remedial action grant application;

(c) If there are inadequate funds in the local toxics control account to cover the entire scope of work required by decree or order; and/or

(d) If remedial actions not required by decree or order have proceeded, grants for this work may be made if the department later formally includes such work items in a decree or order.

(3) Reimbursement of grant funds. If the department awards remedial action funds to a local government that pursues a successful settlement action against a PLP who has not settled with the department, then the department shall be reimbursed for a proportional share of the settlement, after the local government's legal fees in pursuing such contribution have been deducted.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-110, filed 5/1/90, effective 6/1/90.]

WAC 173-322-120 Grant administration. (1) Local governments will be periodically informed of the availability of remedial action grant funding.

(2) A grant application package will be sent to all parties expressing interest in remedial action grants and to all local governments that have been required by decree or order to perform remedial actions. Grant application packages will include grant guidelines and application forms.

(3) Application must be made within sixty days after the date that a decree or order becomes effective, or within sixty days of the effective date of this rule for local governments which meet the requirements of WAC 173-322-050, but which have not submitted an application for remedial action grant funding.

(4) The department will prepare a guidance manual on a biennial basis to assist grant applicants and to facilitate compliance with this regulation.

[Statutory Authority: Chapter 70.105D RCW. 90-10-057 (Order 89-45), § 173-322-120, filed 5/1/90, effective 6/1/90.]

Chapter 173-325 WAC

LOW-LEVEL RADIOACTIVE WASTE DISPOSAL

WAC

173-325-010	Purpose.
173-325-020	Definitions.
173-325-030	Requirements for generators and brokers.
173-325-040	Requirements for site operator.
173-325-050	Effective dates.

WAC 173-325-010 Purpose. The purpose of this chapter is to implement section 4, chapter 2, Laws of 1986, which implements the Federal Low-Level Radioactive Waste Policy Amendments Act of 1985.

[Statutory Authority: 1986 c 2 § 5. 86-15-008 (Order 86-14), § 173-325-010, filed 7/7/86.]

WAC 173-325-020 Definitions. (1) "Site" means the commercial low-level radioactive waste disposal site located near Richland, Washington.

(2) "Low-level radioactive waste" is defined in Public Law 99-240.

(3) "Northwest compact region" means the states of Washington, Oregon, Idaho, Utah, Montana, Alaska, and Hawaii.

(4) "Southeast compact region" means the states of South Carolina, North Carolina, Virginia, Tennessee, Florida, Mississippi, Alabama, and Georgia.

(5) "Rocky Mountain compact region" means the states of Nevada, Colorado, Wyoming, and New Mexico.

(6) "Department" means the department of ecology.

(7) "P.L. 99-240" means the Federal Low-Level Radioactive Waste Policy Amendments Act of 1985, 99 Stat. 1842.

[Statutory Authority: 1986 c 2 § 5. 86-15-008 (Order 86-14), § 173-325-020, filed 7/7/86.]

WAC 173-325-030 Requirements for generators and brokers. (1) Any generator or broker shipping waste which originated outside the northwest compact region for disposal at the site shall pay to the state of Washington a surcharge as follows:

- (a) From March 1, 1986 through December 31, 1987, \$10 per cubic foot of waste.
- (b) From January 1, 1988 through December 31, 1989, \$20 per cubic foot of waste.
- (c) From January 1, 1990, through December 31, 1992, \$40 per cubic foot of waste.

(2) In addition, the department may impose penalty surcharges up to the maximum extent allowed by P.L. 99-240.

(3) Surcharge payments must be mailed or electronically transferred no later than the day the respective waste shipment leaves the state of origin. In the lower left hand corner of the check, the valid site use permit number and shipment manifest number must be recorded. For electronic transfers, the valid site use permit number, and shipment manifest number, followed by the name of the facility (limited to 35 characters) must be transmitted at the time of the transfer. A copy of the face of the check, or of the receipt for wire transfer must be attached to the shipping manifest when the shipment arrives at the disposal site.

(4) Surcharge payment may be made by a check payable to the state of Washington or by electronic transfer. Checks should be mailed to:

"LLW SURCHARGE"
 Cashier
 Fiscal Office
 Department of Ecology
 St. Martin's Campus
 Mail Stop PV-11
 Olympia, WA 98504

Electronic transfers (telegraphic abbreviation RAINIER SEA if needed) should be directed to:

Robert S. O'Brien, State Treasurer
 Concentration Account
 Rainier National Bank
 Olympia Branch
 Account #0041399260

(5) Prenotification forms (#A-1 and #B-1) are no longer required.

(6) Brokers are required to attach to the shipping manifest a tabulated list of those generators whose waste is being shipped. The tabulated list must include the following information in the format specified:

Date of Shipment:

Valid Site Use Permit #	Generator	State	Compact Region	Volume	Surcharge
-------------------------	-----------	-------	----------------	--------	-----------

(7) Any generator or broker shipping waste which was originally generated in the southeast compact region for disposal at the site must attach to the shipping manifest a copy of the letter granting certification to export waste from the southeast compact region.

(8) Any generator or broker shipping waste which was originally generated in the Rocky Mountain compact region for disposal at the site must attach to the shipping manifest a copy of the letter granting approval to export waste from the Rocky Mountain compact region.

(9) Violation of any of these requirements may result in revocation of a generator's or broker's Washington State site use permit. Upon revocation of a site use permit, subsequent reissuance may be conditioned upon agreement to comply with appropriate conditions, such as a condition that surcharge payments be made by certified or cashiers check, and be received in advance, and a condition that the state of Washington be provided specific information at least three days prior to shipment.

[Statutory Authority: 1986 c 2 § 5. 86-15-008 (Order 86-14), § 173-325-030, filed 7/7/86.]

WAC 173-325-040 Requirements for site operator.

(1) For each waste shipment for which a surcharge is due (as required by WAC 173-325-030 (1)-(2)), arriving at the facility, obtain a copy of the surcharge payment check or receipt of electronic wire transfer before receiving the waste shipment for disposal.

(2) For each waste shipment of a broker arriving at the facility, obtain the written information required by WAC 173-325-030(5) before receiving the waste shipment for disposal.

(3) For each waste shipment that contains waste which was originally generated in the southeast compact region arriving at the facility, obtain a copy of the letter granting certification to export waste from the southeast compact region.

(4) For each waste shipment that contains waste which was originally generated in the Rocky Mountain compact region arriving at the facility, obtain a copy of the letter granting approval to export waste from the Rocky Mountain compact region.

(5) Provide to the Washington state department of ecology information on each waste shipment received for disposal at the facility, as requested by the department.

[Statutory Authority: 1986 c 2 § 5. 86-15-008 (Order 86-14), § 173-325-040, filed 7/7/86.]

WAC 173-325-050 Effective dates. This chapter shall take effect April 21, 1986, (1) except the requirements in WAC 173-325-030 (1)-(2) which took effect March 1, 1986, and (2) WAC 173-325-040(3) which takes effect immediately.

[Statutory Authority: 1986 c 2 § 5. 86-15-008 (Order 86-14), § 173-325-050, filed 7/7/86.]

Chapter 173-326 WAC

COMMERCIAL LOW-LEVEL RADIOACTIVE WASTE DISPOSAL—SITE USE PERMITS

WAC	Purpose.
173-326-010	Definitions.
173-326-020	Requirements for generators and brokers using the Hanford low-level radioactive waste disposal facility.
173-326-030	

173-326-040	Payment procedures.
173-326-050	Permit fees.
173-326-060	Requirements for site operator.

WAC 173-326-010 Purpose. The purpose of this chapter is to institute a user permit system and issue site use permits, consistent with regulatory practices, for generators, packagers, or brokers using the Hanford low-level radioactive waste disposal facility (RCW 43.200.080(4)). These rules are in addition to applicable requirements of the United States Nuclear Regulatory Commission (NRC), the United States Department of Transportation (DOT), the requirements of the department of health, Title 246 WAC, other requirements of Title 173 WAC, and conditions of the license issued to the disposal site operator(s).

[Statutory Authority: Chapter 43.200 RCW. 92-24-101 (Order 91-52), § 173-326-010, filed 12/2/92, effective 3/1/93. Statutory Authority: RCW 43.200.080. 88-18-098 (Order 88-27), § 173-326-010, filed 9/7/88; 87-14-078 (Order 87-11), § 173-326-010, filed 7/1/87.]

WAC 173-326-020 Definitions. (1) For the purposes of chapter 173-326 WAC, "low-level radioactive waste" means any radioactive waste which is acceptable for disposal at the Hanford commercial radioactive waste disposal facility.

(2) "Broker" means a person who performs one or more of the following functions for a low-level radioactive waste generator, provided it shall not mean a carrier whose sole function is to transport such low-level radioactive waste:

- (a) Arranges for transportation of the low-level radioactive waste;
- (b) Collects and/or consolidates shipments of such low-level radioactive waste;
- (c) Processes such low-level radioactive waste in some manner.

(3) "Department" means the department of ecology.

(4) "Generator" means the last person who puts radioactive material to practical use, and who then declares it to be no longer of use or value.

(5) "Shipment" means the total low-level radioactive waste material transported in one vehicle.

(6) "Packager" means broker for the purposes of chapter 173-326 WAC.

(7) "Nuclear utility" means any operating or inactive nuclear utility.

[Statutory Authority: Chapter 43.200 RCW. 92-24-101 (Order 91-52), § 173-326-020, filed 12/2/92, effective 3/1/93. Statutory Authority: RCW 43.200.080. 87-14-078 (Order 87-11), § 173-326-020, filed 7/1/87.]

WAC 173-326-030 Requirements for generators and brokers using the Hanford low-level radioactive waste disposal facility. (1) Each generator and broker of low-level radioactive waste shall obtain a new site use permit for disposal of waste at the Hanford commercial radioactive waste disposal facility by March 1, 1993. Permits shall be renewed annually to maintain the permit in active status. Failure to obtain a new permit by March 1, 1993, or to renew a permit in subsequent years, will result in the generator or broker being placed in inactive status. Reinstatement to active status will require the generator or broker to submit additional payment as specified in WAC 173-326-050 (1)(e).

(1992 Ed.)

(2) Generator and broker permit application requirements.

(a) Each generator and broker shall pay the site use permit fees as required in chapter 173-326 WAC.

(b) An application for a site use permit shall be filed on the department form provided.

(c) Each application must be signed by an individual authorized to sign on behalf of the organization.

(d) To ensure timely renewal, generators and brokers need to submit their applications for site use permit renewal a minimum of four weeks prior to the expiration date of their permit. Renewal notices will be sent to generators approximately three months prior to the permit expiration date.

(3) Number of permits required by each generator.

(a) Generators who own multiple facilities within the same state may apply for one permit, provided the same contact person within the generator's company will be responsible for responding to the department of ecology for matters pertaining to the waste shipments. Otherwise separate permits will be required.

(b) Facilities which are owned by the same generator and located in different states will require separate permits.

(c) Facilities who both generate and broker wastes must obtain separate generator and broker permits.

(4) Additional generator and broker requirements.

(a) Permittees must provide additional information as requested by the department of ecology for the safe management of low-level radioactive waste in the state of Washington.

(b) A broker must ensure that a generator has a current, unencumbered site use permit prior to shipment of that generator's waste to the Hanford commercial radioactive waste disposal facility located in the state of Washington, and that the waste will arrive at the disposal facility prior to the expiration date of the generator's permit.

(c) A broker shall ensure all low-level radioactive waste contained within a shipment accepted for disposal at the Hanford commercial radioactive waste disposal facility in the state of Washington is traceable to the original generators and states, regardless of whether the waste is shipped directly from the point of generation to the disposal facility, or shipped through a licensed service facility such as a facility for recycling, processing, compacting, incinerating, collecting, or brokering waste.

[Statutory Authority: Chapter 43.200 RCW. 92-24-101 (Order 91-52), § 173-326-030, filed 12/2/92, effective 3/1/93. Statutory Authority: RCW 43.200.080. 88-21-072 (Order 88-41), § 173-326-030, filed 10/18/88; 87-14-078 (Order 87-11), § 173-326-030, filed 7/1/87.]

WAC 173-326-040 Payment procedures. (1) Generator payment procedures.

Each application shall be accompanied by full payment of the generator fee as required in WAC 173-326-050 (1)(c). Generators who fail to apply for a permit by March 1, 1993, or fail to maintain a permit in active status, must also include payment of the reinstatement fee as required in WAC 173-326-050 (1)(e).

(2) Broker fee payment procedures.

Each application shall be accompanied by full payment of the broker fee as required in WAC 173-326-050(2). Brokers who fail to apply for a permit by March 1, 1993, or

[Title 173 WAC—p 711]

fail to maintain a permit in active status, must also include payment of the reinstatement fee as required in WAC 173-326-050 (1)(e).

[Statutory Authority: Chapter 43.200 RCW. 92-24-101 (Order 91-52), § 173-326-040, filed 12/2/92, effective 3/1/93. Statutory Authority: RCW 43.200.080. 88-18-098 (Order 88-27), § 173-326-040, filed 9/7/88; 87-14-078 (Order 87-11), § 173-326-040, filed 7/1/87.]

WAC 173-326-050 Permit fees. (1) Generator site use permit fee.

(a) For the purpose of assessing generators permit fees (other than nuclear utilities, new generators, and applicants requiring reinstatement), the total annual volume (cubic feet) deposited by each generator during the previous calendar year will be used. Nuclear utilities fees will be based on the ratio found in (b) of this subsection.

(b) The annual site use permit fee for generators shall be determined by the following ratio:

Classification	Ratio
< 50 cubic feet	1x
≥ 50 < 500 cubic feet	2x
≥ 500 < 1000 cubic feet	5x
≥ 1000 < 2500 cubic feet	10x
≥ 2500 cubic feet	35x
Nuclear Utilities	100x

The value of x, which represents the annual base fee, will be published in the *Washington State Register* pursuant to (c) of this subsection.

(c) Fees will be adjusted annually, as required, utilizing the 1x:2x:5x:10x:35x:100x ratio. Fee rates will be published in the *Washington State Register* and distributed to generators by the first day of each calendar year.

(d) A new generator's permit fees will be based on the generator's estimate of the volume (cubic feet) of waste requiring disposal during the first year. If a generator's waste deposits exceed the generator's volume projection, the permit will be suspended until additional fees are paid. Overpayment will be credited toward the site use permit fee for the subsequent year.

(e) A generator or broker who has not obtained a new permit by March 1, 1993, or fails to maintain annual renewal of the permit shall include an additional payment of one thousand dollars. The permit fee for these generators will be based on the volume of waste disposed during the most recent calendar year in which waste was disposed.

(2) Broker site use permit fee. The annual cost of a permit for a broker shall be one thousand dollars.

[Statutory Authority: Chapter 43.200 RCW. 92-24-101 (Order 91-52), § 173-326-050, filed 12/2/92, effective 3/1/93.]

WAC 173-326-060 Requirements for site operator. The site operator shall provide the department of ecology with information on each waste shipment accepted for disposal at the site as requested by the department.

[Statutory Authority: Chapter 43.200 RCW. 92-24-101 (Order 91-52), § 173-326-060, filed 12/2/92, effective 3/1/93.]

Chapter 173-330 WAC

USED AUTOMOTIVE OIL RECYCLING SIGN REQUIREMENTS FOR AUTOMOTIVE OIL SELLERS

WAC

173-330-010	Purpose.
173-330-020	Applicability.
173-330-030	Definitions.
173-330-040	Responsibility to procure and post sign.
173-330-050	Sign criteria.
173-330-060	Posting and maintenance of signs.
173-330-070	Effective date and compliance.
173-330-900	Logo and sign.

WAC 173-330-010 Purpose. Pursuant to chapter 19.114 RCW it is recognized by the legislature that used automotive oil is a limited resource that can be collected and recycled. Further, improper disposal results in undesirable effects upon the economy and the environment.

These rules provide minimum requirements for the posting and maintaining of durable and legible signs informing the public of proper collection and disposal of used oil.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-010, filed 7/19/84.]

WAC 173-330-020 Applicability. All sellers as defined in WAC 173-330-030 shall conform to the provisions of this chapter.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-020, filed 7/19/84.]

WAC 173-330-030 Definitions. Unless the context clearly requires otherwise, the definitions in this section apply throughout this chapter.

(1) "Used oil" means automotive oil which through use, storage, or handling has become unsuitable for its original purpose due to the presence of impurities or the loss of original properties.

(2) "Recycle" means to prepare used oil for reuse as a petroleum product by refining, rerefining, reclaiming, reprocessing, or other means or to use used oil as a substitute for a petroleum product made from new oil, provided that the preparation or use is operationally safe, environmentally sound, and complies with all laws and rules.

(3) "Department" means the department of ecology.

(4) "Director" means the director of the department of ecology.

(5) "Person" means an individual, private or public corporation, partnership, cooperative, association, estate, municipality, political subdivision or governmental agency or instrumentality.

(6) "Seller" means any person selling oil within the state of Washington who sells 100 gallons or more of automotive oil per year for use off their premises.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-030, filed 7/19/84.]

WAC 173-330-040 Responsibility to procure and post sign. It shall be the responsibility of all sellers to procure, post and maintain a sign in accordance with the

provisions within this chapter. Signs will be provided by the department.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-040, filed 7/19/84.]

WAC 173-330-050 Sign criteria. (1) A sign shall be constructed of white card stock - 80# or of equal or better weight and quality material and:

- a. Be commercially printed;
- b. Be size 11" x 14" or 3" x 5" shelf hangers;
- c. Have type style - Helvetica;
- d. Have type color - Green #345; and
- e. Carry the recycling logo.

(2) ALL SIGNS WILL CARRY THIS MESSAGE:

RECYCLE USED OIL

- * Prevent water pollution
- * Protect public health
- * Reuse limited resources

FOR MORE INFORMATION CALL 1-800-RECYCLE

(3) The sign shall indicate how and where used oil may be properly disposed of including the location and hours of operation of conveniently located used oil collection facilities. This information may be clearly handwritten in an information block on the sign.

(4) The sign shall be substantially in the form shown in WAC 173-330-900 contained herein.

(5) Oil sellers may provide their own signs. Limited variances from the sign criteria will be allowed, subject to the department's approval. Proofs of the seller-provided signs must be submitted to the department for written approval prior to posting.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-050, filed 7/19/84.]

WAC 173-330-060 Posting and maintenance of signs. (1) Signs shall be posted in a location visible to the public at or near the point of sale. This location shall either be at the automotive oil display location within the store, at the cash register or on the exterior window facing.

(2) Signs shall be maintained at the required location and shall remain fully visible and legible at all times.

(3) Requests for replacement of damaged, lost or misplaced signs will be made in a timely manner not to exceed two business days. Seller-provided signs should be replaced as soon as practical but not to exceed 14 days.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-060, filed 7/19/84.]

WAC 173-330-070 Effective date and compliance.

(1) This chapter shall become effective October 1, 1984. Sellers shall post signs in accordance with the provisions of this chapter as of that date.

(2) Sellers shall notify the department in writing by January 1, 1985 of compliance.

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-070, filed 7/19/84.]

WAC 173-330-900 Logo and sign.



"IMPROPER DISPOSAL OF USED OIL IS A SIGNIFICANT SOURCE OF WATER POLLUTION, CONTRIBUTES TO THE OVERALL SHORTAGE OF ENERGY RESOURCES AND HAS A DETRIMENTAL IMPACT ON GENERAL PUBLIC HEALTH"

-CHAPTER 173-330 WAC

RECYCLE USED OIL AT:
 LOCATION _____
 TIMES _____

FOR MORE INFORMATION CALL
 THE WASHINGTON STATE DEPT. OF ECOLOGY
 LITTER CONTROL AND RECYCLING PROGRAM
1-800-RECYCLE

[Statutory Authority: Chapter 19.114 RCW. 84-16-005 (Order DE 84-24), § 173-330-900, filed 7/19/84.]

**Chapter 173-331 WAC
 VEHICLE BATTERY RECYCLING**

WAC

- 173-331-010 Authority and purpose.
- 173-331-100 Definitions.
- 173-331-200 Posting of retail notices.
- 173-331-210 Optional exemption to the core charge.
- 173-331-220 Condition of used batteries.
- 173-331-300 Conditions for suspending the acceptance requirements.
- 173-331-400 Authorization of used battery collectors.
- 173-331-410 Reporting requirements.
- 173-331-500 Handling of used vehicle batteries.
- 173-331-600 Severability.

WAC 173-331-010 Authority and purpose. The department of ecology has been authorized under RCW 70.95.670 to implement and enforce a vehicle battery recycling program. The purpose of this chapter is to establish procedures for implementation and enforcement of RCW 70.95.610 through 70.95.660, which is designed to accomplish the recycling of used vehicle batteries through a system of exchanging batteries at the point of sale.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-010, filed 2/11/91, effective 3/14/91.]

WAC 173-331-100 Definitions. The following words, terms, and phrases shall, for the purposes of this chapter, have the meanings given below:

(1) The terms wholesale and retail shall have the same meanings provided in Title 82 RCW, Excise taxes. For example, wholesale refers to the sale of vehicle batteries to retail establishments, and retail refers to sale of vehicle batteries that require payment of the retail sales tax.

(2) Authorization means the license issued by the department of licensing and approved by the department of ecology as authorized by RCW 70.95.610.

(3) Business location means the premises where business is conducted.

(4) Core charge means an added charge applied during a retail sale to be refunded to the purchaser when a used battery of equivalent size is offered in exchange.

(5) Department means the department of ecology.

(6) Disposal means to deposit, dump, abandon, or spill any vehicle battery into or on any land, water, solid waste landfill, or solid waste incinerator.

(7) Equivalent size means weighing fifty to one hundred fifty percent of the vehicle battery purchased.

(8) New vehicle battery means any vehicle battery intended for use as an electrical energy storage device.

(9) Original battery installation means any new vehicle or device that requires a vehicle battery to be connected or installed before use is possible.

(10) Replacement vehicle battery means any vehicle battery sold at retail (a) that is not sale of an original battery installation, or (b) without verifiable proof that the buyer needs the battery for an original battery installation.

(11) Secondary lead smelter means any facility licensed by a state or federal government to reclaim lead from vehicle batteries.

(12) Unified business identifier service location means:

(a) The field offices of the departments of revenue and labor and industries.

(b) The tax offices of employment security.

(c) The Olympia office of the secretary of state.

(d) The business license service office of the department of licensing.

(13) Used vehicle battery means any vehicle battery intended for reclamation, separate from a vehicle or other installation.

(14) Vehicle battery means any battery used or capable of use, without modification, in any vehicle, truck, mobile home, recreational vehicle, boat, airplane, or utility vehicle, having a core of elemental lead, with the capability to produce six or more volts. For purposes of application of the core charge only, a vehicle battery shall be a replacement

battery and the core charge shall not apply to original battery installations.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-100, filed 2/11/91, effective 3/14/91.]

WAC 173-331-200 Posting of retail notices. (1) This section refers to the notices required by RCW 70.95.630(2).

(2) All required notices must be posted in the main vehicle battery display area or other area clearly visible to battery purchasers. Notices must be posted no lower than four feet and no higher than seven feet, level to the floor. Notices must be maintained free of any viewing obstructions.

Note: Notices are available by calling 1-800-RECYCLE.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-200, filed 2/11/91, effective 3/14/91.]

WAC 173-331-210 Optional exemption to the core charge. A retailer is not required to apply a core charge to a battery sale when the buyer submits verifiable proof that the battery is needed for an original battery installation. Verifiable proof shall consist of a voucher issued by the seller of the vehicle or device containing the following:

(1) Title, address, and phone of the retail establishment;

(2) Brief description of the vehicle or device sold with indication that a battery(s) was not included;

(3) Date of issuance;

(4) Name of the purchaser; and

(5) Signature of the sales agent.

Vouchers shall be valid for ninety days following the date of issuance and must be surrendered to the retailer during the battery sale.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-210, filed 2/11/91, effective 3/14/91.]

WAC 173-331-220 Condition of used batteries. (1) A purchaser must provide a used battery in a fully-capped, unbroken condition to qualify for waiver of the core charge. A retailer may refuse to accept a broken or uncapped battery, or may condition acceptance upon provision of a leak proof, acid resistant container, such as a plastic pail, holding the broken or uncapped battery.

(2) The department shall provide on its 1-800-RECYCLE Hotline a list of recycling outlets available for broken and uncapped batteries.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-220, filed 2/11/91, effective 3/14/91.]

WAC 173-331-300 Conditions for suspending the acceptance requirements. (1) This section refers to the suspension order required by RCW 70.95.650(3).

(2) When the department deems it necessary, the department shall determine the market price paid for used lead batteries by contacting agents of the secondary smelters historically used to process used vehicle batteries originating in Washington. The department shall determine transportation costs by contacting at least three trucking firms and at least three shipping firms for estimated unit costs to transport batteries to each secondary smelter. If the lowest estimated transportation costs are higher than market price paid for all

of the secondary smelters, the department will order a suspension.

(3) The department will notify retailers of any suspension by sending notice to trade organization representatives and other businesses on our vehicle battery program mailing list. (To get on the vehicle battery mailing list call (206) 438-7541.)

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-300, filed 2/11/91, effective 3/14/91.]

WAC 173-331-400 Authorization of used battery collectors. (1) This section refers to RCW 70.95.610(1).

(2) Beginning May 1, 1991, any person who collects used vehicle batteries nonincidental to accepting exchanges during sale of new batteries, excluding local governments with approved local hazardous waste plans pursuant to RCW 70.105.220, must have a department approved authorization issued by the department of licensing.

(3) License fees for each business location shall be fifteen dollars annually.

(4) Application forms for a used vehicle battery collector authorization will be available at unified business identifier service locations located throughout the state.

Note: Assistance finding the nearest unified business identifier service is available by calling 1-800-562-8203.

(5) Ecology review of application for authorization as a used vehicle battery collector:

(a) Any application for authorization or reauthorization as a used vehicle battery collector is subject to review and final approval or disapproval by the department of ecology.

(b) The applicant will be notified if the department has evidence that the applicant has failed to comply with environmental regulations affecting the handling, storage, transport, reclamation, or disposal of vehicle batteries. Such failure is sufficient reason for the department to disapprove or rescind authorization as a vehicle battery collector.

(c) Notification shall be in writing and shall include a statement of the basis for the department's belief that failure to comply has occurred and an indication of the department's intentions regarding authorization.

(d) The applicant may submit to the department comments on the department's intended action and basis for that action. Any comments shall be submitted in writing to the department within fifteen days from date of receipt of the department's notice letter unless the department provides an extension.

(e) After reviewing any comments, the department shall issue a letter notifying the applicant of its decision whether to authorize the applicant as a vehicle battery collector. Such decision may be appealed to the department by written application for review within fifteen days of receipt by the applicant of the department's decision. The department shall issue a notice of its decision on the application for review within fifteen days of the receipt of such application. This notice shall be the department's final decision.

(f) Pursuant to RCW 43.21B.110 (1)(c), the department's final decision is appealable to the pollution control hearings board.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-400, filed 2/11/91, effective 3/14/91.]

WAC 173-331-410 Reporting requirements. (1) Consistent with RCW 70.95.280, persons who collect used vehicle batteries in Washington state and recondition them, reclaim them, or arrange transport of the used batteries to out-of-state locations shall report annually to the department quantities of batteries collected and their destination(s).

Note: Reporting instructions and forms are available by calling 1-800-RECYCLE.

(2) Requests for confidentiality will be honored if the reporting business shows that publication of the information may affect adversely its competitive position and if the department determines that confidentiality is not detrimental to public interest.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-410, filed 2/11/91, effective 3/14/91.]

WAC 173-331-500 Handling of used vehicle batteries. Nothing in this chapter shall exempt wholesalers, retailers, or used battery collectors from the sections pertaining to lead-acid battery handling in the state's dangerous waste regulations, chapter 173-303 WAC, including WAC 173-303-050 (Department of ecology cleanup authority), WAC 173-303-145 (Spills and discharges into the environment), and WAC 173-303-960 (Special powers and authorities of the department). All shall use prudent procedures of handling and storing used vehicle batteries.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-500, filed 2/11/91, effective 3/14/91.]

WAC 173-331-600 Severability. If any provision of this chapter or its application to any person is held invalid, the remainder of the chapter or the application of the provision to other persons or circumstances is not affected.

Note: Copies of RCW 70.95.280 and 70.95.610 through 70.95.670, WAC 173-303-050, 173-303-145 and 173-303-960, and additional copies of this chapter, chapter 173-331 WAC, are available from the Department of Ecology, Office of Waste Reduction, Recycling, and Litter Control, Mailstop PV-11, Olympia, WA 98504-8711, (206) 438-7541, 1-800-RECYCLE, 1-800-732-9253.

[Statutory Authority: RCW 70.95.670. 91-05-020 (Order 90-36), § 173-331-600, filed 2/11/91, effective 3/14/91.]

Chapter 173-335 WAC

VEHICLE TIRE RECYCLING AND REMOVAL GRANT REGULATION

WAC

173-335-010	Purpose and authority.
173-335-020	Definitions.
173-335-030	Relation to other legislation and administrative rules.
173-335-040	General.
173-335-050	Administration.

WAC 173-335-010 Purpose and authority. The purpose of this chapter is to set forth eligibility criteria and requirements for the conduct of a vehicle tire recycling and removal program pursuant to RCW 70.95.530. The department shall provide grants to local government for:

(1) Removal of discarded vehicle tires from unauthorized dump sites;

(2) Programs and projects that encourage storage, proper disposal, and recycling of discarded vehicle tires, and to stimulate private recycling programs throughout the state.

This chapter is designed to provide assistance to local governments in carrying out these vital functions pursuant to chapter 70.95 RCW.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-010, filed 8/4/88.]

WAC 173-335-020 Definitions. (1) "Department" means the Washington state department of ecology.

(2) "Local governments" means any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-020, filed 8/4/88.]

WAC 173-335-030 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous and solid waste management and disposal.

(2) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-030, filed 8/4/88.]

WAC 173-335-040 General. (1) The obligation of the department to make grant payments is contingent upon the availability of funds through legislative appropriation and allotment, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums, the obligation of the department is contingent upon the allotment of funds during the next biennium.

(2) All grants under this chapter shall be consistent with the provisions of *Financial Guidelines for Grants Management*, WDOE 80-6, May 1980, reprinted March 1982, or subsequent guidelines adopted thereafter.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-040, filed 8/4/88.]

WAC 173-335-050 Administration. (1) Application for funds shall be made on forms provided by the department and shall include detailed information specified in a guidance document also provided by the department. Application information shall include a confirmation of eligibility and a description of the program and budget.

(2) Applicant eligibility

(a) Applicant must be a local government.

(b) Applicant must have, be processing, or have scheduled an update for a local solid waste management plan.

(3) Eligible project costs

Direct costs related to vehicle tire recycling and removal.

(4) Matching requirements

Grants will be made up to seventy-five percent of the total eligible project costs.

(5) Criteria for allocation of funds

Grants are to be awarded on a competitive basis. Applications will be evaluated on the following criteria:

(a) Number of illegally disposed tires;

(b) Solid waste management priorities of chapter 70.95 RCW;

(c) Solid waste plan which involves tires;

(d) Local tire ordinance;

(e) Generation of information;

(f) Innovation.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-050, filed 8/4/88.]

Chapter 173-340 WAC

MODEL TOXICS CONTROL ACT—CLEANUP

WAC

PART I—OVERALL CLEANUP PROCESS

173-340-100	Purpose.
173-340-110	Applicability.
173-340-120	Overview.
173-340-130	Administrative principles.
173-340-140	Deadlines.

PART II—DEFINITIONS AND USAGE

173-340-200	Definitions.
173-340-210	Usage.

PART III—SITE REPORTS AND CLEANUP DECISIONS

173-340-300	Site discovery and reporting.
173-340-310	Initial investigation.
173-340-320	Site hazard assessment.
173-340-330	Hazardous sites list.
173-340-340	Biennial program report.
173-340-350	State remedial investigation and feasibility study.
173-340-360	Selection of cleanup actions.

PART IV—SITE CLEANUP AND MONITORING

173-340-400	Cleanup actions.
173-340-410	Compliance monitoring requirements.
173-340-420	Periodic review.
173-340-430	Interim actions.
173-340-440	Institutional controls.
173-340-450	Releases from underground storage tanks.

PART V—ADMINISTRATIVE PROCEDURES FOR REMEDIAL ACTIONS

173-340-500	Determination of status as a potentially liable person.
173-340-510	Administrative options for remedial actions.
173-340-520	Consent decrees.
173-340-530	Agreed orders.
173-340-540	Enforcement orders.
173-340-550	Payment of remedial action costs.
173-340-560	Mixed funding.

PART VI—PUBLIC PARTICIPATION

173-340-600	Public notice and participation.
173-340-610	Regional citizens' advisory committees.

PART VII—CLEANUP STANDARDS

173-340-700	Overview of cleanup standards.
173-340-702	General policies.
173-340-704	Use of method A.
173-340-705	Use of method B.
173-340-706	Use of method C.
173-340-707	Analytical considerations.

(1) Removal of discarded vehicle tires from unauthorized dump sites;

(2) Programs and projects that encourage storage, proper disposal, and recycling of discarded vehicle tires, and to stimulate private recycling programs throughout the state.

This chapter is designed to provide assistance to local governments in carrying out these vital functions pursuant to chapter 70.95 RCW.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-010, filed 8/4/88.]

WAC 173-335-020 Definitions. (1) "Department" means the Washington state department of ecology.

(2) "Local governments" means any political subdivision, regional governmental unit, district, municipal or public corporation, including cities, towns, and counties. The term encompasses but does not refer specifically to the departments within a city, town, or county.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-020, filed 8/4/88.]

WAC 173-335-030 Relation to other legislation and administrative rules. (1) Nothing in this chapter shall influence, affect, or modify department programs, regulations, or enforcement of applicable laws relating to hazardous and solid waste management and disposal.

(2) All grants shall be subject to existing accounting and auditing requirements of state laws and regulations applicable to the issuance of grant funds.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-030, filed 8/4/88.]

WAC 173-335-040 General. (1) The obligation of the department to make grant payments is contingent upon the availability of funds through legislative appropriation and allotment, and such other conditions not reasonably foreseeable by the department rendering performance impossible. When the grant crosses over bienniums, the obligation of the department is contingent upon the allotment of funds during the next biennium.

(2) All grants under this chapter shall be consistent with the provisions of *Financial Guidelines for Grants Management*, WDOE 80-6, May 1980, reprinted March 1982, or subsequent guidelines adopted thereafter.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-040, filed 8/4/88.]

WAC 173-335-050 Administration. (1) Application for funds shall be made on forms provided by the department and shall include detailed information specified in a guidance document also provided by the department. Application information shall include a confirmation of eligibility and a description of the program and budget.

(2) Applicant eligibility

(a) Applicant must be a local government.

(b) Applicant must have, be processing, or have scheduled an update for a local solid waste management plan.

(3) Eligible project costs

Direct costs related to vehicle tire recycling and removal.

(4) Matching requirements

Grants will be made up to seventy-five percent of the total eligible project costs.

(5) Criteria for allocation of funds

Grants are to be awarded on a competitive basis. Applications will be evaluated on the following criteria:

(a) Number of illegally disposed tires;

(b) Solid waste management priorities of chapter 70.95 RCW;

(c) Solid waste plan which involves tires;

(d) Local tire ordinance;

(e) Generation of information;

(f) Innovation.

[Statutory Authority: RCW 70.95.260. 88-17-002 (Order 88-25), § 173-335-050, filed 8/4/88.]

Chapter 173-340 WAC

MODEL TOXICS CONTROL ACT—CLEANUP

WAC

PART I—OVERALL CLEANUP PROCESS

- 173-340-100 Purpose.
- 173-340-110 Applicability.
- 173-340-120 Overview.
- 173-340-130 Administrative principles.
- 173-340-140 Deadlines.

PART II—DEFINITIONS AND USAGE

- 173-340-200 Definitions.
- 173-340-210 Usage.

PART III—SITE REPORTS AND CLEANUP DECISIONS

- 173-340-300 Site discovery and reporting.
- 173-340-310 Initial investigation.
- 173-340-320 Site hazard assessment.
- 173-340-330 Hazardous sites list.
- 173-340-340 Biennial program report.
- 173-340-350 State remedial investigation and feasibility study.
- 173-340-360 Selection of cleanup actions.

PART IV—SITE CLEANUP AND MONITORING

- 173-340-400 Cleanup actions.
- 173-340-410 Compliance monitoring requirements.
- 173-340-420 Periodic review.
- 173-340-430 Interim actions.
- 173-340-440 Institutional controls.
- 173-340-450 Releases from underground storage tanks.

PART V—ADMINISTRATIVE PROCEDURES FOR REMEDIAL ACTIONS

- 173-340-500 Determination of status as a potentially liable person.
- 173-340-510 Administrative options for remedial actions.
- 173-340-520 Consent decrees.
- 173-340-530 Agreed orders.
- 173-340-540 Enforcement orders.
- 173-340-550 Payment of remedial action costs.
- 173-340-560 Mixed funding.

PART VI—PUBLIC PARTICIPATION

- 173-340-600 Public notice and participation.
- 173-340-610 Regional citizens' advisory committees.

PART VII—CLEANUP STANDARDS

- 173-340-700 Overview of cleanup standards.
- 173-340-702 General policies.
- 173-340-704 Use of method A.
- 173-340-705 Use of method B.
- 173-340-706 Use of method C.
- 173-340-707 Analytical considerations.

173-340-708	Human health risk assessment procedures.
173-340-710	Applicable state and federal laws.
173-340-720	Ground water cleanup standards.
173-340-730	Surface water cleanup standards.
173-340-740	Soil cleanup standards.
173-340-745	Soil cleanup standards for industrial sites.
173-340-750	Cleanup standards to protect air quality.
173-340-760	Sediment cleanup standards.

PART VIII—GENERAL PROVISIONS

173-340-800	Property access.
173-340-810	Worker safety and health.
173-340-820	Sampling and analysis plans.
173-340-830	Analytical procedures.
173-340-840	General submittal requirements.
173-340-850	Recordkeeping requirements.
173-340-860	Endangerment.
173-340-870	Project coordinator.
173-340-880	Emergency actions.
173-340-890	Severability.

DISPOSITION OF SECTIONS FORMERLY
CODIFIED IN THIS CHAPTER

173-340-010	Purpose. [Statutory Authority: Chapter 70.105B RCW. 88-13-036 (Order 88-40), § 173-340-010, filed 6/8/88.] Repealed by 90-08-086, filed 4/3/90, effective 5/4/90. Statutory Authority: Chapter 70.105D RCW.
173-340-020	Definitions. [Statutory Authority: Chapter 70.105B RCW. 88-13-036 (Order 88-40), § 173-340-020, filed 6/8/88.] Repealed by 90-08-086, filed 4/3/90, effective 5/4/90. Statutory Authority: Chapter 70.105D RCW.
173-340-030	Emergency actions. [Statutory Authority: Chapter 70.105B RCW. 88-13-036 (Order 88-40), § 173-340-030, filed 6/8/88.] Repealed by 90-08-086, filed 4/3/90, effective 5/4/90. Statutory Authority: Chapter 70.105D RCW.
173-340-040	Settlement procedures. [Statutory Authority: Chapter 70.105B RCW. 88-13-036 (Order 88-40), § 173-340-040, filed 6/8/88.] Repealed by 90-08-086, filed 4/3/90, effective 5/4/90. Statutory Authority: Chapter 70.105D RCW.
173-340-050	State conducted remedial action—Notice. [Statutory Authority: Chapter 70.105B RCW. 88-13-036 (Order 88-40), § 173-340-050, filed 6/8/88.] Repealed by 90-08-086, filed 4/3/90, effective 5/4/90. Statutory Authority: Chapter 70.105D RCW.

PART I—OVERALL CLEANUP PROCESS

WAC 173-340-100 Purpose. This chapter is promulgated under the Model Toxics Control Act. It establishes administrative processes and standards to identify, investigate, and cleanup facilities where hazardous substances have come to be located. It defines the role of the department and encourages public involvement in decision making at these facilities.

The goal of this chapter is to implement the policy declared by chapter 70.105D RCW. This chapter provides a workable process to accomplish effective and expeditious cleanups in a manner that protects human health and the environment. This chapter is primarily intended to address releases of hazardous substances caused by past activities although its provisions may be applied to potential and ongoing releases of hazardous substances from current activities.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-100, filed 4/3/90, effective 5/4/90.]

WAC 173-340-110 Applicability. (1) This chapter shall apply to all facilities where there has been a release or threatened release of a hazardous substance that may pose a threat to human health or the environment. Under this chapter, the department may require or take those actions necessary to investigate and remedy these releases.

(2) Nothing herein shall be construed to diminish the department's authority to address a release or threatened release under other applicable laws or regulations. The cleanup process and procedures under this chapter and under other laws may be combined. The department may initiate a remedial action under this chapter and may upon further analysis determine that another law is more appropriate, or vice versa.

(3) If a hazardous substance remains at a facility after actions have been completed under other applicable laws or regulations, the department may apply this chapter to protect human health or the environment.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-110, filed 4/3/90, effective 5/4/90.]

WAC 173-340-120 Overview. (1) Purpose. This section provides an overview of the cleanup process that typically will occur at a site where a release of a hazardous substance has been discovered. If there are any inconsistencies between this section and any specifically referenced sections, the referenced section shall govern.

(2) Site discovery. Site discovery includes:

(a) Release reporting. A reporting program is established to help identify potential hazardous waste sites. Owners and operators who know of or discover a release of a hazardous substance due to past activities must report the release to the department within ninety days of discovery, under WAC 173-340-300. Most current releases of hazardous substances must be reported to the department under the state's hazardous waste, underground storage tank, or water quality laws. The term "hazardous substance" includes a broad range of substances as defined by chapter 70.105D RCW.

(b) Initial investigation. Within ninety days of learning of a hazardous substance release, the department will conduct an initial investigation of the site under WAC 173-340-310. For sites that may need further remedial action, an early notice letter will be sent to the owner and operator informing them of the department's decision.

(3) Site priorities. Priorities for further remedial action are set by the following process:

(a) Site hazard assessment. Based on the results of the initial investigation, a site hazard assessment will be performed if necessary, under WAC 173-340-320. The purpose of the site hazard assessment is to gather information to confirm whether a release has occurred and to enable the department to evaluate the relative potential hazard posed by the release. If the department decides that no further action is required, it will notify the public of that decision through the site register.

(b) Hazardous sites list. The department will maintain a list of sites that require further remedial action. Sites will be listed after the completion of a site hazard assessment. Sites placed on the list will be ranked using the department's hazard ranking method. The department may remove a site

from the hazardous sites list if the cleanup action at the site has achieved the cleanup standards and all remedial actions except confirmational monitoring have been completed. See WAC 173-340-330.

(c) Biennial program report. Every even-numbered year, the department will prepare a biennial program report for the legislature. The hazard ranking, along with other factors, will be used in this report to identify the projects and expenditures recommended for appropriation. See WAC 173-340-340.

(4) Detailed site investigations and cleanup decisions. The following steps will be taken to ensure that the proper method of cleanup is chosen for the site.

(a) Remedial investigation and feasibility study. A state remedial investigation/feasibility study will be performed at ranked sites under WAC 173-340-350. The state remedial investigation/feasibility study defines the extent of the problems at the site and evaluates alternative cleanup actions.

(b) Selection of cleanup action. The department will evaluate the remedial investigation/feasibility study, establish cleanup levels and the point or points at which they must be complied with in accordance with the procedures provided for in WAC 173-340-700 through 173-340-760 and select a cleanup action that will protect human health and the environment and meet the other requirements of WAC 173-340-360. At some sites, restrictions on the use of the land and resources (institutional controls) will be required to insure continued protection of human health and the environment. See WAC 173-340-440. The cleanup action will be set forth in a draft cleanup action plan that addresses cleanup requirements for hazardous substances at the site. After public comment on the draft plan, a final cleanup action plan will be issued by the department. (See WAC 173-340-700 for additional overview discussion of these requirements.)

(5) Site cleanup. Once the appropriate cleanup action has been selected for the site, the actual cleanup will be performed.

(a) Cleanup actions. WAC 173-340-400 describes the design and construction requirements for implementing the cleanup action plan.

(b) Compliance monitoring and review. The cleanup action must include compliance monitoring under WAC 173-340-410 and in some cases periodic review under WAC 173-340-420 to ensure the long-term effectiveness of the cleanup action.

(6) Interim actions. Under certain conditions it may be appropriate to take early actions at a site prior to completing the process described in subsections (2) through (5) of this section. WAC 173-340-430 describes when it is appropriate to take these early or interim actions and the requirements for such actions.

(7) Leaking underground storage tanks. Underground storage tank (UST) owners and underground storage tank operators regulated under chapter 90.76 RCW are required to perform specific actions in addition to what other site owners and operators would do under this chapter. Such additional actions include reporting of a confirmed release within twenty-four hours, follow-up investigation, free product removal and immediate assessment of the threat to human health and the environment at the site. A written report describing the site and the actions taken must be submitted within ninety days of release confirmation.

Depending on the results of these actions, additional remedial actions may be required. WAC 173-340-450 describes these and other requirements for leaking underground storage tanks.

(8) Procedures for conducting remedial actions.

(a) Remedial action agreements. The department has authority to take remedial actions or to order persons to conduct remedial actions under WAC 173-340-510 and 173-340-540. However, the department encourages agreements for investigations and cleanups in appropriate cases. These agreements can be agreed orders or consent decrees reached under the procedures of WAC 173-340-520 and 173-340-530.

(b) Independent remedial actions. Persons may decide to perform investigations and cleanups without department approval under this chapter. The department will use the appropriate requirements contained herein in its evaluation of the adequacy of any independent remedial actions performed. Nothing in this chapter prohibits persons from performing such actions before the department is ready to act at the site; however, all interim and cleanup actions must be reported to the department under WAC 173-340-300. Furthermore, independent remedial actions are done at the potentially liable person's own risk and the department may take or require additional remedial actions at these sites at any time. (See WAC 173-340-510.)

(c) Public participation. The public will receive notice and an opportunity to comment on most of the steps in the cleanup process. At many sites, a public participation plan will be prepared to provide opportunities for more extensive public involvement in the cleanup process.

These requirements are described in WAC 173-340-600.

[Statutory Authority: Chapter 70.105D RCW, 91-04-019, § 173-340-120, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-120, filed 4/3/90, effective 5/4/90.]

WAC 173-340-130 Administrative principles. (1) Introduction. The department shall conduct or require remedial actions consistent with the provisions of this section, as typically defined by the subsequent sections.

(2) Information sharing. It is the policy of the department to make available information about releases or threatened releases with property owners or other persons with potential liability for a site in order to encourage them to conduct prompt remedial action. It is also the policy of the department to make information available to interested members of the public.

(3) Information exchange.

(a) Technical assistance. Persons are encouraged to contact the department and seek assistance on the general administrative and technical requirements of this chapter. The department may provide informal advice and assistance to potentially liable persons at any time during the development of a remedial action. Unless the department is providing formal guidance for the implementation of an order or decree any comments by the department or its agents are advisory and not commitments or approvals binding on the department. A person may not represent this advice as an approval of a remedial action. If the person requesting the advice is seeking binding commitments or approvals an order or consent decree shall be used. The department advises

persons requiring site-specific legal or technical assistance to hire an attorney or engineering consultant with the appropriate environmental expertise.

(b) Response to requests. If the department believes that responding to a request for technical assistance would involve substantial time or resources or would not be in the public interest, the department may decline to provide the requested assistance. The department shall inform the requester of its response. The department may require one or more of the following before devoting time to the request:

- (i) A proposed schedule;
- (ii) Payment, in advance, for its costs in responding to the request;
- (iii) Other assurances that the requester is serious about carrying out the provisions of this chapter; or
- (iv) Other information.

(4) Scope of public participation. The department seeks to encourage public participation in all steps of the cleanup process. The department shall encourage a level of participation appropriate to the conditions at a facility and the level of the public's interest.

(5) Scope of information. It is the department's intention that adequate information will be gathered at a site to enable decisions on appropriate actions. It is also the department's intention that decisions be made once adequate information is obtained. Studies can be performed and submittals made at varying levels of detail appropriate to the conditions at the site. For example, the department might decide that a study of a small site with minimal ground water impacts need not include as detailed an analysis of the ground water flow system as for a study of a geologically more complex site. Once the department has adequate information it will make cleanup decisions within the framework provided in this chapter and in site-specific orders or decrees.

(6) Combining steps. Several steps in the cleanup process may be combined into fewer steps, when appropriate. For example, the department and a potentially liable person may agree that conditions at a site are such that the remedial investigation/feasibility study and remedial design and implementation steps could be combined into a single step.

(7) Routine cleanup actions. Flexibility in the scope of investigations and in combining steps may be particularly appropriate for routine cleanup actions. For example, the department may decide to approve a routine cleanup action based upon a single investigation that includes a site hazard assessment and a simplified state remedial investigation/feasibility study and engineering design plan.

(a) A cleanup action may be considered routine if the following criteria are met:

- (i) It involves an obvious and limited choice among cleanup methods;
- (ii) It uses a cleanup method that is reliable and has proven capable of accomplishing cleanup standards;
- (iii) Cleanup standards for each hazardous substance addressed by the cleanup are obvious and undisputed, and allow an adequate margin of safety for protection of human health and the environment;
- (iv) The department has experience with similar actions;

and

(v) The action does not require an environmental impact statement.

(b) Routine cleanup actions consist of or are comparable to one or more of the following remedial actions:

- (i) Cleanup of above-ground structures;
 - (ii) Cleanup of below-ground structures;
 - (iii) Cleanup of contaminated soils where the action would restore the site to cleanup levels; or
 - (iv) Cleanup of solid wastes, including containers.
- (c) Cleanup of ground water will not normally be considered a routine cleanup action.

(d) A routine cleanup action may be conducted under any of the procedures described in WAC 173-340-510. However, the department will attempt to ensure that all routine cleanup action decisions are consistent with this chapter.

(8) Preparation of documents. Except for the initial investigation, any of the studies, reports, or plans used in the cleanup process can be prepared by either the department or the potentially liable person. The department retains all authority to review and verify the documents submitted and to make decisions based on the documents.

(9) Inter-agency coordination.

(a) The department shall ensure appropriate local, state, and federal agencies and tribal organizations are kept informed and, as appropriate, involved in the development and implementation of remedial actions. The department may require a potentially liable person to undertake this responsibility. If the potentially liable person demonstrates that they are unable to obtain adequate involvement to allow the remedial action to proceed by a particular government agency or tribe, the department shall request the involvement of the agency or tribe.

(b) The nature and degree of coordination and consultation shall be commensurate with the other agencies and tribes interest and need at the site. Interested agencies and tribes shall also be included in the mailing list for public notices under WAC 173-340-600. To facilitate coordination, it is important for the agencies and tribes to provide specific comments, including the identification of additional information needed or mitigating measures that are necessary or desirable to satisfy their concerns.

(c) In order to provide for expeditious cleanup actions, all federal, state, and local agencies are encouraged to coordinate when providing notices, holding meetings and hearings, and preparing documents. Whenever reasonable, the department shall coordinate and combine its activities with other agencies and tribes to minimize the duplication of notices, hearings and preparation of documents, unless otherwise prohibited.

(10) Appeals. Unless otherwise indicated all department decisions made under this chapter are remedial decisions and may be appealed only as provided for in RCW 70.105D.060.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-130, filed 4/3/90, effective 5/4/90.]

WAC 173-340-140 Deadlines. (1) Purpose. It is the department's intent to move sites through the cleanup process as expeditiously as possible. However, the department is limited by the amount of personnel and funds it can expend in any given fiscal year. This section is intended to

establish reasonable deadlines for remedying releases within these constraints. The procedure for setting priorities is described in WAC 173-340-330 and 173-340-340.

(2) Within ninety days of learning of a release or threatened release of a hazardous substance, the department shall complete an initial investigation under WAC 173-340-310.

(3) At least twice a year, the department will determine which sites with completed initial investigations are a high priority for further investigation. At that time, the department will schedule high priority sites for further investigations to commence within six months. This determination will be based on best professional judgment of department staff. Sites may be scheduled for further investigation at any time if the department determines that the site warrants expedited action.

(4) The department shall complete the site hazard assessment and hazard ranking on high priority sites within one hundred eighty days of the scheduled start date. These sites will be identified in the department's site register. Sites not designated as a high priority will be scheduled for future investigations and listed in the biennial report to the legislature (WAC 173-340-340). The department will conduct at least thirty-five site hazard assessments each fiscal year until the number of sites needing site hazard assessments are reduced below this number.

(5) Within thirty days of ranking, the department shall designate which sites are a high priority for a state remedial investigation/feasibility study and which sites are a lower priority where further action can be delayed. The department shall review these lower priority sites and provide an opportunity for public comment as part of the biennial report to the legislature (WAC 173-340-340).

(6) For all sites designated as a high priority the state remedial investigation/feasibility study shall be completed under WAC 173-340-350 within eighteen months of signing the order or decree. The department may extend the deadline up to twelve months if the circumstances at the site merit a longer timeframe. The department shall provide the public an opportunity to comment on any extension. The department shall initiate a state remedial investigation/feasibility study on at least ten sites per fiscal year.

(7) The department shall select the cleanup action under WAC 173-340-360 and file a consent decree or issue an order for cleanup action for all designated high priority sites within six months of the completion of the state remedial investigation/feasibility study. The department may extend the deadline for up to four months for consent decree and order discussions. The department shall provide the public with an opportunity to comment on any deadline extension.

(8) The department will publish site schedules for designated high priority sites in the site register under WAC 173-340-600(6).

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-140, filed 4/3/90, effective 5/4/90.]

PART II—DEFINITIONS AND USAGE

WAC 173-340-200 Definitions. For the purpose of this chapter, the following definitions shall apply:

"Act" means the same as the "Model Toxics Control Act" and "chapter 70.105D RCW."

"Acute toxicity" means the ability of a hazardous substance to cause injury or death to an organism as a result of a short-term exposure to a hazardous substance.

"Agreed order" means an order issued under WAC 173-340-530.

"All practicable methods of treatment" means all technologies and/or methods currently available and demonstrated to work under similar site circumstances or through pilot studies, and applicable to the site at reasonable cost. These include "all known available and reasonable methods of treatment" (AKART) for discharges or potential discharges to waters of the state, and "best available control technologies" for releases of hazardous substances into the air resulting from cleanup actions.

"Applicable state and federal laws" means all legally applicable requirements and those requirements that the department determines, based on the criteria in WAC 173-340-710(3), are relevant and appropriate requirements.

"Area background" means the concentrations of hazardous substances that are consistently present in the environment in the vicinity of a site which are the result of human activities unrelated to releases from that site.

"Bioconcentration factor" means the ratio of the concentration of a hazardous substance in the tissue of an aquatic organism divided by the hazardous substance concentration in the ambient water in which the organism resides.

"Carcinogen" means any substance or agent that produces or tends to produce cancer in humans. For implementation of this chapter, the term carcinogen will apply to substances on the United States Environmental Protection Agency lists of A (known human) and B (probable human) carcinogens, and any substance which causes a significant increased incidence of benign or malignant tumors in a single, well conducted animal bioassay, consistent with the weight of evidence approach specified in the United States Environmental Protection Agency's Guidelines for Carcinogen Risk Assessment as set forth in 51 FR 33992 et seq. as presently published or as subsequently amended or republished.

"Carcinogenic potency factor" or "CPF" means the upper 95th percentile confidence limit of the slope of the dose-response curve and is expressed in units of (mg/kg-day)⁻¹. When derived from human epidemiological data, the carcinogenic potency factor may be a maximum likelihood estimate.

"Chronic reference dose" means an estimate (with an uncertainty spanning an order of magnitude or more) of a daily exposure level for the human population, including sensitive subpopulations, that is likely to be without an appreciable risk of adverse effects during a lifetime.

"Chronic toxicity" means the ability of a hazardous substance to cause injury or death to an organism resulting from repeated or constant exposure to the hazardous substance over an extended period of time.

"Cleanup" means the implementation of a cleanup action or interim action.

"Cleanup action" means any remedial action, except interim actions, taken at a site to eliminate, render less toxic, stabilize, contain, immobilize, isolate, treat, destroy, or

remove a hazardous substance that complies with WAC 173-340-360.

"Cleanup action plan" means the document prepared by the department under WAC 173-340-360 which selects the cleanup action and specifies cleanup standards and other requirements for the cleanup action.

"Cleanup level" means the concentration of a hazardous substance in soil, water, air, or sediment that is determined to be protective of human health and the environment under specified exposure conditions.

"Cleanup process" means the process for identifying, investigating, and cleaning up hazardous waste sites under chapter 70.105D RCW.

"Cleanup standards" means the standards promulgated under RCW 70.105D.030 (2)(d). Establishing cleanup standards requires specification of the following:

Hazardous substance concentrations that protect human health and the environment ("cleanup levels");

The location on the site where those cleanup levels must be attained ("points of compliance"); and

Additional regulatory requirements that apply to a cleanup action because of the type of action and/or the location of the site. These requirements are specified in applicable state and federal laws and are generally established following the selection of a specific cleanup action.

"Closure site assessment" means a site assessment required for closure of an underground storage tank pursuant to rules adopted under chapter 90.76 RCW.

"Compliance monitoring" means a remedial action that consists of monitoring as described in WAC 173-340-410.

"Containment" means a container, vessel, barrier, or structure, whether natural or constructed, which confines a hazardous substance within a defined boundary and prevents or minimizes its release into the environment.

"Contaminant" means any hazardous substance that does not occur naturally or occurs at greater than natural background levels.

"Curie" means the measure of radioactivity defined as that quantity of radioactive material which decays at the rate of 3.70×10^{10} transformations per second. This decay rate is nearly equivalent to that exhibited by 1 gram of radium in equilibrium with its disintegration products.

"Day" means calendar day; however, any document due on the weekend or a holiday may be submitted on the first working day after the weekend or holiday.

"Decree" means consent decree under WAC 173-340-520. "Consent decree" is synonymous with decree.

"Department" means the department of ecology.

"Developmental reference dose" means an estimate (with an uncertainty of an order of magnitude or more) of an exposure level for the human population, including sensitive subgroups, that is likely to be without an appreciable risk of developmental effects.

"Direct contact" means exposure to hazardous substances through ingestion or dermal contact.

"Director" means the director of ecology or the director's designee.

"Environment" means any plant, animal, natural resource, surface water (including underlying sediments), ground water, drinking water supply, land surface (including tidelands and shorelands) or subsurface strata, or ambient air

within the state of Washington or under the jurisdiction of the state of Washington.

"Exposure" means subjection of an organism to the action, influence, or effect of a hazardous substance (chemical agent) or physical agent. Exposure is quantified as the amount of the agent available at the exchange boundaries (e.g., skin, lungs, gut) and available for absorption.

"Exposure parameters" means those parameters used to derive an estimate of the exposure to a hazardous substance.

"Exposure pathway" means the path a hazardous substance takes or could take from a source to an exposed organism. An exposure pathway describes the mechanism by which an individual or population is exposed or has the potential to be exposed to hazardous substances at or originating from a site. Each exposure pathway includes an actual or potential source or release from a source, an exposure point, and an exposure route. If the exposure point differs from the source of the hazardous substance, the exposure pathway also includes a transport/exposure medium.

"Facility" means any building, structure, installation, equipment, pipe or pipeline (including any pipe into a sewer or publicly owned treatment works), well, pit, pond, lagoon, impoundment, ditch, landfill, storage container, motor vehicle, rolling stock, vessel, or aircraft; or any site or area where a hazardous substance, other than a consumer product in consumer use, has been deposited, stored, disposed of, or placed, or otherwise come to be located.

"Federal cleanup law" means the Comprehensive Environmental Response, Compensation, and Liability Act of 1980, as amended by the Superfund Amendments and Reauthorization Act of 1986, 42 U.S.C. 9601 et seq., as presently promulgated or as subsequently amended or repromulgated.

"Fish diet fraction" means the percentage of the total fish or shellfish in an individual's diet that is obtained or has the potential to be obtained from the site.

"Food crop" means any domestic plant which is produced for the purpose of, or may be used in whole or in part for, consumption by people or livestock. This shall include nursery, root, or seedstock to be used for the production of food crops.

"Free product" means a hazardous substance that is present as a nonaqueous phase liquid (that is, liquid not dissolved in water).

"Ground water" means water in a saturated zone or stratum beneath the surface of land or below a surface water.

"Hazard index" means the sum of two or more hazard quotients for multiple hazardous substances and/or multiple exposure pathways.

"Hazardous sites list" means the list of hazardous waste sites maintained under WAC 173-340-330.

"Hazardous substance" means any dangerous or extremely hazardous waste as defined in RCW 70.105.010 (5) and (6), or any dangerous or extremely dangerous waste as designated by rule under chapter 70.105 RCW; any hazardous substance as defined in RCW 70.105.010(14) or any hazardous substance as defined by rule under chapter 70.105 RCW; any substance that, on the effective date of this section, is a hazardous substance under section 101(14) of the federal cleanup law, 42 U.S.C., Sec. 9601(14); petroleum or petroleum products; and any substance or category of

substances, including solid waste decomposition products, determined by the director by rule to present a threat to human health or the environment if released into the environment.

The term hazardous substance does not include any of the following when contained in an underground storage tank from which there is not a release: Crude oil or any fraction thereof or petroleum, if the tank is in compliance with all applicable federal, state, and local law.

"Hazardous waste site" means any facility where there has been confirmation of a release or threatened release of a hazardous substance that requires remedial action.

"Hazard quotient" or "HQ" means the ratio of the dose of a single hazardous substance over a specified time period to a reference dose for that hazardous substance derived for a similar exposure period.

"Highest beneficial use" means the beneficial use of a resource generally requiring the highest quality in the resource. For example, for many hazardous substances, providing protection for the beneficial use of drinking water will generally also provide protection for a great variety of other existing and future beneficial uses of ground water.

"Independent remedial actions" means remedial actions conducted without department oversight or approval and not under an order or decree.

"Indicator hazardous substances" means the subset of hazardous substances present at a site selected under WAC 173-340-708 for monitoring and analysis during any phase of remedial action for the purpose of characterizing the site or establishing cleanup requirements for that site.

"Inhalation correction factor" means a multiplier that is used to adjust exposure estimates based on ingestion of drinking water to take into account exposure to hazardous substances which are volatilized and inhaled during use of the water.

"Initial investigation" means a remedial action that consists of an investigation under WAC 173-340-310 to determine that a release or threatened release may have occurred that warrants further action under this chapter.

"Institutional control" means a measure undertaken to limit or prohibit activities that may interfere with the integrity of a cleanup action or result in exposure to hazardous substances at the site.

"Integrated risk information system" or "IRIS" means a data base developed by the United States Environmental Protection Agency which provides a summary of information on hazard identification and dose-response assessment for specific hazardous substances.

"Interim action" means a remedial action conducted under WAC 173-340-430 that partially addresses the cleanup of a site.

"Interspecies scaling factor" means the conversion factor used to take into account differences between animals and humans.

"Legally applicable requirements" means those cleanup standards, standards of control, and other human health and environmental protection requirements, criteria, or limitations promulgated under state or federal law that specifically address a hazardous substance, cleanup action, location, or other circumstances at the site.

"Lowest observed adverse effect level" or "LOAEL" means the lowest concentration of a hazardous substance at

which there is a statistically or biologically significant increase in the frequency or severity of an adverse effect between a population and a control group.

"Mail" means delivery through the United States Postal Service or an equivalent method of delivery or transmittal, including private mail carriers, or personal delivery.

"Maximum contaminant level" or "MCL" means the maximum concentration of a contaminant established by either the Washington state board of health or the United States Environmental Protection Agency under the Federal Safe Drinking Water Act (42 U.S.C. 300f et seq.) and published in chapter 248-54 WAC or 40 C.F.R. 141 as presently promulgated or subsequently amended or repromulgated.

"Maximum contaminant level goal" or "MCLG" means the maximum concentration of a contaminant established by either the Washington state board of health or the United States Environmental Protection Agency under the Federal Safe Drinking Water Act (42 U.S.C. 300f et seq.) and published in chapter 248-54 WAC or 40 C.F.R. 141 as presently promulgated or subsequently amended or repromulgated, for which no known or anticipated adverse effects on human health occur, including an adequate margin of safety.

"Method detection limit" or "MDL" means the minimum concentration of a compound that can be measured and reported with 99% confidence that the value is greater than zero.

"Millirem" or "mrem" means the measure of the dose of any radiation to body tissue in terms of its estimated biological effect relative to a dose received from an exposure to one roentgen (R) of x-rays. One millirem equals 0.001 rem.

"Mixed funding" means any funding provided to potentially liable persons from the state toxics control account under WAC 173-340-560.

"Model Toxics Control Act" or "act" means the act approved by the voters at the November 1988 general election, also known as Initiative 97 (chapter 70.105D RCW).

"Natural background" means the concentration of hazardous substance consistently present in the environment which has not been influenced by localized human activities. For example, several metals naturally occur in the bedrock and soils of Washington state due solely to the geologic processes that formed these materials and the concentration of these metals would be considered natural background. Also, low concentrations of some particularly persistent organic compounds such as polychlorinated biphenyls (PCBs) can be found in surficial soils and sediment throughout much of the state due to global use of these hazardous substances. These low concentrations would be considered natural background. Similarly, concentrations of various radionuclides which are present at low concentrations throughout the state due to global distribution of fallout from bomb testing and nuclear accidents would be considered natural background.

"Natural person" means any unincorporated individual or group of individuals. The term "individual" is synonymous with "natural person."

"No observed adverse effect level" or "NOAEL" means the exposure level at which there are no statistically or

biologically significant increases in frequency or severity of adverse effects between the exposed population and its appropriate control; some effects may be produced at this level, but they are not considered to be adverse, nor precursors to specific adverse effects.

"Null hypothesis" means an assumption about hazardous substance concentrations at a site when evaluating compliance with cleanup levels established under this chapter. The null hypothesis is that the site is contaminated at concentrations which exceed cleanup levels. This shall not apply to cleanup levels based on background concentrations.

"Order" means an enforcement order issued under WAC 173-340-540 or an agreed order issued under WAC 173-340-530.

"Owner or operator" means any person with any ownership interest in the facility or who exercises any control over the facility; or in the case of an abandoned facility, any person who had owned, or operated, or exercised control over the facility any time before its abandonment. The term does not include:

An agency of the state or unit of local government which acquired ownership or control involuntarily through bankruptcy, tax delinquency, abandonment, or circumstances in which the government involuntarily acquires title. This exclusion does not apply to an agency of the state or unit of local government which has caused or contributed to the release or threatened release of a hazardous substance from the facility; or

A person who, without participating in the management of a facility, holds indicia of ownership primarily to protect the person's security interest in the facility.

"PAHs (carcinogenic)" means those PAHs substances identified as A (known human) or B (probable human) carcinogens by the United States Environmental Protection Agency. These include benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, benzo(a)pyrene, chrysene, dibenzo(a,h)anthracene, and indeno(1,2,3-cd)pyrene.

"Permanent solution" means a cleanup action in which cleanup standards of WAC 173-340-700 through 173-340-760 can be met without further action being required at the site being cleaned up or any other site involved with the cleanup action, other than the approved disposal of any residue from the treatment of hazardous substances.

"Person" means an individual, firm, corporation, association, partnership, consortium, joint venture, commercial entity, state government agency, unit of local government, federal government agency, or Indian tribe.

"Picocurie" or "pCi" means 10^{-12} curie.

"Point of compliance" means the point or points where cleanup levels established in accordance with WAC 173-340-720 through 173-340-760 shall be attained.

"Polychlorinated biphenyls" or "PCB mixtures" means those aromatic compounds containing two benzene nuclei with two or more substituted chlorine atoms. For the purposes of this chapter, PCB includes those congeners which are identified using the appropriate analytical methods as specified in WAC 173-340-830.

"Polycyclic aromatic hydrocarbons" or "PAH" means those hydrocarbon molecules composed of two or more fused benzene rings. For the purpose of this chapter, PAH includes those compounds which are identified and quanti-

fied using the appropriate analytical methods as specified in WAC 173-340-830. The specific compounds generally included are acenaphthene, acenaphthylene, fluorene, naphthalene, anthracene, fluoranthene, phenanthrene, benzo[a]anthracene, benzo[b]fluoranthene, benzo[k]fluoranthene, pyrene, chrysene, benzo[a]pyrene, dibenzo[a,h]anthracene, indeno[1,2,3-cd]pyrene, and benzo[ghi]perylene.

"Potentially liable person" means any person whom the department finds, based on credible evidence, to be liable under RCW 70.105D.040.

"Practicable" means (except when used in the phrase "permanent to the maximum extent practicable" which is defined in WAC 173-340-360(5)) capable of being designed, constructed and implemented in a reliable and effective manner including consideration of cost. When considering cost under this analysis, an alternative shall not be considered practicable if the incremental cost of the alternative is substantial and disproportionate to the incremental degree of protection provided by the alternative over other lower cost alternatives.

"Practical quantitation limit" or "PQL" means the lowest concentration that can be reliably measured within specified limits of precision, accuracy, representativeness, completeness, and comparability during routine laboratory operating conditions, using department approved methods.

"Public notice" means, at a minimum, adequate notice mailed to all persons who have made a timely request of the department and to persons residing in the potentially affected vicinity of the proposed action; mailed to appropriate news media; published in the newspaper of largest circulation in the city or county of the proposed action; and opportunity for interested persons to comment.

"Public participation plan" means a plan prepared under WAC 173-340-600 to encourage coordinated and effective public involvement tailored to the public's needs at a particular site.

"Rad" means that quantity of ionizing radiation that results in the absorption of 100 ergs of energy per gram of irradiated material, regardless of the source of radiation.

"Radionuclide" means a type of atom which spontaneously undergoes radioactive decay. Radionuclides are hazardous substances under the act.

"Recovery by-products" means any hazardous substance, water, sludge or other materials collected in the free product removal process in response to a release from an underground storage tank.

"Reasonable maximum exposure" means the highest exposure that can be reasonably expected to occur for a human or other living organisms at a site under current and potential future site use.

"Reference dose" or "RFD" means a benchmark dose, derived from the NOAEL or LOAEL for a hazardous substance by consistent application of uncertainty factors used to estimate acceptable daily intake doses and an additional modifying factor, which is based on professional judgment when considering all available data about a substance, expressed in units of milligrams per kilogram body weight per day. This includes chronic reference doses, subchronic reference doses, and developmental reference doses.

"Regional office" means one of the regional offices of the department of ecology.

"Release" means any intentional or unintentional entry of any hazardous substance into the environment, including but not limited to the abandonment or disposal of containers of hazardous substances.

"Relevant and appropriate requirements" means those cleanup standards, standards of control, and other human health and environmental requirements, criteria, or limitations established under state and federal law that, while not legally applicable to the hazardous substance, cleanup action, location, or other circumstance at a site, the department determines address problems or situations sufficiently similar to those encountered at the site that their use is well suited to the particular site. The criteria specified in WAC 173-340-710(3) shall be used to determine if a requirement is relevant and appropriate.

"Rem" means the unit of radiation dose equivalent that is the dosage in rads multiplied by a factor representing the different biological effects of various types of radiation.

"Remedy" or "remedial action" means any action or expenditure consistent with the purposes of chapter 70.105D RCW to identify, eliminate, or minimize any threat posed by hazardous substances to human health or the environment including any investigative and monitoring activities with respect to any release or threatened release of a hazardous substance and any health assessments or health effects studies conducted in order to determine the risk or potential risk to human health.

"Restoration time frame" means the period of time needed to achieve the required cleanup levels at the points of compliance established for the site.

"Risk" means the probability that a hazardous substance, when released into the environment, will cause an adverse effect in exposed humans or other living organisms.

"Routine cleanup action" means a remedial action that consists of a cleanup action meeting the requirements in WAC 173-340-130(7).

"Safety and health plan" means a plan prepared under WAC 173-340-810.

"Sample mean" means the arithmetic mean or the average of a set of measurements. The arithmetic mean is defined as the sum of all measurements divided by the number of measurements.

"Sampling and analysis plan" means a plan prepared under WAC 173-340-820.

"Saturated zone" means the area below the water table in which all interstices are filled with water.

"Science advisory board" means the advisory board established by the department under RCW 70.105D.030(4).

"Secondary maximum contaminant level" means the maximum concentration of a secondary contaminant in water established by the United States Environmental Protection Agency under the Federal Safe Drinking Water Act (42 U.S.C. 300f et seq.) and published in 40 C.F.R. 143 as presently promulgated or as subsequently amended or repromulgated.

"Sensitive environment" means an area of particular environmental value, where a release could pose a greater threat than in other areas including: Wetlands; critical habitat for endangered or threatened species; national or state wildlife refuge; critical habitat, breeding or feeding area for fish or shellfish; wild or scenic river; rookery; riparian area; big game winter range.

"Site" means the same as facility.

"Site characterization report" means a written report describing the site and nature of a release from an underground storage tank, as described in WAC 173-340-450 (4)(b).

"Site check" means the investigation conducted pursuant to rules adopted under chapter 90.76 RCW in order to confirm a release from an underground storage tank.

"Site hazard assessment" means a remedial action that consists of an investigation performed under WAC 173-340-320.

"Site register" means the public information document described in WAC 173-340-600.

"Soil" means a mixture of organic and inorganic solids, air, water, and biota which exists on the earth's surface above bedrock, including materials of anthropogenic sources such as slag, sludge, etc.

"State remedial investigation/feasibility study" means a remedial action that consists of activities performed under WAC 173-340-350 to collect, develop, and evaluate sufficient information regarding a site to enable the selection of a cleanup plan under WAC 173-340-360.

"Status report" means a written or verbal report on the status of the interim actions taken in response to a release from an underground storage tank, as described in WAC 173-340-450 (4)(b).

"Subchronic reference dose" means an estimate (with an uncertainty of an order of magnitude or more) of a daily exposure level for the human population, including sensitive subgroups, that is likely to be without appreciable risk of adverse effects during a portion of a lifetime.

"Surface water" means lakes, rivers, ponds, streams, inland waters, salt waters, and all other surface waters and water courses within the state of Washington or under the jurisdiction of the state of Washington.

"Technically possible" means capable of being designed, constructed and implemented in a reliable and effective manner, regardless of cost.

"Total excess cancer risk" means the upper bound on the estimated excess cancer risk associated with exposure to multiple hazardous substances and multiple exposure pathways.

"Total petroleum hydrocarbons" or "TPH" means any fraction of crude oil that is contained in plant condensate, crankcase motor oil, gasoline, aviation fuels, kerosene, diesel motor fuel, benzol, fuel oil, and other products derived from the refining of crude oil. For the purposes of this chapter, TPH will generally mean those fractions of the above products that are quantified by EPA Methods 8015 or 418.1 as appropriate or other test methods approved by the department.

"Type I error" means the error made when it is concluded that an area of a site is below cleanup levels when it actually exceeds cleanup levels. This is the rejection of a true null hypothesis.

"Underground storage tank" or "UST" means an underground storage tank and connected underground piping as defined in the rules adopted under chapter 90.76 RCW.

"Underground storage tank operator" means any underground storage tank operator as defined in the rules adopted under chapter 90.76 RCW.

"Underground storage tank owner" means any underground storage tank owner as defined in the rules adopted under chapter 90.76 RCW.

"Underground storage tank release" means a confirmed release from an underground storage tank pursuant to the rules adopted under chapter 90.76 RCW.

"Unrestricted site use conditions" means restrictions on the use of the site or natural resources affected by releases of hazardous substances from the site are not required to ensure continued protection of human health and the environment.

"Upper bound on the estimated excess cancer risk of one in one hundred thousand" means the upper 95th percent confidence limit on the estimated risk of one additional cancer above the background cancer rate per one hundred thousand individuals.

"Upper bound on the estimated excess cancer risk of one in one million" means the upper 95th percent confidence limit on the estimated risk of one additional cancer above the background cancer rate per one million individuals.

"Volatile organic compound" means those carbon-based compounds listed in EPA methods 601, 602, 603, 624, 8010, 8015, 8020, 8030, 8240, 502.1, 502.2, 503.1, 524.1, 524.2, and those with similar vapor pressures or boiling points.

"Wastewater facility" means all structures and equipment required to collect, transport, treat, reclaim, or dispose of domestic, industrial, or combined domestic/industrial wastewaters.

"Wetlands" means lands transitional between terrestrial and aquatic systems where the water table is usually at or near the surface or the land is covered by shallow water. For the purposes of this classification, wetlands must have one or more of the following attributes at least periodically, the land supports predominantly hydrophytes; the substrate is predominately undrained hydric soil; and the substrate is nonsoil and saturated with water or covered by shallow water at some time during the growing season each year.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-200, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-200, filed 4/3/90, effective 5/4/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-340-210 Usage. For the purposes of this chapter, the following shall apply:

(1) Unless the context clearly requires otherwise the use of the singular shall include the plural and conversely.

(2) The terms "applicable," "appropriate," "relevant," "unless otherwise directed by the department" and similar terms implying discretion mean as determined by the department, with the burden of proof on other persons to demonstrate the requirements are or are not necessary.

(3) "Approved" means for department conducted or ordered remedial actions, or for potentially liable person conducted cleanups agreed to by the department in an agreed order or decree governing remedial actions at the site.

(4) "Conduct" means to perform or undertake whether directly or through an agent or contractor, unless this chapter expressly provides otherwise.

(5) "Include" means included but not limited to.

(6) "May" means the provision is optional and permissive, and does not impose a requirement.

(7) "Shall" means the provision is mandatory.

(8) "Threat" means threat or potential threat.

(9) "Under" means pursuant to, subject to, required by, established by, in accordance with, and similar expressions of legislative or administrative authorization or direction.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-210, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-210, filed 4/3/90, effective 5/4/90.]

PART III—SITE REPORTS AND CLEANUP DECISIONS

WAC 173-340-300 Site discovery and reporting. (1)

Purpose. As part of a program to identify hazardous waste sites, this section sets forth the requirements for reporting a release of a hazardous substance due to past activities, whether discovered before or after the effective date of this regulation. It also sets forth the requirements for reporting independent cleanup actions. The department may take any other actions it deems appropriate to identify potential hazardous waste sites consistent with chapter 70.105D RCW.

(2) **Release report.** Any owner or operator who has information that a hazardous substance has been released to the environment at the owner or operator's facility and may be a threat to human health or the environment shall report such information to the department by June 1, 1990, or for discovery of releases after this date, within ninety days of discovery. Releases from underground storage tanks as described in the rules adopted under chapter 90.76 RCW must be reported within twenty-four hours of release confirmation, in accordance with WAC 173-340-450. To the extent known, the report shall include: The identification and location of the hazardous substance, circumstances of the release and the discovery, and any remedial actions planned, completed, or underway. All other persons are encouraged to report such information to the department.

(3) **Exemptions.** The following releases are exempt from these notification requirements:

(a) Application of pesticides and fertilizers for their intended purposes and according to label instructions;

(b) Lawful and nonnegligent use of hazardous substances by a natural person for personal or domestic purposes;

(c) A release in accordance with a permit that authorizes the release;

(d) A release previously reported to the department in fulfillment of a reporting requirement in this chapter or in another law or regulation;

(e) A release previously reported to the United States Environmental Protection Agency under CERCLA, Section 103(c) (42 9603(c));

(f) A release to the air;

(g) Releases discovered in public water systems regulated by the department of health; or

(h) A release to a permitted wastewater facility.

An exemption from these notification requirements does not imply a release from liability in future actions by the department.

(4) **Report of independent actions.**

(a) **Report.** Any person who conducts an independent interim action or cleanup action shall submit a written report to the department within ninety days of the completion of

the action. For the purposes of this section, the department will consider an interim action or cleanup action complete if no remedial action other than compliance monitoring has occurred at the site for ninety days. This is not intended to preclude earlier reporting of such actions. See WAC 173-340-450 for additional requirements for reporting independent interim actions for releases from underground storage tanks.

(b) Contents. The report shall include the information in subsection (2) of this section if not already reported, and results of all site investigations, cleanup actions and compliance monitoring planned or underway. The department may require additional reports on the work performed.

(c) Combined reports. If the independent interim action or cleanup action is completed within ninety days of discovery, a single written report may be submitted on both the release and the action taken. The reports shall contain the information specified in subsections (2) and (4) of this section and shall be submitted within ninety days of completion of the interim action or cleanup action.

(d) Notification. The department shall publish a notice of all reports on independent interim actions and cleanup actions received under this section in the site register.

(5) Department response. Within ninety days of receipt of information under this section, the department shall respond in accordance with WAC 173-340-310. Receipt of information regarding an independent interim action or cleanup action under subsection (3) or (4) of this section shall not obligate the department to take any action beyond that prescribed in WAC 173-340-310 and subsection (4)(d) of this section. Neither submission of information on independent interim action and cleanup actions nor any response by the department shall release the person submitting the report or any other person from liability. The department reserves all rights to pursue any subsequent action it deems appropriate.

(6) Other obligations. Nothing in this section shall eliminate any obligations to comply with reporting requirements that may exist in a permit or under other laws.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-300, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-300, filed 4/3/90, effective 5/4/90.]

WAC 173-340-310 Initial investigation. (1) Purpose. The purpose of the initial investigation is to determine whether or not a release or threatened release of a hazardous substance may have occurred that warrants further action under this chapter.

(a) Applicability and timing. Whenever the department receives information and has a reasonable basis to believe that there may be a release or a threatened release of a hazardous substance that may pose a threat to human health or the environment, the department shall conduct an initial investigation within ninety days.

(b) Exemptions. The department shall not be required to conduct an initial investigation when:

(i) The circumstances associated with the release or threatened release are known to the department and have previously been or currently are being evaluated by the department or other government agency; or

(ii) The release is permitted.

(2) Contents. The initial investigation shall include at a minimum: A site visit and documentation of conditions observed.

(3) Department deferral to others. The department may rely on another government agency or a contractor to the department to conduct an initial investigation on its behalf, provided the department determines such agency or contractor is not suspected to have contributed to the release or threatened release of a hazardous substance and that no conflict of interest exists.

(4) Department decision. Based on the information obtained about the site, the department shall within thirty days of completion of the initial investigation make one or more of the following decisions:

- (a) A site hazard assessment is required;
- (b) Emergency remedial action is required;
- (c) Interim action is required; or

(d) The site requires no further action under this chapter at this time because either:

(i) There has been no release or threatened release of a hazardous substance; or

(ii) A release or threatened release of a hazardous substance has occurred, but in the department's judgment, does not pose a threat to human health or the environment; or

(iii) Action under another authority is appropriate.

A decision for a particular follow-up action does not preclude the department from requiring some other action in the future based on reevaluation of the site or additional information.

(5) Early notice letter.

(a) For sites requiring further remedial action under chapter 70.105D RCW, the department will notify the owner, operator, and any potentially liable person known to the department of its decision. This letter may be combined with the notice in WAC 173-340-500.

(b) The notification shall be a letter mailed to the person which includes:

(i) The basis for the department's decision;

(ii) Information on the cleanup process provided for in this chapter;

(iii) A statement that it is the department's policy to work cooperatively with persons to accomplish prompt and effective cleanups;

(iv) A person or office of the department to contact regarding the contents of the letter; and

(v) A statement that the letter is not a determination of liability and that cooperating with the department in planning or conducting a remedial action is not an admission of guilt or liability.

Nothing in this section shall preclude the department from taking or requiring appropriate remedial action at any time.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-310, filed 4/3/90, effective 5/4/90.]

WAC 173-340-320 Site hazard assessment. (1) Purpose. The purpose of the site hazard assessment is to provide sufficient sampling data and other information to:

(a) Confirm or rule out that a release or threatened release of a hazardous substance has occurred;

(b) To identify the hazardous substance and provide some information regarding the extent and concentration of the substance;

(c) Identify site characteristics that could result in the hazardous substance entering and moving through the environment;

(d) Evaluate the potential for the threat to human health and the environment; and

(e) Determine the hazard ranking of the site under WAC 173-340-330, if appropriate.

(2) Timing. Unless otherwise directed by the department, a site hazard assessment shall be completed before proceeding to any subsequent phase of remedial action, other than an emergency or interim action.

(3) Administrative options. The site hazard assessment may be conducted under any of the procedures described in WAC 173-340-510.

(4) Scope and content. A site hazard assessment is an early study to provide preliminary data regarding the relative potential hazard of the site. A site hazard assessment is not intended to be a detailed site characterization, however it shall include sufficient sampling, site observations, maps, and other information needed to meet the purposes specified in subsection (1) of this section. To fulfill this requirement, a site hazard assessment shall include, as appropriate, the following information:

(a) Identification of hazardous substances, including what was released and is threatened to be released and/or, if known, what products of decomposition, recombination, or chemical reaction are currently present on site, and an estimate of their quantities and concentrations;

(b) Evidence confirming a release or threatened release of hazardous substances to the environment;

(c) Description of facilities containing releases, if any, and their condition;

(d) Identification of the location of all areas where a hazardous substance is known or suspected to be, indicated on a site map;

(e) Consideration of surface water run-on and run-off and the hazardous substances leaching potential;

(f) Preliminary characterization of the subsurface and ground water actually or potentially affected by the release, including vertical depth to ground water and distance to nearby wells, bodies of surface water, and drinking water intakes;

(g) Preliminary evaluation of receptors, including: Human population, food crops, recreation areas, parks, sensitive environments, irrigated areas, and aquatic resources currently or potentially affected by ground water, air, or surface water containing the release of hazardous substances at the site, including distances to these receptors; and

(h) Any other physical factors which may be significant in estimating the potential or current exposure to sensitive biota.

(5) Guidance. The department shall make available guidance for how to conduct a site hazard assessment to meet the requirements of this section.

(6) Notification. The department shall make available the results of the site hazard assessment to the site's owner and operator and any person who has received a potentially liable person status letter under WAC 173-340-500 regarding the site. If the department finds after a site hazard assess-

ment that the site requires no further action, it shall publish this decision in the site register.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-320, filed 4/3/90, effective 5/4/90.]

WAC 173-340-330 Hazardous sites list. (1) Purpose. The department shall maintain a list of sites where remedial action has been determined by the department to be necessary. This hazardous sites list shall fulfill the department's responsibilities under RCW 70.105D.030 (2)(b) and (3). From this list, the department shall select those sites where action is anticipated and include those in the biennial program report. (See WAC 173-340-340.)

(2) Hazard ranking. Sites placed on the list shall be given a hazard ranking. The purpose of hazard ranking is to estimate, based on the information compiled during the site hazard assessment, the relative potential risk posed by the site to human health and the environment. This assessment considers air, ground water, and surface water migration pathways, human and nonhuman exposure targets, properties of the substances present, and the interaction of these variables.

(a) The department shall evaluate each site on a consistent basis using the procedure described in the "*Washington Ranking Method Scoring Manual*," and all revisions and additions thereto. The ranking procedure and major amendments to the manual shall be reviewed by the science advisory board established under chapter 70.105D RCW. Information obtained in the site hazard assessment, plus any additional data specified in the manual, shall be included in the hazard ranking evaluation.

(b) The department shall periodically provide notification of the results of hazard ranking in the site register established under WAC 173-340-600. The department shall make available hazard ranking results for each site to the site owner and operator and any potentially liable person known to the department prior to publishing in the site register.

(c) The department may at its discretion re-rank a site if, prior to the initiation of state action at the site, the department receives additional information within the scope of the evaluation criteria which indicates that a significant change in rank may result.

(3) Listing.

(a) Sites shall be placed on the hazardous sites list if, after the completion of a site hazard assessment, the department has determined that further action is required at the site. The list shall be updated at least once per year. Placement of a site on the hazardous sites list does not, by itself, imply that persons associated with the site are liable under chapter 70.105D RCW.

(b) The hazardous sites list shall also reflect the current status of remedial action at each site. The department may change a site's status to reflect current conditions. The status for each site shall be identified as one of the following:

- (i) Sites awaiting further remedial action;
- (ii) Sites with remedial action in progress;
- (iii) Sites where a cleanup action has been conducted but confirmational monitoring is underway;
- (iv) Sites with independent remedial actions; or
- (v) Other categories established by the department.

(4) Removing sites from the list.

(a) The department may remove a site from the list only after it has determined that:

(i) All remedial actions except confirmational monitoring have been completed and compliance with the cleanup standards has been achieved at the site; or

(ii) The listing was erroneous.

(b) A site owner, operator, or potentially liable person may request that a site be removed from the list by submitting a petition to the department. The petition shall include thorough documentation of all investigations performed, all cleanup actions taken, and of adequate compliance monitoring to demonstrate to the department's satisfaction that one of the conditions in (a) of this subsection has been met. The department may require payment of costs incurred, including an advance deposit, for review and verification of the work performed. The department shall review such petitions; however, the timing of the review shall be at its discretion and as resources may allow.

(c) The department will maintain a record of sites that have been removed from the list under (a)(i) of this subsection. This record will be made available to the public upon request.

(5) Relisting of sites. The department may relist a site which has previously been removed if it determines that the site requires further remedial action.

(6) Notice. The department shall provide public notice and an opportunity to comment when the department proposes to remove a site from the list. Additions to the list, changes in site status, and removal from the list shall be published in the site register.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-330, filed 4/3/90, effective 5/4/90.]

WAC 173-340-340 Biennial program report. (1) Before November 1 of each even-numbered year, the department shall prepare a biennial program report for the legislature containing its plan for conducting remedial actions for the following two fiscal years. This report shall identify the projects and expenditures recommended for appropriation from both the state and local toxics control accounts. In determining which sites the department shall consider for planned action, emphasis shall be given to sites posing the highest risk to human health and the environment, as indicated by a site's hazard ranking. The department may also consider other factors in setting site priorities. After legislative action and any revisions, this report shall become the department's biennial program plan.

(2) The department shall provide public notice and a hearing on the proposed plan. For purposes of this subsection only, public notice shall consist of mailings to all persons who have made a timely request and to appropriate news media, and publication in the state register. Notice shall also be provided in the site register. The public comment period on the proposed plan shall run for at least thirty days from the date of the publication in the site register.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-340, filed 4/3/90, effective 5/4/90.]

WAC 173-340-350 State remedial investigation and feasibility study. (1) Purpose. The purpose of a state remedial investigation/feasibility study is to collect, develop, and evaluate sufficient information regarding a site to enable the selection of a cleanup action under WAC 173-340-360.

(2) Timing. Unless otherwise directed by the department, a state remedial investigation/feasibility study shall be completed before selecting a cleanup action under WAC 173-340-360, except for an emergency or interim action.

(3) Administrative options. A state remedial investigation/feasibility study may be conducted under any of the procedures described in WAC 173-340-510.

(4) Public participation will be accomplished in a manner consistent with WAC 173-340-600.

(5) Scope. The scope of a state remedial investigation/feasibility study will depend on the informational needs of the specific facility. This requires that the process remain flexible, with the scope of the state remedial investigation/feasibility study varying from site to site to avoid the collection of unnecessary information so that the cleanup can proceed in a timely manner. However, in all cases sufficient information must be collected, developed, and evaluated to enable the selection of a cleanup action under WAC 173-340-360. In addition, for facilities on the federal national priorities list, the state remedial investigation/feasibility study shall comply with federal requirements.

(6) Contents. A state remedial investigation/feasibility study shall include the following information as appropriate:

(a) General facility information. General information, including: Project title; name, address, and phone number of project coordinator; legal description of the facility location; dimensions of the facility; present owner and operator; chronological listing of past owners and operators and operational history; and other pertinent information.

(b) Site conditions map. An existing site conditions map which illustrates relevant current site features such as: Property boundaries; proposed facility boundaries; surface topography; surface and subsurface structures; utility lines; well locations; and other pertinent information.

(c) Field investigations. Sufficient investigations to characterize the distribution of hazardous substances present at the site, and threat to human health and the environment. Where applicable to the site, these investigations will need to address the following:

(i) Surface water and sediments. Investigations of surface water and sediments to characterize significant hydrologic features such as: Surface drainage patterns and quantities, areas of erosion and sediment deposition, surface waters, floodplains, and actual or potential hazardous substance migration routes towards and within these features. Sufficient surface water and sediment sampling shall be performed to adequately characterize the areal and vertical distribution and concentrations of hazardous substances. Properties of surface and subsurface sediments which are likely to influence the type and rate of hazardous substance migration, or are likely to affect the ability to implement alternative cleanup actions shall be characterized.

(ii) Soils. Investigations to adequately characterize the areal and vertical distribution and concentrations of hazardous substances in the soil due to the facility. Properties of surface and subsurface soils which are likely to influence the type and rate of hazardous substance migration, or which

are likely to affect the ability to implement alternative cleanup actions shall be characterized.

(iii) Geology and ground water system characteristics. Investigations of site geology and hydrogeology to adequately characterize the areal and vertical distribution and concentrations of hazardous substances in the ground water and those features which affect the fate and transport of these hazardous substances. This shall include, as appropriate, the description, physical properties and distribution of bedrock and unconsolidated materials; ground water flow rate and gradient for affected and potentially affected ground waters; ground water divides; areas of ground water recharge and discharge; location of public and private production wells; and ground water quality data.

(iv) Air. An evaluation of air quality impacts, including sampling, where appropriate, and information regarding local and regional climatological characteristics which are likely to affect the hazardous substance migration such as: Seasonal patterns of rainfall; the magnitude and frequency of significant storm events; temperature extremes; prevailing wind direction; and wind velocity.

(v) Land use. Information characterizing human populations exposed or potentially exposed to the hazardous substance released from the facility and present and proposed land uses and zoning for the site and potentially affected areas.

(vi) Natural resources and ecology. Information to determine the impact or potential impact of the hazardous substance from the facility on the natural resources and ecology of the area such as: Sensitive environment, plant and animal species, and other environmental receptors.

(vii) Hazardous substance sources. A description of and sufficient sampling to define the location, quantity, areal and vertical extent, concentration within and sources of waste disposal areas. Where relevant, information on the physical and chemical characteristics, and the biological effects of hazardous substances shall be provided.

(viii) Regulatory classifications. Regulatory designations classifying affected air, surface water and ground water, if any.

(d) Risk assessment. A risk assessment characterizing the current and potential threats to human health and the environment that may be posed by hazardous substances. This assessment may not be required when the department determines that proposed cleanup standards are obvious and undisputed and allow an adequate margin of safety for protection of human health and the environment.

(e) Cleanup action alternatives. An evaluation of alternative cleanup actions that protect human health and the environment by eliminating, reducing, or otherwise controlling risks posed through each exposure pathway and migration route, shall be required. The number and types of alternatives to be evaluated shall take into account the characteristics and complexity of the facility. A phased approach for evaluation of alternatives may be required for certain facilities, including an initial screening of alternatives to reduce the number of potential remedies for the final detailed evaluation. The final evaluation of cleanup action alternatives that pass the initial screening shall be evaluated for compliance with the requirements in WAC 173-340-360.

(f) Work plans. A sampling and analysis plan, and a safety and health plan shall be prepared as part of state

remedial investigation/feasibility study activities. These plans shall conform to the requirements specified in this chapter.

(g) Treatability studies. The department may require treatability studies as necessary to provide sufficient information to develop and evaluate cleanup action alternatives for a site.

(h) Any information needed to fulfill the applicable requirements of the State Environmental Policy Act.

(i) Other information as required by the department.

(7) In appropriate cases the department may allow departure from the requirements of subsection (6) of this section and will allow information to be incorporated by reference to avoid unnecessary duplication.

(8) Report. A report shall be prepared at the completion of the remedial investigation/feasibility study. Additionally, the department may require reports to be submitted following discrete elements of the remedial investigation/feasibility study. Reports prepared under this section and under an order or decree shall be submitted to the department for review and approval.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-350, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-350, filed 4/3/90, effective 5/4/90.]

WAC 173-340-360 Selection of cleanup actions. (1)

Purpose.

(a) This section describes the requirements for selecting cleanup actions. It specifies the criteria for approving cleanup actions, the order of preference for cleanup technologies, policies for permanent solutions, the application of these criteria to particular situations, and the process for making these decisions. This section is intended to be used in conjunction with the cleanup standards defined in WAC 173-340-700 through 173-340-760 and the administrative principles for the overall cleanup process (WAC 173-340-130).

(b) Because cleanup actions will often involve the use of several cleanup technologies or methods at a single site, the overall cleanup action shall meet the requirements of this section.

(2) Threshold requirements.

All cleanup actions conducted under this chapter shall protect human health and the environment; shall comply with cleanup standards (see WAC 173-340-700 through 173-340-760); shall comply with applicable state and federal laws (see WAC 173-340-710); and shall provide for compliance monitoring (see WAC 173-340-410).

(3) Other requirements. In addition, the cleanup action conducted shall:

(a) Use permanent solutions to the maximum extent practicable (see WAC 173-340-360 (4), (5), (7), and (8));

(b) Provide for a reasonable restoration time frame (see WAC 173-340-360(6)); and

(c) Consider public concerns raised during public comment on the draft cleanup action plan (see WAC 173-340-360 (10) through (13)).

(4) Cleanup technologies.

(a) Cleanup of hazardous waste sites shall be conducted using technologies which minimize the amount of untreated hazardous substances remaining at a site. Toward that end,

the following technologies for addressing specific hazardous substances or pathways shall be considered in order of descending preference:

- (i) Reuse or recycling;
- (ii) Destruction or detoxification;
- (iii) Separation or volume reduction followed by reuse, recycling, destruction, or detoxification of the residual hazardous substance;
- (iv) Immobilization of hazardous substances;
- (v) On-site or off-site disposal at an engineered facility designed to minimize the future release of hazardous substances and in accordance with applicable state and federal laws;
- (vi) Isolation or containment with attendant engineering controls; and
- (vii) Institutional controls and monitoring.

(b) A combination of technologies from more than one of the categories under (a) of this subsection may be used at a specific site. For example, the source of the hazardous substance may be recovered and recycled or destroyed, while containment is used to stop the migration of hazardous substances that have reached the ground water.

(c) Since cleanup actions will often involve a combination of technologies, cleanup action alternatives shall maximize the use of higher preference technologies.

(d) Ecology does not expect that one type of technology will be used for all sites. The adoption of the technology preferences in this subsection is designed to make it more difficult to select a cleanup action with a low preference without careful explanation of why technologies above it have not been used. As noted in subsection (9) of this section, ecology expects that lower options will be appropriate for some sites.

(5) Permanent solutions.

(a) When selecting a cleanup action, preference shall be given to permanent solutions to the maximum extent practicable.

(b) A permanent solution is one in which cleanup standards can be met without further action being required at the original site or any other site involved with the cleanup action, other than the approved disposal of any residue from preferred treatment technologies under subsection (4)(a)(i) through (iii) of this section.

(c) In general, technologies which reuse, recycle, destroy, or detoxify hazardous substances will result in permanent solutions if residual hazardous substance concentrations are below cleanup levels established under WAC 173-340-700 through 173-340-760. Containment of hazardous substances and/or institutional controls alone are not permanent solutions. Other technologies, such as immobilization of hazardous substances, may provide permanent solutions under some conditions.

(d) Ecology recognizes that permanent solutions may not be practicable for all sites. A determination that a cleanup action satisfies the requirement to use permanent solutions to the maximum extent practicable is based upon consideration of a number of factors. The following criteria shall be used to determine whether a cleanup action is "permanent to the maximum extent practicable":

(i) Overall protectiveness of human health and the environment including the degree to which existing risks are reduced, time required to reduce risk at the facility and attain

cleanup standards, on-site and off-site risks resulting from implementing the alternative, the degree the cleanup action may perform to a higher level than specific standards in WAC 173-340-700 through 173-340-760, and improvement of the overall environmental quality;

(ii) Long-term effectiveness including degree of certainty that the alternative will be successful, long-term reliability, magnitude of residual risk, and effectiveness of controls required to manage treatment residues or remaining wastes;

(iii) Short-term effectiveness including protection of human health and the environment during construction and implementation of the alternative, and the degree of risk to human health and the environment prior to attainment of cleanup standards;

(iv) Permanent reduction of toxicity, mobility and volume of the hazardous substance including adequacy of the alternative in destroying the hazardous substances, reduction or elimination of hazardous substance releases and sources of releases, degree of irreversibility of waste treatment process, and the characteristics and quantity of treatment residuals generated;

(v) Ability to be implemented including consideration of whether the alternative is technically possible, availability of necessary off-site facilities, services and materials, administrative and regulatory requirements, scheduling, size, complexity, monitoring requirements, access for construction, operations and monitoring, and integration with existing facility operations and other current or potential remedial actions;

(vi) Cleanup costs. A cleanup action shall not be considered practicable if the incremental cost of the cleanup action is substantial and disproportionate to the incremental degree of protection it would achieve over a lower preference cleanup action. When selecting from among two or more cleanup action alternatives which have an equivalent level of preference under subsection (4) of this section, preference may be given to the least cost alternative. In performing this evaluation, the top three preferences in subsection (4) of this section shall be considered equivalent unless there are overriding public concerns or technical uncertainties;

(vii) The degree to which community concerns are addressed.

(e) To ensure a bias toward permanent solutions, cleanup actions conducted under this chapter including consideration of prior actions at the site shall comply with the following requirements:

(i) The cleanup action shall prevent or minimize present and future releases and migration of hazardous substances in the environment;

(ii) The cleanup action shall provide for a net reduction in the amount of a hazardous substance being released from the source area;

(iii) The cleanup action shall not rely primarily on dilution and dispersion of the hazardous substance if active remedial measures are technically possible;

(iv) A cleanup action relying primarily on institutional controls and monitoring shall not be used where it is technically possible to implement a cleanup action alternative that utilizes a higher preference cleanup technology for all or a portion of the site; and

(v) A cleanup action involving off-site transport and disposal of hazardous substances without treatment shall not be used if a treatment technology or method exists which will attain cleanup standards and is practicable.

(6) Restoration time frame.

(a) The cleanup action selected shall provide for a reasonable restoration time frame. The factors to be considered when establishing a reasonable restoration time frame shall include:

(i) Potential risks posed by the site to human health and the environment;

(ii) Practicability of achieving a shorter restoration time frame;

(iii) Current use of the site, surrounding areas, and associated resources that are, or may be, affected by releases from the site;

(iv) Potential future use of the site, surrounding areas, and associated resources that are, or may be, affected by releases from the site;

(v) Availability of alternative water supplies;

(vi) Likely effectiveness and reliability of institutional controls;

(vii) Ability to control and monitor migration of hazardous substances from the site;

(viii) Toxicity of the hazardous substances at the site; and

(ix) Natural processes which reduce concentrations of hazardous substances and have been documented to occur at the site or under similar site conditions.

(b) A longer period of time may be used for the restoration time frame for a site to achieve cleanup levels at the point of compliance if higher preference cleanup technologies in accordance with subsections (4) and (5) of this section are selected instead of on-site or off-site disposal, isolation, or containment options.

(c) When area background concentrations would result in recontamination of the site to levels which exceed cleanup levels, that portion of the cleanup action which addresses cleanup below area background concentrations may be delayed until the off-site sources of hazardous substances are controlled. In these cases the remedial action shall be considered an interim action until cleanup levels are attained.

(d) Where cleanup levels determined under method C in WAC 173-340-707 are below technically possible concentrations, concentrations that are technically possible to achieve shall be met within a reasonable time frame considering the factors in (a) of this subsection. In these cases the remedial action shall be considered an interim action until cleanup levels are attained.

(e) Extending the restoration time frame shall not be used as a substitute for active cleanup actions, when such actions are practicable.

(7) Ground water restoration.

(a) Ground water treatment to achieve the levels in WAC 173-340-720 throughout the ground water at and beyond the point of compliance shall be required where such treatment is practicable or where such treatment is not practicable, but deemed by the department to be in the public interest.

(b) When ground water treatment to achieve the cleanup levels at or beyond the point of compliance within an

existing ground water plume is not practicable the following measures shall be taken:

(i) Treatment shall be used to reduce the levels to the maximum extent practicable;

(ii) Ground water containment, including barriers or hydraulic control through ground water pumping or both, shall be implemented to the maximum extent practicable to avoid lateral and vertical expansion of the ground water volume affected by the hazardous substance;

(iii) Source control measures shall be implemented to prevent or minimize additional releases to the ground water;

(iv) Adequate ground water monitoring to demonstrate control and containment of the hazardous substance shall be conducted;

(v) The potentially liable person shall provide an alternative water supply or treatment for persons with water supplies rendered unusable by the release; and

(vi) The practicability of achieving ground water cleanup levels by treating the ground water affected by the release shall be reevaluated during the periodic review under WAC 173-340-420.

(c) Appropriate restrictions on the use of ground water shall be placed under WAC 173-340-440 until cleanup levels established under WAC 173-340-720 are achieved.

(d) The integrity and continued operation of any treatment or containment system shall be assured in accordance with WAC 173-340-440.

(8) Containment actions.

(a) A cleanup action which relies primarily on on-site disposal, isolation, or containment of hazardous substances shall not be conducted if it is practicable to reuse, destroy, or detoxify those substances in a manner that remaining concentrations are below cleanup levels established under WAC 173-340-700 through 173-340-760.

(b) Long-term monitoring (WAC 173-340-410) and institutional controls (WAC 173-340-440) shall be required if on-site disposal, isolation, or containment is the selected cleanup action for a site or a portion of a site. Such measures shall be required until residual hazardous substance concentrations no longer exceed site cleanup levels established under WAC 173-340-700 through 173-340-760.

(c) If the proposed cleanup action involves on-site containment, the draft cleanup action plan shall specify the types, levels, and amounts of hazardous substances remaining on-site and the measures that will be utilized to prevent migration and contact with those substances.

(9) Expectations. Ecology has the following expectations for cleanup actions conducted under this chapter. The department recognizes that there may be sites where these expectations are not appropriate:

(a) Ecology expects that treatment technologies will be used wherever practicable. Use of treatment technologies should be emphasized at sites containing liquid wastes, areas contaminated with high concentrations of hazardous substances, highly mobile materials, and/or discrete areas of hazardous substances which lend themselves to treatment;

(b) To minimize the need for long-term management of contaminated materials, ecology expects that hazardous substances will be totally destroyed, detoxified, and/or removed to concentrations below cleanup levels throughout sites containing small volumes of hazardous substances;

(c) Ecology recognizes the need to use engineering controls, such as containment, for sites or portions of sites that contain large volumes of materials with relatively low levels of hazardous substances where treatment is impracticable;

(d) Ecology expects institutional controls, such as water use restrictions and deed restrictions, will be used to supplement engineering controls in order to prevent or limit exposure to hazardous substances and protect the integrity of the cleanup action;

(e) Ecology expects that cleanup actions will return useable ground waters to their beneficial uses wherever practicable, within a reasonable time frame. When restoration of ground water to beneficial uses is not practicable, ecology expects to require measures to minimize/prevent further migration, minimize ongoing releases, prevent exposure to contaminated water, and other appropriate measures (see WAC 173-340-360(7));

(f) In order to minimize the potential for migration of hazardous substances, ecology expects that active measures will be taken to prevent precipitation and subsequent runoff from coming into contact with contaminated soils and waste materials. When such measures are impracticable, such as during active cleanup, ecology expects that site runoff will be contained and treated prior to release from the site;

(g) Ecology expects that when hazardous substances remain on-site at concentrations which exceed cleanup levels, those hazardous substances will be consolidated to the maximum extent practicable where needed to minimize the potential for direct contact and migration of hazardous substances;

(h) Ecology expects that, for facilities adjacent to a surface water body, active measures will be taken to prevent/minimize releases to surface water via surface runoff and ground water discharges. Ecology expects that dilution will not be the sole method for demonstrating compliance with cleanup standards; and

(i) Ecology expects that cleanup actions conducted under this chapter will not result in a significantly greater overall threat to human health and the environment than other alternatives.

(10) Draft cleanup action plan. The department shall issue a draft cleanup action plan for cleanup actions conducted by the department or conducted by a potentially liable person under an order or decree. The level of detail in the draft cleanup action plan shall be commensurate with the complexity of the site and proposed cleanup action.

(a) The draft cleanup action plan shall include the following:

(i) A general description of the proposed cleanup action including compliance monitoring;

(ii) A brief summary of other alternative cleanup actions evaluated in the state remedial investigation/feasibility study or comparable documents;

(iii) Site cleanup levels and points of compliance for each hazardous substance and for each media of concern;

(iv) The schedule for implementation of the cleanup action plan including, if known, restoration time frame;

(v) Required institutional controls and site use restrictions, if any, for the proposed cleanup action;

(vi) Justification for selecting a cleanup action that uses cleanup technologies that have a lower preference than

higher representative cleanup technologies listed in subsection (4)(a) of this section;

(vii) Applicable state and federal laws for the proposed cleanup action, when these are known at this step in the cleanup process (this does not preclude subsequent identification of applicable state and federal laws);

(viii) A preliminary determination by the department that the proposed cleanup action will comply with subsections (2) and (3) of this section; and

(ix) Where the cleanup action involves on-site containment, specification of the types, levels, and amounts of hazardous substances remaining on site and the measures that will be utilized to prevent migration and contact with those substances.

(b) For routine actions the department may use an order or decree to fulfill the requirements of a cleanup action plan, provided that the information in (a) of this subsection is included therein. The scope of detail for the required information shall be commensurate with the complexity of the site and proposed cleanup action.

(11) Public participation. The department will provide public notice and opportunity for comment on the draft cleanup plan as described in WAC 173-340-600.

(12) Final plan. Upon completion of the public comment period the department, after review and consideration of the comments received, shall issue a final cleanup action plan and publish its availability in the site register and by other appropriate methods. If the department determines, following the implementation of the preferred alternative, that the cleanup levels established in the cleanup action plan cannot be achieved, the department shall issue public notice of this determination.

(13) Federal cleanup sites. A record of decision or order or consent decree prepared under the Federal Cleanup Law that provides for a cleanup action may be used by the department to meet the requirements of this section provided:

(a) The cleanup action meets the requirements in subsections (2) and (3) of this section;

(b) The state has concurred with the cleanup action; and

(c) An opportunity was provided for the public to comment on the cleanup action.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-360, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-360, filed 4/3/90, effective 5/4/90.]

PART IV—SITE CLEANUP AND MONITORING

WAC 173-340-400 Cleanup actions. Unless otherwise directed by the department, cleanup actions shall comply with this section except for emergencies or interim actions.

(1) Purpose. The purpose of this section is to ensure that the cleanup action is designed, constructed, and operated in a manner which is consistent with:

(a) The cleanup action plan;

(b) Accepted engineering practices; and

(c) The requirements of WAC 173-340-360 (1) and (2).

(2) Administrative options. A cleanup action may be conducted under any of the procedures described in WAC 173-340-510.

(3) Public participation. During cleanup action implementation, public participation shall be accomplished in a manner consistent with the requirements of WAC 173-340-600.

(4) Plans describing the cleanup action. Design, construction, and operation of the cleanup action shall be consistent with the purposes of this section and shall consider relevant information provided by the state remedial investigation/feasibility study. For most cleanups, to ensure this is done it will be necessary to prepare the following engineering documents. The scope and level of detail in these documents may vary from site to site depending on the site specific conditions and nature and complexity of the proposed cleanup action. In some cases it may be appropriate to combine the information in these various documents into one report to avoid unnecessary duplication. Any document prepared in order to implement a cleanup may be used to satisfy these requirements provided they contain the required information. In addition, for facilities on the national priorities list the plans prepared for the cleanup action shall also comply with federal requirements.

(a) Engineering design report. The engineering design report shall include sufficient information for the development and review of construction plans and specifications. It shall document engineering concepts and design criteria used for design of the cleanup action. The following information shall be included in the engineering design report, as appropriate:

(i) Goals of the cleanup action including specific cleanup or performance requirements;

(ii) General information on the facility including a summary of information in the state remedial investigation/feasibility study updated as necessary to reflect the current conditions;

(iii) Identification of who will own, operate, and maintain the cleanup action during and following construction;

(iv) Facility maps showing existing site conditions and proposed location of the cleanup action;

(v) Characteristics, quantity, and location of materials to be treated or otherwise managed, including ground water containing hazardous substances;

(vi) A schedule for final design and construction;

(vii) A description and conceptual plan of the actions, treatment units, facilities, and processes required to implement the cleanup action including flow diagrams;

(viii) Engineering justification for design and operation parameters, including: Design criteria, assumptions and calculations for all components of the cleanup action; expected treatment, destruction, immobilization, or containment efficiencies and documentation on how that degree of effectiveness is determined; demonstration that the cleanup action will achieve compliance with cleanup requirements by citing pilot or treatability test data, results from similar operations, or scientific evidence from the literature;

(ix) Design features for control of hazardous materials spills and accidental discharge (for example, containment structures, leak detection devices, run-on and run-off controls);

(x) Design features to assure long-term safety of workers and local residences (for example, hazardous

substances monitoring devices, pressure valves, bypass systems, safety cutoffs);

(xi) A discussion of methods for management or disposal of any treatment residual and other waste materials containing hazardous substances generated as a result of the cleanup action;

(xii) Facility specific characteristics which may affect design, construction, or operation of the selected cleanup action, including: Relationship of the proposed cleanup action to existing facility operations; probability of flooding, probability of seismic activity, temperature extremes, local planning and development issues; soil characteristics and ground water system characteristics;

(xiii) A general description of construction testing which will be used to demonstrate adequate quality control;

(xiv) A general description of compliance monitoring which will be performed during and after construction to meet the requirements of WAC 173-340-410;

(xv) A general description of construction procedures proposed to assure that the safety and health requirements of WAC 173-340-810 are met;

(xvi) Any information not provided in the state remedial investigation/feasibility study needed to fulfill the applicable requirements of the State Environmental Policy Act (chapter 43.21C RCW);

(xvii) Any additional information needed to address the applicable state, federal and local requirements; and property access issues which need to be resolved to implement the cleanup action; and

(xviii) Other information as required by the department.

(b) Construction plans and specifications. Construction plans and specifications shall detail the cleanup actions to be performed. The plans and specifications shall be prepared in conformance with currently accepted engineering practices and techniques and shall include the following information as applicable:

(i) A general description of the work to be performed and a summary of the engineering design criteria from the engineering design report;

(ii) General location map and existing facility conditions map;

(iii) A copy of any permits and approvals;

(iv) Detailed plans and procedural material specifications necessary for construction of the cleanup action;

(v) Specific quality control tests to be performed to document the construction, including specifications for the testing or reference to specific testing methods, frequency of testing, acceptable results, and other documentation methods;

(vi) Startup procedures and criteria to demonstrate the cleanup action is prepared for routine operation;

(vii) Additional information to address applicable state, federal, and local requirements;

(viii) A compliance monitoring plan prepared under WAC 173-340-410 describing monitoring to be performed during construction, and a sampling and analysis plan meeting the requirements of WAC 173-340-820;

(ix) Provisions to assure safety and health requirements of WAC 173-340-810 are met; and

(x) Other information as required by the department.

(c) Operation and maintenance plan. An operation and maintenance plan which presents technical guidance and regulatory requirements to assure effective operations under

both normal and emergency conditions. The operation and maintenance plan shall include the following elements, as appropriate:

- (i) Name and phone number of the responsible individuals;
- (ii) Process description and operating principles;
- (iii) Design criteria and operating parameters and limits;
- (iv) General operating procedures, including startup, normal operations, operation at less than design loading, shutdown, and emergency or contingency procedures;
- (v) A discussion of the detailed operation of individual treatment units, including a description of various controls, recommended operating parameters, safety features, and any other relevant information;
- (vi) Procedures and sample forms for collection and management of operating and maintenance records;
- (vii) Spare part inventory, addresses of suppliers of spare parts, equipment warranties, and appropriate equipment catalogues;
- (viii) Equipment maintenance schedules incorporating manufacturers recommendations;
- (ix) Contingency procedures for spills, releases, and personnel accidents;
- (x) A compliance monitoring plan prepared under WAC 173-340-410 describing monitoring to be performed during operation and maintenance, and a sampling and analysis plan meeting the requirements of WAC 173-340-820;
- (xi) Description of procedures which assure that the safety and health requirements of WAC 173-340-810 are met, including specification of contaminant action levels and contingency plans, as appropriate;
- (xii) Procedures for the maintenance of the facility after completion of the cleanup action, including provisions for removal of unneeded appurtenances, and the maintenance of covers, caps, containment structures, and monitoring devices; and
- (xiii) Other information as required by the department.

(5) In appropriate cases the department may authorize departure from the requirements of subsection (4) of this section, and may allow information to be incorporated by reference to avoid unnecessary duplication.

(6) Permits and approvals, if required for construction or to otherwise implement the cleanup action shall be identified and where possible, resolved prior to, or during, the design phase to avoid delays during construction and implementation of the cleanup action.

(7) Construction. Construction shall be conducted in accordance with the construction plans and specifications, and other plans prepared under this section.

(a) Department inspections.

(i) The department may perform site inspections and construction oversight. The department may require that construction activities be halted at a site if construction or any supporting activities: Are not consistent with approved plans; are not in compliance with environmental regulations or accepted construction procedures; or endanger human health or the environment.

(ii) The department may conduct a formal inspection of the site following construction and an initial operational shake down period to ensure satisfactory completion of the construction. If such an inspection is performed, the construction documentation report and engineer's opinion

specified in (b)(ii) of this subsection shall be available prior to the inspection.

(b) Construction documentation.

(i) All aspects of construction shall be performed under the supervision of a professional engineer registered in the state of Washington or a qualified technician under the direct supervision of a professional engineer registered in the state of Washington. During construction detailed records shall be kept of all aspects of the work performed including construction techniques and materials used, items installed, and tests and measurements performed.

(ii) As built reports. At the completion of construction the engineer responsible for the supervision of construction shall prepare as built drawings and a report documenting all aspects of facility construction. The report shall also contain an opinion from the engineer, based on testing results and inspections, as to whether the cleanup action has been constructed in substantial compliance with the plans and specifications and related documents.

(iii) In appropriate cases the department may authorize departure from the requirements of this subsection and may allow information to be incorporated by reference to avoid unnecessary duplication.

(c) Plan modifications. Changes in the design or construction of the cleanup action performed under an order or decree shall be approved by the department.

(8) If the department determines that any plans prepared under this section represent a substantial change from the cleanup action plan, the department shall provide public notice and opportunity for comment under WAC 173-340-600.

(9) Plans or reports prepared under this section and under an order or decree shall be submitted to the department for review and approval.

(10) Waste management. Any waste contaminated by a hazardous substance generated during cleanup activities and requiring off-site treatment, storage or disposal, shall be transported to a facility permitted or approved to handle these wastes.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-400, filed 4/3/90, effective 5/4/90.]

WAC 173-340-410 Compliance monitoring requirements. (1) Purpose. The purposes of compliance monitoring and evaluation of the data are to:

(a) Protection monitoring. Confirm that human health and the environment are adequately protected during construction and the operation and maintenance period of an interim action or cleanup action as described in the safety and health plan;

(b) Performance monitoring. Confirm that the interim action or cleanup action has attained cleanup standards and, if appropriate, other performance standards;

(c) Confirmational monitoring. Confirm the long-term effectiveness of the interim action or cleanup action once cleanup standards and, if appropriate, other performance standards have been attained.

(2) General requirements. Compliance monitoring shall be required for all cleanup actions, and may be required for interim and emergency actions, performed under this chapter.

(3) Compliance monitoring plans. A compliance monitoring plan shall be prepared for all cleanup actions and may be required for interim and emergency actions unless otherwise directed by the department. Plans prepared under this section and under an order or decree shall be submitted to the department for review and approval. Protection monitoring may be addressed in the safety and health plan. Performance and confirmational monitoring may be addressed in separate plans and may be combined with other plans or submittals, such as those in WAC 173-340-400 and 173-340-820.

Compliance monitoring plans shall be specific for the media being tested and shall contain the following elements:

(a) A sampling and analysis plan meeting the requirements of WAC 173-340-820 which shall explain in the statement of objectives how the purposes of WAC 173-340-410(2) are met;

(b) Data analysis and evaluation procedures used, to demonstrate and confirm compliance and justification for these procedures, including:

(i) A description of any statistical method to be employed; or

(ii) If sufficient data is not available prior to writing the plan to propose a reliable statistical method to demonstrate and confirm compliance, a contingency plan proposing one or more reliable statistical methods to demonstrate and confirm compliance, and the conditions under which the methods would be used at the facility; and

(c) Other information as required by the department.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-410, filed 4/3/90, effective 5/4/90.]

WAC 173-340-420 Periodic review. (1) If the department selects or approves a cleanup action that results in hazardous substances remaining at a site at concentrations which exceed method A or method B cleanup levels established under WAC 173-340-700 through 173-340-760 or if conditional points of compliance have been established, the department shall review the cleanup action no less frequently than every five years after the initiation of such cleanup action to assure that human health and the environment are being protected.

(2) When evaluating whether human health and the environment are being protected, the factors the department shall consider shall include:

(a) The effectiveness of ongoing or completed cleanup actions;

(b) New scientific information for individual hazardous substances or mixtures present at the site;

(c) New applicable state and federal laws for hazardous substances present at the site;

(d) Current and projected site uses;

(e) The availability and practicability of higher preference technologies as defined in WAC 173-340-360(4); and

(f) The availability of improved analytical techniques to evaluate compliance with cleanup levels.

(3) The department shall publish a notice of all periodic reviews in the site register and provide an opportunity for public comment.

(4) When the department determines that substantial changes in the cleanup action are necessary to protect human

health and the environment at the site, a revised cleanup action plan shall be prepared. The department shall provide opportunities for public review and comment on the draft cleanup action plan consistent with the requirements in WAC 173-340-360 and 173-340-600.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-420, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-420, filed 4/3/90, effective 5/4/90.]

WAC 173-340-430 Interim actions. (1) Purpose. The purpose of this section is to describe how certain interim actions can occur prior to the selection and completion of a cleanup action. An interim action is:

(a) An action that is technically necessary to reduce a threat to human health or the environment by eliminating or substantially reducing one or more pathways for exposure to a hazardous substance at a facility; or

(b) An action that corrects a problem that may become substantially worse or cost substantially more to address if the action is delayed; or

(c) An action needed to provide for completion of a site hazard assessment, state remedial investigation/feasibility study or design of a cleanup action.

Example. A site is identified where oil-based wood preservative has leaked from a tank and is puddled on the ground and is floating on the water table. Run-off from adjacent properties passes through the site. Neighborhood children have been seen on the site. In this case, several interim actions would be appropriate prior to fully defining the extent of the distribution of hazardous substances at the site and selecting a cleanup action. These interim actions might consist of removing the tank, fencing the site, rerouting run-off, and removing the product puddled on the ground and floating on the water table. Further studies would then determine what additional soil and ground water cleanup would be needed.

(2) General requirements.

(a) Interim actions may:

(i) Achieve cleanup standards for a portion of the site; or

(ii) Provide a partial cleanup, that is, clean up hazardous substances from all or part of the site, but not achieve cleanup standards; or

(iii) Provide a partial cleanup of hazardous substances and not achieve cleanup standards, but provide information on how to achieve cleanup standards for a cleanup. For example, demonstration of an unproven cleanup method.

(b) Relationship to the cleanup action:

(i) If the cleanup action is known, the interim action shall be consistent with the cleanup action.

(ii) If the cleanup action is not known, the interim action shall not foreclose reasonable alternatives for the cleanup action. This is not meant to preclude the destruction or removal of hazardous substances.

(3) Timing.

(a) Interim actions may occur anytime during the cleanup process. Interim actions shall not be used to delay or supplant the cleanup process. An interim action may be done prior to or in conjunction with a site hazard assessment and hazard ranking. However, sufficient technical informa-

tion must be available regarding the facility to ensure the interim action is appropriate and warranted.

(b) Interim actions shall be followed by additional remedial actions unless compliance with cleanup standards has been confirmed at the site.

(c) The department shall set appropriate deadlines commensurate with the actions taken for completion of the interim action.

(4) Administrative options. Except as provided in WAC 173-340-530, interim cleanup actions may be conducted under any of the procedures described in WAC 173-340-510.

(5) Public participation will be accomplished in a manner consistent with WAC 173-340-600.

(6) Submittal requirements. Unless otherwise directed by the department and except for underground storage tank releases being addressed under WAC 173-340-450 and emergencies, a report shall be prepared prior to conducting an interim action. Reports prepared under an order or decree shall be submitted to the department for review and approval. Reports shall be of a scope and detail commensurate with the work performed and site-specific characteristics, and shall include, as appropriate:

(a) A description of the interim action and how it will meet the criteria identified in subsections (1) and (2) of this section;

(b) Information from the applicable subsections of the remedial investigation/feasibility study of WAC 173-340-350, including at a minimum;

(i) A description of existing site conditions and a summary of all available data related to the interim action;

(ii) Alternative interim actions considered and an explanation why the proposed alternative was selected;

(c) Information from the applicable subsections of the design and construction requirements of WAC 173-340-400;

(d) A compliance monitoring plan meeting the applicable requirements of WAC 173-340-410;

(e) A safety and health plan meeting the requirements of WAC 173-340-810; and

(f) A sampling and analysis plan meeting the requirements of WAC 173-340-820.

(7) Construction. Construction of the interim action shall be in conformance with WAC 173-340-400(7).

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-430, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-430, filed 4/3/90, effective 5/4/90.]

WAC 173-340-440 Institutional controls. (1) Purpose. Institutional controls are measures undertaken to limit or prohibit activities that may interfere with the integrity of an interim action or cleanup action or result in exposure to hazardous substances at a site. Such measures shall be required to assure both the continued protection of human health and the environment and the integrity of an interim action or cleanup action in the following circumstances:

(a) Where a cleanup action results in residual concentrations of hazardous substances which exceed method A or method B cleanup levels, as applicable, established under WAC 173-340-700 through 173-340-760; or

(b) If conditional points of compliance have been established; or

(c) When the department determines such controls are required to assure the continued protection of human health and the environment or the integrity of the cleanup action.

(2) Institutional controls shall not be used as a substitute for cleanup actions that would otherwise be technically possible.

(3) Institutional controls include:

(a) Physical measures, such as fences and signs, to limit activities that may interfere with the cleanup action or result in exposure to hazardous substances at the site; and

(b) Legal and administrative mechanisms used to ensure that such measures are maintained over time.

(4) Format.

(a) For properties owned by the potentially liable parties, appropriate institutional controls shall be described in a restrictive covenant on the property executed by the property owner and recorded with the register of deeds for the county in which the site is located. This restrictive covenant shall run with the land, and be binding on the owner's successors and assigns.

(b) For other properties containing hazardous substances, the department may approve cleanup actions which include restrictive covenants or other legal and/or administrative mechanisms.

(5) Where required, the restrictive covenant shall:

(a) Prohibit activities on the site that may interfere with a cleanup action, operation and maintenance, monitoring, or other measures necessary to assure the integrity of the cleanup action and continued protection of human health and the environment;

(b) Prohibit activities that may result in the release of a hazardous substance which was contained as a part of the cleanup action;

(c) Require notice to the department of the owner's intent to convey any interest in the site. No conveyance of title, easement, lease, or other interest in the property shall be consummated by the property owner without adequate and complete provision for the continued operation, maintenance and monitoring of the cleanup action, and for continued compliance with this subsection;

(d) Require notice and approval by the department of any proposal to use the site in a manner which is inconsistent with the restrictive covenant. If the department, after public notice and comment approves the proposed change, the restrictive covenant shall be amended to reflect the change.

(e) Grant the department and its designated representatives the right to enter the property at reasonable times for the purpose of evaluating compliance with the cleanup action plan and other required plans, including the right to take samples, inspect any remedial actions taken at the site, and to inspect records.

(6) Financial assurances. The department may require the potentially liable person to provide financial assurances, through a trust fund or equivalent financial mechanism approved by the department, sufficient to cover all costs of operation and maintenance including compliance monitoring and undertaking appropriate corrective measures. It is the department's expectation that such assurances will be required wherever the cleanup action includes containment and in other appropriate circumstances.

(7) Removal of restrictions. If the residual hazardous substances remaining at the site are subsequently reduced in concentration such that the method A or method B cleanup levels, as applicable, established under WAC 173-340-700 through 173-340-760 are met without a conditional point of compliance, then the owner may request that the restrictive covenant or other restrictions be eliminated. The restrictive covenant or other restrictions shall be removed, if the department, after public notice and opportunity for comment, concurs.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-440, filed 1/28/91, effective 2/28/91.]

WAC 173-340-450 Releases from underground storage tanks. (1) Purpose. The purpose of this section is to set forth the requirements for addressing releases which may pose a threat to human health or the environment from USTs defined under chapter 90.76 RCW and rules adopted therein, including heating oil USTs of greater than 1,100 gallons capacity.

(a) Releases from USTs exempted under chapter 90.76 RCW and rules adopted therein are still subject to all other requirements of this chapter.

(b) Unless the department requires otherwise, UST owners and UST operators shall comply with the requirements in this section after confirmation of an UST release which may pose a threat to human health or the environment.

(2) Initial response. Within twenty-four hours of the UST release, the UST owner or the UST operator shall perform the following actions:

(a) Report the UST release to the department and other authorities with jurisdiction, in accordance with rules adopted under chapter 90.76 RCW and any other applicable law;

(b) Remove as much of the hazardous substance from the UST as is possible and necessary to prevent further release to the environment;

(c) Eliminate or reduce any fire, explosion or vapor hazards in such a way as to minimize any release of hazardous substances to surface water and ground water; and

(d) Visually inspect any aboveground releases or exposed belowground releases and prevent the hazardous substance from spreading into surrounding soils, ground water and surface water.

(3) Interim actions.

(a) As soon as possible but no later than twenty days following confirmation of an UST release, the UST owner or the UST operator shall perform the following interim actions:

(i) Continue to monitor and mitigate any additional fire and safety hazards posed by vapors or free product which may have migrated from the UST into structures in the vicinity of the site, such as sewers or basements;

(ii) Reduce the threat to human health and the environment posed by contaminated soils that are excavated or discovered as a result of investigation or cleanup activities. Treatment, storage and disposal of soils must be carried out in compliance with all applicable federal, state and local requirements;

(iii) Test for hazardous substances in the environment where they are most likely to be present. Such testing shall

be done in accordance with a sampling and analysis plan prepared under WAC 173-340-820. The sample types, sample locations, and measurement methods shall be based on the nature of the stored substance, type of subsurface soils, depth to ground water and other factors as appropriate for identifying the presence and source of the release. If contaminated soil is found in contact with the ground water or soil contamination appears to extend below the lowest soil sampling depth, then testing shall include the installation of ground water monitoring wells to test for the presence of possible ground water contamination. Information gathered for the site check or closure site assessment conducted pursuant to rules adopted under chapter 90.76 RCW, which sufficiently characterizes the releases at the site, may be substituted for the testing required under this paragraph;

(iv) The testing performed under (a)(iii) of this subsection shall include, at a minimum, the following:

(A) Benzene, toluene, ethylbenzene, xylene, lead, and total petroleum hydrocarbons where leaded gasoline may be present;

(B) Benzene, toluene, ethylbenzene, xylene and total petroleum hydrocarbons where unleaded gasoline may be present;

(C) Total petroleum hydrocarbons and other appropriate indicator hazardous substances where any petroleum product other than gasoline may be present;

(D) The hazardous substance stored and any likely decomposition by-products where a hazardous substance other than petroleum may be present; and

(E) Any other tests required by the department; and

(v) Investigate for the presence of free product.

(b) Free product removal. At sites where investigations indicate free product is present, the UST owner or the UST operator shall conduct, as soon as possible after discovery, an interim action to remove the free product while continuing, as necessary, any other actions required under this section. To accomplish this the UST owner or UST operator shall:

(i) Conduct free product removal to the maximum extent practicable and in a manner which minimizes the spread of hazardous substances, by using recovery and disposal techniques appropriate to the hydrogeologic conditions at the site. The objective of free product removal system must be, at a minimum, to stop the free product migration;

(ii) Properly treat, discharge, or dispose of recovery by-products in compliance with all applicable local, state, and federal regulations and permits; and

(iii) Handle all flammable products safely to prevent fires and explosions.

(4) Reporting requirements. The following reports are required to be submitted to the department:

(a) Status report. Within twenty days after an UST release, the UST owner or UST operator shall submit a status report to the department. The status report shall identify if known, the types, amounts, and locations of hazardous substances released, how the release occurred, evidence confirming the release, actions taken under subsections (2) and (3) of this section, any planned remedial actions, and any results of work done up to the time of the report. This report may be provided verbally to the department.

(b) Site characterization reports. Within ninety days after release confirmation, unless directed to do otherwise by the department, the UST owner or UST operator shall submit a report to the department about the site and nature of the release. This report shall be submitted to the department in writing and may be combined with the twenty-day status report, if the information required is available at that time. The site characterization report shall include, at a minimum, the following information:

(i) The information required for the status report under (a) of this subsection;

(ii) A site conditions map indicating approximate boundaries of the property, all areas where hazardous substances are known or suspected to be located, and sampling locations. This map may consist of a sketch of the site at a scale sufficient to illustrate this information;

(iii) Available data regarding surrounding populations, surface and ground water quality, use and approximate location of wells potentially affected by the release, subsurface soil conditions, depth to ground water, direction of ground water flow, proximity to and potential for affecting surface water, locations of sewers and other potential conduits for vapor or free product migration, surrounding land use, and proximity to sensitive environments;

(iv) Results of tests for hazardous substances performed under subsection (3)(a)(iii) and (iv) of this section;

(v) Results of the free product investigation required under subsection (3)(a)(v) of this section;

(vi) Results of all completed site investigations, interim actions and cleanup actions and a description of any remaining investigations, cleanup actions and compliance monitoring which are planned or underway; and

(vii) Information on the free product removal efforts at sites where investigations indicate free product is present. This shall include, at a minimum, the following information:

(A) Name of the person responsible for implementing the free product removal measures;

(B) The estimated quantity, type, and thickness of free product observed or measured in wells, boreholes and excavations;

(C) The type of free product recovery system used;

(D) The location of any on-site or off-site discharge during the recovery operation;

(E) The type of treatment applied to, and the effluent quality expected from, any discharge;

(F) The steps taken and planned to obtain necessary permits for any discharge;

(G) Disposition of recovered free product; and

(viii) Any other information required by the department.

(5) State remedial investigation and feasibility study.

(a) The scope of a state remedial investigation and feasibility study under this chapter will depend on the informational needs at a specific site and will vary from site to site to avoid the collection of unnecessary information. For sites with UST releases, a state remedial investigation and feasibility study must at a minimum address the elements in WAC 173-340-350 (6)(a), (b), (c)(ii), (c)(iii), (c)(v) through (c)(vii) and (e). The department may require additional information when needed to select a cleanup action. UST owners and operators shall conduct a state remedial investigation and feasibility study for sites where the following conditions exist:

(i) There is evidence that the release has caused hazardous substances to be present in the ground water in excess of the ground water standards promulgated under chapter 90.48 RCW or cleanup levels in WAC 173-340-720 (Table 1);

(ii) Free product is found; or

(iii) Where otherwise required by the department.

(b) UST owners and UST operators shall submit the information collected for the state remedial investigation/feasibility study to the department as soon as practicable. The information may be included with other reports submitted under this section.

(6) If the department determines, based on the results of the remedial investigation/feasibility study or other information, that additional remedial action is required, the department may require the UST owner or the UST operator to submit engineering documents as described in WAC 173-340-400.

(7) Unless directed to do otherwise by the department, cleanup actions performed by UST owners or UST operators shall comply with cleanup standards, WAC 173-340-700 through 173-340-750 and the requirements for the selection of cleanup actions, WAC 173-340-360.

(8) Independent cleanup actions. In addition to work performed under subsections (2) through (5), and (7) of this section, UST owners or UST operators performing independent cleanup actions shall:

(a) Notify the department of their intention to begin cleanup. This can be included with other reports under this section;

(b) Comply with any conditions imposed by the department to assure adequate protection of human health and the environment; and

(c) Within ninety days of completion of the cleanup action, submit the results of all investigations, interim and cleanup actions and compliance monitoring not previously submitted to the department.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-450, filed 1/28/91, effective 2/28/91.]

PART V—ADMINISTRATIVE PROCEDURES FOR REMEDIAL ACTIONS

WAC 173-340-500 Determination of status as a potentially liable person. (1) Status letter. The department shall issue a potentially liable person status letter to any person it believes to be potentially liable as provided for in RCW 70.105D.020(8), unless an emergency requires otherwise. Persons will be notified when the department has credible evidence of their potential liability under RCW 70.105D.040 and when the department is ready to proceed with remedial action except for emergencies and initial investigations. The status letter shall be sent by certified mail, return receipt requested, or by personal service.

(2) Contents of letter. The status letter shall provide:

(a) The name of the person the department believes to be potentially liable;

(b) A general description of the location of the facility;

(c) The basis for the department's belief that the person has a relationship to the facility;

(d) The basis for the department's belief that a release or threatened release of a hazardous substance has occurred at the facility and that the release or threatened release poses a threat to human health or the environment;

(e) An indication of the department's intentions regarding enforcement or other actions at the facility; and

(f) The names of other persons to whom the department has sent a status letter.

(3) Opportunity to comment. Any comments shall be submitted in writing to the department within thirty days from the date of receipt by the potentially liable person of the status letter unless the department provides an extension.

(4) Determination of status. If after reviewing any comments submitted, the department concludes that credible evidence supports a finding of potential liability, then the department shall issue a determination of potentially liable person status.

(5) Voluntary waiver. Persons may accept status as a potentially liable person at any time through a voluntary waiver of their right to notice and comment.

(6) Additional potentially liable persons. The department reserves the right to notify additional potentially liable persons at any time, and as resources permit, will facilitate potentially liable persons' efforts to identify additional potentially liable persons. The department shall notify in writing, all persons who previously received a status letter for the facility whenever additional status letters have been sent.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-500, filed 4/3/90, effective 5/4/90.]

WAC 173-340-510 Administrative options for remedial actions. (1) Policy. It is the responsibility of each and every liable person to conduct remedial action so that sites are cleaned up well and expeditiously where a release or threatened release of a hazardous substance requires remedial action. Potentially liable persons are encouraged to initiate discussions and negotiations with the department and the office of the attorney general which may lead to an agreement on the remedial action to be conducted with the state of Washington. The department may provide informal advice and assistance on the development of proposals for remedial action, as provided by WAC 173-340-130. Any approval by the department or the state of remedial action shall occur by one of the means described in subsections (2) and (3) of this section.

(2) Actions initiated by the potentially liable person. Potentially liable persons may initiate a remedial action, as follows:

(a) A person may initiate negotiations for a consent decree by submitting a letter under WAC 173-340-520(1).

(b) A person may request an agreed order by submitting a letter under WAC 173-340-530.

(3) Action initiated by the department. The department may initiate remedial action by:

(a) Issuing a letter inviting negotiations on a consent decree under WAC 173-340-520(2); or

(b) Issuing an enforcement order under WAC 173-340-540.

(4) Department remedial action. Nothing in this chapter shall preclude the department from taking appropriate

remedial action on its own at any time. Except for emergency actions and initial investigations, reasonable effort will be made to notify potentially liable persons prior to the department taking remedial actions for which the recovery of public funds can be sought under RCW 70.105D.050(3).

(5) Independent remedial action. Nothing in this chapter shall preclude potentially liable persons from taking independent remedial action without oversight or approval from the department at sites not in discussions or negotiations for, or under, an order or decree. A potentially liable person may not take independent remedial actions after commencing discussions or negotiations for an agreed order or consent decree unless:

(a) Such action does not foreclose or preempt the remedial actions under discussion or negotiations and such action does not foreclose the selection of cleanup action; or

(b) If the potentially liable person has provided reasonable notice to the department and the department does not object to such action.

The department will use the appropriate requirements contained herein to evaluate the adequacy of any independent remedial action performed. Persons performing independent remedial actions do so at their own risk and may be required to take additional remedial actions if the department deems such actions necessary. In such circumstances, the department reserves all of its rights to take actions authorized by law.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-510, filed 4/3/90, effective 5/4/90.]

WAC 173-340-520 Consent decrees. (1) Initiated by potentially liable persons. To request a consent decree a person shall submit a letter to the department and office of the attorney general via certified mail, return receipt requested, or by personal delivery.

(a) Request. The letter shall describe, based on available information:

(i) The proposed remedial action, including the schedule for the work;

(ii) Information which demonstrates that the settlement will lead to a more expeditious cleanup, be consistent with cleanup standards if the remedial action is a cleanup action, and be consistent with any previous orders;

(iii) The facility, including location and boundaries;

(iv) The environmental problems to be addressed including a description of the releases at the facility and the potential impact of those releases to human health and the environment;

(v) A summary of the relevant historical use or conditions at the facility;

(vi) The date on which the potentially liable person will be ready to submit a detailed proposal;

(vii) Any special scheduling considerations for implementing the remedial actions;

(viii) Names of other persons who the person has reason to believe may be potentially liable persons at the facility; and

(ix) A proposed public participation plan. This proposed plan shall be commensurate with the nature of the proposal and site and shall include the elements listed in WAC 173-340-600(8).

(b) The letter may include:

(i) A waiver of the procedural requirements of WAC 173-340-500 and acceptance, for purposes of settlement, of potentially liable person status.

(ii) The contents of detailed proposal under (f) of this subsection.

(c) Recognizing that the steps of the cleanup process may be combined and may vary by site, the information in the request shall be at the level of detail appropriate to the steps in the process for which the consent decree is requested. For example, a request for a consent decree for a state remedial investigation/feasibility study should generally include the level of information needed for a site hazard assessment, if not already done by the department, so that the department and the public can evaluate the proposed scope of work and relative priority of the site.

(d) The department may waive part of the letter requirements of (a) of this subsection if the requirements have already been met.

(e) Response. The department shall respond to the request within sixty days, unless the department needs additional time to determine potentially liable person status under WAC 173-340-500. This determination will be based in part on a preliminary finding by the department that any resulting consent decree would be in accordance with RCW 70.105D.040 (4)(a). The department may:

(i) Request additional information;

(ii) Accept the request and require the person to submit a detailed written proposal by a specified date; or

(iii) Provide written reasons for denying the request.

(f) Contents of detailed proposal. The proposal shall contain:

(i) A proposed technical scope of work describing the remedial action to be conducted;

(ii) The data, studies, or any other information upon which the settlement proposal is based;

(iii) A statement describing the potentially liable person's ability to conduct or finance the remedial action as described in the proposed scope of work; and

(iv) A schedule for proposed negotiations and implementation of the proposed remedial actions.

(g) The department and the office of the attorney general shall determine whether the proposal provides a sufficient basis for negotiations, and shall deliver to the potentially liable person within sixty days following receipt of their proposal a written notice indicating whether or not the proposal is sufficient to proceed with negotiations.

(h) Time limits for negotiations. The department shall set the time period and starting date for negotiations. The department and the office of the attorney general shall then negotiate with those potentially liable persons who have received a notice under (e) of this subsection that their proposal was sufficient to proceed with negotiations. Negotiations may address one or more phases of remedial action. The length of the negotiation period specified by the department shall be no less than that proposed by the potentially liable person provided it does not conflict with the deadlines established under WAC 173-340-140.

(i) Enforcement stay. Unless an emergency exists, the department will stay any enforcement action under chapter 70.105D RCW, but the duration of such stay shall not exceed one hundred twenty days from the date negotiations

begin. The department can withdraw from negotiations if it determines that:

(i) Reasonable progress is not being made toward a consent decree acceptable to the department; or

(ii) The proposal is inappropriate based on new information or changed circumstances.

The department may commence with enforcement action after notifying the potentially liable person, in writing, of its intent to withdraw from negotiations.

(2) State-initiated procedures. When the department believes that a consent decree will be a more expeditious method to achieve remedial action at a facility, it may initiate the procedures set forth in this subsection by sending a letter to the potentially liable person. The letter shall be sent via certified mail, return receipt requested, or by personal service.

(a) The letters may be delivered with potentially liable person status letters issued under WAC 173-340-500. The period for negotiation shall not commence until the thirty-day comment period required by WAC 173-340-500 has expired or the person expressly waives the procedural requirements of WAC 173-340-500.

(b) Contents of letter. The letter shall:

(i) Inform potentially liable person(s) that the department and the attorney general want to begin negotiations which may lead to a consent decree providing for remedial action;

(ii) Propose a draft consent decree and scope of work;

(iii) Define the negotiation process and schedule which shall not exceed ninety days;

(iv) Reference the department's finding under WAC 173-340-500;

(v) Request a written statement of the potentially liable person's willingness to proceed with the negotiation process defined in the letter; and

(vi) Request the names of other persons whom the person has reason to believe may be potentially liable persons at the facility.

(c) The letter may request the potentially liable person to respond, in writing, to the proposed draft consent decree and scope of work prior to initiating the negotiation phase.

(d) Negotiations. The department and the office of the attorney general shall negotiate with potentially liable persons who have indicated to the department a willingness to proceed with the negotiations. The negotiation time frame shall begin from the date the potentially liable person receives the letter under (a) of this subsection unless modified by the department. Negotiations may address one or more phases of remedial action.

(e) Enforcement stay. Unless an emergency exists, the department will stay any enforcement action under chapter 70.105D RCW, but the duration of the stay shall not exceed ninety days from the date negotiations begin. The department can withdraw from negotiations if it determines that:

(i) Reasonable progress is not being made toward a consent decree acceptable to the department; or

(ii) The proposal is inappropriate based on new information or changed circumstances. The department may commence with enforcement action after notifying the potentially liable person, in writing, of its intent to withdraw from negotiations.

(f) **Deadline extensions.** The department may at its discretion extend the deadline for negotiations established in (b) of this subsection, provided the extension does not exceed thirty days.

(3) **Filing a decree.** After satisfying the public comment and hearing requirements, the department shall determine whether the proposed settlement negotiated under subsection (1) or (2) of this section, is more expeditious and consistent with cleanup standards established and in compliance with any order issued by the department relevant to the remedial action. After making the requisite findings, the department shall forward the proposed consent decree with the findings required by RCW 70.105D.040(4), to the office of the attorney general. If agreed to by the office of the attorney general, the consent decree will be filed by that office with the appropriate superior court or the federal court having jurisdiction over the matter.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-520, filed 4/3/90, effective 5/4/90.]

WAC 173-340-530 Agreed orders. (1) Agreed orders may be used for all remedial actions except for nonroutine cleanup actions and interim actions that constitute a substantial majority of a cleanup action likely to be selected. Since an agreed order is not a settlement, an agreed order shall not provide for mixed funding, a covenant not to sue, or protection from claims for contribution. An agreed order means that the potentially liable person agrees to perform remedial actions at the site in accordance with the provisions of the agreed order and that the department will not take additional enforcement action against the potentially liable person to require those remedial actions specified in the agreed order so long as the potentially liable person complies with the provisions of the order. The department may require additional remedial actions should it deem such actions necessary.

(2) **Request.**

(a) To request an agreed order, a person shall submit a letter to the department based on available information, describing:

- (i) The proposed remedial action including a schedule for the work;
- (ii) The facility, including location and boundaries;
- (iii) The environmental problems to be addressed, including the releases at the facility and the potential impact of those releases to human health and the environment;
- (iv) A summary of the relevant historical use or conditions at the facility;
- (v) Names of other persons whom the person has reason to believe may be potentially liable persons at the facility; and

(vi) A proposed public participation plan. This proposed plan shall be commensurate with the nature of the proposal and site and shall include at a minimum the elements listed in WAC 173-340-600(8).

(b) The letter may include a waiver of the procedural requirements of WAC 173-340-500, and acceptance, for purposes of the agreed order, of potentially liable person status.

(c) Recognizing that the basic steps of the cleanup process may be combined and may vary by site, the informa-

tion in the request shall be at the level of detail appropriate to the step in the process for which the order is requested. For example, a request for an agreed order for a state remedial investigation/feasibility study should generally include the level of information needed for a site hazard assessment, so that the department and the public can evaluate the proposed scope of work and relative priority of the site.

(d) The department may waive part of the letter requirements of (a) of this subsection if the requirements have already been met.

(3) **Response.** The department shall respond to the request within sixty days, unless the department needs additional time to determine potentially liable person status under WAC 173-340-500. The department may:

- (a) Request additional information;
- (b) Proceed with discussions, if the department believes it is in the public interest to do so; or
- (c) Provide written reasons for denying the request.

(4) Discussions on the agreed order shall not exceed sixty days unless the department decides continued discussions are in the public interest.

Unless an emergency exists, the department will stay any enforcement action under chapter 70.105D RCW; however, the duration of such stay shall not exceed sixty days from the date discussions begin. Furthermore, the department can withdraw from discussions if it determines that:

- (a) Reasonable progress is not being made toward an agreed order acceptable to the department; or
- (b) The agreed order is inappropriate based on new information or changed circumstances.

The department may commence with enforcement action after notifying the potentially liable person in writing of its intent to withdraw from discussions.

(5) **Focus of discussions.** The focus of discussions for the agreed order shall ordinarily be the technical scope of work and work schedule. This subsection is not intended to preclude discussion on any item. It is intended to convey the expectation that the scope of work and work schedule will be the primary topics of discussion in formulating agreed orders.

(6) When issuing an agreed order, the department shall provide appropriate public participation opportunities under WAC 173-340-600. If the agreed order is for a routine cleanup action and any person requests judicial review, then the applicable consent decree procedures under WAC 173-340-520 will be initiated.

(7) **Revisions.** If the department and the potentially liable person signing the order agree to substantial changes in the order, the department shall provide appropriate additional public notice and opportunity to comment.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-530, filed 4/3/90, effective 5/4/90.]

WAC 173-340-540 Enforcement orders. The department may issue an enforcement order requiring remedial action after issuing a notice of potentially liable person status letter under WAC 173-340-500. In emergencies, the notice of potentially liable person status may occur concurrently with the issuance of the order. Unless an

emergency requires otherwise, the issuance of a potentially liable person status letter shall precede or take place concurrently with the issuance of an enforcement order. Furthermore, except in an emergency, the department shall issue its determination under WAC 173-340-500(4) before an enforcement order can become effective. Failure to comply with an enforcement order may result in substantial liability for costs and penalties as specified in RCW 70.105D.050.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-540, filed 4/3/90, effective 5/4/90.]

WAC 173-340-550 Payment of remedial action costs. (1) Policy. RCW 70.105D.050(3) requires that the state seek to recover the amounts spent by the department for investigative and remedial actions and orders. It is the department's intention to recover those costs which are reasonably attributable to the site. Timing of cost recovery for individual sites will be considered on a case-by-case basis, however, the department may demand payment of costs as they are incurred.

(2) Costs. Each person who is liable under chapter 70.105D RCW is liable for remedial action costs incurred by the department. Remedial action costs are costs reasonably attributable to the site and may include costs of direct activities, support costs of direct activities, and interest charges for delayed payments.

(3) Request for payment. When the department requests payment of remedial action costs it shall provide an itemized statement documenting the costs incurred.

(4) Interest charges. A minimum of twelve percent interest shall accrue on all remedial action costs not paid within ninety days of the billing date, or within another longer time period designated by the department.

(5) Contribution rights. In addition to any other action under chapter 70.105D RCW, cost recovery is available through contribution actions between potentially liable persons, unless such claims are barred by RCW 70.105D.040 (4)(d). The right to contribution furthers the purposes of chapter 70.105D RCW because it provides an incentive for potentially liable persons to work with the department in complying with chapter 70.105D RCW.

(6) Natural resource damages. Nothing in this section shall affect the authority of the department and the office of attorney general to recover natural resource damages.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-550, filed 4/3/90, effective 5/4/90.]

WAC 173-340-560 Mixed funding. (1) Introduction. Under RCW 70.105D.070 (2)(d)(xi), the department may provide public funds from the state toxics control account to a potentially liable person for the purpose of assisting with the payment of remedial action costs regardless of when incurred. This assistance can be provided in the form of a loan or a contribution, in cash or in kind. Any funding decision under this section is solely the responsibility of the director.

(2) Applicability and request.

(a) Mixed funding shall be provided only to potentially liable persons whom the department has found to be eligible and who have entered into a consent decree with the department under the requirements of this chapter.

(b) The consent decree shall identify remedial action tasks to be addressed by the mixed funding, costs to be borne by the potentially liable person, costs to be borne by the state toxics control account and terms of the agreement. In the case of loans, the consent decree shall also define any terms and conditions under which the potentially liable person receiving mixed funding has agreed to reimburse the state toxics control account.

(c) The potentially liable person shall submit sufficient documentation to support its request for mixed funding.

(3) Eligibility and mixed funding criteria. The director shall make a determination, based upon specific criteria whether a proposal is eligible for funding. The only circumstances under which mixed funding can be approved by the department are when the funding will achieve both:

(a) A substantially more expeditious or enhanced cleanup than would otherwise occur; and

(b) The prevention or mitigation of unfair economic hardship. In considering this criterion the department shall consider the extent to which mixed funding will either:

(i) Prevent or mitigate unfair economic hardship faced by the potentially liable person if the remedial action plan were to be implemented without public funding; or

(ii) Achieve greater fairness with respect to the payment of remedial action costs between the potentially liable person entering into a consent decree with the department and any nonsettling potentially liable persons.

(4) Funding decision. The department may have informal discussions on mixed funding. If a potentially liable person is found to be eligible for mixed funding, the director shall make a determination regarding the amount of funding to be provided, if any. This shall be determined at the discretion of the director and is not subject to review. A determination of eligibility is not a funding commitment. Actual funding will depend on the availability of funds.

(5) The department may recover the amount of public funding spent on investigations and remedial actions from potentially liable persons who have not entered into a consent decree under this chapter. For purposes of such cost recovery action, the amount in mixed funding attributed to the site shall be considered as remedial action costs paid by the department.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-560, filed 4/3/90, effective 5/4/90.]

PART VI—PUBLIC PARTICIPATION

WAC 173-340-600 Public notice and participation.

(1) Purpose. Public participation is an integral part of the department's responsibilities under the Model Toxics Control Act. The department's goal is to provide the public with timely information and meaningful opportunities for participation which are commensurate with each site. The department will meet this goal through a public participation program that includes: The early planning and development of a site-specific public participation plan; the provision of public notices; a site register; public meetings or hearings; and the participation of regional citizens' advisory committees.

(2) Criteria. In order to promote effective and meaningful public participation, the department may determine that

public participation opportunities in addition to those specifically required by chapter 70.105D RCW, or this chapter, are appropriate and should be provided. In making this determination, the department may consider:

(a) Known or potential risks to human health and the environment that could be avoided or reduced by providing information to the public;

(b) Public concerns about the facility;

(c) The need to contact the public in order to gather information about the facility;

(d) The extent to which the public's opportunity to affect subsequent departmental decisions at the facility may be limited or foreclosed in the future;

(e) The need to prevent disclosure of confidential, unverified, or enforcement-sensitive information;

(f) The routine nature of the contemplated remedial action; and

(g) Any other factors as determined by the department.

(3) Public notice. Whenever public notice is required by chapter 70.105D RCW, the department shall at a minimum provide or require notice as described in this section except as specified for the biennial report in WAC 173-340-340.

(a) Request. Notice shall be mailed to persons who have made a timely request. A request for notice is timely if received prior to or during the public comment period for the current phase of remedial action at the facility. However, the receipt of a request for notice shall not require the department to extend the comment period associated with the notice.

(b) Mail. Notice shall be mailed to persons who reside within the potentially affected vicinity of the proposed action. The potentially affected vicinity shall include all property adjoining the site and any other area that the department determines to be directly affected by the proposed action.

(c) Newspaper publication. Notice of the proposed action shall be published in the newspaper of largest circulation in the city or county of the proposed action, by one or more of the following methods: Display ad; legal notice; or any other appropriate format, as determined by the department.

(d) Other news media. Notice of the proposed action shall be mailed to any other news media which the department determines to be appropriate. The department may consider how a medium compares with the newspaper of largest circulation in terms of: Audience reached; timeliness; adequacy in conveying the particular information in the notice; cost; or other relevant factors.

(e) Comment periods. All public notices shall indicate the public comment period on the proposed action. Unless stated otherwise, comment periods shall be for thirty days at a minimum.

(f) Combining public comment requirements. Whenever reasonable, the department shall consolidate public notice and opportunities for public comment under this chapter with public notice and comment requirements under other laws and regulations.

(4) Public meetings. During any comment period announced by a public notice issued under this chapter, if ten or more persons request a public meeting on the subject of

the public notice, the department shall hold a public meeting for the purpose of receiving comments.

(5) Additional methods. In addition to "public notice" required by chapter 70.105D RCW, or this chapter, the department may use any of the following methods to provide information to the public:

(a) Press releases;

(b) Fact sheets;

(c) Public meetings;

(d) Publications;

(e) Personal contact by department employees;

(f) Posting signs at the facility;

(g) Notice in the site register;

(h) Any other methods as determined by the department.

(6) Site register. The department shall regularly publish and maintain a site register, giving notice of the following:

(a) Determinations of no further action under WAC 173-340-320;

(b) Results of site hazard rankings;

(c) Availability of annual and biennial reports;

(d) Issuance of enforcement orders, agreed orders, or proposed consent decrees;

(e) Public meetings or hearings;

(f) Scoping notice of department-conducted state remedial investigation/feasibility study;

(g) Availability of state remedial investigation/feasibility study reports and draft and final cleanup plans;

(h) Change in site status or placing sites on or removing sites from the hazardous sites list under WAC 173-340-330;

(i) Availability of engineering design reports under WAC 173-340-400;

(j) Schedules developed under WAC 173-340-140;

(k) Reports of independent cleanup actions received under WAC 173-340-300;

(l) Commencement of negotiations or discussions under WAC 173-340-520 and 173-340-530;

(m) Deadline extensions or missed deadlines under WAC 173-340-140; and

(n) Any other notice that the department deems appropriate for inclusion.

(7) Evaluation. As part of requiring or conducting a remedial action at any facility, the department shall evaluate public participation needs at the facility, including an identification of the potentially affected vicinity for the remedial action.

(8) Public participation plans.

(a) Scope. The public participation plans required by this section are intended to encourage a coordinated and effective public involvement tailored to the public's needs at a particular facility. The scope of a plan shall be commensurate with the nature of the proposed remedial actions; the level of public concern; and the risks posed by the facility.

(b) Early planning encouraged. In order to develop an appropriate plan, the department or potentially liable person (if submitting a plan to the department) should engage in an early planning process to assess the public participation needs at the facility. This process may include identifying and conferring with individuals, community groups, local governments, tribes, public agencies, or any other organizations that may have an interest in or knowledge of the facility.

(c) Plan development. The department shall develop the plan, or work with the potentially liable person to develop the plan. If a plan already exists for a facility, the department shall consider whether the existing plan is still appropriate or whether the plan should be amended. For example, a plan originally developed to address a state remedial investigation/feasibility study may need to be amended to address implementation phases.

(d) Plans required. As part of requiring or conducting a remedial action, except emergency actions, at any site that has been assigned a hazard ranking score, the department shall ensure that a public participation plan is developed and implemented. The department may also require the development of a public participation plan for facilities which have not been assigned a hazard ranking score as part of an agreed order or consent decree with a potentially liable person.

(e) Plan as part of order or decree. A potentially liable person will ordinarily be required to submit a proposed public participation plan as part of its request for an agreed order or a consent decree. If a plan already exists for the facility, the potentially liable person may either resubmit the existing plan with any proposed amendments or submit an entirely new proposed plan. The proposed plan may be revised during the course of discussions or negotiations on the agreed order or consent decree.

The final public participation plan may become part of the agreed order or consent decree.

(f) Contents. The public participation plan shall include the following:

(i) Applicable public notice requirements and how these will be met, including: When public notice will occur; the length of the comment periods accompanying each notice; the potentially affected vicinity and any other areas to be provided notice, to the extent known.

(ii) Information repositories. The plan should identify at least one location where the public can review information about the remedial action. Multiple locations may be appropriate.

(iii) Methods of identifying the public's concerns. Such methods may include: Interviews; questionnaires; meetings; contacts with community groups or other organizations which have an interest in the site; establishing citizen advisory groups for sites; or obtaining advice from the appropriate regional citizens' advisory committee.

(iv) Methods of addressing the public's concerns and conveying information to the public. These may include any of the methods listed in subsection (5) of this section.

(v) Coordination of public participation requirements. The plan should identify any public participation requirements of other applicable federal, state or local laws, and address how such requirements can be coordinated. For example, if Comprehensive Environmental Response, Compensation and Liability Act (CERCLA) applies to the proposed action, the plan should explain how CERCLA and this chapter's public comment periods will be coordinated.

(vi) Amendments to the plan. The plan should outline the process for amending the plan. Any amendments must be approved by the department.

(vii) Any other elements that the department determines to be appropriate for inclusion in the final public participation plan.

(g) Implementation. The department shall retain approval authority over the actions taken by a potentially liable person to implement the plan.

(9) Consent decrees. In addition to any other applicable public participation requirements, the following shall be required for consent decrees.

(a) A public participation plan which meets the requirements of subsection (8) of this section shall be developed when required by subsection (8)(d) of this section.

(b) Notice of negotiations. When the department decides to proceed with negotiations it shall place a notice in the site register advising the public that negotiations have commenced. This notice shall include the name of the facility, a general description of the subject of the order and the deadlines for negotiations.

(c) Notice of proposed decree. The department shall provide or require public notice of proposed consent decree. The notice may be combined with notice of other documents under this chapter, such as a cleanup action plan, or under other laws. The notice shall briefly:

(i) Identify and generally describe the facility;

(ii) Identify the person(s) who are parties to the consent decree;

(iii) Generally describe the remedial action proposed in the proposed consent decree;

(iv) Indicate the date, place, and time of the public hearing on the proposed consent decree; and

(v) Invite the public to comment at the public hearing or in writing. The public comment period shall run for at least thirty days from the date of the issuance of the notice.

(d) Public hearing. The department shall hold a public hearing on the proposed consent decree for the purpose of providing the public with an opportunity to comment.

(e) Revisions. If the state and the potentially liable person agree to substantial changes to the proposed consent decree, the department shall provide additional public notice and opportunity to comment.

(f) Extensions. The department shall publish in the next site register the extension of deadlines for designated high priority sites.

(10) Agreed orders. In addition to any other applicable public participation requirements, the following shall be required for agreed orders under WAC 173-340-530.

(a) Public participation plan. A plan meeting the requirements of subsection (8) of this section shall be developed when required by subsection (8)(d) of this section.

(b) Notice of discussions. When the department decides to proceed with discussions it shall place a notice in the site register advising the public that discussions have commenced. This notice shall include the name of the facility, a general description of the subject of the order and the deadlines for discussions.

(c) Notice of agreed orders. Public notice shall be provided by the department for any agreed order. For all agreed orders, notice shall be mailed no later than three days after the issuance of the agreed order. For agreed orders covering a state remedial investigation/feasibility study, the comment period shall be at least thirty days and shall be completed before the agreed order becomes effective. For other agreed orders, the agreed order may be effective before the comment period is over, unless the department determines it is in the public interest to complete the public

comment period prior to the effective date of the agreed order. The department may determine that it is in the public interest to provide public notice prior to the effective date of any agreed order or to hold a public meeting or hearing on the agreed order. This notice shall briefly:

- (i) Identify and generally describe the facility;
- (ii) Identify the person(s) who are parties to the order;
- (iii) Generally describe the remedial action proposed in the proposed order; and

(iv) Invite the public to comment on the proposed order.

(d) Revisions. If the department and the potentially liable person agree to substantial changes to the proposed order, the department shall provide additional public notice and opportunity to comment.

(e) Extensions. The department shall publish in the next site register the extension of deadlines for designated high priority sites.

(11) Enforcement orders. In addition to any other applicable public participation requirements, the department shall provide public notice of all enforcement orders. Except in the case of emergencies, notice shall be mailed no later than three days after the date of the issuance of the order. In emergencies, notice shall be mailed no later than ten days after the issuance of the order.

(a) Contents of notice. All notices shall briefly:

- (i) Identify and generally describe the facility;
- (ii) Identify the person(s) who are parties to the order;
- (iii) Generally describe the terms of the proposed order;

and

(iv) Invite the public to comment on the proposed order.

(b) The department may amend the order on the basis of public comments. The department shall provide additional public notice and opportunity to comment if the order is substantially changed.

(12) State remedial investigation/feasibility study. In addition to any other applicable public participation requirements, the following shall be required during a state remedial investigation/feasibility study.

(a) Scoping. When the department elects to perform a state remedial investigation/feasibility study, public notice and an opportunity to comment on the scope of the state remedial investigation/feasibility study will be provided.

(b) Extensions. The department shall publish in the next site register the extension of deadlines for designated high priority sites.

(c) Report. The department shall provide or require public notice of state remedial investigation/feasibility study reports prepared under WAC 173-340-350. This public notice may be combined with public notice of the draft cleanup action plan. At a minimum, public notice shall briefly:

(i) Describe the site and state remedial investigation/feasibility study results;

(ii) If available, identify the department's selected cleanup action and provide an explanation for its selection;

(iii) Invite public comment on the report. The public comment period shall extend for at least thirty days from the date of mailing of the notice.

(13) Selection of cleanup actions. In addition to any other applicable public participation requirements, the department shall:

(a) Provide a notice of availability of draft or final cleanup action plans and a brief description of the proposed or selected alternative in the site register;

(b) Provide public notice of the draft cleanup action plan. A notice of a draft cleanup plan may be combined with notice on the state remedial investigation/feasibility study. Notice of a draft cleanup action plan may be combined with notice on a draft consent decree or on an order. At a minimum, public notice shall briefly:

(i) Describe the site;

(ii) Identify the department's proposed cleanup action and provide an explanation for its selection;

(iii) Invite public comment on the draft cleanup action plan. The public comment period shall run for at least thirty days from the date of issuance of the public notice.

(14) Cleanup action implementation. In addition to any other applicable public participation requirements, the following shall be required during cleanup action implementation.

(a) Public notice and opportunity to comment on any plans prepared under WAC 173-340-400 that represent a substantial change from the cleanup action plan.

(b) When the department conducts a cleanup action, public notice and an opportunity to comment shall be provided on the engineering design report and notice shall be given in the site register.

(15) Routine cleanup and interim actions. In addition to any other applicable public participation requirements, the following will be required for routine cleanup actions and interim actions.

(a) Public notice shall be provided for any proposed routine cleanup or interim actions under WAC 173-340-130 or 173-340-430. This public notice shall be combined with public notice of an order or settlement whenever practicable.

(b) At a minimum, public notice shall briefly:

(i) Describe the site;

(ii) Identify the proposed action;

(iii) Identify the likely or planned schedule for the action;

(iv) Reference any planning documents prepared for the action;

(v) Identify department staff who may be contacted for further information; and

(vi) Invite public comment on the routine cleanup or interim action.

The public comment period shall extend for at least thirty days from the date of the mailing of notice.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-600, filed 4/3/90, effective 5/4/90.]

WAC 173-340-610 Regional citizens' advisory committees. (1) The department shall establish regional citizens' advisory committees as part of a public participation program. The regional citizens' advisory committees are intended to promote meaningful and effective public involvement in the department's remedial action program under chapter 70.105D RCW. The committees will advise the department as to the concerns of citizens locally and regionally regarding the remedial actions within each committee's region, with emphasis on issues that affect the region as a whole, rather than site-specific concerns.

(2) Location. There shall be a regional citizens' advisory committee representing each geographic region of the state served by a regional office of the department.

(3) Membership. At any time, each committee shall have no fewer than five and no more than twelve members. The director shall, no later than July 1, 1990, appoint five members to each committee to represent citizens' interests in the region. These members shall serve three-year terms that may be renewed at the director's discretion. These members should represent citizen interests in the region.

(a) The director may appoint up to seven additional members to represent communities that may be affected by the remedial actions within each region. These members shall serve two-year terms that may be renewed at the director's discretion.

(b) At no time shall more than twenty-five percent of the membership of any committee consist of persons who are elected or appointed public officials or their representatives.

(c) The department shall advise the public as to whether any vacancies exist on the committees, and shall accept applications from interested citizens.

(d) The following persons shall not be eligible to serve on any committee:

(i) Persons whom the department has found are potentially liable persons under WAC 173-340-500 with regard to any facility that is currently the subject of department investigative, remedial or enforcement actions, not including compliance monitoring;

(ii) Agents or employees of such potentially liable persons as described in (d)(i) of this subsection; and

(iii) Agents or employees of the department.

(e) A member shall refrain from participating in a committee matter if that member for any reason cannot act fairly and in the public interest with regard to that matter.

(f) The director may dismiss a member for cause in accordance with the terms of the regional citizens' advisory committee charter.

(4) Meetings. The committees shall meet at least twice a year at the regional offices or elsewhere as agreed upon by a committee and the department. Appropriate department staff may attend these meetings. The department shall brief the committees on the program's major planned and ongoing activities for the year.

(a) The department and the committees may agree to additional meetings.

(b) Each committee will designate one of its members to serve as chair. The committee chairs shall meet every year with the program manager or his/her designee.

(c) All committee meetings shall be open to the public. The department shall inform the public of committee meetings.

(5) Resources to be allocated to the committees.

(a) The department shall determine, after consulting with the committees, the amount of staff time and other department resources that shall be available to the committees for each biennium.

(b) The department shall designate staff to work with the committees.

(c) Members shall be reimbursed for travel expenses (as provided for in chapter 43.03 RCW) for any meetings approved by the department.

(6) Responsibilities. The committees are directed to:

(a) Meet at least twice annually;

(b) Inform citizens within each region as to the existence of the committees and their availability as a resource;

(c) Review the department's biennial program priorities, and advise the department of citizen concerns regarding the program priorities;

(d) Advise the department on a timely basis of citizen concerns regarding investigative or remedial activities within each region, and where possible, suggest ways in which the department can address those concerns;

(e) Annually prepare a brief report to the department describing:

(i) Major citizen concerns that have been brought to the committee's attention during the past year;

(ii) Any committee proposals or recommendations to address these concerns;

(iii) The committee's plans for the coming year; and

(iv) Any other information or issues which the committee believes appropriate for inclusion.

(7) The committees are encouraged to work with the department and the public to develop additional committee goals or responsibilities.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-610, filed 4/3/90, effective 5/4/90.]

PART VII—CLEANUP STANDARDS

WAC 173-340-700 Overview of cleanup standards.

(1) Purpose. This section provides an overview of the methods for establishing cleanup standards that apply to a release or threatened release of a hazardous substance at a site. If there are any inconsistencies between this section and any specifically referenced section, the referenced section shall govern.

(2) Cleanup standards versus selection of cleanup actions.

(a) Cleanup standards are identified for the particular hazardous substances at a site and the specific areas or pathways, such as land or water, where humans and the environment can become exposed to these substances. This part provides uniform methods state-wide for identifying cleanup standards and requires that all cleanups under the act meet these standards. The actual degree of cleanup may vary from site to site and will be determined by the cleanup action alternative selected under WAC 173-340-360. Establishing cleanup standards for individual sites requires the specification of the following:

(i) Hazardous substance concentrations that protect human health and the environment ("cleanup levels");

(ii) The location on the site where those cleanup levels must be attained ("points of compliance"); and

(iii) Additional regulatory requirements that apply to a cleanup action because of the type of action and/or the location of the site. These requirements are specified in applicable state and federal laws and are generally established in conjunction with the selection of a specific cleanup action.

(b) For most sites, there are several cleanup technologies or combinations of cleanup technologies ("cleanup action alternatives") that may be used to comply with cleanup standards at individual sites. Other parts of this rule

govern the process for planning and deciding on the cleanup action to be taken at a site. For example, WAC 173-340-350 (State remedial investigation and feasibility study) (RI/FS) specifies the studies that are prepared to define the nature and extent of contamination ("RI") and to identify and evaluate cleanup action alternatives ("FS"). WAC 173-340-360 (Selection of cleanup actions) specifies the criteria for selecting the preferred alternative. WAC 173-340-410 specifies the monitoring required to assure that the remedy is effective.

(c) The department recognizes that cleanup actions selected under WAC 173-340-360 may involve containment of hazardous substances. In these cases, the cleanup action may be determined to comply with cleanup standards, provided the compliance monitoring program is designed to ensure the long-term integrity of the containment system, and the other requirements for containment technologies in WAC 173-340-360(8) are met.

(3) Three basic methods for establishing cleanup levels. These rules provide three approaches for establishing cleanup levels:

(a) Method A: Tables. On some sites, the cleanup action may be routine (WAC 173-340-130) or may involve relatively few hazardous substances. Under Method A, cleanup levels for hazardous substances are established at concentrations at least as stringent as concentrations specified in applicable state and federal laws and Tables 1, 2, or 3 of this chapter. Method A cleanup levels for hazardous substances not addressed under applicable state and federal laws or Tables 1, 2, or 3 are established at concentrations which do not exceed the natural background concentration or the practical quantitation limit for the substance in question.

(b) Method B: Standard method. Method B is the standard method for determining cleanup levels for ground water, surface water, soil, and air. Cleanup levels for individual hazardous substances are established using applicable state and federal laws or the risk equations specified in WAC 173-340-720 through 173-340-750. For individual carcinogens, cleanup levels are based upon the upper bound of the estimated excess lifetime cancer risk of one in one million (1×10^{-6}). For individual noncarcinogenic substances, cleanup levels are set at concentrations which are anticipated to result in no acute or chronic toxic effects on human health and the environment. Where a hazardous waste site involves multiple hazardous substances and/or multiple pathways of exposure, method B cleanup levels for individual substances must be modified in accordance with the procedures in WAC 173-340-708. Under this method, the total excess lifetime cancer risk for a site shall not exceed one in one hundred thousand (1×10^{-5}) and the hazard index for substances with similar noncarcinogenic toxic effects shall not exceed one (1).

(c) Method C: Conditional method. Compliance with cleanup levels developed under the method A or B may be impossible to achieve or may cause greater environmental harm. In those situations, method C cleanup levels for individual hazardous substances may be established on the basis of applicable state and federal laws and a site-specific risk assessment. Method C cleanup levels may also be established at industrial sites which meet the criteria in WAC 173-340-745. For individual carcinogens, method C cleanup levels are based upon the upper bound of the estimated

lifetime cancer risk of one in one hundred thousand (1×10^{-5}). For individual noncarcinogenic substances, method C cleanup levels are set at concentrations which are anticipated to result in no acute or chronic toxic effects on human health and no significant adverse effects on the protection and propagation of aquatic and terrestrial organisms. Where a hazardous waste site involves multiple hazardous substances and/or multiple pathways of exposure, method C cleanup levels for individual substances must be modified in accordance with the procedures in WAC 173-340-708. Under this method, the total excess lifetime cancer risk for a site shall not exceed one in one hundred thousand (1×10^{-5}) and the hazard index for substances with similar noncarcinogenic toxic effects shall not exceed one (1).

(4) Additional requirements for setting cleanup levels. Several requirements apply to cleanups under any of the three basic methods. Some of these requirements, such as the identification of applicable state and federal laws, describe analyses used along with methods A, B or C in order to set cleanup levels for particular substances at a site. Others describe the technical procedures to be used.

(a) Applicable state and federal laws. RCW 70.105D.030 (2)(d) requires the cleanup standards in these rules to be "at least as stringent as all applicable state and federal laws." In addition to establishing minimum requirements for cleanup standards, applicable state and federal laws may also impose certain technical and procedural requirements for performing cleanup actions. These requirements are described in WAC 173-340-710 and are similar to the "ARAR" (applicable, relevant and appropriate requirements) approach of the federal superfund law.

(b) Cross-media contamination. In some situations, migration of hazardous substances from one medium may cause contamination in a second media. For example, the release of hazardous substances in soil may cause ground water contamination. Under methods A, B, and C, cleanup levels must be established at concentrations which prevent violations of cleanup levels for other media following implementation of the cleanup action.

(c) Risk assessment procedures. The analyses performed under methods B and C use several factors for defining cleanup levels for carcinogens and noncarcinogens. The individual factors and procedures for modifying these factors based on new scientific information are specified in WAC 173-340-708 and 173-340-720 through 173-340-750. WAC 173-340-708 also provides rules for use of indicator hazardous substances.

(d) Natural background. Cleanup levels shall not exceed concentrations established under methods A, B, or C except where the natural background concentration is greater than the cleanup level established under those methods. In such situations, the cleanup level shall be established at a concentration equal to the natural background concentration.

(5) Threshold criteria for all cleanup actions. WAC 173-340-360 specifies that all cleanup actions conducted under this chapter shall protect human health and the environment, comply with cleanup standards and applicable state and federal laws, and provide for compliance monitoring. These are the threshold criteria and all cleanup actions must meet these criteria regardless of other factors such as cost or technical limitations.

(6) Measuring compliance. Setting cleanup standards also involves being able to demonstrate that they have been met. This involves specifying where on the site the cleanup levels must be met ("points of compliance"), how long it takes for a site to meet cleanup levels ("restoration time frame"), and conducting sufficient monitoring to demonstrate that the cleanup standards have been met and will continue to be met in the future. The provisions for establishing points of compliance are in WAC 173-340-720 through 173-340-750. The provisions for establishing restoration time frames are in WAC 173-340-360. The compliance monitoring plan prepared under WAC 173-340-410 specifies precisely how these are measured for each site. Where cleanup levels are below the practical quantitation limit, compliance with cleanup standards will be based upon the practical quantitation limit.

(7) Administrative principles for cleanup standards.

(a) Remedial actions under this chapter shall be conducted in a manner that is consistent with this section. This section shall be used in combination with WAC 173-340-130, the more specific sections in Part VII of this chapter and WAC 173-340-360.

(b) Establishing cleanup standards and selecting an appropriate cleanup action involves many technical and public policy decisions. This chapter is intended to constrain the range of decisions needed to be made on individual sites to promote expeditious cleanups.

(c) The act contains policies which state, in part, each person has a fundamental and inalienable right to a healthful environment and it is essential that sites be cleaned up well. Consistent with these policies, cleanup standards under this chapter shall be established which provide conservative estimates of human health and environmental risks which protect susceptible individuals as well as the general population.

(d) Cleanup standards under this chapter shall be established which protect human health and the environment for current and potential future site and resource uses.

(e) Cleanup actions that achieve cleanup levels under methods A, B or C (as applicable) and comply with applicable state and federal laws shall be presumed to be protective of human health and the environment.

(f) Except as provided for in applicable state and federal laws, cost shall not be a factor in determining what cleanup level is protective of human health and the environment. In addition, where specifically provided for in this chapter, cost may be appropriate for certain other determinations related to cleanup standards such as point of compliance. Cost shall, however, be considered when selecting an appropriate cleanup action.

(g) At most sites, there is more than one hazardous substance and more than one pathway for hazardous substances to get into the environment. For many sites there is more than one technology that could address each of these. When evaluating cleanup action alternatives it is appropriate to consider a representative range of technologies that could address each of these as well as different combinations of these technologies to accomplish the overall site cleanup.

(h) The cleanup of a particular media of a site will often affect other media at the site. These cross-media impacts shall be considered when establishing cleanup standards and selecting a cleanup action. Cleanup actions conducted under

this chapter shall use appropriate engineering controls or other measures to minimize these cross-media impacts.

(i) In general, cleanup levels must be met throughout a site before the site will be considered to be clean. A remedy that leaves hazardous substances on a site in excess of cleanup levels may qualify as a cleanup action as long as the remedy is protective of human health and the environment, meets cleanup levels at specified points of compliance, complies with applicable state and federal laws, provides for adequate monitoring, and incorporates appropriate institutional controls. However, these rules are intended to promote thorough cleanups rather than long-term partial cleanups or containment measures.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-700, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-700, filed 4/3/90, effective 5/4/90.]

WAC 173-340-702 General policies. (1) Purpose. This section defines the policies and principles that the department shall utilize to ensure that cleanup standards under this chapter are established and implemented in a scientifically and technically sound manner.

(2) Relationship to federal cleanup law. When evaluating cleanup actions performed under the federal cleanup law, the department shall consider WAC 173-340-360 and 173-340-700 through 173-340-760 to be a legally applicable requirement under Section 121(d) of the Federal Cleanup Law.

(3) Regulation update. The department shall review and, as appropriate, update WAC 173-340-700 through 173-340-760 no less frequently than once every five years.

(4) Institutional controls. Institutional controls under WAC 173-340-440 shall be required whenever a cleanup action results in residual concentrations of hazardous substances which exceed method A or method B cleanup levels, as applicable, or conditional points of compliance are approved by the department under WAC 173-340-720 through 173-340-760. Institutional controls shall also be required when cleanup levels are established under WAC 173-340-745.

(5) Burden of proof. Any person responsible for undertaking a cleanup action under this chapter who proposes to establish a cleanup level under method C or a conditional point of compliance shall have the burden of demonstrating to the department that requirements in this part have been met to assure protection of human health and the environment. The department shall only approve cleanup levels under method C or conditional points of compliance when it determines that that the person undertaking the cleanup actions met this burden of proof.

(6) New scientific information. The department shall consider new scientific information when establishing cleanup levels for individual sites. In making a determination on how to use this new information, the department shall, as appropriate, consult with the science advisory board, the department of health, and the United States Environmental Protection Agency.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-702, filed 1/28/91, effective 2/28/91.]

WAC 173-340-704 Use of method A. (1) Method A may be used to establish cleanup levels at the following types of sites:

(a) Sites undergoing routine cleanup actions as defined in WAC 173-340-130; or

(b) Sites where numerical standards are available in this chapter or applicable state and federal laws for all indicator hazardous substances in all media of concern.

(2) Method A cleanup levels shall be established in accordance with the procedures in WAC 173-340-720 through 173-340-760. Method A cleanup levels shall be at least as stringent as all of the following:

(a) Concentrations of individual hazardous substances listed in the tables in WAC 173-340-720, 173-340-740, or 173-340-745;

(b) Concentrations of individual hazardous substances established under applicable state and federal laws; and

(c) For individual hazardous substances not addressed under (a) and (b) of this subsection, concentrations that do not exceed natural background levels or the practical quantitation limit for the substance in question.

(3) The department may establish method A cleanup levels more stringent than those required by subsection (2) of this section, when based on a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(4) Caution on misusing method A tables. Method A tables have been developed for specific purposes. They are intended to provide conservative cleanup levels for sites undergoing routine cleanup actions or those sites with relatively few hazardous substances. The tables may not be appropriate for defining cleanup levels at other sites. For these reasons, the values in these tables should not automatically be used to define cleanup levels that must be met for financial, real estate, insurance coverage or placement, or similar transactions or purposes. Exceedances of the values in these tables do not necessarily trigger requirements for cleanup action under this chapter.

(5) If there are any inconsistencies between this section and any specifically referenced sections, the referenced section shall govern.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-704, filed 1/28/91, effective 2/28/91.]

WAC 173-340-705 Use of method B. (1) Method B is applicable to all sites. It shall be used to develop cleanup levels unless one or more of the conditions for using method A or method C are demonstrated to exist and the person conducting the cleanup action elects to utilize that method.

(2) Method B cleanup levels shall be established in accordance with the procedures in WAC 173-340-720 through 173-340-760. Method B cleanup levels shall be at least as stringent as all of the following:

(a) Concentrations of individual hazardous substances established under applicable state and federal laws;

(b) Concentrations which are estimated to result in no adverse effects on the protection and propagation of aquatic and terrestrial life;

(c) For hazardous substances for which sufficiently protective, health-based criteria or standards have not been established under applicable state and federal laws, those

concentrations which protect human health and the environment as determined by the following methods:

(i) Concentrations which are estimated to result in no acute or chronic toxic effects on human health as determined using a hazard quotient of one (1) and the procedures specified in WAC 173-340-720 through 173-340-760;

(ii) For known or suspected carcinogens, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to one in one million as determined using the procedures specified in WAC 173-340-720 through 173-340-760; and

(iii) Concentrations which eliminate or minimize the potential for food chain contamination; and

(3) The department may establish method B cleanup levels that are more stringent than those required by subsection (2) of this section, when based upon a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(4) Concentrations of individual hazardous substances established under subsections (2) and (3) of this section, including those based on applicable state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with the procedures in WAC 173-340-708. In making these adjustments, the hazard index shall not exceed one (1) and the total excess cancer risk shall not exceed one in one hundred thousand. These overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure pathway, including cleanup levels based on applicable state and federal laws.

(5) If there are any inconsistencies between this section and any specifically referenced sections, the referenced section shall govern.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-705, filed 1/28/91, effective 2/28/91.]

WAC 173-340-706 Use of method C. (1) Method C cleanup levels represent concentrations which are protective of human health and the environment for specified site uses. Method C cleanup levels may be established where the person undertaking the cleanup action can demonstrate that such levels comply with applicable state and federal laws, that all practicable methods of treatment are utilized, that institutional controls are implemented in accordance with WAC 173-340-440, and that one or more of the following conditions exist:

(a) Where method A or B cleanup levels are below area background concentrations, method C cleanup levels may be established at concentrations that are equal to area background concentrations, but in no case greater than concentrations specified in subsection (2) of this section;

(b) Where attainment of method A or B cleanup levels has the potential for creating a significantly greater overall threat to human health or the environment than attainment of method C cleanup levels established under this chapter, method C cleanup levels may be established at concentrations which minimize those overall threats, but in no case greater than concentrations specified in subsection (2) of this

section. Factors that shall be considered in making this determination include:

- (i) Results of a site-specific risk assessment;
- (ii) Duration of threats;
- (iii) Reversibility of threats;
- (iv) Magnitude of threats; and
- (v) Nature of affected population.

(c) Where method A or B cleanup levels are below technically possible concentrations, method C cleanup levels may be established at the technically possible concentrations, but in no case greater than levels specified in subsection (2) of this section; or

(d) The site is defined as an industrial site and meets the criteria for establishing soil cleanup levels under WAC 173-340-745.

(2) Method C cleanup levels shall be established in accordance with the procedures in WAC 173-340-720 through 173-340-760. Method C cleanup levels shall be at least as stringent as all of the following:

(a) Concentrations established under applicable state and federal laws;

(b) Concentrations which are estimated to result in no significant adverse effects on the protection and propagation of aquatic and terrestrial life;

(c) For hazardous substances for which sufficiently protective, health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which are protective of human health and the environment as determined by the following methods:

(i) Concentrations which are estimated to result in no significant adverse acute or chronic toxic effects on human health as estimated using a hazard quotient of one (1) and the procedures defined in WAC 173-340-720 through 173-340-760;

(ii) For known or suspected carcinogens, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to one in one hundred thousand as determined using the procedures defined in WAC 173-340-720 through 173-340-760; and

(iii) Concentrations which eliminate or minimize the potential for food chain contamination.

(3) The department may establish method C cleanup levels that are more stringent than those required by subsection (2) of this section when based upon a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(4) Concentrations of individual hazardous substances established under subsections (2) and (3) of this section, including those based on applicable state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with WAC 173-340-708. In making these adjustments, the hazard index shall not exceed one (1) and the total excess cancer risk shall not exceed one in one hundred thousand. These overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure pathway, including cleanup levels based on applicable state and federal laws.

(5) If there are any inconsistencies between this subsection and any specifically referenced sections, the referenced section shall govern.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-706, filed 1/28/91, effective 2/28/91.]

WAC 173-340-707 Analytical considerations. (1) Analytical methods used to evaluate the effectiveness of a cleanup action shall comply with the requirements in WAC 173-340-830.

(2) The department recognizes that there may be situations where a hazardous substance is not detected or is detected at a concentration below the practical quantitation limit utilizing sampling and analytical procedures which comply with the requirements of WAC 173-340-830. If those situations arise and the practical quantitation limit is higher than the cleanup level for that substance, the cleanup level shall be considered to have been attained, subject to subsection (4) of this section, only when the more stringent of the following conditions are met:

(a) The practical quantitation limit is no greater than ten times the method detection limit; or

(b) The practical quantitation limit for the particular hazardous substance, medium, and analytical procedure is no greater than the practical quantitation limit established by the United States Environmental Protection Agency and used to establish requirements in 40 CFR 136, 40 CFR 141 through 143, or 40 CFR 260 through 270.

(3) In cases where a cleanup level required by this chapter is less than the practical quantitation limit using an approved analytical procedure, the department may also require one or more of the following:

(a) Use of surrogate measures of hazardous substance contamination;

(b) Use or development of specialized sample collection or analysis techniques to improve the method detection limit or practical quantitation limit for the hazardous substances at the site; or

(c) Monitoring to assure that the concentration of a hazardous substance does not exceed detectable levels.

(4) When the practical quantitation limit is above the cleanup level, the department shall consider the availability of improved analytical techniques when performing periodic reviews under WAC 173-340-420. Subsequent to those reviews, the department may require the use of improved analytical techniques with lower practical quantitation limits and other appropriate actions.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-707, filed 1/28/91, effective 2/28/91.]

WAC 173-340-708 Human health risk assessment procedures. (1) Purpose. This section defines the risk assessment framework that the department will utilize to establish cleanup levels.

(2) Selection of indicator hazardous substances.

(a) When defining cleanup requirements at a site that is contaminated with a large number of hazardous substances, the department may eliminate from consideration those hazardous substances that contribute a small percentage of the overall threat to human health and the environment. The remaining hazardous substances shall serve as indicator

hazardous substances for purposes of defining site cleanup requirements.

(b) If the department considers this approach appropriate for a particular site, the factors evaluated when eliminating individual hazardous substances from further consideration shall include:

(i) The toxicological characteristics of the hazardous substance that influence its ability to adversely affect human health or the environment relative to the concentration of the hazardous substance at the site;

(ii) The chemical and physical characteristics of the hazardous substance which govern its tendency to persist in the environment;

(iii) The chemical and physical characteristics of the hazardous substance which govern its tendency to move into and through environmental media;

(iv) The natural background concentrations of the hazardous substance;

(v) The thoroughness of testing for the hazardous substance at the site;

(vi) The frequency that the hazardous substance has been detected at the site; and

(vii) Degradation by-products of the hazardous substance.

(c) When the department determines that the use of indicator hazardous substances is appropriate for a particular site, it may also require biological testing to address potential toxic effects associated with hazardous substances eliminated from consideration under this subsection.

(3) Reasonable maximum exposure.

(a) Cleanup levels shall be based on estimates of current and future resource uses and reasonable maximum exposures expected to occur under both current and potential future site use conditions.

(b) The reasonable maximum exposure is defined as the highest exposure that is reasonably expected to occur at a site under current and potential future site use. WAC 173-340-720 through 173-340-760 define the reasonable maximum exposures for ground water, surface water, soil, and air. These reasonable maximum exposures will apply to most sites where individuals or groups of individuals are or could be exposed to hazardous substances. For example, the reasonable maximum exposure for most ground water is defined as exposure to hazardous substances in drinking water and other domestic uses.

(c) Persons performing cleanup actions under this chapter may utilize the evaluation criteria in WAC 173-340-720 through 173-340-760 to demonstrate that the reasonable maximum exposure scenarios specified in those sections are not appropriate for a particular site. The use of an alternate exposure scenario shall be documented by the person performing the cleanup action. Documentation for the use of alternate exposure scenarios shall be based on the results of investigations performed in accordance with WAC 173-340-350.

(d) Individuals or groups of individuals may be exposed to hazardous substances through more than one exposure pathway. For example, a person may be exposed to hazardous substances from a site by drinking contaminated ground water, eating contaminated fish, and breathing contaminated air. At sites where the same individuals or groups of individuals are or could be consistently exposed through

more than one pathway, the reasonable maximum exposure shall represent the total exposure through all of those pathways. At such sites, the cleanup levels derived for individual pathways under WAC 173-340-720 through 173-340-760 shall be adjusted downward to take into account multiple exposure pathways.

(4) Cleanup levels for individual hazardous substances. Cleanup levels for individual hazardous substances will generally be based on a combination of requirements in applicable state and federal laws and risk assessment.

(5) Multiple hazardous substances.

(a) Cleanup levels for individual hazardous substances established under methods B and C shall be adjusted downward to take into account exposure to multiple hazardous substances. Adverse effects resulting from exposure to two or more hazardous substances with similar types of toxic response are assumed to be additive unless scientific evidence is available to demonstrate otherwise.

(b) Cancer risks resulting from exposure to two or more carcinogens are assumed to be additive unless scientific evidence is available to demonstrate otherwise.

(c) For purposes of establishing cleanup levels for noncarcinogens under methods B and C, the health threats resulting from exposure to two or more hazardous substances with similar types of toxic response may be apportioned between those hazardous substances in any combination as long as the hazard index does not exceed one (1).

(d) For purposes of establishing cleanup levels for carcinogens under methods B and C, the cancer risks resulting from exposure to multiple hazardous substances may be apportioned between hazardous substances in any combination as long as the total excess cancer risk does not exceed one in one hundred thousand.

(e) The department may require biological testing to assess the potential interactive effects associated with chemical mixtures.

(6) Multiple pathways of exposure.

(a) Estimated doses of individual hazardous substances resulting from more than one pathway of exposure are assumed to be additive unless scientific evidence is available to demonstrate otherwise.

(b) Cleanup levels based on one pathway of exposure shall be adjusted downward to take into account exposures from more than one exposure pathway. The number of exposure pathways considered at a given site shall be based on the reasonable maximum exposure scenario as defined in WAC 173-340-708(3).

(c) For purposes of establishing cleanup levels for noncarcinogens under methods B and C, the health threats associated with exposure via multiple pathways may be apportioned between exposure pathways in any combination as long as the hazard index does not exceed one (1).

(d) For purposes of establishing cleanup levels for carcinogens under methods B and C, the cancer risks associated with exposure via multiple pathways may be apportioned between exposure pathways in any combination as long as the total excess cancer risk does not exceed one in one hundred thousand.

(7) Reference doses.

(a) The chronic reference dose and the developmental reference dose shall be used to establish cleanup levels under

this chapter. Cleanup levels shall be established using the value which results in the most protective concentration.

(b) Inhalation reference doses shall be used in WAC 173-340-750. Where the inhalation reference dose is reported as a concentration in air, that value shall be converted to a corresponding inhaled intake (mg/kg-day) using a human body weight of 70 kg and an inhalation rate of 20 m³/day.

(c) A subchronic reference dose may be utilized to evaluate potential noncarcinogenic effects resulting from exposure to hazardous substances over short periods of time. This value may be used in place of the chronic reference dose where it can be demonstrated that a particular hazardous substance will degrade to negligible concentrations during the exposure period.

(d) For purposes of establishing cleanup levels for hazardous substances under this chapter, a reference dose established by the United States Environmental Protection Agency and available through the "integrated risk information system" data base shall be used unless the department determines that there is clear and convincing scientific data which demonstrates that the use of this value is inappropriate.

(e) If a reference dose is not available through the "integrated risk information system" or is demonstrated to be inappropriate under (d) of this subsection, a reference dose shall be established utilizing the methods described in Risk Assessment Guidance for Superfund. Human Health Evaluation Manual, Part A. (October 1989.)

(f) In estimating a reference dose for a hazardous substance under (e) of this subsection, the department shall consult with the science advisory board, the department of health, and the United States Environmental Protection Agency.

(g) Where a reference dose other than those established under (d) of this subsection is used to establish a cleanup level at individual sites, the department shall summarize the scientific rationale for the use of those values in the cleanup action plan. The department shall provide the opportunity for public review and comment on this value in accordance with the requirements of WAC 173-340-360 and 173-340-600.

(8) Carcinogenic potency factor.

(a) For purposes of establishing cleanup levels for hazardous substances under this chapter, a carcinogenic potency factor established by the United States Environmental Protection Agency and available through the "integrated risk information system" data base shall be used unless the department determines that there is clear and convincing scientific data which demonstrates that the use of this value is inappropriate.

(b) If a carcinogenic potency factor is not available through the "integrated risk information system" or is demonstrated to be inappropriate under (a) of this subsection, one of the following methods shall be utilized to establish a carcinogenic potency factor:

(i) The carcinogenic potency factor may be derived from appropriate human epidemiology data on a case-by-case basis; or

(ii) The carcinogenic potency factor may be derived from animal bioassay data using the following procedures:

(A) All carcinogenesis bioassays shall be reviewed and data of appropriate quality shall be used for establishing the carcinogenic potency factor.

(B) The linearized multistage extrapolation model shall be utilized to estimate the slope of the dose-response curve unless the department determines that there is clear and convincing scientific data which demonstrates that the use of an alternate extrapolation model is more appropriate;

(C) All doses shall be adjusted to give an average daily dose over the study duration; and

(D) An interspecies scaling factor shall be used to take into account differences between animals and humans. This scaling factor shall be based on the assumption that milligrams per surface area is an equivalent dose between species unless the department determines there is clear and convincing scientific data which demonstrates that an alternate procedure is more appropriate. The slope of the dose response curve for the test species shall be multiplied by this scaling factor in order to obtain the carcinogenic potency factor, except where such scaling factors are incorporated into the extrapolation model under (B) of this subsection. Where adequate pharmacokinetic and metabolism studies are available, data from these studies may be utilized to adjust the interspecies scaling factor.

(c) In estimating a carcinogenic potency factor for a hazardous substance under (b) of this subsection, the department shall consult with the science advisory board, the department of health, and the United States Environmental Protection Agency.

(d) Where a carcinogenic potency factor other than that established under (a) of this subsection is used to establish cleanup levels at individual sites, the department shall summarize the scientific rationale for the use of that value in the cleanup action plan. The department shall provide the opportunity for public review and comment on this value in accordance with the requirements of WAC 173-340-360 and 173-340-600.

(9) Bioconcentration factors.

(a) For purposes of establishing cleanup levels for a hazardous substance under WAC 173-340-730, a bioconcentration factor established by the United States Environmental Protection Agency and utilized to establish the ambient water quality criterion for that substance under section 304 of the Clean Water Act shall be used unless the department determines that there is clear and convincing scientific data which demonstrates that the use of an alternate value is more appropriate.

(b) When utilizing a bioconcentration factor other than that utilized to establish the ambient water quality criterion, the department shall consult with the science advisory board, the department of health, and the United States Environmental Protection Agency.

(c) Where a bioconcentration factor other than that established under (a) of this subsection is used to establish cleanup levels at individual sites, the department shall summarize the scientific rationale for the use of that factor in the draft cleanup action plan. The department shall provide the opportunity for public review and comment on the value in accordance with the requirements of WAC 173-340-360 and 173-340-600.

(10) Exposure parameters.

(a) As a matter of policy, the department has defined the exposure parameters to be used when establishing cleanup levels under this chapter. With the exception of the parameters identified in (b) of this subsection, these parameters shall not be modified for individual hazardous substances or sites in a manner which results in a less stringent cleanup level. The scientific and technical basis for these parameters shall be reviewed when updating this chapter under WAC 173-340-704(3).

(b) The department may approve the use of values other than those specified in WAC 173-340-720 through 173-340-760 where there is clear and convincing scientific data which demonstrates that one or more of the following parameters should be modified for an individual hazardous substance or site:

- (i) Gastrointestinal absorption rate;
- (ii) Inhalation correction factor;
- (iii) Bioconcentration factor; or
- (iv) Inhalation absorption rate.

(c) Where exposure parameters other than those established under WAC 173-340-720 through 173-340-760 are used to establish cleanup levels at individual sites, the department shall summarize the scientific rationale for the use of those parameters in the cleanup action plan. The department shall provide the opportunity for public review and comment on those values in accordance with the requirements of WAC 173-340-360 and 173-340-600.

(11) Methods for defining background concentrations.

(a) Sampling of hazardous substances in background areas may be conducted to distinguish site-related concentration from nonsite related concentrations of hazardous substances or to support the development of a method C cleanup level under the provisions of WAC 173-340-706. For purposes of this chapter, two types of background may be determined, natural background and area background concentrations.

(b) For purposes of defining background concentrations, samples shall be collected from areas that have the same basic characteristics as the medium of concern at the site, have not been influenced by releases from the site and, in the case of natural background concentrations, have not been influenced by releases from other localized human activities.

(c) The statistical method used to evaluate available data shall be appropriate for the distribution of each hazardous substance. If the distribution of the hazardous substance data is inappropriate for statistical methods based on a normal distribution, then the data may be transformed. If the distributions of individual hazardous substances differ, more than one statistical method may be required at a site. In general, appropriate statistical methods include the following:

(i) A tolerance interval procedure in which an interval for each hazardous substance is established from the distribution of background data and the cleanup level of each hazardous substance is compared to the lower tolerance limit; and

(ii) Other statistical methods proposed by the person undertaking the cleanup action and approved by the department.

(d) If a tolerance interval approach is used to evaluate natural background data, the tolerance interval shall have a coverage of ninety-five percent and a tolerance coefficient of ninety-five percent. When determining natural background

concentrations, sample size of ten or more background soil samples shall be required. When determining area background concentrations, a sample size of twenty or more soil samples shall be required. The number of samples for other media shall be sufficient to provide a representative measure of background concentrations and shall be determined on a case-by-case basis.

(e) For purposes of estimating background concentrations, values below the method detection limit shall be assigned a value equal to one-half of the method detection limit. Measurements above the method detection limit, but below the practical quantitation limit shall be assigned a value equal to the method detection limit. The department may approve the use of alternate statistical procedures for handling data below the method detection limit or practical quantitation limit. Alternate statistical procedures may include probit analysis and regression analysis.

(12) Significant figures. Risk assessment results shall be presented using one significant figure.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-708, filed 1/28/91, effective 2/28/91.]

WAC 173-340-710 Applicable state and federal laws. (1) Applicable state and federal laws.

(a) All cleanup actions conducted under this chapter shall comply with applicable state and federal laws. For purposes of this chapter, the term "applicable state and federal laws" shall include legally applicable requirements and those requirements that the department determines, based on consideration of the criteria in subsection (3) of this section, are relevant and appropriate requirements.

(b) The person conducting a cleanup action shall identify all applicable state and federal laws. The department shall make the final interpretation on whether these requirements have been correctly identified and are legally applicable or relevant and appropriate.

(2) Legally applicable requirements. Legally applicable requirements include those cleanup standards, standards of control, and other environmental protection requirements, criteria, or limitations promulgated under state or federal law that specifically address a hazardous substance, cleanup action, location or other circumstances at the site.

(3) Relevant and appropriate requirements. Relevant and appropriate requirements include those cleanup standards, standards of control, and other environmental requirements, criteria, or limitations established under state or federal law that, while not legally applicable to the hazardous substance, cleanup action, location, or other circumstance at a site, address problems or situations sufficiently similar to those encountered at the site that their use is well suited to the particular site. WAC 173-340-710 through 173-340-760 identifies several requirements the department shall consider relevant and appropriate for establishing cleanup standards. For other regulatory requirements, the following criteria shall be evaluated, where pertinent, to determine whether such requirements are relevant and appropriate for a particular hazardous substance, remedial action, or site:

(a) Whether the purpose for which the statute or regulations under which the requirement was created is similar to the purpose of the cleanup action;

(b) Whether the media regulated or affected by the requirement is similar to the media contaminated or affected at the site;

(c) Whether the hazardous substance regulated by the requirement is similar to the hazardous substance found at the site;

(d) Whether the entities or interests affected or protected by the requirement are similar to the entities or interests affected by the site;

(e) Whether the actions or activities regulated by the requirement are similar to the cleanup action contemplated at the site;

(f) Whether any variance, waiver, or exemption to the requirements are available for the circumstances of the site;

(g) Whether the type of place regulated is similar to the site;

(h) Whether the type and size of structure or site regulated is similar to the type and size of structure or site affected by the release or contemplated by the cleanup action; and

(i) Whether any consideration of use or potential use of affected resources in the requirement is similar to the use or potential use of the resources affected by the site or contemplated cleanup action.

(4) Variances. For purposes of this chapter, a regulatory variance or waiver provision included in an applicable state and federal law shall be considered potentially applicable to interim actions and cleanup actions and the department may determine that a particular regulatory variance or waiver is appropriate if the substantive conditions for such a regulatory variance or waiver are met. In all such cases, interim actions and cleanup actions shall be protective of human health and the environment.

(5) New requirements. The department shall consider new applicable state and federal laws as part of the periodic review under WAC 173-340-420. Cleanup actions shall be evaluated in light of these new requirements to determine whether the cleanup action is still protective of human health and the environment.

(6) Selection of cleanup actions. To demonstrate compliance with WAC 173-340-360, cleanup actions shall comply with all applicable state and federal laws in addition to the other requirements of this chapter. The following, which is not a complete list, are selected applications of specific applicable state and federal laws to cleanup actions.

(a) Water discharge requirements. Hazardous substances which are directly or indirectly released or proposed to be released to waters of the state shall be provided with all known, available and reasonable methods of treatment consistent with the requirements of chapters 90.48 and 90.54 RCW and the regulations that implement those statutes.

(b) Air emission requirements. Best available control technologies consistent with the requirements of chapter 70.94 RCW and the regulations that implement this statute shall be applied to releases of hazardous substances to the air resulting from cleanup actions at a site.

(c) Solid waste landfill closure requirements. For solid waste landfills, the solid waste closure requirements in chapter 173-304 WAC shall be minimum requirements for cleanup actions conducted under this chapter. In addition, when the department determines that the closure requirements in chapter 173-303 WAC are applicable requirements,

the more stringent closure requirements under that law shall also apply to cleanup actions conducted under this chapter.

(d) Sediment management requirements. Sediment cleanup actions conducted under this chapter shall comply with the sediment cleanup standards in chapter 173-204 WAC. In addition, a state remedial investigation/feasibility study conducted under WAC 173-340-350 shall also comply with the cleanup study plan requirements under chapter 173-204 WAC. The process for selecting sediment cleanup actions under this chapter shall comply with the requirements in WAC 173-340-360.

(7) Interim actions. Interim actions conducted under this chapter shall comply with legally applicable requirements. The department may also determine, based on the criteria in subsection (3) of this section, that other requirements, criteria, or limitations are relevant and appropriate for interim actions.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-710, filed 1/28/91, effective 2/28/91.]

WAC 173-340-720 Ground water cleanup standards. (1) General considerations.

(a) Ground water cleanup levels shall be based on estimates of the highest beneficial use and the reasonable maximum exposure expected to occur under both current and potential future site use conditions. The department has determined that for most sites drinking water is the beneficial use requiring the highest quality of ground water and that exposure to hazardous substances via ingestion of drinking water and other domestic uses represents the reasonable maximum exposure. In the event of a release of a hazardous substance, treatment, removal, or containment measures shall be conducted to reduce the concentration of the hazardous substance in ground water to a concentration consistent with this use unless the following can be demonstrated:

(i) The ground water does not serve as a current source of drinking water;

(ii) The ground water is not a potential future source of drinking water for any of the following reasons:

(A) The ground water is present in insufficient quantity to yield greater than 0.5 gallon per minute on a sustainable basis to a well constructed in compliance with chapter 173-160 WAC and in accordance with normal domestic water well construction practices for the area in which the site is located;

(B) The ground water contains natural background concentrations of organic or inorganic constituents which make use of the water for drinking not practicable. Ground water containing total dissolved solids at concentrations greater than 10,000 mg/l shall normally be considered to have fulfilled this requirement; or

(C) The ground water is situated at a great depth or location which makes recovery of water for drinking water purposes technically impossible; and

(iii) The department determines it is unlikely that hazardous substances will be transported from the contaminated ground water to ground water that is a current or potential future source of drinking water, as defined in (a)(ii) of this subsection, at concentrations which exceed ground water quality criteria published in chapter 173-200 WAC; or

(iv) More stringent concentrations are necessary to protect human health or the environment.

(b) In making a determination under (a)(iii) of this subsection, the department shall consider site-specific factors including:

(i) The extent of affected ground water;
 (ii) The distance to existing water supply wells;
 (iii) The likelihood of interconnection due to well construction practices in the area of the state where the site is located;

(iv) The physical and chemical characteristics of the hazardous substance;

(v) The hydrogeologic characteristics of the site;

(vi) The presence of discontinuities in the affected geologic stratum; and

(vii) The degree of confidence in any predictive modeling performed.

(c) The department recognizes that there may be sites where there is an extremely low probability that ground water classified as potential future source of drinking water under (b) of this subsection will actually be used for that purpose (i.e., the shallow ground waters on Harbor Island). At such sites, the department may approve ground water cleanup levels that are based on protecting beneficial uses of adjacent surface water if the person undertaking the cleanup action can demonstrate all of the following:

(i) There are known or projected points of entry of the ground water into the surface water;

(ii) The surface water is not classified as a suitable domestic water supply source under chapter 173-201 WAC;

(iii) Ground water flows into surface waters will result in no exceedances of surface water cleanup levels at the point of entry or at any downstream location where it is reasonable to believe that hazardous substances may accumulate;

(iv) The cleanup action includes institutional controls that will prevent the use of contaminated ground water at any point between the source of hazardous substances and the point(s) of entry of the ground water into the surface water; and

(v) The department determines it is unlikely that hazardous substances will be transported from the contaminated ground water to ground water that is a current or potential future source of drinking water, as defined in (b) of this subsection, at concentrations which exceed ground water quality criteria published in chapter 173-200 WAC.

(d) Where more stringent cleanup levels are necessary to protect beneficial uses of ground water other than drinking water, the cleanup level shall be established by the department under methods B or C as appropriate.

(e) Releases of hazardous substances to ground waters of the state shall not directly or indirectly cause violations of surface water, sediments, soil, or air cleanup standards established under this chapter or other applicable state and federal laws.

(2) Method A cleanup levels.

(a) Where the ground water is a current or potential future source of drinking water, method A cleanup levels shall be at least as stringent as all of the following:

(i) Concentrations listed in Table 1:

Table 1
Method A Cleanup Levels - Ground Water^a

Hazardous Substance	CAS Number	Cleanup Level
Arsenic	7440-38-2	5.0 ug/liter ^b
Benzene	71-43-2	5.0 ug/liter ^c
Cadmium	7440-43-9	5.0 ug/liter ^d
Chromium (Total)	7440-47-3	50.0 ug/liter ^e
DDT	50-29-3	0.1 ug/liter ^f
1,2 Dichloroethane	107-06-2	5.0 ug/liter ^g
Ethylbenzene	100-41-4	30.0 ug/liter ^h
Ethylene dibromide	106-93-4	0.01 ug/liter ⁱ
Gross Alpha Particle Activity		15.0 pCi/liter ^j
Gross Beta Particle Activity		4.0 mrem/yr ^k
Lead	7439-92-1	5.0 ug/liter ^l
Lindane	58-89-9	0.2 ug/liter ^m
Methylene chloride	75-09-2	5.0 ug/liter ⁿ
Mercury	7439-97-6	2.0 ug/liter ^o
PAHs (carcinogenic)		0.1 ug/liter ^p
PCB mixtures		0.1 ug/liter ^q
Radium 226 and 228		5.0 pCi/liter ^r
Radium 226		3.0 pCi/liter ^s
Tetrachloroethylene	127-18-4	5.0 ug/liter ^t
Toluene	108-88-3	40.0 ug/liter ^u
Total Petroleum Hydrocarbons		1000.0 ug/liter ^v
1,1,1 Trichloroethane	71-55-6	200.0 ug/liter ^w
Trichloroethylene	79-01-5	5.0 ug/liter ^x
Vinyl chloride	75-01-4	0.2 ug/liter ^y
Xylenes	1330-20-7	20.0 ug/liter ^z

^a Caution on misusing method A tables. Method A tables have been developed for specific purposes. They are intended to provide conservative cleanup levels for sites undergoing routine cleanup actions or those sites with relatively few hazardous substances. The tables may not be appropriate for defining cleanup levels at other sites. For these reasons, the values in these tables should not automatically be used to define cleanup levels that must be met for financial, real estate, insurance coverage or placement, or similar transactions or purposes. Exceedances of the values in these tables do not necessarily trigger requirements for cleanup action under this chapter.

^b Arsenic. Cleanup level based on background concentrations for state of Washington.

^c Benzene. Cleanup level based on applicable state and federal law.

^d Cadmium. Cleanup level based on applicable state and federal law and concentration derived using procedures in subsection (3)(a)(ii)(A) of this section and a hazard quotient of 0.2.

^e Chromium (Total). Cleanup level based on applicable state and federal law.

^f DDT. Cleanup levels based on concentration derived using procedures in subsection (3)(a)(ii)(B) of this section.

^g 1,2 Dichloroethane. Cleanup level based on applicable state and federal law.

^h Ethylbenzene. Cleanup level based on applicable state and federal law and prevention of adverse aesthetic characteristics.

ⁱ Ethylene dibromide. Cleanup level based on concentration derived using procedures in subsection (3)(a)(ii)(B) of this section and modified based on analytical considerations.

^j Gross Alpha Particle Activity, excluding uranium. Cleanup level based on applicable state and federal law.

^k Gross Beta Particle Activity, including gamma activity. Cleanup level based on applicable state and federal law.

^l Lead. Cleanup level based on applicable state and federal law and prevention of unacceptable blood lead levels.

^m Lindane. Cleanup level based on concentration derived using procedures in subsection (3)(a)(ii)(B) of this section.

ⁿ Methylene chloride. Cleanup level based on concentration derived using the procedures in subsection (3)(a)(ii)(B) of this section.

^o Mercury. Cleanup level based on applicable state and federal law.

- P PAHs (carcinogenic). Cleanup level based on concentration derived using procedures in subsection (3)(a)(ii)(B) of this section and modified based on analytical considerations.
- Q PCB mixtures. Cleanup level based on concentration derived using procedures in subsection (3)(a)(ii)(B) of this section and modified based on analytical considerations.
- R Radium 226 and 228. Cleanup level based on applicable state and federal law.
- S Radium 226. Cleanup level based on applicable state and federal law.
- T Tetrachloroethylene. Cleanup level based on applicable state and federal law.
- U Toluene. Cleanup level based on applicable state and federal law and prevention of adverse aesthetic characteristics.
- V Total Petroleum Hydrocarbons. Cleanup level based on prevention of adverse aesthetic characteristics.
- W 1,1,1 Trichloroethane. Cleanup level based on applicable state and federal law.
- X Trichloroethylene. Cleanup level based on applicable state and federal law.
- Y Vinyl chloride. Cleanup level based on concentration derived using procedures in subsection (3)(a)(ii)(B) of this section and modified based on analytical considerations.
- Z Xylenes. Cleanup level based on applicable state and federal law and prevention of adverse aesthetic characteristics; and

(ii) Concentrations established under applicable state and federal laws, including the following requirements:

(A) Maximum contaminant levels established under the Safe Drinking Water Act and published in 40 C.F.R. 141, as amended;

(B) Maximum contaminant level goals for noncarcinogens established under the Safe Drinking Water Act and published in 40 C.F.R. 141, as amended;

(C) Secondary maximum contaminant levels established under the Safe Drinking Water Act and published in 40 C.F.R. 143, as amended; and

(D) Maximum contaminant levels established by the state board of health and published in chapter 248-54 WAC, as amended.

(b) The department may establish method A cleanup levels more stringent than those required by (a) of this subsection when, based upon site-specific evaluations, the department determines that such levels are necessary to protect human health and the environment.

(c) Cleanup levels to protect beneficial uses of ground water other than drinking water shall be established by the department under methods B or C, as appropriate.

(3) Method B cleanup levels.

(a) Where the ground water is a current or potential future source of drinking water, method B cleanup levels shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws, including the requirements in subsection (2)(a)(ii) of this section;

(ii) For hazardous substances for which sufficiently protective, health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health as determined by the following methods:

(A) Concentrations which are estimated to result in no acute or chronic toxic effects on human health as determined using the following equation and standard exposure assumptions:

$$\text{Ground water cleanup level (ug/l)} = \frac{\text{RFD} \times \text{ABW} \times \text{UCF} \times \text{HQ}}{\text{DWIR} \times \text{INH}}$$

Where:

RFD = Reference Dose as specified in WAC 173-340-708(7) (mg/kg-day)

ABW = Average body weight during the period of exposure (16 kg)

UCF = Unit conversion factor (1,000 ug/mg)

HQ = Hazard quotient (1)

DWIR = Drinking water ingestion rate (1.0 liter/day)

INH = Inhalation correction factor as defined in WAC 173-340-720(7);

(B) For known or suspected carcinogens, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 1,000,000 as determined using the following equation and standard exposure assumptions:

$$\text{Ground water cleanup level (ug/l)} = \frac{\text{RISK} \times \text{ABW} \times \text{LIFE} \times \text{UCF}}{\text{CPF} \times \text{DWIR} \times \text{DUR} \times \text{INH}}$$

Where:

RISK = Acceptable cancer risk level (1 in 1,000,000)

ABW = Average body weight during the period of exposure (70 kg)

LIFE = Lifetime (75 years)

UCF = Unit conversion factor (1,000 ug/mg)

CPF = Carcinogenic potency factor as specified in WAC 173-340-708(8) (kg-day/mg)

DWIR = Drinking water ingestion rate (2.0 liters/day)

DUR = Duration of exposure (30 years)

INH = Inhalation correction factor as defined in WAC 173-340-720(7);

(b) The department may establish method B cleanup levels that are more stringent than those required by subsection (3)(a) of this section, when, based on site-specific evaluations, the department determines such levels are necessary to protect human health and the environment. This may include the following:

(i) Concentrations which are necessary to protect sensitive sub-groups;

(ii) Concentrations which eliminate or minimize the potential for food chain contamination;

(iii) Concentrations which eliminate or minimize the potential for damage to soils or biota in the soils which could impair the use of the soil for agricultural or silvicultural purposes;

(iv) Concentrations which eliminate or minimize the potential for the accumulation of vapors in buildings or other structures to concentrations which pose a threat to human health or the environment; and

(v) Concentrations which protect nearby surface waters. In general, these will be based on attaining surface water cleanup levels in the surface water as close as technically possible to the point or points where the ground water flows into the surface water.

(c) Method B cleanup levels to protect beneficial uses of ground water other than drinking water shall be established by the department on a case-by-case basis.

(4) Method C cleanup levels.

(a) Method C cleanup levels may be approved by the department if the person undertaking the cleanup action can demonstrate that such levels are consistent with applicable state and federal laws, that all practicable methods of treatment have been utilized, that institutional controls are implemented in accordance with WAC 173-340-440, and that one or more of the conditions in WAC 173-340-706(1) exist.

(b) Where the ground water is a current or potential future source of drinking water as defined in subsection (1)(a) of this section, method C cleanup levels for ground water shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws, including the requirements in subsection (2)(a)(ii) of this section;

(ii) For hazardous substances for which sufficiently protective, health-based standards or criteria have not been established under applicable state and federal laws, those concentrations that protect human health as determined using the following methods:

(A) Concentrations which are estimated to result in no significant acute or chronic toxic effects on human health and are estimated in accordance with WAC 173-340-720 (3)(a)(ii)(A) except that the average body weight shall be 70 kg and the drinking water intake rate shall be 2 liters/day;

(B) Concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 100,000 and are estimated in accordance with WAC 173-340-720 (3)(a)(ii)(B);

(c) The department may establish method C cleanup levels that are more stringent than those required by (b) of this subsection when, based on a site-specific evaluation, the department determines such levels are necessary to protect human health and the environment. This may include consideration of those factors listed in subsection (3)(b) of this section.

(d) Method C cleanup levels that protect beneficial uses of ground water other than drinking water shall be established by the department on a case-by-case basis.

(5) Multiple hazardous substances/multiple pathways of exposure.

(a) Ground water cleanup levels for individual hazardous substances developed in accordance with subsections (3) and (4) of this section, including those based on applicable state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with the procedures in WAC 173-340-708 (5) and (6). In making these adjustments, the hazard index shall not exceed one and the total excess cancer risk shall not exceed one in one hundred thousand.

(b) The overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure pathway, including cleanup levels based on applicable state and federal laws.

(6) Point of compliance.

(a) For ground water, the point of compliance is the point or points where the ground water cleanup levels established under subsections (2), (3), (4), and (5) of this section must be attained. Ground water cleanup levels shall be attained in all ground waters from the point of compliance to the outer boundary of the hazardous substance plume.

(b) The point of compliance shall be established throughout the site from the uppermost level of the saturated zone extending vertically to the lowest most depth which could potentially be affected by the site.

(c) Where hazardous substances remain on-site as part of the cleanup action, the department may approve a conditional point of compliance which shall be as close as practicable to the source of hazardous substances, not to exceed the property boundary. Where a conditional point of compliance is proposed, the person responsible for undertaking the cleanup action shall demonstrate that all practicable methods of treatment are to be utilized in the site cleanup.

(d) At sites where the affected ground water flows into nearby surface water, the cleanup level may be based on protection of the surface water. At these sites, the department may approve a conditional point of compliance that is located within the surface water as close as technically possible to the point or points where ground water flows into the surface water. Conditional points of compliance may be approved only if the following requirements are met:

(i) Use of a dilution zone under WAC 173-201-035 to demonstrate compliance with surface water cleanup levels shall not be allowed;

(ii) Ground water discharges shall be provided with all known available and reasonable methods of treatment prior to release into surface waters;

(iii) Ground water discharges shall not result in violations of sediment quality values published in chapter 173-204 WAC; and

(iv) Ground water monitoring shall be performed to estimate contaminant flux rates and to address potential bioaccumulation problems resulting from surface water concentrations below method detection limits.

(7) Inhalation correction factors.

(a) The inhalation correction factor is an adjustment factor which takes into account exposure to hazardous substances which are volatilized and inhaled during showering and other domestic activities. When available, hazardous substance-specific information shall be used to estimate these values.

(b) Where hazardous substance-specific information is not available, inhalation correction factors shall be one of the following:

(i) For volatile organic hazardous substances, 2; or

(ii) Other hazardous substances, 1.

(c) Where separate toxicity factors (reference doses and carcinogenic potency factors) are available for inhalation and oral exposures, the health hazards associated with the inhalation of hazardous substances in ground water during showering and other domestic activities may be evaluated separately from the health hazards associated with ingestion of drinking water. In these cases, the ground water cleanup level based on ingestion of drinking water shall be modified to take into account multiple exposure pathways in accordance with WAC 173-340-708(6).

(8) Compliance monitoring.

(a) Compliance with ground water cleanup levels shall be determined by analyses of unfiltered ground water samples, unless it can be demonstrated that a filtered sample provides a more representative measure of ground water quality. Ecology expects that filtering will generally be acceptable for inorganic substances where:

(i) A properly constructed monitoring well cannot be sufficiently developed to provide low turbidity water samples;

(ii) Due to the natural background concentration of hazardous substances in the aquifer material, unfiltered

samples would not provide a representative measure of ground water quality; and

(iii) Filtering is performed in the field with all practicable measures taken to avoid exposing the ground water sample to the ambient air prior to filtering.

(iv) Ecology expects that filtering will generally be allowed for hazardous substances such as iron and manganese.

(b) Sampling and analytical procedures shall be defined in a compliance monitoring plan prepared under WAC 173-340-410. The sample design shall provide data which are representative of the site.

(c) The data analysis and evaluation procedures used to evaluate compliance with ground water cleanup levels shall be defined in a compliance monitoring plan prepared under WAC 173-340-410. These procedures shall meet the following general requirements:

(i) Methods of data analysis shall be consistent with the sampling design;

(ii) When cleanup levels are based on requirements specified in applicable state and federal laws, the procedures for evaluating compliance that are specified in those requirements shall be utilized to evaluate compliance with cleanup levels unless those procedures conflict with the intent of this section;

(iii) Where procedures for evaluating compliance are not specified in an applicable state and federal law, statistical methods used shall be appropriate for the distribution of sampling data for each hazardous substance. If the distribution of sampling data for a hazardous substance is inappropriate for statistical methods based on a normal distribution, then the data may be transformed. If the distributions for hazardous substances differ, more than one statistical method may be required;

(iv) Compliance with ground water cleanup levels shall be determined for each ground water monitoring well or other monitoring points such as a spring;

(v) The data analysis procedures identified in the compliance monitoring plan shall specify the statistical parameters to be used to determine compliance with ground water cleanup levels.

(A) For clean levels based on short-term or acute toxic effects on human health or the environment, an upper percentile concentration shall be used to evaluate compliance with ground water cleanup levels.

(B) For cleanup levels based on chronic or carcinogenic threats, the mean concentration shall be used to evaluate compliance with ground water cleanup levels unless there are large variations in concentrations relative to the mean concentration or a large percentage of concentrations below the detection limit;

(vi) When active ground water restoration is performed, or containment technologies are used that incorporate active pumping of ground water, compliance with ground water cleanup levels shall be determined when the ground water characteristics at the site are no longer influenced by the cleanup action.

(d) Appropriate statistical methods include the following:

(i) A procedure in which a confidence interval for each hazardous substance is established from ground water

sampling data and the ground water cleanup level is compared to the upper confidence interval; and

(ii) A parametric test for percentiles based on tolerance intervals to test the proportion of ground water samples having concentrations less than the ground water cleanup level; or

(iii) Other statistical methods approved by the department.

(e) If a confidence interval approach is used to evaluate compliance with a ground water cleanup level, the decision rule is a one-tailed test of the null hypothesis that the true ground water concentration exceeds the ground water cleanup level. Compliance with a ground water cleanup level shall be determined using the following criteria:

(i) The upper confidence limit on the true ground water concentration shall be less than the ground water cleanup level. Statistical tests shall be performed at a Type I error level of 0.05;

(ii) No single sample concentration shall be greater than two times the ground water cleanup level; and

(iii) Less than ten percent of the sample concentrations shall exceed the ground water cleanup level during a representative sampling period.

(f) If a method to test the proportion of ground water samples is used to evaluate compliance with a ground water cleanup level, compliance shall be determined using the following criteria:

(i) The true proportion of samples that exceed the ground water cleanup level shall be less than fifty percent. Statistical tests shall be performed with a Type I error level of 0.05; and

(ii) No single sample concentration shall be greater than two times the ground water cleanup level; and

(iii) Less than ten percent of the sample concentrations shall exceed the ground water cleanup level during a representative sampling period.

(g) For purposes of demonstrating compliance with ground water cleanup levels, measurements below the method detection limit shall be assigned a value equal to one-half the method detection limit. Measurement above the method detection limit but below the practical quantitation limit shall be assigned a value equal to the method detection limit. The department may approve alternate statistical procedures for handling nondetected values or values below the practical quantitation limit. Alternate procedures may include probit analysis and regression analysis.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-720, filed 1/28/91, effective 2/28/91.]

WAC 173-340-730 Surface water cleanup standards. (1) General considerations.

(a) Surface water cleanup levels shall be based on estimates of the highest beneficial use and the reasonable maximum exposure expected to occur under both current and potential future site use conditions. The classification and the highest beneficial use of a surface water body shall be determined in accordance with chapter 173-201 WAC, as amended. In the event of a release of a hazardous substance, treatment, removal, or containment measures shall be conducted to reduce the level of hazardous substances in

surface water to concentrations consistent with uses specified under this section and chapter 173-201 WAC, as amended.

(b) Surface water cleanup levels established under this section apply to those surface waters of the state affected or potentially affected by releases of hazardous substances from sites addressed under this chapter. Ecology does not expect that cleanup standards will be applied to storm water runoff that is in the process of being conveyed to a treatment system.

(c) Releases of hazardous substances to surface waters of the state shall not directly or indirectly cause violations of groundwater, soil, sediment, or air cleanup standards established under this chapter or other applicable state and federal laws.

(2) Method A cleanup levels.

(a) Method A cleanup levels shall be at least as stringent as concentrations established under applicable state and federal laws, including the following requirements:

(i) All water quality criteria published in the water quality standards for surface waters of the state of Washington, chapter 173-201 WAC, as amended;

(ii) Water quality criteria based on the protection of aquatic organisms (acute and chronic criteria) and human health published pursuant to section 304 of the Clean Water Act.

(b) The department may establish method A cleanup levels that are more stringent than those required under subsection (2)(a) of this section, when, based on site-specific evaluations, the department determines that such levels are necessary to protect human health and the environment.

(3) Method B cleanup levels.

(a) Method B cleanup levels for surface waters shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws, including the following requirements:

(A) All water quality criteria published in the water quality standards for surface waters of the state of Washington, chapter 173-201 WAC, as amended; and

(B) Water quality criteria based on the protection of aquatic organisms (acute and chronic criteria) and human health published pursuant to section 304 of the Clean Water Act unless it can be demonstrated that such criteria are not relevant and appropriate for a specific surface water body or hazardous substance.

(ii) Concentrations which are estimated to result in no adverse effects on the protection and propagation of wildlife, fish, and other aquatic life;

(iii) For hazardous substances for which sufficiently protective, health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health as determined by the following methods:

(A) For surface waters which support or have the potential to support fish or shellfish populations, concentrations which are anticipated to result in no acute or chronic toxic effects on human health as determined using the following equations and standard exposure assumptions:

$$\text{Surface water cleanup level} = \frac{\text{RFD} \times \text{ABW} \times \text{UCF1} \times \text{UCF2} \times \text{HQ}}{\text{BCF} \times \text{FCR} \times \text{FDF}} \text{ (ug/l)}$$

Where:

RFD = Reference Dose as specified in WAC 173-340-708(7) (mg/kg-day)

ABW = Average body weight during the exposure period (70 kg)

UCF1 = Unit conversion factor (1,000 ug/mg)

UCF2 = Unit conversion factor (1,000 grams/liter)

BCF = Fish bioconcentration factor as defined in WAC 173-340-708(9) (unitless)

FCR = Fish consumption rate (54 grams/day)

FDF = Diet fraction (0.5)

HQ = Hazard Index (1)

(B) For surface waters which support fish or shellfish populations, concentrations which are anticipated to result in an excess cancer risk less than or equal to 1 in 1,000,000 as determined using the following equation and standard exposure assumptions:

$$\text{Surface water cleanup level} = \frac{\text{RISK} \times \text{ABW} \times \text{LIFE} \times \text{UCF1} \times \text{UCF2}}{\text{CPF} \times \text{BCF} \times \text{FCR} \times \text{FDF} \times \text{DUR}} \text{ (ug/l)}$$

Where:

CPF = Carcinogenic Potency Factor as specified in WAC 173-340-708(8) (kg-day/mg)

RISK = Acceptable cancer risk level (1 in 1,000,000)

ABW = Average body weight during the exposure period (70 kg)

LIFE = Lifetime (75 years)

UCF1 = Unit conversion factor (1,000 ug/mg)

UCF2 = Unit conversion factor (1,000 grams/liter)

BCF = Fish bioconcentration factor as defined in WAC 173-340-708(9) (unitless)

FCR = Fish consumption rate (54 grams/day)

FDF = Diet fraction (0.5)

DUR = Duration of exposure (30 years);

(C) For surface waters which represent a source or potential future source of drinking water, concentrations which are anticipated to result in no adverse impacts on human health as established in accordance with WAC 173-340-720(3).

(b) The department may establish method B cleanup levels more stringent than those required by subsection (3)(a) of this section, when, based on site-specific evaluations, the department determines that such levels are necessary to protect human health and the environment.

(4) Method C cleanup levels.

(a) Method C cleanup levels may be approved by the department if the person undertaking the cleanup action can demonstrate that such levels are consistent with applicable state and federal laws, that all practicable methods of treatment have been utilized, that institutional controls are implemented in accordance with WAC 173-340-440, and that one or more of the conditions in WAC 173-340-706(1) exist.

(b) Method C cleanup levels for surface waters shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws, including the requirements identified in subsection (3)(a)(i) of this section;

(ii) Concentrations which are estimated to result in no significant adverse effects on the protection and propagation of wildlife, fish and other aquatic life;

(iii) For hazardous substances for which sufficiently protective, health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health and the environment as determined by the following methods:

(A) For surface waters which support or have the potential to support fish or shellfish populations, concentra-

tions which are estimated to result in no significant acute or chronic toxic effects on human health or the environment and are estimated in accordance with WAC 173-340-730 (3)(a)(iii)(A) except that the fish diet fraction shall be twenty percent;

(B) For surface waters which support or have the potential to support fish or shellfish populations, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 100,000 and are estimated in accordance with WAC 173-340-730 (3)(a)(iii)(B) except that the fish diet fraction shall be twenty percent;

(C) For surface waters which represent a source or potential future source of drinking water, concentrations which are estimated to result in no adverse impacts on human health and are established in accordance with WAC 173-340-720(4); and

(c) The department may establish method C cleanup levels that are more stringent than those required by (b) of this subsection when, based on site-specific evaluations, the department determines that such levels are necessary to protect human health and the environment.

(5) Multiple hazardous substances/multiple pathways of exposure.

(a) Surface water cleanup levels for individual hazardous substances developed in accordance with subsections (3) and (4) of this section, including those based on applicable state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with the procedures specified in WAC 173-340-708 (5) and (6). In making these adjustments, the hazard index shall not exceed one and the total excess cancer risk shall not exceed one in one hundred thousand.

(b) These overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure pathway, including cleanup levels based on applicable state and federal laws.

(6) Point of compliance.

(a) The point of compliance shall be the point or points at which hazardous substances are released to surface waters of the state unless the department has authorized a dilution zone in accordance with WAC 173-201-035.

(b) Where hazardous substances are released to the surface water as a result of ground water flows, no dilution zone shall be allowed to demonstrate compliance with surface water cleanup levels. See WAC 173-340-720 (6)(d) for additional requirements.

(7) Compliance monitoring.

(a) Sampling and analytical procedures shall be defined in a compliance monitoring plan prepared under WAC 173-340-410. The sample design shall provide data which are representative of the site.

(b) The data analysis and evaluation procedures used to evaluate compliance with surface water cleanup levels shall be defined in a compliance monitoring plan prepared under WAC 173-340-410.

(c) Compliance with surface water cleanup standards shall be determined by analyses of unfiltered surface water samples, unless it can be demonstrated that a filtered sample

provides a more representative measure of surface water quality.

(d) When surface water cleanup levels are based on requirements specified in applicable state and federal laws, the procedures for evaluating compliance that are specified in those requirements shall be utilized to evaluate compliance with surface water cleanup levels unless these procedures conflict with the intent of this section.

(e) Where procedures for evaluating compliance are not specified in an applicable state and federal law, the statistical methods used to evaluate compliance with surface water cleanup levels shall be appropriate for the distribution of the hazardous substance sampling data. If the distribution of the hazardous substance sampling data is inappropriate for statistical methods based on a normal distribution, then the data may be transformed. If the distributions of individual hazardous substances differ, more than one statistical method may be required.

(f) For purposes of demonstrating compliance, measurements below the method detection limit shall be assigned a value equal to one-half of the method detection limit. Measurements above the method detection limit but below the practical quantitation limit shall generally be assigned a value equal to the method detection limit. The department may approve alternate statistical procedures for handling nondetected values or values below the practical quantitation limit. Alternate statistical procedures may include probit analysis and regression analysis.

(g) Sampling and analysis of fish tissue or shellfish may be required to supplement water column sampling during compliance monitoring.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-730, filed 1/28/91, effective 2/28/91.]

WAC 173-340-740 Soil cleanup standards. (1) General considerations.

(a) Soil cleanup levels shall be based on estimates of the reasonable maximum exposure expected to occur under both current and future site use conditions. The department has determined that residential site use is generally the site use requiring the most protective cleanup levels and that exposure to hazardous substances under residential site use conditions represents the reasonable maximum exposure scenario. In the event of a release of a hazardous substance, treatment, removal, and/or containment measures shall be implemented for those soils with hazardous substance concentrations which exceed cleanup levels based on this use unless the following can be demonstrated:

(i) The site does not serve as a current residential area;

(ii) The site does not have the potential to serve as a future residential area based on the consideration of site zoning, statutory and regulatory restrictions, comprehensive plans, historical site use, adjacent land uses, and other relevant factors; and

(iii) Appropriate site use restrictions are implemented at the site; or

(iv) More stringent concentrations are necessary to protect human health and the environment.

(b) Soil cleanup levels for qualifying industrial sites may be established in accordance with the requirements in WAC 173-340-745.

(c) For industrial sites not qualifying under WAC 173-340-745 and commercial sites, the presumption is that soil cleanup levels will be established in accordance with residential areas unless it can be clearly demonstrated that this is inappropriate.

(i) For a site to qualify under this subsection, it must be clearly demonstrated that:

(A) The site is currently zoned for or otherwise officially designated for industrial/commercial use;

(B) The site is currently used for industrial/commercial purposes or has a history of use for industrial/commercial purposes;

(C) Properties adjacent to and in the general vicinity of the site are used or are designated for use for industrial/commercial purposes; and

(D) The site is expected to be used for industrial/commercial purposes for the foreseeable future due to site zoning, statutory or regulatory restrictions, comprehensive plans, adjacent land use, and other relevant factors.

(ii) For industrial/commercial sites qualifying under this subsection, soil cleanup levels shall be established as close as practicable to the method B soil cleanup levels established under subsection (3) of this section and shall be at least as stringent as the method C soil cleanup levels established under subsection (4) of this section. The overall limits on hazard index and total excess cancer risk specified in subsections (3) through (5) of this section shall apply to these sites.

(iii) Institutional controls under WAC 173-340-440 shall be required for industrial/commercial sites qualifying under this subsection where soil cleanup levels are less stringent than method B soil cleanup levels established under subsection (3) of this section.

(iv) The department expects that only industrial/commercial sites located in the interior portion of a large industrial/commercial area will qualify for other than method A or method B cleanup levels under this subsection.

(d) Soil cleanup levels for other nonresidential site uses such as recreational or agricultural uses shall be established on a case-by-case basis. The overall limits on the hazard index and cancer risk specified in subsections (3) through (5) of this section shall apply to these types of sites. Cleanup levels for these types of sites shall be at least as stringent as method C cleanup levels established under subsection (4) of this section.

(e) Soil cleanup levels shall be established at concentrations which do not directly or indirectly cause violations of ground water, surface water, sediment, or air cleanup standards established under this chapter or applicable state and federal laws.

(2) Method A cleanup levels.

(a) Method A cleanup levels shall be at least as stringent as all of the following:

(i) Concentrations in the following table; and

Table 2
Method A Cleanup Levels - Soil^a

Hazardous Substance	CAS Number	Cleanup Level
Arsenic	7440-38-2	20.0 mg/kg ^b
Benzene	71-43-2	0.5 mg/kg ^c
Cadmium	7440-43-9	2.0 mg/kg ^d

(1992 Ed.)

Chromium	7440-47-3	100.0 mg/kg ^e
DDT	50-29-3	1.0 mg/kg ^f
Ethylbenzene	100-41-4	20.0 mg/kg ^g
Ethylene dibromide	106-93-4	0.001 mg/kg ^h
Lead	7439-92-1	250.0 mg/kg ⁱ
Lindane	58-89-9	1.0 mg/kg ^j
Methylene chloride	75-09-2	0.5 mg/kg ^k
Mercury (inorganic)	7439-97-6	1.0 mg/kg ^l
PAHs (carcinogenic)		1.0 mg/kg ^m
PCB Mixtures		1.0 mg/kg ⁿ
Tetrachloroethylene	127-18-4	0.5 mg/kg ^o
Toluene	108-88-3	40.0 mg/kg ^p
TPH (gasoline)		100.0 mg/kg ^q
TPH (diesel)		200.0 mg/kg ^r
TPH (other)		200.0 mg/kg ^s
1,1,1 Trichloroethane	71-55-6	20.0 mg/kg ^t
Trichloroethylene	79-01-5	0.5 mg/kg ^u
Xylenes	1330-20-7	20.0 mg/kg ^v

- ^a Caution on misusing method A tables. Method A tables have been developed for specific purposes. They are intended to provide conservative cleanup levels for sites undergoing routine cleanup actions or those sites with relatively few hazardous substances. The tables may not be appropriate for defining cleanup levels at other sites. For these reasons, the values in these tables should not automatically be used to define cleanup levels that must be met for financial, real estate, insurance coverage or placement, or similar transactions or purposes. Exceedances of the values in these tables do not necessarily trigger requirements for cleanup action under this chapter.
- ^b Arsenic. Cleanup level based on background concentrations in the state of Washington.
- ^c Benzene. Cleanup level based on protection of ground water.
- ^d Cadmium. Cleanup level based on plant protection.
- ^e Chromium. Cleanup level based on health risks associated with inhalation of resuspended dust.
- ^f DDT. Cleanup level based on concentrations derived using the procedures in subsection (3)(a)(iii)(B) of this section.
- ^g Ethylbenzene. Cleanup level based on protection of ground water.
- ^h Ethylene dibromide. Cleanup level based on protection of ground water.
- ⁱ Lead. Cleanup level based on preventing unacceptable blood lead levels.
- ^j Lindane. Cleanup level based on concentration derived using the procedures in subsection (3)(a)(iii)(B) of this section.
- ^k Methylene chloride. Cleanup level based on protection of ground water.
- ^l Mercury. Cleanup level based on protection of ground water.
- ^m PAHs (carcinogenic). Cleanup level based on concentration derived using the procedures in subsection (3)(a)(iii)(B) of this section.
- ⁿ PCB Mixtures. Cleanup level based on concentration derived using the procedures in subsection (3)(a)(iii)(B) of this section.
- ^o Tetrachloroethylene. Cleanup level based on protection of ground water.
- ^p Toluene. Cleanup level based on protection of ground water.
- ^q Total Petroleum Hydrocarbons (gasoline). Cleanup level based on protection of ground water.
- ^r Total Petroleum Hydrocarbons (diesel). Cleanup level based on protection of ground water.
- ^s Total Petroleum Hydrocarbons (other). Cleanup level based on protection of ground water.
- ^t 1,1,1 Trichloroethane. Cleanup level based on protection of ground water.
- ^u Trichloroethylene. Cleanup level based on protection of ground water.
- ^v Xylenes. Cleanup level based on protection of ground water.

(ii) Concentrations established under applicable state and federal laws;

(b) The department may establish method A cleanup levels that are more stringent than those required by subsec-

tion (2)(a) of this section, when based on a site-specific evaluation, the department determines that such levels are necessary to protect human health or environment.

(3) Method B cleanup levels.

(a) Method B cleanup levels for soils shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws;

(ii) Concentrations which will not cause contamination of ground water at levels which exceed method B ground water cleanup levels established under WAC 173-340-720 as determined using the following criteria:

(A) For individual hazardous substances or mixtures, concentrations that are equal to or less than one hundred times the ground water cleanup level established in accordance with WAC 173-340-720 unless it can be demonstrated that a higher soil concentration is protective of ground water at the site;

(B) For total petroleum hydrocarbons, the person undertaking the cleanup may elect to make this demonstration on the basis of data on individual hazardous substances that comprise the total petroleum hydrocarbons.

(iii) For those hazardous substances for which health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health and the environment as determined by the following methods:

(A) Concentrations which are estimated to result in no acute or chronic toxic effects on human health via direct contact with contaminated soil and are determined using the following equation and standard exposure assumptions:

$$\text{Soil Cleanup Level} = \frac{\text{RFD} \times \text{ABW} \times \text{UCF2} \times \text{HQ}}{\text{SIR} \times \text{AB1} \times \text{FOC}}$$

(mg/kg)

Where:

RFD	=	Reference Dose as defined in WAC 173-340-708(7) (mg/kg-day)
ABW	=	Average body weight over the period of exposure (16 kg)
UCF2	=	Units conversion factor (1,000,000 mg/kg)
SIR	=	Soil ingestion rate (200 mg/day)
AB1	=	Gastrointestinal absorption rate (1.0)
FOC	=	Frequency of contact (1.0)
HQ	=	Hazard quotient (1);

(B) Concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 1,000,000 via direct contact with contaminated soil and are determined using the following equation and standard exposure assumptions:

$$\text{Soil Cleanup Level} = \frac{\text{RISK} \times \text{ABW} \times \text{LIFE} \times \text{UCF1}}{\text{CPF} \times \text{SIR} \times \text{AB1} \times \text{DUR} \times \text{FOC}}$$

(mg/kg)

Where:

RISK	=	Acceptable cancer risk level (1 in 1,000,000)
ABW	=	Average body weight over the period of exposure (16 kg)
LIFE	=	Lifetime (75 years)
UCF1	=	Unit conversion factor (1,000,000 mg/kg)
CPF	=	Carcinogenic Potency Factor as defined in WAC 173-340-708(8) (kg-day/mg)
SIR	=	Soil ingestion rate (200 mg/day)
AB1	=	Gastrointestinal absorption rate (1.0)
DUR	=	Duration of exposure (6 years)
FOC	=	Frequency of contact (1.0);

(iv) To assure that unacceptable risks do not result from inhalation of hazardous substances in or released from contaminated soils, soil concentrations which ensure that releases of hazardous substances shall not result in ambient air concentrations which exceed method B cleanup levels established under WAC 173-340-750.

(b) The department may establish method B cleanup levels that are more stringent than those required under (a) of this subsection, when, based on a site-specific evaluation, the department determines that such levels are necessary to protect human health or environment, including the following:

(i) Concentrations which eliminate or substantially reduce the potential for food chain contamination;

(ii) Concentrations which eliminate or substantially reduce the potential for damage to soils or biota in the soils which could impair the use of soils for agricultural or silvicultural purposes;

(iii) Concentrations which eliminate or substantially reduce the potential for adverse effects on vegetation or wildlife;

(iv) Concentrations more stringent than those in (b) of this subsection where the department determines that such levels are necessary to protect the ground water at a particular site;

(v) Concentrations necessary to protect nearby surface waters from hazardous substances in runoff from the site; and

(vi) Concentrations which eliminate or minimize the potential for the accumulation of vapors in buildings or other structures to concentrations which pose a threat to human health or the environment.

(4) Method C cleanup levels.

(a) Method C cleanup levels may be approved by the department if the person undertaking the cleanup action can demonstrate that such levels are consistent with applicable state and federal laws, that all practicable methods of treatment have been utilized, that institutional controls are implemented in accordance with WAC 173-340-440, and that one or more of the conditions in WAC 173-340-706(1) exist.

(b) Method C cleanup levels for soils shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws;

(ii) Concentrations which will not cause contamination of ground water at levels which exceed ground water cleanup levels established under WAC 173-340-720 as determined using the following procedures:

(A) For individual hazardous substances or mixtures, concentrations that are equal to or less than one hundred times the ground water cleanup level established in accordance with WAC 173-340-720 unless it can be demonstrated that a higher soil concentration is protective of ground water at the site;

(B) For total petroleum hydrocarbons, the person undertaking the cleanup may elect to make this demonstration on the basis of data on individual hazardous substances that comprise the total petroleum hydrocarbons;

(iii) For those hazardous substances for which health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which

protect human health and the environment as determined by the following methods:

(A) Concentrations which are anticipated to result in no significant acute or chronic toxic effects on human health and estimated in accordance with WAC 173-340-740 (3)(a)(iii)(A) except that the frequency of contact shall be 0.5, the soil ingestion rate shall be 100 milligrams per day, and the average body weight shall be 16 kilograms;

(B) For known or suspected carcinogens, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 100,000 and are estimated in accordance with WAC 173-340-740 (3)(a)(iii)(B) except that the frequency of contact shall be 0.5 and the soil ingestion rate shall be 100 milligrams per day; and

(iv) To assure that unacceptable risks do not result from inhalation of hazardous substances in or released from contaminated soils, soil concentrations which ensure that releases of hazardous substances shall not result in ambient air concentrations which exceed method C cleanup levels established under WAC 173-340-750.

(b) The department may establish method C cleanup levels that are more stringent than those required by (a) through (c) of this subsection when, based on a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment, including consideration of those factors listed in subsection (3)(c) of this section.

(5) Multiple hazardous substances/multiple pathways of exposure.

(a) Soil cleanup levels for individual hazardous substances developed in accordance with subsections (3) and (4) of this section, including cleanup levels based on applicable state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with the procedures specified in WAC 173-340-708 (5) and (6).

In making these adjustments, the hazard index shall not exceed one and the total excess cancer risk shall not exceed one in one hundred thousand.

(b) These overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure pathway, including cleanup levels based on applicable state and federal laws.

(6) Point of compliance.

(a) The point of compliance is the point or points where the soil cleanup levels established under subsections (2), (3), (4), and (5) of this section shall be attained.

(b) For soil cleanup levels based on the protection of ground water, the point of compliance shall be established in the soils throughout the site.

(c) For soil cleanup levels based on human exposure via direct contact, the point of compliance shall be established in the soils throughout the site from the ground surface to fifteen feet below the ground surface. This represents a reasonable estimate of the depth of soil that could be excavated and distributed at the soil surface as a result of site development activities.

(d) The department recognizes that, for those cleanup actions selected under WAC 173-340-360 that involve

containment of hazardous substances, the soil cleanup levels will typically not be met at the points of compliance specified in (b) and (c) of this subsection. In these cases, the cleanup action may be determined to comply with cleanup standards, provided the compliance monitoring program is designed to ensure the long-term integrity of the containment system, and the other requirements for containment technologies in WAC 173-340-360(8) are met.

(7) Compliance monitoring.

(a) Compliance with soil cleanup levels shall be based on total analyses of the soil fraction less than two millimeters in size. When it is reasonable to expect that larger soil particles could be reduced to two millimeters or less during current or future site use and this reduction could cause an increase in the concentrations of hazardous substances in the soil, soil cleanup levels shall also apply to these larger soil particles. Compliance with soil cleanup levels shall be based on dry weight concentrations. The department may approve the use of alternate procedures for stabilized soils.

(b) Sampling and analytical procedures shall be defined in a compliance monitoring plan prepared under WAC 173-340-410. The sample design shall provide data which are representative of the area where exposure to hazardous substances may occur.

(c) The data analysis and evaluation procedures used to evaluate compliance with soil cleanup levels shall be defined in a compliance monitoring plan prepared under WAC 173-340-410. These procedures shall meet the following general requirements:

(i) Methods of data analysis shall be consistent with the sampling design. Separate methods may be specified for surface soils and deeper soils;

(ii) When cleanup levels are based on requirements specified in applicable state and federal laws, the procedures for evaluating compliance that are specified in those requirements shall be utilized to evaluate compliance with cleanup levels unless those procedures conflict with the intent of this section;

(iii) Where procedures for evaluating compliance are not specified in an applicable state and federal law, statistical methods shall be appropriate for the distribution of sampling data for each hazardous substance. If the distribution of sampling data for a hazardous substance is inappropriate for statistical methods based on a normal distribution, then the data may be transformed. If the distributions for hazardous substances differ, more than one statistical method may be required; and

(iv) The data analysis plan shall specify which parameters are to be used to determine compliance with soil cleanup levels.

(A) For cleanup levels based on short-term or acute toxic effects on human health or the environment, an upper percentile soil concentration shall be used to evaluate compliance with cleanup levels.

(B) For cleanup levels based on chronic or carcinogenic threats, the mean soil concentration shall be used to evaluate compliance with cleanup levels unless there are large variations in hazardous substance concentrations relative to the mean hazardous substance concentration or a large percentage of concentrations are below the detection limit.

(d) Appropriate statistical methods include the following:

(i) A procedure in which a confidence interval for each hazardous substance is established from site sampling data and the soil cleanup level is compared to the upper confidence interval;

(ii) A parametric test for percentiles based on tolerance intervals to test the proportion of soil samples having concentrations less than the soil cleanup level; or

(iii) Other statistical methods approved by the department.

(e) If a confidence interval approach is used to evaluate compliance with a soil cleanup level, the decision rule is a one-tailed test of the null hypothesis that the true soil concentration of a hazardous substance exceeds the soil cleanup level. Compliance with soil cleanup levels shall be determined using the following criteria:

(i) The upper confidence interval on the true soil concentration is less than the soil cleanup level. Statistical tests shall be performed at a Type I error level of 0.05;

(ii) No single sample concentration shall be greater than two times the soil cleanup level; and

(iii) Less than ten percent of the sample concentrations shall exceed the soil cleanup level.

(f) If a method to test the proportion of soil samples is used to evaluate compliance with a soil cleanup level, compliance shall be determined using the following criteria:

(i) No single sample concentrations shall be greater than two times the soil cleanup level; and

(ii) Less than ten percent of the sample concentrations shall exceed the soil cleanup level; and

(iii) The true proportion of samples that do not exceed the soil cleanup level shall not be less than ninety percent. Statistical tests shall be performed with a Type I error level of 0.05.

(g) For purposes of demonstrating compliance with soil cleanup levels, measurements below the method detection limit shall be assigned a value equal to one-half the method detection limit. Detectable levels below the practical quantitation limit shall be assigned a value equal to the method detection limit. The department may approve alternate statistical procedures for handling nondetected values or values below the practical quantitation limit. Alternate statistical procedures may include probit analysis and regression analysis.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-740, filed 1/28/91, effective 2/28/91.]

WAC 173-340-745 Soil cleanup standards for industrial sites. (1) General considerations.

(a) This section shall be used to establish soil cleanup levels where the department has determined that industrial site use represents the reasonable maximum exposure.

(b) Cleanup levels shall not be based on industrial site use unless the following can be demonstrated:

(i) The site is zoned or has been otherwise officially designated for industrial use;

(ii) The site is currently used for industrial purposes or has a history of use for industrial purposes;

(iii) Adjacent properties are currently used or designated for use for industrial purposes;

(iv) The site is expected to be used for industrial purposes for the foreseeable future due to site zoning,

statutory or regulatory restrictions, comprehensive plans, adjacent land use, and other relevant factors; and

(v) The cleanup action provides for institutional controls implemented in accordance with WAC 173-340-440.

(c) The department expects that only sites located within a limited number of large industrial areas will qualify for industrial soil cleanup levels under this section.

(d) Soil cleanup levels established under this section shall be as close as practicable to cleanup levels established in accordance with WAC 173-340-740, but in no case higher than the concentrations established under subsections (2) through (5) of this section.

(e) Soil cleanup levels for areas beyond the industrial property boundary shall be established in accordance with WAC 173-340-740.

(f) Soil cleanup levels shall be established at concentrations which do not directly or indirectly cause violations of ground water, surface water, or air cleanup standards established under this chapter or under applicable state and federal laws.

(g) See WAC 173-340-740 (1)(c) for establishing cleanup levels at industrial sites not qualifying under this section and at commercial sites.

(2) Method A cleanup levels.

(a) Method A cleanup levels shall be at least as stringent as all of the following:

(i) Concentrations in the following table:

**Table 3
Method A Cleanup Levels - Industrial Soil^a**

Hazardous Substance	CAS Number	Cleanup Level
Arsenic	7440-38-2	200.0 mg/kg ^b
Benzene	71-43-2	0.5 mg/kg ^c
Cadmium	7440-43-9	10.0 mg/kg ^d
Chromium (Total)	7440-47-3	500.0 mg/kg ^e
DDT	50-29-3	5.0 mg/kg ^f
Ethylbenzene	100-41-4	20.0 mg/kg ^g
Ethylene dibromide	106-93-4	0.001 mg/kg ^h
Lead	7439-92-1	1000.0 mg/kg ⁱ
Lindane	58-89-9	20.0 mg/kg ^j
Methylene chloride	75-09-2	0.5 mg/kg ^k
Mercury (inorganic)	7439-97-6	1.0 mg/kg ^l
PAHs (carcinogenic)		20.0 mg/kg ^m
PCB Mixtures		10.0 mg/kg ⁿ
Tetrachloroethylene	127-18-4	0.5 mg/kg ^o
Toluene	108-88-3	40.0 mg/kg ^p
TPH (gasoline)		100.0 mg/kg ^q
TPH (diesel)		200.0 mg/kg ^r
TPH (other)		200.0 mg/kg ^s
1,1,1 Trichloroethane	71-55-6	20.0 mg/kg ^t
Trichloroethylene	79-01-5	0.5 mg/kg ^u
Xylenes	1330-20-7	20.0 mg/kg ^v

^a Caution on misusing method A tables. Method A tables have been developed for specific purposes. They are intended to provide conservative cleanup levels for sites undergoing routine cleanup actions or those sites with relatively few hazardous substances. The tables may not be appropriate for defining cleanup levels at other sites. For these reasons, the values in these tables should not automatically be used to define cleanup levels that must be met for financial, real estate, insurance coverage or placement, or similar transactions or purposes. Exceedances of the values in these tables do not necessarily trigger requirements for cleanup actions under this chapter.

- b Arsenic. Cleanup level based on concentration derived using the procedures in subsection (4)(a)(iii)(B) of this section.
- c Benzene. Cleanup level based on protection of ground water.
- d Cadmium. Cleanup level based on protection of ground water.
- e Chromium. Cleanup level based on inhalation exposure.
- f DDT. Cleanup level based on protection of ground water.
- g Ethylbenzene. Cleanup level based on protection of ground water.
- h Ethylene dibromide. Cleanup level based on protection of ground water.
- i Lead. Cleanup level based on direct contact.
- j Lindane. Cleanup level based on cleanup level based on concentration derived using the procedures in subsection (4)(a)(iii)(B) of this section.
- k Methylene chloride. Cleanup level based on protection of ground water.
- l Mercury. Cleanup level based on protection of ground water.
- m PAHs (carcinogenic). Cleanup level based on concentration derived using the procedures in subsection (4)(a)(iii)(B) of this section.
- n PCB Mixtures. Cleanup level based on concentration derived using the procedures in subsection (4)(a)(iii)(B) of this section.
- o Tetrachloroethylene. Cleanup level based on protection of ground water.
- p Toluene. Cleanup level based on protection of ground water.
- q Total Petroleum Hydrocarbons (gasoline). Cleanup level based on protection of ground water.
- r Total Petroleum Hydrocarbons (diesel). Cleanup level based on protection of ground water.
- s Total Petroleum Hydrocarbons (other). Cleanup level based on protection of ground water.
- t 1,1,1 Trichloroethane. Cleanup level based on protection of ground water.
- u Trichloroethylene. Cleanup level based on protection of ground water.
- v Xylenes. Cleanup level based on protection of ground water; and

(ii) Concentrations established under applicable state and federal laws;

(b) The department may establish method A cleanup levels that are more stringent than those required by (a) of this subsection when, based on site-specific evaluations, the department determines that such levels are necessary to protect human health or environment, including consideration of the factors in WAC 173-340-740 (3)(b).

(3) Method B cleanup levels. This section does not provide procedures for establishing method B cleanup levels. Method C is the standard method for establishing soil cleanup levels at industrial sites and its use is conditioned upon the continued use of the site for industrial purposes.

(4) Method C cleanup levels.

(a) Method C cleanup levels for industrial soils shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws;

(ii) Concentrations which will not cause contamination of ground water to concentrations which exceed ground water cleanup levels established under WAC 173-340-720 as determined using the following procedures:

(A) For individual hazardous substances or mixtures, concentrations that are equal to or less than one hundred times the ground water cleanup level established in accordance with WAC 173-340-720 unless it can be demonstrated that higher soil concentrations are protective of ground water at the site;

(B) For total petroleum hydrocarbons, the person undertaking the cleanup action may elect to make this

demonstration on the basis of data on individual hazardous substances that comprise the total petroleum hydrocarbons;

(iii) For those hazardous substances for which sufficiently protective health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health and the environment as determined by the following methods:

(A) Concentrations which are anticipated to result in no acute or chronic toxic effects on human health via direct contact with contaminated soil and are determined using the following equation and standard exposure assumptions:

$$\text{Soil Cleanup Level} = \frac{\text{RFD} \times \text{ABW} \times \text{UCF2} \times \text{HQ}}{\text{SIR} \times \text{AB1} \times \text{FOC}}$$

(mg/kg)

Where:

RFD = Reference Dose as specified in WAC 173-340-708(7) (mg/kg-day)

ABW = Average body weight over the period of exposure (70 kg)

UCF2 = Unit conversion factor (1,000,000 mg/kg)

SIR = Soil ingestion rate (50 mg/day)

AB1 = Gastrointestinal absorption rate (1.0)

FOC = Frequency of contact (0.4)

HQ = Hazard quotient (1);

(B) Concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 100,000 via direct contact with contaminated soil and are determined using the following equation and standard exposure assumptions:

$$\text{Soil Cleanup Level} = \frac{\text{RISK} \times \text{ABW} \times \text{LIFE} \times \text{UCF1}}{\text{CPF} \times \text{SIR} \times \text{AB1} \times \text{DUR} \times \text{FOC}}$$

(mg/kg)

Where:

RISK = Acceptable cancer risk level (1 in 100,000)

ABW = Average body weight over the period of exposure (70 kg)

LIFE = Lifetime (75 years)

UCF1 = Units conversion factor (1,000,000 mg/kg)

CPF = Carcinogenic Potency Factor as specified in WAC 173-340-708(8) (kg-day/mg)

SIR = Soil ingestion rate (50 mg/day)

AB1 = Gastrointestinal absorption rate (1.0)

DUR = Duration of exposure (20 years)

FOC = Frequency of contact (0.4);

(b) The department may establish method C cleanup levels that are more stringent than those required by (a) of this subsection when, based on a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(5) Multiple hazardous substances/multiple pathways of exposure.

(a) Soil cleanup levels for individual hazardous substances developed in accordance with subsection (4) of this section, including cleanup levels based on state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with the procedures specified in WAC 173-340-708 (5) and (6). In making these adjustments, the hazard index shall not exceed one and the total excess cancer risk shall not exceed one in one hundred thousand.

(b) These overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure

pathway, including cleanup levels based on applicable state and federal laws.

(6) Point of compliance. The point of compliance shall be established in accordance with WAC 173-340-740(6).

(7) Compliance monitoring. Compliance monitoring shall be performed in accordance with WAC 173-340-410 and 173-340-740(7).

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-745, filed 1/28/91, effective 2/28/91.]

WAC 173-340-750 Cleanup standards to protect air quality. (1) General considerations.

(a) Cleanup levels to protect air quality shall be based on estimates of the reasonable maximum exposure expected to occur under both current and future site use conditions. The department has determined that residential site use will generally require the most protective ambient air cleanup levels and that exposure to hazardous substances under these conditions represents the reasonable maximum exposure. In the event of a release or potential release of hazardous substances into the ambient air, treatment, removal, or containment measures shall be conducted to reduce the levels of hazardous substances in the ambient air to levels consistent with this use unless all of the following can be demonstrated:

- (i) The site does not serve as a current residential area;
- (ii) The site is not likely to become a residential area in the future based on a review of site zoning, statutory or regulatory restrictions, comprehensive plans, historic site use, adjacent land uses, and other relevant factors;
- (iii) Appropriate institutional controls are implemented at the site to prohibit residential use; and
- (iv) Air emissions from the site will not reduce the air quality in adjacent residential areas; or
- (v) More stringent concentrations are necessary to protect human health and the environment.

(b) Ambient air cleanup levels for nonresidential site uses shall be established on a case-by-case basis. The overall limits on the hazard index and total excess cancer risk specified in subsections (3) through (5) of this section shall apply to these sites. Cleanup levels for these types of sites shall be at least as stringent as method C cleanup levels established under subsection (4) of this section.

(c) Ambient air cleanup levels shall be established at concentrations which do not directly or indirectly cause violations of ground water, surface water, or soil cleanup standards established under this chapter or applicable state and federal laws.

(2) Method A cleanup levels.

(a) Method A cleanup levels for ambient air shall be at least as stringent as concentrations established under applicable state and federal laws;

(b) The department may establish method A cleanup levels that are more stringent than those required by (a) of this subsection when, based on a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(3) Method B cleanup levels.

(a) Method B cleanup levels for ambient air shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws; and

(ii) For hazardous substances for which sufficiently protective health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health and the environment as determined by the following methods:

(A) Concentrations which are estimated to result in no acute or chronic toxic effects on human health and are determined using the following equation and standard exposure assumptions:

$$\text{Ambient air cleanup level (ug/m}^3\text{)} = \frac{\text{RFD} \times \text{ABW} \times \text{UCF} \times \text{HQ}}{\text{BR} \times \text{ABS}}$$

Where:

- RFD = Reference Dose as specified in WAC 173-340-708(7) (mg/kg-day)
- BW = Body weight (16 kg)
- UCF = Units conversion factor (1,000 ug/mg)
- BR = Breathing rate (10 m³/day)
- ABS = Absorption percentage (1.0)
- HQ = Hazard Quotient (1);

(B) For known or suspected carcinogens, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 1,000,000 and are determined using the following equation and standard exposure assumptions:

$$\text{Ambient air cleanup level (ug/m}^3\text{)} = \frac{\text{RISK} \times \text{BW} \times \text{LIFE} \times \text{UCF}}{\text{CPF} \times \text{BR} \times \text{ABS} \times \text{DUR}}$$

Where:

- RISK = Acceptable cancer risk level (1 in 1,000,000)
- BW = Body weight (70 kg)
- LIFE = Lifetime (75 years)
- UCF = Units conversion factor (1,000 ug/mg)
- CPF = Carcinogenic potency factor as specified in WAC 173-340-708(8) (kg-day/mg)
- BR = Breathing rate (20 m³/day)
- ABS = Absorption percentage (1.0)
- DUR = Duration of exposure (30 years);

(b) The department may establish method B cleanup levels that are more stringent than those required by (a) of this subsection, when, based on a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(4) Method C cleanup levels.

(a) Method C cleanup levels may be approved by the department if the person undertaking the cleanup action can demonstrate that such levels are consistent with applicable state and federal laws, that best available control technology has been utilized, and that one or more of the conditions in WAC 173-340-707(1) exist.

(b) Method C cleanup levels for ambient air shall be at least as stringent as all of the following:

(i) Concentrations established under applicable state and federal laws; and

(ii) For hazardous substances for which sufficiently protective health-based criteria or standards have not been established under applicable state and federal laws, those concentrations which protect human health and the environment as determined by the following methods:

(A) Concentrations which are anticipated to result in no significant acute or chronic effects on human health and are estimated in accordance with WAC 173-340-750 (3)(a)(ii)(A) except that the average body weight shall be 70 kg and the estimated breathing rate shall be 20 m³/day; and

(B) For known or suspected carcinogens, concentrations for which the upper bound on the estimated excess cancer risk is less than or equal to 1 in 100,000 and are determined in accordance with WAC 173-340-750 (3)(a)(ii)(B).

(c) The department may establish method C cleanup levels that are more stringent than those required by (b) of this subsection, when, based on a site-specific evaluation, the department determines that such levels are necessary to protect human health and the environment.

(5) Multiple hazardous substances/multiple pathways of exposure.

(a) Air cleanup levels for individual hazardous substances developed in accordance with subsections (3) and (4) of this section, including cleanup levels based on applicable state and federal laws, shall be adjusted downward to take into account exposure to multiple hazardous substances and/or exposure resulting from more than one pathway of exposure. These adjustments shall be made in accordance with the procedures in WAC 173-340-708 (5) and (6). In making these adjustments, the hazard index shall not exceed one and the total excess cancer risk shall not exceed one in one hundred thousand.

(b) These overall limits on the hazard index and total excess cancer risk shall also apply to sites where there is exposure to a single hazardous substance by one exposure pathway, including those cleanup levels based on applicable state and federal laws.

(6) Points of compliance. Cleanup levels established under subsections (2), (3), (4), and (5) of this section shall be attained in the ambient air throughout the site. For sites determined to be industrial sites under the criteria in WAC 173-340-745, the department may approve a conditional point of compliance not to exceed the property boundary.

(7) Compliance monitoring.

(a) Sampling and analytical procedures shall be defined in a compliance monitoring plan prepared under WAC 173-340-410. The sample design shall provide data which are representative of the site.

(b) Data analysis and evaluation procedures used to evaluate compliance with ambient air cleanup levels shall be defined in a compliance monitoring plan prepared under WAC 173-340-410.

(c) Averaging times specified in applicable state and federal laws shall be used to demonstrate compliance with those requirements.

(d) When cleanup levels are not based on applicable state and federal laws, the following averaging times shall be used:

(i) Compliance with ambient air cleanup levels for noncarcinogens shall be based on twenty-four-hour time weighted averages except where the cleanup level is based upon an inhalation reference dose which specifies an alternate averaging time;

(ii) Compliance with ambient air cleanup levels for carcinogens shall be based on annual average concentrations.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-750, filed 1/28/91, effective 2/28/91.]

(1992 Ed.)

WAC 173-340-760 Sediment cleanup standards. RESERVED.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-760, filed 1/28/91, effective 2/28/91.]

PART VIII—GENERAL PROVISIONS

WAC 173-340-800 Property access. (1) Normal entry procedures. Whenever there is a reasonable basis to believe that a release or threatened release of a hazardous substance may exist, the department's authorized employees, agents or contractors may, after reasonable notice, enter upon any real property, public or private, to conduct investigations or remedial actions. The notice shall briefly describe the reason for requesting access. For the purpose of this subsection, unless earlier access is granted, reasonable notice shall mean:

(a) Written notice to site owner and operator to the extent known to the department, sent through the United States Postal Service at least three days prior to entry; or

(b) Notice to site owner and operator to the extent known to the department, in person or by telephone at least twenty-four hours prior to entry.

(2) Notification of property owner. The department will ask a resident, occupant, or other persons in custody of the site to identify the name and address of owners of the property. If an owner is identified who has not been previously notified, the department will make a prompt and reasonable effort to notify such owners of remedial actions planned or conducted.

(3) Orders and consent decrees. Whenever investigations or remedial actions are conducted under a consent decree or order, a potentially liable person shall not deny access to the department's authorized employees, agents, or contractors to enter and move freely about the property to oversee and verify investigations and remedial actions being performed.

(4) Ongoing operations. Persons gaining access under this section shall take all reasonable precautions to avoid disrupting the ongoing operations on a site. Such persons shall comply with all state and federal safety and health requirements which the department determines to be applicable.

(5) Access to documents. The department's authorized employees, agents or contractors may, after reasonable notice, enter property for the purpose of inspecting documents relating to a release or threatened release at the facility. Persons maintaining such documents shall:

(a) Provide access during normal business hours and allow the department to copy these documents; or

(b) At the department's request, provide legible copies of the requested documents to the department.

(6) Emergency entry. Notice by the department's authorized employees, agents, or contractors is not required for entry onto property to investigate, mitigate, or abate an emergency posed by the release or threatened release of a hazardous substance. The department will make efforts which are reasonable under the circumstances to promptly notify those owners and operators to the extent known to the department of the actions taken.

(7) Other authorities. Where consent has not been obtained for entry, the department shall secure access in a manner consistent with state and federal law, including compliance with any warrant requirements. Nothing in this chapter shall affect site access authority granted under other state laws and regulations.

(8) Access by potentially liable persons. The department shall make reasonable efforts to facilitate access to real property and documents for persons who are conducting remedial actions under either an order or decree.

(9) Information sharing. The department will provide the documents and factual information on releases or threatened releases obtained through this section to persons who request such in accordance with chapter 42.17 RCW and chapter 173-03 WAC. The department does not intend application of these authorities to limit its sharing of such factual information.

(10) Split samples. Whenever the department intends to perform sampling at a site, it shall indicate in its notification under subsection (1) of this section whether sampling may occur. The person receiving notice may take split samples, provided this does not interfere with the department's sampling.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-800, filed 4/3/90, effective 5/4/90.]

WAC 173-340-810 Worker safety and health. (1) General provisions. Requirements under the Occupational Safety and Health Act of 1970 (29 U.S.C. Sec. 651 et seq.) and the Washington Industrial Safety and Health Act (chapter 49.17 RCW), and regulations promulgated pursuant thereto shall be applicable to remedial actions taken under this chapter. These requirements are subject to enforcement by the designated federal and state agencies. All governmental agencies and private employers are directly responsible for the safety and health of their own employees and compliance with those requirements. Actions taken by the department under this chapter do not constitute an exercise of statutory authority within the meaning of section (4)(b)(1) of the Occupational Safety and Health Act.

(2) Safety and health plan. Potentially liable persons responsible for undertaking remedial actions under WAC 173-340-520 through 173-340-540, shall submit a safety and health plan for the department's review and comment. The safety and health plan must be consistent with chapter 49.17 RCW and regulations promulgated pursuant thereto.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-810, filed 4/3/90, effective 5/4/90.]

WAC 173-340-820 Sampling and analysis plans. (1) General. A sampling and analysis plan shall be prepared for all sampling activities which are part of investigation and remedial actions unless otherwise directed by the department and except for emergencies. The level of detail required in the sampling and analysis plan may vary with the scope and purpose of the sampling activity. Sampling and analysis plans prepared under an order or decree shall be submitted to the department for review and approval.

(2) Contents. The sampling and analysis plan shall specify procedures which ensure that sample collection, handling, and analysis will result in data of sufficient quality

to plan and evaluate remedial actions at the site. Additionally, information necessary to insure proper planning and implementation of sampling activities shall be included. References to standard protocols or procedures manuals may be used provided the information referenced is readily available to the department. The sampling and analysis plan shall contain:

(a) A statement on the purpose and objectives of the data collection, including quality assurance and quality control requirements;

(b) Organization and responsibilities for the sampling and analysis activities;

(c) Requirements for sampling activities including:

(i) Project schedule;

(ii) Identification and justification of location and frequency of sampling;

(iii) Identification and justification of parameters to be sampled and analyzed;

(iv) Procedures for installation of sampling devices;

(v) Procedures for sample collection and handling, including procedures for personnel and equipment decontamination;

(vi) Procedures for the management of waste materials generated by sampling activities, including installation of monitoring devices, in a manner that is protective of human health and the environment;

(vii) Description and number of quality assurance and quality control samples, including blanks and spikes;

(viii) Protocols for sample labeling and chain of custody; and

(ix) Provisions for splitting samples, where appropriate.

(d) Procedures for analysis of samples and reporting of results, including:

(i) Detection or quantification limits;

(ii) Analytical techniques and procedures;

(iii) Quality assurance and quality control procedures; and

(iv) Data reporting procedures, and where appropriate, validation procedures.

(3) Available guidance. The department shall make available guidance for preparation of sampling and analysis plans.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-820, filed 4/3/90, effective 5/4/90.]

WAC 173-340-830 Analytical procedures. (1) Purpose. This section specifies acceptable analytical methods and other testing requirements for sites where remedial action is being conducted under this chapter.

(2) General requirements.

(a) All hazardous substance analyses shall be conducted by a laboratory accredited under chapter 173-50 WAC, unless otherwise approved by the department.

(b) All analytical procedures used shall be done in accordance with a sampling and analysis plan prepared under WAC 173-340-820.

(c) Tests for which methods have not been specified in this section shall be performed using standard methods or procedures such as those specified by the American Society for Testing of Materials, when available, unless otherwise approved by the department.

(d) Samples shall be analyzed consistent with methods appropriate for the site, the media being analyzed, the hazardous substances being analyzed for, and the anticipated use of the data.

(e) The department may require or approve modifications to the standard analytical methods identified in subsection (4) of this section to provide lower quantitation limits, improved accuracy, greater precision, or to address the factors in (d) of this subsection.

(f) Limits of quantitation. Laboratories shall achieve the lowest practical quantitation limits consistent with the selected method and WAC 173-340-707.

(3) Multiple methods.

(a) Where there is more than one method specified in subsection (4) of this section with a practical quantitation limit less than the cleanup standard, any of the methods may be selected. In these situations, considerations in selecting a particular method may include confidence in the data, analytical costs, and considerations relating to quality assurance or analysis efficiencies.

(b) The department may require an analysis to be conducted by more than one method in order to provide higher data quality. For example, the department may require that different separation and detection techniques be used to verify the presence of a hazardous substance ("qualification") and determine the concentration of the hazardous substance ("quantitation").

(4) Analytical methods.

(a) The methods used for sample collection, sample preservation, transportation, allowable time before analysis, sample preparation, analysis, method detection limits, practical quantitation limits, quality control, quality assurance and other technical requirements and specifications shall comply with the following requirements, as applicable:

(i) Method 1. **Test Methods for Evaluating Solid Waste**, U.S. EPA, SW-846 and any revisions or amendments thereto;

(ii) Method 2. **Methods for Chemical Analysis of Water and Wastes**, U.S. EPA, EPA-600/4-79-020 and any revisions or amendments thereto;

(iii) Method 3. **Guidelines Establishing Test Procedures for the Analysis of Pollutants Under the Clean Water Act**, 40 CFR 136, and Appendix A, B, and C, U.S. EPA and any revisions or amendments thereto;

(iv) Method 4. **Standard Methods for the Examination of Water and Wastewater**, American Public Health Association, American Water Works Association, and Water Pollution Control Federation and any revisions or amendments thereto;

(v) Method 5. **Recommended Protocols for Measuring Selected Environmental Variables in Puget Sound**, Puget Sound Estuary Program/Tetra Tech, 1986 and any revisions or amendments thereto;

(vi) Method 6. **Quality Assurance Interim Guidelines for Water Quality Sampling and Analysis**, Groundwater Management Areas Program, Washington Department of Ecology, Water Quality Investigations Section, December 1986 and any revisions or amendments thereto; or

(vii) Equivalent methods subject to approval by the department.

(b) The methods used for a particular hazardous substance at a site shall be selected in consideration of the factors in subsection (2) of this section.

(c) Ground water. Methods 1, 2, 3 and 4, as described in (a) of this subsection, may be used to determine compliance with WAC 173-340-720.

(d) Surface water. Methods 1, 2, 3, 4 and 5 as described in (a) of this subsection, may be used to determine compliance with WAC 173-340-730.

(e) Soil. Method 1, as described in (a) of this subsection, may be used to determine compliance with WAC 173-340-740 and 173-340-745.

(f) Air. Appropriate methods for determining compliance with WAC 173-340-750 shall be selected on a case-by-case basis, in consideration of the factors in subsection (2) of this section.

[Statutory Authority: Chapter 70.105D RCW. 91-04-019, § 173-340-830, filed 1/28/91, effective 2/28/91; 90-08-086, § 173-340-830, filed 4/3/90, effective 5/4/90.]

WAC 173-340-840 General submittal requirements.

Unless otherwise specified by the department, all reports, plans, specifications, and similar information submitted under this chapter shall meet the following requirements:

(1) Cover letter. Include a letter describing the submittal and specifying the desired department action or response.

(2) Number of copies. Three copies of the plan or report shall be submitted to the department's office responsible for the facility. The department may require additional copies to meet public participation and interagency coordination needs.

(3) Certification. All engineering work submitted under this chapter shall be under the seal of a professional engineer registered with the state of Washington.

(4) Visuals. Maps, figures, photographs, and tables to clarify information or conclusions shall be legible. All maps, plan sheets, drawings, and cross-sections shall meet the following requirements:

(a) To facilitate filing and handling, be on paper no larger than 24 x 36 inches and no smaller than 8 1/2 x 11 inches. Photo-reduced copies of plan sheets may be submitted provided at least one full-sized copy of the photo-reduced sheets are included in the submittal.

(b) Identify and use appropriate and consistent scales to show all required details in sufficient clarity.

(c) Be numbered, titled, have a legend of all symbols used, and specify drafting or origination dates.

(d) Contain a north arrow.

(e) Use United States Geological Survey datum as a basis for all elevations.

(f) For planimetric views, show a survey grid based on monuments established in the field and referenced to state plane coordinates. This requirement does not apply to conceptual diagrams or sketches when the exact location of items shown is not needed to convey the necessary information.

(g) Where grades are to be changed, show original topography in addition to showing the changed site topography. This requirement does not apply to conceptual diagrams or sketches where before and after topography is not needed to convey the necessary information.

(h) For cross-sections, identify the location and be cross-referenced to the appropriate planimetric view. A reduced diagram of a cross-section location map shall be included on the sheets with the cross-sections.

(5) Sampling data. All sampling data shall be submitted consistent with procedures specified by the department.

(6) Appendix. An appendix providing the principal information relied upon in preparation of the submittal. This should include, for example: A complete citation of references; applicable raw data; a description of, or where readily available, reference to testing and sampling procedures used; relevant calculations; and any other information needed to facilitate review.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-840, filed 4/3/90, effective 5/4/90.]

WAC 173-340-850 Recordkeeping requirements.

(1) Any remedial actions at a facility must be documented with adequate records. Such records may include: Factual information or data; relevant decision documents; and any other relevant, site specific documents or information.

(2) Unless otherwise required by the department, records shall be retained for at least ten years from the date of completion of compliance monitoring.

(3) Records shall be retained by the person taking remedial action, unless the department requires that person to submit the records to the department.

(4) The department shall maintain its records in accordance with chapter 42.17 RCW.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-850, filed 4/3/90, effective 5/4/90.]

WAC 173-340-860 Endangerment. In the event that the department determines that any activity being performed at a hazardous waste site is creating or has the potential to create a danger to human health or the environment, the department may direct such activities to cease for such period of time as it deems necessary to abate the danger.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-860, filed 4/3/90, effective 5/4/90.]

WAC 173-340-870 Project coordinator. The potentially liable person shall designate a project coordinator for work performed under an order or decree. The project coordinator shall be the designated representative for the purposes of the order or decree. That person shall coordinate with the department and the public and shall facilitate compliance with requirements of the order or decree.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-870, filed 4/3/90, effective 5/4/90.]

WAC 173-340-880 Emergency actions. Nothing in this chapter shall limit the authority of the department, its employees, agents, or contractors to take or require appropriate action in the event of an emergency.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-880, filed 4/3/90, effective 5/4/90.]

WAC 173-340-890 Severability. If any provision of this chapter or its application to any person or circumstance

is held invalid, the remainder of this chapter or the application of the provision to other persons or circumstances shall not be affected.

[Statutory Authority: Chapter 70.105D RCW. 90-08-086, § 173-340-890, filed 4/3/90, effective 5/4/90.]

Chapter 173-342 WAC ADDITIONAL TAXABLE HAZARDOUS SUBSTANCE LIST

WAC

173-342-010	Purpose and authority.
173-342-020	Definitions.
173-342-030	Basis to determine what is a taxable hazardous substance.
173-342-040	Listing.
173-342-050	List.

WAC 173-342-010 Purpose and authority. The purposes of this chapter are to establish requirements for the addition or deletion of materials to the list of hazardous substances which are subject to the state hazardous substance tax pursuant to chapter 2, Laws of 1989, and to list or delete those substances.

It is the intent of this rule to add only materials which are similar to those previously defined by the Model Toxics Control Act as taxable hazardous substances. Those are, in general terms, petroleum products, pesticide products, and chemicals. Manufactured products which may be environmentally detrimental, but not of special hazard, such as plastic containers, solid metals, and wood products or wood fibers are not of this type.

The authority to add or delete additional substances is granted under section 9, chapter 2, Laws of 1989.

[Statutory Authority: 1989 c 2. 90-03-020, § 173-342-010, filed 1/9/90, effective 2/9/90.]

WAC 173-342-020 Definitions. For the purpose of this chapter, the following terms have the meanings given below:

(1) "Director" means the director of the department of ecology or the director's designee.

(2) "Hazardous substance" means anything designated as such by the provisions of this rule, as adopted and thereafter amended. In addition, this term includes:

(a) Any substance that, on March 1, 1989, is a hazardous substance under section 101(14) of the Federal Comprehensive Environmental Response, Compensation and Liability Act of 1980 (CERCLA), as amended by P.L. 99-499. These substances consist of chemicals and elements in their purest form. (Reportable quantities associated with these chemicals under CERCLA are not considered for the purposes of this tax, but are duly noted here to avoid any confusion regarding the intent of the federal regulation. See CERCLA, 42 USCA, Sec. 9601.) A CERCLA substance which contains water, a stabilizer, or a preservative is still considered pure. Combinations of CERCLA substances as ingredients together with nonhazardous substances will not be taxable unless the end product is specifically designated as a hazardous substance by the department of ecology under the provisions of this rule;

- (b) Petroleum products;
- (c) Pesticide products required to be registered under the Federal Insecticide, Fungicide, and Rodenticide Act (FIFRA).

(3) "Material" means substance, chemicals, category of chemicals, or mixtures of chemicals including products.

(4) "Persistence" means the tendency of a substance to resist degradation and remain in the atmosphere, soil, and/or water.

(5) "Toxicity" means a measure of the propensity of a chemical to produce injury once it reaches a susceptible receptor in or on a living organism.

(6) Except for terms defined in this section, the definitions in section 9, chapter 2, Laws of 1989 and WAC 458-20-252 apply to this chapter.

[Statutory Authority: 1989 c 2. 90-03-020, § 173-342-020, filed 1/9/90, effective 2/9/90.]

WAC 173-342-030 Basis to determine what is a taxable hazardous substance. Additional materials may be defined as taxable hazardous substances on the basis of a departmental determination of:

(1) Negative environmental factors such as substantial toxicity and persistence of materials being considered for listing or delisting; and

(2) Substantial adverse impact on waste management operations such as the management of hazardous waste, solid waste, wastewater treatment facilities, wastewater from ground or marine septic systems, and contaminated sites.

[Statutory Authority: 1989 c 2. 90-03-020, § 173-342-030, filed 1/9/90, effective 2/9/90.]

WAC 173-342-040 Listing. The director may propose to add (or delete from those materials previously added) materials to the definition of hazardous substance.

(1) Additions or deletions to the list shall be made by amendment of this rule pursuant to the Administrative Procedure Act (chapter 34.05 RCW).

(2) The director of ecology shall add or delete materials no more than twice during each calendar year.

(3) For tax purposes, changes in this definition shall take effect on the first day of the next month that is at least thirty days after the effective date of the rule.

(4) For each material proposed for additional listing, the department shall prepare a "basis for listing" which shall include those factors and data which led the director to propose the listing.

(5) The director shall prepare a "basis for deletion" which shall include those factors and data which led the director to propose deletions from materials previously added.

[Statutory Authority: 1989 c 2. 90-03-020, § 173-342-040, filed 1/9/90, effective 2/9/90.]

WAC 173-342-050 List. (Reserved.)

[Statutory Authority: 1989 c 2. 90-03-020, § 173-342-050, filed 1/9/90, effective 2/9/90.]

Chapter 173-360 WAC

UNDERGROUND STORAGE TANK REGULATIONS

WAC

PART I

PROGRAM SCOPE, ADMINISTRATION, AND ENFORCEMENT

- 173-360-100 Purpose and authority.
- 173-360-105 Intergovernmental agreements.
- 173-360-110 Applicability, exemptions, and deferrals.
- 173-360-120 Definitions.
- 173-360-130 Tank permits and delivery of regulated substances.
- 173-360-140 Investigation and access.
- 173-360-150 Compliance monitoring.
- 173-360-160 Enforcement.
- 173-360-170 Penalties.
- 173-360-180 Public participation and information sharing.
- 173-360-190 Annual tank fees.

PART II

NOTIFICATION, REPORTING, AND RECORDKEEPING REQUIREMENTS

- 173-360-200 Notification requirements.
- 173-360-210 Reporting and recordkeeping requirements.

PART III

PERFORMANCE STANDARDS AND OPERATING AND CLOSURE REQUIREMENTS

- 173-360-300 Performance standards for deferred UST systems.
- 173-360-305 Performance standards for new UST systems.
- 173-360-310 Upgrading requirements for existing UST systems.
- 173-360-315 Spill and overflow control requirements.
- 173-360-320 Operation and maintenance of corrosion protection.
- 173-360-323 Compatibility.
- 173-360-325 Repairs of UST systems.
- 173-360-330 Release detection compliance schedule.
- 173-360-335 Release detection for petroleum UST systems.
- 173-360-340 Release detection for hazardous substance UST systems.
- 173-360-345 Methods of release detection for tanks.
- 173-360-350 Methods of release detection for piping.
- 173-360-355 Release detection recordkeeping.
- 173-360-360 Reporting of suspected releases.
- 173-360-365 Investigation due to off-site impacts.
- 173-360-370 Release investigation and confirmation steps.
- 173-360-372 Reporting of confirmed releases.
- 173-360-375 Cleanup and reporting of spills and overfills.
- 173-360-380 Temporary closure of UST systems.
- 173-360-385 Permanent closure and change-in-service.
- 173-360-390 Site assessment at closure or change-in-service.
- 173-360-395 Applicability to previously closed UST systems.
- 173-360-398 Closure records.
- 173-360-399 Corrective action requirements.

PART IV

FINANCIAL RESPONSIBILITY REQUIREMENTS

- 173-360-400 Applicability.
- 173-360-403 Compliance dates.
- 173-360-406 Amount and scope of required financial responsibility.
- 173-360-410 Allowable mechanisms and combinations of mechanisms.
- 173-360-413 Financial test of self-insurance.
- 173-360-416 Guarantee.
- 173-360-420 Insurance and risk retention group coverage.
- 173-360-423 Surety bond.
- 173-360-426 Letter of credit.
- 173-360-433 Trust fund.
- 173-360-436 Standby trust fund.
- 173-360-440 Substitution of financial assurance mechanisms by owner or operator.
- 173-360-443 Cancellation or nonrenewal by a provider of financial assurance.
- 173-360-446 Reporting by owner or operator.
- 173-360-450 Recordkeeping.

173-360-453	Drawing on financial assurance mechanisms.
173-360-456	Release from the requirements.
173-360-460	Bankruptcy or other incapacity of owner or operator.
173-360-463	Replenishment of guarantees, letters of credit, or surety bonds.
173-360-466	Suspension of enforcement.
173-360-470	Appendix A—Letter from chief financial officer.
173-360-473	Appendix B—Guarantee.
173-360-476	Appendix C—Endorsement.
173-360-480	Appendix D—Certificate of insurance.
173-360-483	Appendix E—Performance bond.
173-360-486	Appendix F—Irrevocable standby letter of credit.
173-360-490	Appendix G—Trust agreement.
173-360-493	Appendix H—Certification of acknowledgment.
173-360-496	Appendix I—Certification of financial responsibility.
173-360-499	Appendix J—Certification of valid claim.

PART V
LOCAL PROGRAMS

173-360-500	Local delegation of underground storage tank programs.
173-360-510	Environmentally sensitive areas.
173-360-520	Physical criteria for environmentally sensitive areas.
173-360-530	Application for designation of environmentally sensitive area and approval of local regulations.

PART VI

REGISTRATION AND LICENSING REQUIREMENTS FOR UNDERGROUND STORAGE TANK SERVICE PROVIDERS AND SERVICE SUPERVISORS

173-360-600	Purpose of Part VI.
173-360-610	Scope.
173-360-630	Registration and licensing of tank service providers.
173-360-640	Types of licenses.
173-360-650	Examination and licensing of tank services supervisors.
173-360-655	Examination and licensing of persons who perform inspections.
173-360-660	Study guide fees.
173-360-670	Penalties.
173-360-680	Reciprocity with other states.
173-360-690	Appeals.
173-360-695	Inactive license.

PART I
PROGRAM SCOPE, ADMINISTRATION, AND ENFORCEMENT

WAC 173-360-100 Purpose and authority. (1) The purpose of this chapter is to address the serious threat posed to human health and the environment by leaking underground storage systems containing petroleum and other regulated substances.

(2) The department of ecology is directed by chapter 90.76 RCW to establish an underground storage tank program designed, operated and enforced in a manner that, at a minimum, meets the requirements for delegation of the Federal Underground Storage Tank Program of the Resource Conservation and Recovery Act of 1976, as amended (42 U.S.C. Section 6901, et seq.). The legislative intent is that state-wide requirements for underground storage tanks adopted by the department be consistent with and no less stringent than the objectives outlined in the federal regulations. Because certain areas of the state possess physical characteristics that make them especially vulnerable to threats from leaking underground storage tanks, local requirements more stringent than the state-wide requirements may apply in these environmentally sensitive areas.

(Note: All codes, standards, rules, or regulations cited in this chapter are available for inspection at the Department of Ecology, Mailstop PV-11, Olympia, WA 98504-8711.)

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-100, filed 11/28/90, effective 12/29/90.]

WAC 173-360-105 Intergovernmental agreements.

In order to fully implement this chapter, and to protect surface and ground water resources that may cross jurisdictional boundaries, the department and delegated agencies may negotiate and enter into cooperative agreements with Indian tribal governments, adjacent states, and Canadian governmental agencies when agencies are delegated responsibility for carrying out all or a portion of the underground storage tank program contiguous with or affecting lands under tribal, state, or Canadian government jurisdiction. Such cooperative agreements shall not affect the regulatory jurisdiction of any party thereto with regard to any civil or criminal matters otherwise exercised by any party. Intergovernmental agreements shall further the purpose of this chapter, and shall serve to establish a framework for intergovernmental coordination and cooperation, and shall serve to minimize duplication and efficiently utilize program resources to manage underground storage tanks and protect surface and ground water resources.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-105, filed 11/28/90, effective 12/29/90.]

WAC 173-360-110 Applicability, exemptions, and deferrals. (1) The requirements of this chapter apply to all owners and operators of an underground storage tank (UST) system as defined in WAC 173-360-120 except as otherwise provided in subsections (2) and (3) of this section. It is the responsibility of owners and operators to ensure that any UST system service providers and supervisors they employ are properly licensed in accordance with WAC 173-360-600 through 173-360-690.

(2) Exemptions. The following UST systems, including any piping connected thereto, are exempt from the requirements of this chapter:

(a) Any UST system holding hazardous wastes subject to Subtitle C of the Federal Solid Waste Disposal Act, or a mixture of such hazardous waste and other regulated substances.

(b) Any wastewater treatment tank system that is part of a wastewater treatment facility regulated under Section 402 or 307(b) of the Clean Water Act.

(c) Equipment or machinery that contains regulated substances for operational purposes such as hydraulic lift tanks and electrical equipment tanks.

(d) Any UST system whose capacity is one hundred ten gallons or less.

(e) Any UST system that contains a de minimis concentration of regulated substances.

(f) Any emergency spill or overflow containment UST system that is expeditiously emptied after use.

(g) Farm or residential UST systems of one thousand one hundred gallons or less capacity used for storing motor fuel for noncommercial purposes (i.e., not for resale);

(h) UST systems used for storing heating oil for consumptive use on the premises where stored; except that such systems which store in excess of one thousand one

hundred gallons are subject to the release reporting requirements of WAC 173-360-372;

(i) Septic tanks;

(j) Any pipeline facility (including gathering lines) regulated under:

(i) The Natural Gas Pipeline Safety Act of 1968 (49 U.S.C. App. 1671, et seq.); or

(ii) The Hazardous Liquid Pipeline Safety Act of 1979 (49 U.S.C. App. 2001, et seq.); or

(iii) Which is an intrastate pipeline facility regulated under state laws comparable to the provisions of the law referred to in (j) (i) or (ii) of this subsection;

(k) Surface impoundments, pits, ponds, or lagoons;

(l) Storm water or wastewater collection systems;

(m) Flow-through process tanks;

(n) Liquid traps or associated gathering lines directly related to oil or gas production and gathering operations; or

(o) Storage tanks situated in an underground area (such as a basement, cellar, vault, mineworking drift, shaft, or tunnel) if the storage tank is situated upon or above the surface of the floor.

(3) Deferrals. The following UST systems are subject only to the requirements of WAC 173-360-130, 173-360-140, 173-360-160, 173-360-170, 173-360-190, 173-360-200, 173-360-372 and 173-360-385. Any new deferred UST systems shall also be subject to the performance standards of WAC 173-360-300:

(a) Wastewater treatment tank systems not regulated under section 307(b) or 402 of the Clean Water Act;

(b) Any UST systems containing radioactive material that are regulated under the Atomic Energy Act of 1954 (42 U.S.C. 2011 et seq.);

(c) Any UST system that is part of an emergency generator system at nuclear power generation facilities regulated by the Nuclear Regulatory Commission under 10 CFR Part 50 Appendix A;

(d) Airport hydrant fuel distribution systems;

(e) UST systems with field-constructed tanks.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-110, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-110, filed 11/28/90, effective 12/29/90.]

WAC 173-360-120 Definitions. For the purposes of this chapter, the following definitions shall apply:

"Abandoned" means left unused indefinitely, without being substantially emptied or permanently altered structurally to prevent reuse.

"Aboveground release" means any release to the surface of the land or to surface water. This includes, but is not limited to, releases from the above-ground portion of an UST system and aboveground releases associated with overfills and transfer operations as the regulated substance moves to or from an UST system.

"Accidental release" means any sudden or nonsudden release of petroleum from an underground storage tank that results in a need for corrective action and/or compensation for bodily injury or property damage neither expected nor intended by the tank owner or operator.

"Ancillary equipment" means any devices including, but not limited to, such devices as piping, fittings, flanges,

valves, and pumps used to distribute, meter, or control the flow of regulated substances to and from an UST.

"Belowground release" means any release to the subsurface of the land and to ground water. This includes, but is not limited to, releases from the belowground portions of an underground storage tank system and belowground releases associated with overfills and transfer operations as the regulated substance moves to or from an underground storage tank.

"Beneath the surface of the ground" means beneath the ground surface or otherwise covered with earthen materials.

"Bodily injury" shall have the meaning given to this term by applicable state law; however, this term shall not include those liabilities which, consistent with standard insurance industry practices, are excluded from coverage in liability insurance policies for bodily injury.

"Cathodic protection" means a technique to prevent corrosion of a metal surface by making that surface the cathode of an electrochemical cell. For example, a tank system can be cathodically protected through the application of either galvanic anodes or impressed current.

"Cathodic protection tester" means a person who can demonstrate an understanding of the principles and measurements of all common types of cathodic protection systems as applied to buried or submerged metal piping and tank systems by passing an examination and obtaining a license for supervision of cathodic protection installation and testing in compliance with WAC 173-360-600 through 173-360-690. At a minimum, such persons shall have education and experience in soil resistivity, stray current, structure-to-soil potential, and component electrical isolation measurements of buried metal piping and tank systems.

"CERCLA" means the Comprehensive Environmental Response, Compensation, and Liability Act of 1980, as amended.

"Closure" means to take an underground storage tank out of operation, either temporarily or permanently, in accordance with WAC 173-360-380 or 173-360-385. The term is synonymous with "decommissioning."

"Compatible" means the ability of two or more substances or materials to maintain their respective physical and chemical properties upon contact with one another such that the stored substance will not pass through the wall or lining of the tank and connected piping for the design life of the tank system under conditions likely to be encountered in the UST.

"Connected piping" means all underground piping including valves, elbows, joints, flanges, and flexible connectors attached to a tank system through which regulated substances flow. For the purpose of determining how much piping is connected to any individual UST system, the piping that joins two UST systems should be allocated equally between them.

"Consumptive use" with respect to heating oil means consumed on the premises.

"Controlling interest" means direct ownership of at least fifty percent of the voting stock of another entity.

"Corrosion expert" means a person who possesses a thorough knowledge of the physical sciences and the principles of engineering and mathematics acquired by a professional education and related practical experience, and is qualified to engage in the practice of corrosion control on

buried or submerged metal piping systems and metal tanks. Such a person shall be accredited or certified as being qualified by the National Association of Corrosion Engineers or be a registered professional engineer who has certification or licensing that includes education and experience in corrosion control of buried or submerged metal piping systems and metal tanks.

"Decommissioning" means to take an underground storage tank out of operation, either temporarily or permanently, in accordance with WAC 173-360-380 or 173-360-385. The term is synonymous with "closure."

"Deferral" means a category of UST systems which are subject to certain, but not all, of the requirements of this chapter as specified in WAC 173-360-110(3).

"Delegated agency" means the local government agency which has been delegated responsibility by the department for administering any portion of an UST program approved in accordance with WAC 173-360-500.

"Department" means the department of ecology.

"Dielectric material" means a material that does not conduct direct electrical current. Dielectric coatings are used to electrically isolate UST systems from the surrounding soils. Dielectric bushings are used to electrically isolate portions of the UST system (e.g., tank from piping).

"Director" means the director of the department of ecology.

"Electrical equipment" means underground equipment that contains dielectric fluid that is necessary for the operation of equipment such as transformers and buried electrical cable.

"Emergency power generator" means an engine that uses fuel to produce auxiliary electrical or mechanical energy for use in emergencies.

"Emergency power generator tank" means a tank that stores fuel solely for use by an emergency power generator.

"Excavation zone" means the volume containing the UST system and backfill material bounded by the ground surface, walls, and floor of the pit and trenches into which the UST system is placed at the time of installation.

"Existing UST system" means an UST system used to contain an accumulation of regulated substances or for which installation had commenced on or before December 22, 1988. Installation is considered to have commenced if:

The owner or operator had obtained all federal, state, and local approvals or permits necessary to begin physical construction of the site or installation of the tank system; and if

Either a continuous on-site physical construction or installation program had begun; or

The owner or operator had entered into contractual obligations—which cannot be cancelled or modified without substantial loss—for physical construction at the site or installation of the tank system to be completed within a reasonable time.

"False alarm" means indicating that an UST system is leaking when in fact it is tight.

"Farm tank" is a tank located on a tract of land devoted to the production of crops or raising animals, including fish, and associated residences and improvements. A farm tank must be located on the farm property. "Farm" includes fish hatcheries, rangeland, and nurseries with growing operations. It does not include laboratories where animals are raised,

land used to grow timber, pesticide aviation operations, retail stores or garden centers where nursery products are marketed but not grown, cemeteries, golf courses, or other facilities dedicated primarily to recreation or aesthetics, or other non-agricultural activities.

"Field-constructed tank" means an underground storage tank that is constructed in the field rather than factory built because of its large size.

"Financial reporting year" means the latest consecutive twelve-month period for which any of the following reports used to support a financial test is prepared: A 10-K report submitted to the SEC; an annual report of tangible net worth submitted to Dun and Bradstreet; or annual reports submitted to the Energy Information Administration or the Rural Electrification Administration. "Financial reporting year" may thus comprise a fiscal or a calendar year period.

"Firm" means any business, including but not limited to corporations, limited partnerships, and sole proprietorships, engaged in performing tank services.

"Flow-through process tank" is a tank that forms an integral part of a production process through which there is a steady, variable, recurring, or intermittent flow of materials during the operation of the process. Flow-through process tanks do not include tanks used for the storage of materials prior to their introduction into the production process or for the storage of finished products or by-products from the production process.

"Free product" refers to a regulated substance that is present as a nonaqueous phase liquid (e.g., liquid not dissolved in water).

"Gathering lines" means any pipeline, equipment, facility, or building used in the transportation of oil or gas during oil or gas production or gathering operations.

"Ground water" means water in a saturated zone or stratum beneath the surface of land or below a surface water body.

"Hazardous substance UST system" means an underground storage tank system that contains a hazardous substance defined in section 101(14) of the Comprehensive Environmental Response, Compensation, and Liability Act of 1980 (but not including any substance regulated as a hazardous waste under Subtitle C) or any mixture of such substances and petroleum, and which is not a petroleum UST system.

"Heating oil" means petroleum that is No. 1, No. 2, No. 4—light, No. 4—heavy, No. 5—light, No. 5—heavy, and No. 6 technical grades of fuel oil; other residual fuel oils (including Navy Special Fuel Oil and Bunker C); and other fuels when used as substitutes for one of these fuel oils. Heating oil is typically used in the operation of heating equipment, boilers, or furnaces.

"Hydraulic lift tank" means a tank holding hydraulic fluid for a closed-loop mechanical system that uses compressed air or hydraulic fluid to operate lifts, elevators, and other similar devices.

"Immiscible" means largely incapable of blending or mixing.

"Installation" means the activity of placing an underground storage tank system or any part thereof in the ground and preparing it to be placed in service.

"Legal defense cost" is any expense that an owner or operator or provider of financial assurance incurs in defend-

ing against claims or actions brought: By the United States Environmental Protection Agency (EPA) or a state to require corrective action or to recover the costs of corrective action; by or on behalf of a third party for bodily injury or property damage caused by an accidental release; or by any person to enforce the terms of a financial assurance mechanism.

"Licensed" means a firm or a person which has been issued a license by the department under this chapter.

"Liquid trap" means sumps, well cellars, and other traps used in association with oil and gas production, gathering, and extraction operations (including gas production plants), for the purpose of collecting oil, water, and other liquids. These liquid traps may temporarily collect liquids for subsequent disposition or reinjection into a production or pipeline stream, or may collect and separate liquids from a gas stream.

"Maintenance" means the normal operational upkeep to prevent an underground storage tank system from releasing a regulated substance.

"Motor fuel" means petroleum or a petroleum-based substance that is motor gasoline, aviation gasoline, No. 1 or No. 2 diesel fuel, or any grade of gasohol, and is typically used in the operation of a motor engine.

"New UST system" means a tank system that will be used to contain an accumulation of regulated substances and for which installation commenced after December 22, 1988. (See also "existing tank system.")

"Noncommercial purposes" with respect to motor fuel means not for resale.

"Occurrence" means an accident, including continuous or repeated exposure to conditions, which results in a release from an underground storage tank.

Note: This definition is intended to assist in the understanding of WAC 173-360-400 through 173-360-499 and is not intended either to limit the meaning of "occurrence" in a way that conflicts with standard insurance usage or to prevent the use of other standard insurance terms in place of "occurrence."

"On the premises where stored" with respect to heating oil means UST systems located on the same property where the stored heating oil is used.

"Operational life" refers to the period beginning when installation of the tank system has commenced until the time the tank system is properly closed under WAC 173-360-380 through 173-360-398.

"Operator" means any person in control of, or having responsibility for, the daily operation of the UST system.

"Overfill release" is a release that occurs when a tank is filled beyond its capacity, resulting in a discharge of the regulated substance to the environment.

"Owner" means: In the case of an UST system in use on November 8, 1984, or brought into use after that date, any person who owns an UST system used for storage, use, or dispensing of regulated substances; and in the case of any UST system in use before November 8, 1984, but no longer in use on that date, any person who owned such UST immediately before the discontinuation of its use. In the event that the owner of an UST system cannot be physically located, the owner shall be the person who owns the property where the UST system is located, except any lien holder and any agency of the state or unit of local government which acquired ownership or control involuntarily through bankruptcy, tax delinquency, abandonment, or circumstances

in which the government involuntarily acquires title. This exclusion does not apply to an agency of the state or unit of local government which has caused or contributed to a release or threatened release of a regulated substance from the UST system.

"Owner or operator," means, for the purposes of WAC 173-360-400 through 173-360-499, when the owner or operator are separate parties, the party that is obtaining or has obtained financial assurances.

"Party" means a person or group concerned or having or taking part in any affair, matter, transaction, or proceeding.

"Permanently closed" means: (1) In the case of an UST system taken out of operation before December 22, 1988, the UST system was substantially emptied of regulated substances or permanently altered structurally to prevent reuse; (2) in the case of an UST system taken out of operation after December 21, 1988, and before the effective date of this chapter, the UST system was closed in accordance with 40 CFR 280; and (3) in the case of an UST system taken out of operation on or after the effective date of this chapter, the UST system was closed in accordance with WAC 173-360-385.

"Person" means an individual, trust, firm, joint stock company, federal agency, corporation, state, municipality, commission, political subdivision of a state, or any interstate body. "Person" also includes a consortium, a joint venture, a commercial entity, and the United States government.

"Petroleum marketing facilities" include all facilities at which petroleum is produced or refined and all facilities from which petroleum is sold or transferred to other petroleum marketers or to the public.

"Petroleum marketing firms" are all firms owning petroleum marketing facilities. Firms owning other types of facilities with USTs as well as petroleum marketing facilities are considered to be petroleum marketing firms.

"Petroleum UST system" means an underground storage tank system that contains petroleum or a mixture of petroleum with de minimis quantities of other regulated substances. Such systems include those containing motor fuels, jet fuels, distillate fuel oils, residual fuel oils, lubricants, petroleum solvents, and used oils.

"Pipe" or "piping" means a hollow cylinder or tubular conduit that is constructed of nonferrous materials.

"Pipeline facilities (including gathering lines)" are new and existing pipe rights-of-way and any associated equipment, facilities, or buildings.

"Property damage" shall have the meaning given this term by applicable state law. This term shall not include those liabilities which, consistent with standard insurance industry practices, are excluded from coverage in liability insurance policies for property damage. However, such exclusions for property damage shall not include corrective action associated with releases from tanks which are covered by the policy.

"Provider of financial assurance" means an entity that provides financial assurance to an owner or operator of an underground storage tank through one of the mechanisms listed in WAC 173-360-413 through 173-360-436, including a guarantor, insurer, risk retention group, surety, issuer of a letter of credit, issuer of a state-required mechanism, or a state.

"Regulated substance" means:

Any substance defined in section 101(14) of the Comprehensive Environmental Response, Compensation, and Liability Act (CERCLA) of 1980 (but not including any substance regulated as a hazardous waste under Subtitle C of the Federal Solid Waste Disposal Act, or a mixture of such hazardous waste and any other regulated substances); and

Petroleum, including crude oil or any fraction thereof that is liquid at standard conditions of temperature and pressure (sixty degrees Fahrenheit and 14.7 pounds per square inch absolute). The term "regulated substance" includes but is not limited to petroleum and petroleum-based substances comprised of a complex blend of hydrocarbons derived from crude oil through processes of separation, conversion, upgrading and finishing, such as motor fuels, jet fuels, distillate fuel oils, residual fuel oils, lubricants, petroleum solvents, and used oils. The term "regulated substance" does not include propane or asphalt or any other petroleum product which is not liquid at standard conditions of temperature and pressure.

"Release" means any spilling, leaking, emitting, discharging, escaping, leaching, or disposing from an UST system to ground water, surface water or soils.

"Release detection" means determining whether a release of a regulated substance has occurred from the UST system into the environment or into the interstitial space between the UST system and its secondary barrier or secondary containment around it.

"Repair" means to restore a tank or UST system component that has caused a release of a regulated substance from the UST system.

"Residential tank" is a tank located on property used primarily for dwelling purposes; such properties do not include dormitories, convents, mobile parks, apartments, hotels and similar facilities, unless the tank is used by the owner solely for his or her own personal use, rather than to maintain the overall facility.

"Retrofitting" means the repair or upgrading of an existing underground storage tank system including, but not limited to, installation of splash, spill and overflow protection, installing or replacing monitoring systems, adding cathodic protective systems, tank repair, replacement of piping, valves, fill pipes or vents and installing tank liners.

"Septic tank" is a water-tight covered receptacle designed and used to receive or process, through liquid separation or biological digestion, the sewage discharged from a building sewer. The effluent from such receptacle is distributed for disposal through the soil and settled solids and scum from the tank are pumped out periodically and hauled to a treatment facility.

"Site assessment" means investigating an UST site for the presence of a release at the time of closure or change-in-service.

"Site check" means investigating an UST site for the presence of a release when evidence indicates that a release may have occurred.

"Stormwater or wastewater collection system" means piping, pumps, conduits, and any other equipment necessary to collect and transport the flow of surface water run-off resulting from precipitation, or domestic, commercial, or industrial wastewater to and from retention areas or any areas where treatment is designated to occur. The collection

of storm water and wastewater does not include treatment except where incidental to conveyance.

"Structural defect" means a hole or crack in the tank portion of the UST system, which has either caused a release from the system or is being repaired to prevent a release from the system.

"Substantial business relationship" means the extent of a business relationship necessary under applicable state law to make a guarantee contract issued incident to that relationship valid and enforceable. A guarantee contract is issued "incident to that relationship" if it arises from and depends on existing economic transactions between the guarantor and the owner or operator.

"Supervisor" means a licensed person operating independently or employed by a contractor, who is responsible for directing and overseeing the performance of tank services at a facility.

"Surface impoundment" is a natural topographic depression, excavation, or diked area formed primarily of earthen materials (although it may be lined with synthetic materials) that is not an injection well.

"Tangible net worth" means the tangible assets that remain after deducting liabilities; such assets do not include intangibles such as goodwill and rights to patents or royalties. For purposes of this definition, "assets" means all existing and all probable future economic benefits obtained or controlled by a particular entity as a result of past transactions.

"Tank" is a stationary device designed to contain an accumulation of regulated substances and constructed of nonearthen materials (e.g., concrete, steel, plastic) that provide structural support.

"Tank permit" means a tank tag, as required by RCW 90.76.020(4).

"Tank services" include underground storage tank installation, decommissioning, retrofitting, and testing.

"Tank services provider" is a person or firm licensed to perform tank services on regulated underground storage tanks in Washington.

"Termination" under WAC 173-360-476 and 173-360-480 means only those changes that could result in a gap in coverage as where the insured has not obtained substitute coverage or has obtained substitute coverage with a different retroactive date than the retroactive date of the original policy.

"Testing" means applying a method to determine the integrity of an underground storage tank.

"Tightness testing" means a procedure for testing the ability of a tank system to prevent an inadvertent release of any stored substance into the environment or, in the case of an underground storage tank system, intrusion of ground water into a tank system.

"Underground area" means an underground room, such as a basement, cellar, shaft or vault, providing enough space for physical inspection of the exterior of the tank situated on or above the surface of the floor.

"Underground release" means any below ground release.

"Underground storage tank" or "UST" means any one or combination of tanks (including underground pipes connected thereto) that is used to contain an accumulation of regulated substances, and the volume of which (including the volume of underground pipes connected thereto) is ten

percent or more beneath the surface of the ground. This term does not include any of the exempt UST systems specified in WAC 173-360-110(2), or any piping connected thereto.

"Upgrade" means the addition or retrofit of some systems such as cathodic protection, lining, or spill and overflow controls to improve the ability of an underground storage tank system to prevent the release of regulated substances.

"UST site" or "site" means the location at which underground storage tanks are in place or will be placed. An UST site encompasses all of the property within a contiguous ownership that is associated with the use of the tanks.

"UST system" or "tank system" means an underground storage tank, connected underground piping, underground ancillary equipment, and containment system, if any.

"Wastewater treatment tank" means a tank that is designed to receive and treat an influent wastewater through physical, chemical, or biological methods.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-120, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-120, filed 11/28/90, effective 12/29/90.]

WAC 173-360-130 Tank permits and delivery of regulated substances. (1) Requirement for a permit. After July 1, 1991, no underground storage tank system, as defined in this chapter, shall be operated without a valid permit from the department. However, possession of a valid permit does not preclude enforcement against the owner or operator of the underground storage tank under this or other laws.

(2) Application for a permit. Permits for UST systems shall be obtained as follows:

(a) To apply for a permit for an UST system which is to be newly installed, the owner or operator shall complete a notice of intent to install an UST system, as specified in WAC 173-360-200(1), and submit it to the department at least thirty days prior to installation of the system. An initial permit, valid for ninety days, will be provided by the department so the UST system can be tested and operation of the system can begin. If necessary, and if circumstances warrant, an additional permit valid for ninety days will be provided by the department. Upon receipt of the following items, a permit valid until the following June 30, if the UST system remains in compliance, will be provided by the department for the newly installed UST system:

(i) A properly completed UST notification form, as specified in WAC 173-360-200(2); and

(ii) A properly completed installation checklist, as specified in WAC 173-360-200(3).

(b) To apply for a permit for an existing UST system not previously reported to the department, the owner or operator shall complete a Washington state underground storage tank notification form, as specified in WAC 173-360-200(2), and submit it to the department with a payment of the applicable annual fee, as specified in WAC 173-360-190, including any fees which should have been paid for earlier fiscal years if the UST system had been properly registered, but which were not paid.

(c) To apply for a permit for a tank which has been temporarily out of service, the owner or operator shall notify

the department of the change in status and follow the provisions of WAC 173-360-380.

(d) Each year the department will request owners and operators of reported UST systems to certify compliance with the requirements of this chapter. UST systems which are in the department's notification data base when the department requests this certification will receive permits by July 1 of each year if:

(i) Adequate documentation of compliance, as specified by the department, is submitted to the department; and

(ii) The documentation of compliance is submitted by the deadline for submittal established by the department in its request.

(3) Eligibility for a permit. Tanks which are temporarily closed under WAC 173-360-380 are not eligible to receive permits. Underground storage tank systems are eligible for a permit if the following conditions are met:

(a) The owner or operator is in compliance with all requirements of this chapter, including the financial responsibility requirements, and chapter 173-340 WAC, if applicable, or the owner or operator is in conformance with a compliance schedule negotiated with and agreed to by the department;

(b) The storage tank system is not known by the owner or operator to be leaking; and

(c) All annual state tank fees and local environmentally sensitive area tank fees have been remitted.

(4) Delivery of regulated substances. Regulated substances shall not be delivered to any underground storage tank requiring a permit under this section unless a valid permit is displayed on such tank itself or the dispensing or measuring device connected thereto or, where appropriate, in the office or kiosk of the facility where the tank is located. This subsection applies only to suppliers who directly transfer regulated substances into underground storage tank systems.

(5) Waste oil tanks. Tanks used to collect and store used or waste oil regulated under this chapter shall not be pumped by a used or waste oil collector unless a valid permit is displayed on such tank itself or a device connected thereto or, where appropriate, in the office or kiosk of the facility where the tank is located. This prohibition does not apply to a one-time removal of substances from tanks which will not be used again for the storage of used or waste oil once the substances are removed; such tanks must be properly closed or undergo the procedures for a change-in-service in accordance with WAC 173-360-385. This subsection applies only to used or waste oil collectors who directly transfer regulated substances from underground storage tanks.

(6) Delivery prohibited to leaking tanks. Except as specified in subsection (10) of this section, suppliers shall not deliver regulated substances to any underground storage tank which is known by the supplier to be leaking, or to have leaked and not been properly repaired, regardless of the permit status of the tank.

(7) Delivery of regulated substances. If a confirmed release occurs from a permitted tank, in addition to meeting the reporting requirements of WAC 173-360-372, within twenty-four hours of having knowledge of the release the owner or operator shall lock the fill pipe and remove from display the permit for the tank from which the release has

occurred. At no time can the owner or operator receive regulated substances, except as specified in subsection (10) of this section, until all the applicable requirements of this chapter and chapter 173-340 WAC have been met. If the department determines that reasonable progress is not being made in meeting these requirements it may request that the owner or operator surrender the permit, as specified in subsection (8) of this section, for the tank from which the release occurred.

(8) Permit revocation. The department may request the surrender of a permit for any tank which does not remain in compliance with the requirements of this chapter, including financial responsibility requirements and payment of fees, or for any violation of the chapter by an underground storage tank owner or operator, including refusal of access to property under WAC 173-360-140. Upon request of a representative of the department or delegated agency or upon receipt of a letter from the department or delegated agency requesting surrender of the permit, the owner or operator must return the permit to the department or delegated agency within seven days.

(9) When a tank is closed, any active permit must be returned to ecology within thirty days of the completion of the closure procedures.

(10) Appeals. The revocation of a permit may be appealed to the pollution control hearings board, pursuant to chapter 43.21B RCW.

(11) Display of permits for tightness testing. A permit which has been removed from display in accordance with subsection (7) of this section may be redisplayed for the purpose of receiving regulated substances in order to conduct a volumetric tightness test on the storage system. If a leak is determined to exist in the uppermost level of the system, the regulated substance shall be immediately removed to a point below the source of the leak. If a leak is determined to exist below the uppermost level of the system, all regulated substances shall be immediately removed from the system. The requirements of subsection (7) of this section and the requirement for reporting of confirmed releases specified in WAC 173-360-372 shall be followed, regardless of the location of the source of the release in the storage tank system.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-130, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-130, filed 11/28/90, effective 12/29/90.]

WAC 173-360-140 Investigation and access. (1) If necessary to determine compliance with the requirements of this chapter, an authorized representative of the state engaged in compliance inspections, monitoring and testing may, by request, require an owner or operator to submit relevant information or documents. The department may subpoena witnesses, documents, and other relevant information that the department deems necessary. In the case of any refusal to obey the subpoena, the superior court for any county in which the person is found, resides, or transacts business has jurisdiction to issue an order requiring the person to appear before the department and give testimony or produce documents. Any failure to obey the order of the court may be punished by the court as contempt.

(2) Any authorized representative of the state may require an owner or operator to conduct monitoring or testing.

(3) Upon reasonable notice, an authorized representative of the state may enter a premises or site subject to regulation under this chapter or in which records relevant to the operation of an underground storage tank system are kept. In the event of an emergency or in circumstances where notice would undermine the effectiveness of an inspection, notice is not required. The authorized representative may copy records, obtain samples of regulated substances, and inspect or conduct monitoring or testing of an underground storage tank system.

(4) For purposes of this section, the term "authorized representative" or "authorized representative of the state" means an enforcement officer, employee, or representative of the department or a local government that has obtained authority under RCW 90.76.030.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-140, filed 11/28/90, effective 12/29/90.]

WAC 173-360-150 Compliance monitoring. The department's compliance monitoring procedures, including procedures for recordkeeping and a program for systematic inspections, shall be consistent with and no less stringent than those required by 40 CFR 281.40 and amendments thereto.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-150, filed 11/28/90, effective 12/29/90.]

WAC 173-360-160 Enforcement. (1) The director may seek appropriate injunctive or other judicial relief by filing an action in Thurston County Superior Court or issuing such order as the director deems appropriate to:

(a) Enjoin any threatened or continuing violation of this chapter;

(b) Restrain immediately and effectively a person from engaging in unauthorized activity that results in a violation of any requirement of this chapter and is endangering or causing damage to public health or the environment;

(c) Require compliance with requests for information, access, testing, or monitoring under WAC 173-360-140; or

(d) Assess and recover civil penalties authorized under RCW 90.76.080.

(2) The department's enforcement procedures shall be consistent with and no less stringent than those required by 40 CFR 281.41 and amendments thereto.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-160, filed 11/28/90, effective 12/29/90.]

WAC 173-360-170 Penalties. (1) Any person who fails to notify the department pursuant to the notification requirements of this chapter, or who submits false information, is subject to a civil penalty not to exceed five thousand dollars per violation.

(2) Any person who violates this chapter is subject to a civil penalty not to exceed five thousand dollars for each tank per day of violation.

(3) Penalties may be appealed to the pollution control hearings board, pursuant to chapter 43.21B RCW.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-170, filed 11/28/90, effective 12/29/90.]

WAC 173-360-180 Public participation and information sharing. The department's procedures for public participation and information sharing shall be consistent with and no less stringent than those required by 40 CFR 281.42 and 281.43 and amendments thereto.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-180, filed 11/28/90, effective 12/29/90.]

WAC 173-360-190 Annual tank fees. An annual state tank fee of seventy-five dollars per tank for the fiscal year ending June 30, 1992, and each fiscal year thereafter shall be paid within thirty days of the billing date and no later than the December 31st of each fiscal year by every person who owns an underground storage tank which:

- (1) Is located in this state;
- (2) Was required to be reported to the department under the Federal Underground Storage Tank Program of the Resource Conservation and Recovery Act of 1976, as amended (42 U.S.C. Section 6901, et seq.);
- (3) Is not permanently closed according to the requirements of this chapter on June 30 of the fiscal year preceding the fiscal year for which the fee is assessed; and
- (4) If required, for which corrective action has not been completed in accordance with this chapter.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-190, filed 11/28/90, effective 12/29/90.]

PART II NOTIFICATION, REPORTING, AND RECORDKEEPING REQUIREMENTS

Note: Tank owners and operators may be subject to certain local requirements in addition to the state UST regulations. Permits or approval for construction activities may be required by local jurisdictions. These may include, but are not limited to, requirements to obtain grading, building or demolition permits, and requirements for compliance with local ordinances pertaining to environmental review under the state Environmental Policy Act (chapter 43.21C RCW).

WAC 173-360-200 Notification requirements. (1) Notice of intent to install a new UST system. Except in the circumstances defined in subsection (5) of this section, any owner who intends to install a new UST system shall submit a notice of such intent to the department or delegated agency at least thirty days prior to installing the UST system. Such notice shall meet the following requirements:

- (a) The notice of intent shall be provided on the appropriate Washington state form, which is available from the department;
- (b) Each UST system to be installed which is regulated under this chapter shall be reported;
- (c) Owners may provide notice for more than one UST system using a single form, but UST systems to be installed at separate sites shall be reported on separate forms; and
- (d) The completed form shall include all of the information required on the form.

(2) Notification of new UST systems in use. Within thirty days of bringing any newly installed UST system

regulated under this chapter into use, the owner shall submit notice of such UST system to the department. This notice shall meet the following requirements:

(a) The notice shall be provided on the appropriate Washington state underground storage tank notification form, which is available from the department;

(b) Each tank regulated under this chapter shall be reported;

(c) Owners may provide notice for more than one tank using a single notification form, but owners who own tanks located at more than one site shall file a separate notification form for each site;

(d) Notification required under this section shall include all of the information required on the form for each tank for which notice must be given; and

(e) Notification for tanks installed after December 22, 1988, shall also certify compliance with the following requirements:

(i) Corrosion protection of steel tanks and piping under WAC 173-360-305 (1) and (2);

(ii) Financial responsibility under WAC 173-360-400 through 173-360-499; and

(iii) Release detection under WAC 173-360-335 and 173-360-340.

(3) Installation checklist. All owners and operators of new UST systems shall ensure that a licensed installation supervisor certifies that the methods used to install the tanks and piping comply with the requirements in WAC 173-360-305(4). Such certification shall be accomplished by completing an installation checklist, which is available from the department, as specified in WAC 173-360-305(5).

(4) Notification of existing UST systems. Owners of any existing UST system regulated under this chapter which has not previously been reported to the department shall provide notification regarding such UST system immediately, following the requirements of subsection (2) (a) through (e) of this section.

Note: Owners and operators of UST systems that were in the ground on or after May 8, 1986, unless taken out of operation on or before January 1, 1974, were required to notify the department in accordance with the Hazardous and Solid Waste Amendments of 1984, Public Law 98-616, on a form published by Washington state unless notice was given pursuant to section 103(c) of CERCLA.

(5) Emergency replacement of UST systems.

(a) An exception to the thirty-day notice requirement for new installations in subsection (1) of this section is allowed when an UST system is being replaced on an emergency basis due to a release from the system being replaced. An emergency shall be regarded as a newly discovered release from an UST system which is:

(i) In operation at the time of the release;

(ii) Located at an operating facility; and

(iii) Necessary for the normal operation of the facility.

(b) Under the circumstances described in (a) of this subsection, the notice of intent to install an UST system may be provided after the installation of the new system but no more than seven days after the installation is completed. The information which must be included in the notice of intent form is the same as in subsection (1) of this section. A site assessment meeting the requirements of WAC 173-360-390 shall be completed prior to installing a tank in the

excavation pit of a tank being replaced and prior to installing new piping in the piping trench of piping being replaced.

(6) Changes to UST systems. Any changes in the information initially reported in the notification form submitted under subsection (2), (4) or (5) of this section, including temporary closure of an UST system that was initially reported as being in use, shall be reported to the department or delegated agency by submitting a new notification form within thirty days after such changes occur.

(7) Beginning October 24, 1988, any person who sells a new tank which is intended to be used as an underground storage tank, or an existing UST system or property including an existing UST system which is intended to be used as an UST system, shall notify the purchaser of such tank or UST system of the owner's notification obligations under this section.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-200, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-200, filed 11/28/90, effective 12/29/90.]

WAC 173-360-210 Reporting and recordkeeping requirements. Owners and operators of UST systems shall cooperate fully with inspections, monitoring, and testing conducted by the department or delegated agency, as well as requests for document submission, testing, and monitoring by the owner or operator pursuant to RCW 90.76.060.

(1) Reporting. Owners and operators shall submit the information specified in (a) through (e) of this subsection to the department or delegated agency:

(a) Notification for all UST systems (WAC 173-360-200), which includes certification of installation for new UST systems (WAC 173-360-305(5));

(b) Reports of all suspected releases (WAC 173-360-360), confirmed releases (WAC 173-360-372), and spills and overfills (WAC 173-360-375);

(c) Reports required for corrective actions under chapter 173-340 WAC;

(d) A notification before permanent closure or change-in-service (WAC 173-360-385); and

(e) The appropriate forms, certificates of compliance, and evidence of financial responsibility (WAC 173-360-446).

(f) Checklists required for tank service activities, site checks, and site assessments shall be submitted by tank services providers or persons registered to perform site checks and site assessments, as applicable (WAC 173-360-630(12)).

(2) Recordkeeping. Owners and operators shall maintain the following information:

(a) Documentation of operation of corrosion protection equipment (WAC 173-360-320);

(b) Documentation of UST system repairs (WAC 173-360-325(7));

(c) Recent compliance with release detection requirements (WAC 173-360-355);

(d) Results of the site assessment conducted at permanent closure (WAC 173-360-398);

(e) Corrective action records in accordance with chapter 173-340 WAC; and

(f) Evidence of financial assurance mechanisms used to demonstrate financial responsibility (WAC 173-360-450).

(3) Availability and maintenance of records. Owners and operators shall keep the records required either:

(a) At the UST site and immediately available for inspection by the department or delegated agency; or

(b) At a readily available alternative site and be provided for inspection to the department or delegated agency upon request.

(c) In the case of permanent closure records required under WAC 173-360-398, owners and operators are also provided with the additional alternative of mailing closure records to the department or delegated agency if they cannot be kept at the site or an alternative site as indicated above.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-210, filed 11/28/90, effective 12/29/90.]

PART III

PERFORMANCE STANDARDS AND OPERATING AND CLOSURE REQUIREMENTS

WAC 173-360-300 Performance standards for deferred UST systems. In order to prevent releases due to structural failure, corrosion, or spills and overfills for as long as the UST system is used to store regulated substances, no person may install a deferred UST system listed in WAC 173-360-110(3) for the purpose of storing regulated substances unless the UST system (whether of single-wall or double-wall construction):

(1) Will prevent releases due to corrosion or structural failure for the operational life of the UST system;

(2) Is cathodically protected against corrosion, constructed of noncorrodible material, steel clad with a noncorrodible material, or designed in a manner to prevent the release or threatened release of any stored substance; and

(3) Is constructed or lined with material that is compatible with the stored substance.

Note: The provisions of WAC 173-360-305 and EPA's publication *The Interim Prohibition: Guidance for Design and Installation of Underground Storage Tanks* may be used to satisfy the requirements of this section.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-300, filed 11/28/90, effective 12/29/90.]

WAC 173-360-305 Performance standards for new UST systems. In order to prevent releases due to structural failure, corrosion, or spills and overfills for as long as the UST system is used to store regulated substances, all owners and operators of new UST systems shall meet the following requirements:

(1) Tanks. Each tank shall be properly designed and constructed with material that is compatible with and impermeable to the stored substance, and any portion underground that routinely contains regulated substances shall be protected from corrosion, in accordance with a code of practice developed by a nationally recognized association or independent testing laboratory as specified under (a) through (d) below:

(a) The tank is constructed of fiberglass-reinforced plastic; or

Note: The following industry codes may be used to comply with subsection (1)(a) of this section: Underwriters Laboratories Standard 1316, "Standard for Glass-Fiber-Reinforced Plastic

Underground Storage Tanks for Petroleum Products"; Underwriter's Laboratories of Canada CAN4-S615-M83, "Standard for Reinforced Plastic Underground Tanks for Petroleum Products"; or American Society of Testing and Materials Standard D4021-86, "Standard Specification for Glass-Fiber-Reinforced Polyester Underground Petroleum Storage Tanks."

(b) The tank is constructed of steel and cathodically protected in the following manner:

(i) The tank is coated with a suitable dielectric material;

(ii) The tank is equipped with a factory-installed or field-installed cathodic protection system designed by a corrosion expert;

(iii) Cathodic protection systems are designed and installed to include provisions for testing to allow a determination of current operating status as required in WAC 173-360-320(2) and to facilitate testing by the department or delegated agency in accordance with WAC 173-360-325 (5) and (6); and

(iv) Cathodic protection systems are operated and maintained in accordance with WAC 173-360-320 or according to guidelines established by the department or delegated agency; or

Note: The following codes and standards may be used to comply with subsection (1)(b) of this section:

(A) Steel Tank Institute "Specification for STI-P3 System of External Corrosion Protection of Underground Steel Storage Tanks";

(B) Underwriters Laboratories Standard 1746, "Corrosion Protection Systems for Underground Storage Tanks";

(C) Underwriters Laboratories of Canada CAN4-S603-M85, "Standard for Steel Underground Tanks for Flammable and Combustible Liquids," and CAN4-G03.1-M85, "Standard for Galvanic Corrosion Protection Systems for Underground Tanks for Flammable and Combustible Liquids," and CAN4-S631-M84, "Isolating Bushings for Steel Underground Tanks Protected with Coatings and Galvanic Systems"; or

(D) National Association of Corrosion Engineers Standard RP- 02-85, "Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," and Underwriters Laboratories Standard 58, "Standard for Steel Underground Tanks for Flammable and Combustible Liquids."

(c) The tank is constructed of a steel-fiberglass-reinforced-plastic composite; or

Note: The following industry codes may be used to comply with subsection (1)(c) of this section: Underwriters Laboratories Standard 1746, "Corrosion Protection Systems for Underground Storage Tanks," or the Association for Composite Tanks ACT-100, "Specification for the Fabrication of FRP Clad Underground Storage Tanks."

(d) The tank construction and corrosion protection are determined by the department or delegated agency to be designed to prevent the release or threatened release of any stored regulated substance in a manner that is no less protective of human health and the environment than subsection (1)(a) through (c) of this section.

(2) Piping. The piping that routinely contains regulated substances and is in contact with the ground shall be properly designed and constructed with material that is compatible with and impermeable to the stored substance, and protected from corrosion in accordance with a code of

practice developed by a nationally recognized association or independent testing laboratory as specified below:

(a) The piping is constructed of fiberglass-reinforced plastic; or

Note: The following codes and standards may be used to comply with subsection (2)(a) of this section:

(i) Underwriters Laboratories Subject 971, "UL Listed Non-Metal Pipe";

(ii) Underwriters Laboratories Standard 567, "Pipe Connectors for Flammable and Combustible and LP Gas";

(iii) Underwriters Laboratories of Canada Guide ULC-107, "Glass Fiber Reinforced Plastic Pipe and Fittings for Flammable Liquids"; and

(iv) Underwriters Laboratories of Canada Standard CAN 4-S633-M81, "Flexible Underground Hose Connectors."

(b) The piping is constructed of steel and cathodically protected in the following manner:

(i) The piping is coated with a suitable dielectric material;

(ii) Field-installed cathodic protection systems are designed by a corrosion expert;

(iii) Cathodic protection systems are designed and installed to include provisions for testing to allow a determination of current operating status as required in WAC 173-360-320(2) and to facilitate testing by the department or delegated agency in accordance with WAC 173-360-325 (5) and (6); and

(iv) Cathodic protection systems are operated and maintained in accordance with WAC 173-360-320 or guidelines established by the department or delegated agency; or

Note: The following codes and standards may be used to comply with subsection (2)(b) of this section:

(A) National Fire Protection Association Standard 30, "Flammable and Combustible Liquids Code";

(B) American Petroleum Institute Publication 1615, "Installation of Underground Petroleum Storage Systems";

(C) American Petroleum Institute Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems"; and

(D) National Association of Corrosion Engineers Standard RP- 01-69, "Control of External Corrosion on Submerged Metallic Piping Systems."

(c) The piping construction and corrosion protection are determined by the department or delegated agency to be designed to prevent the release or threatened release of any stored regulated substance in a manner that is no less protective of human health and the environment than the requirements in subsection (2)(a) and (b) of this section.

(d) Metal flexible underground hose connectors shall be cathodically protected or covered with sleeves or jackets that will provide corrosion protection over the operating life of the UST system.

(3) Spill and overflow prevention equipment.

(a) Except as provided in subsection (3)(b) of this section, to prevent spilling and overfilling associated with transfer of regulated substances to the UST system, owners and operators shall use the following spill and overflow prevention equipment:

(i) Spill prevention equipment that will prevent release of regulated substances to the environment when the transfer

hose is detached from the fill pipe (for example, a spill catchment basin); and

(ii) Overfill prevention equipment that will:

(A) Automatically shut off flow into the tank when the tank is no more than ninety-five percent full;

(B) Alert the transfer operator when the tank is no more than ninety percent full by restricting the flow into the tank or triggering a high-level alarm; or

(C) Restrict flow thirty minutes prior to overfilling, alert the operator with a high level alarm one minute before overfilling, or automatically shut off flow into the tank so that none of the fittings located on top of the tank are exposed to regulated substances due to overfilling.

Note: Overflow prevention equipment that will automatically shut off or restrict flow into the tank should not be used where a pressurized fuel transfer system may be employed since an overflow may occur when the flow is suddenly shut off or restricted.

(b) Owners and operators are not required to use the spill and overfill prevention equipment specified in subsection (3)(a) of this section if:

(i) Alternative equipment is used that is determined by the department or delegated agency to be no less protective of human health and the environment than the equipment specified in subsection (3)(a)(i) or (ii) of this section; or

(ii) The UST system is filled by transfers of no more than twenty-five gallons at one time.

(4) Installation. All tanks and piping shall be properly installed by a licensed tank services provider in accordance with a code of practice developed by a nationally recognized association or independent testing laboratory and in accordance with the manufacturer's instructions.

Note: Tank and piping system installation practices and procedures described in the following codes may be used to comply with the requirements of subsection (4) of this section:

- (a) American Petroleum Institute Publication 1615, "Installation of Underground Petroleum Storage System"; or
- (b) Petroleum Equipment Institute Publication RP100, "Recommended Practices for Installation of Underground Liquid Storage Systems"; or
- (c) American National Standards Institute Standard B31.3, "Petroleum Refinery Piping," and American National Standards Institute Standard B31.4 "Liquid Petroleum Transportation Piping System."

(5) Certification of installation. All owners and operators shall ensure that a licensed tank services provider certifies compliance with subsection (4) of this section by submitting a properly completed installation checklist to the department on a form provided by the department as required in WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW: 91-22-020 (Order 91-26), § 173-360-305, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-305, filed 11/28/90, effective 12/29/90.]

WAC 173-360-310 Upgrading requirements for existing UST systems. (1) Alternatives allowed. Not later than December 22, 1998, all existing UST systems shall comply with one of the following requirements:

(a) New UST system performance standards under WAC 173-360-305;

(b) The upgrading requirements in subsections (2) through (4) of this section; or

(c) Closure requirements under WAC 173-360-380 through 173-360-398, including applicable requirements for corrective action under WAC 173-360-399.

(2) Tank upgrading requirements. Steel tanks shall be upgraded by a licensed tank services provider to meet one of the following requirements in accordance with a code of practice developed by a nationally recognized association or independent testing laboratory:

(a) Interior lining. A tank may be upgraded by internal lining if:

(i) The lining is installed in accordance with the requirements of WAC 173-360-325; and

(ii) Within ten years after lining, and every five years thereafter, the lined tank is internally inspected and found to be structurally sound with the lining still performing in accordance with original design specifications, unless cathodic protection is also installed within ten years of lining the tank, as specified in WAC 173-360-310 (2)(c).

(b) Cathodic protection. A tank may be upgraded by cathodic protection if the cathodic protection system meets the requirements of WAC 173-360-305 (1)(b)(ii), (iii), and (iv) and the integrity of the tank is ensured using one of the following methods:

(i) The tank is internally inspected and assessed to ensure that the tank is structurally sound and free of corrosion holes prior to installing the cathodic protection system; or

(ii) The tank has been installed or internally lined for less than ten years and is monitored monthly for releases in accordance with WAC 173-360-345 (6)(e) through (6)(i); or

(iii) The tank has been installed or internally lined for less than ten years and is assessed for corrosion holes by conducting two tightness tests that meet the requirements of WAC 173-360-345 (6)(d). The first tightness test shall be conducted prior to installing the cathodic protection system. The second tightness test shall be conducted between three and six months following the first operation of the cathodic protection system; or

(iv) The tank is assessed for corrosion holes by a method that is determined by the department or delegated agency to prevent releases in a manner that is no less protective of human health and the environment than subsection (2)(b)(i) through (iii) of this section.

(c) Internal lining combined with cathodic protection. A tank may be upgraded by both internal lining and cathodic protection if:

(i) The lining is installed in accordance with the requirements of WAC 173-360-325; and

(ii) The cathodic protection system is installed within ten years of the tank being lined and meets the requirements of WAC 173-360-305 (1)(b)(ii), (iii), and (iv).

Note: The following codes and standards may be used to comply with this section:

(A) American Petroleum Institute Publication 1631, "Recommended Practice for the Interior Lining of Existing Steel Underground Storage Tanks";

(B) National Leak Prevention Association Standard 631, "Spill Prevention, Minimum 10 Year Life Extension of Existing Steel Underground Tanks by Lining Without the Addition of Cathodic Protection";

(C) National Association of Corrosion Engineers Standard RP- 02-85, "Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems";

(D) American Petroleum Institute Publication 1632, "Cathodic Protection of Underground Petroleum Storage Tanks and Piping Systems"; and

(E) Steel Tank Institute Publication STI F894-91 "Specifications for External Corrosion Protection FRP Composite Underground Steel Storage Tanks."

(3) Piping upgrading requirements. Metal piping that routinely contains regulated substances and is in contact with the ground shall be cathodically protected in accordance with a code of practice developed by a nationally recognized association or independent testing laboratory and shall meet the requirements of WAC 173-360-305 (2)(b)(ii), (iii), and (iv).

Note: The codes and standards listed in the note following WAC 173-360-305 (2)(b) may be used to comply with this requirement.

(4) Spill and overfill prevention equipment. To prevent spilling and overfilling associated with transfer of regulated substances to the UST system, all existing UST systems shall comply with new UST system spill and overfill prevention equipment requirements specified in WAC 173-360-305(3), except that an UST system that is filled by transfers of no more than twenty-five gallons at a time is not required to use spill and overfill prevention equipment.

(5) Tank services providers who perform any of the tank services described in this section shall certify that such services comply with the requirements of this section by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-310, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-310, filed 11/28/90, effective 12/29/90.]

WAC 173-360-315 Spill and overfill control requirements. (1) Owners and operators shall ensure that releases due to spilling or overfilling do not occur. The owner and operator shall ensure that the volume available in the tank is greater than the volume of regulated substances to be transferred to the tank before the transfer is made and that the transfer operation is monitored constantly to prevent overfilling and spilling.

Note: The transfer procedures described in National Fire Protection Association Publication 385 may be used to comply with paragraph (a) of this section. Further guidance on spill and overfill prevention appears in American Petroleum Institute Publication 1621, "Recommended Practice for Bulk Liquid Stock Control at Retail Outlets," and National Fire Protection Association Standard 30, "Flammable and Combustible Liquids Code."

(2) The owner and operator shall report, investigate, and clean up any spills and overfills in accordance with WAC 173-360-375.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-315, filed 11/28/90, effective 12/29/90.]

WAC 173-360-320 Operation and maintenance of corrosion protection. All owners and operators of steel UST systems with corrosion protection shall comply with the

following requirements to ensure that releases due to corrosion are prevented for as long as the UST system is used to store regulated substances:

(1) All corrosion protection systems shall be operated and maintained to continuously provide corrosion protection to the metal components of that portion of the tank and piping that routinely contain regulated substances and are in contact with the ground.

(2) All UST systems equipped with cathodic protection systems shall be inspected for proper operation by a licensed supervisor of cathodic protection installation and testing in accordance with the following requirements:

(a) Frequency. All cathodic protection systems shall be tested when they are installed, and again between one and six months after installation, and at least every three years thereafter or according to another reasonable time frame established by the department or delegated agency; and

(b) Inspection criteria. The criteria that are used to determine that cathodic protection is adequate as required by this section shall be in accordance with a code of practice developed by a nationally recognized association.

Note: National Association of Corrosion Engineers Standard RP-02-85, "Control of External Corrosion on Metallic Buried, Partially Buried, or Submerged Liquid Storage Systems," may be used to comply with subsection (2)(b) of this section.

(3) UST systems with impressed current cathodic protection systems shall also be inspected every 60 days to ensure the equipment is running properly.

(4) For UST systems using cathodic protection, records of the operation of the cathodic protection shall be maintained to demonstrate compliance with the performance standards in this section. These records shall provide the following:

(a) The results of the last three inspections required in subsection (3) of this section; and

(b) The results of testing from the last two inspections required in subsection (2) of this section.

(5) Tank services providers who perform any of the tank services described in this section shall certify that such services comply with the requirements of this section by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-320, filed 11/28/90, effective 12/29/90.]

WAC 173-360-323 Compatibility. Owners and operators shall use an UST system made of or lined with materials that are compatible with and impermeable to the substance stored in the UST system.

Note: Owners and operators storing alcohol blends may use the following codes to comply with the requirements of this section:

(1) American Petroleum Institute Publication 1626, "Storing and Handling Ethanol and Gasoline-Ethanol Blends at Distribution Terminals and Service Stations"; and

(2) American Petroleum Institute Publication 1627, "Storage and Handling of Gasoline-Methanol/Cosolvent Blends at Distribution Terminals and Service Stations."

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-323, filed 11/28/90, effective 12/29/90.]

WAC 173-360-325 Repairs of UST systems. Owners and operators of UST systems shall ensure that repairs will prevent releases due to structural failure or corrosion as long as the UST system is used to store regulated substances. Any UST system which is repaired to correct a structural defect must also be upgraded at the time of the repair to meet the requirements specified in WAC 173-360-310 (1)(a) or (b), and must employ a method of release detection for the tank as specified in WAC 183-360-335, 173-360-340 or 173-360-345, as applicable, and a method of release detection for the piping as specified in WAC 173-360-350. The repairs shall meet the following requirements:

(1) Repairs to UST systems shall be properly conducted by a licensed tank services provider in accordance with a code of practice developed by a nationally recognized association or an independent testing laboratory.

Note: The following codes and standards may be used to comply with subsection (1) of this section: National Fire Protection Association Standard 30, "Flammable and Combustible Liquids Code"; American Petroleum Institute Publication 2200, "Repairing Crude Oil, Liquified Petroleum Gas, and Product Pipelines"; American Petroleum Institute Publication 1631, "Recommended Practice for the Interior Lining of Existing Steel Underground Storage Tanks"; and National Leak Prevention Association Standard 631, "Spill Prevention, Minimum 10 Year Life Extension of Existing Steel Underground Tanks by Lining Without the Addition of Cathodic Protection."

(2) Repairs to fiberglass-reinforced plastic tanks shall be made in accordance with the manufacturer's specifications or a code of practice developed by a nationally recognized association or an independent testing laboratory.

(3) Metal pipe sections and fittings that have released regulated substances as a result of corrosion or other damage shall be replaced. Fiberglass pipes and fittings may be repaired in accordance with the manufacturer's specifications.

(4) Repaired tanks and piping shall be tightness tested in accordance with WAC 173-360-345 (6)(d) and 173-360-350 (3)(b) within thirty days following the date of the completion of the repair except as provided in subsection (4) (a) through (c), of this section:

(a) The repaired tank is internally inspected in accordance with a code of practice developed by a nationally recognized association or an independent testing laboratory; or

(b) The repaired portion of the UST system is monitored monthly for releases in accordance with a method specified in WAC 173-360-345 (6)(e) through (6)(i); or

(c) Another test method is used that is determined by the department or delegated agency to be no less protective of human health and the environment than those listed above.

(5) Except as specified in subsection (6) of this section, within six months following the repair of any cathodically protected UST system, the cathodic protection system shall be tested in accordance with WAC 173-360-320 (2) and (3) to ensure that it is operating properly.

(6) Any repair to a cathodic protection system shall be tested in accordance with WAC 173-360-320 (2) and (3), at the time of the repair and again between one and six months following the repair.

(7) UST system owners and operators shall maintain records of each repair for the remaining operating life of the

UST site that demonstrate compliance with the requirements of this section.

(8) Tank services providers who perform any of the tank services described in this section shall certify that such services comply with the requirements of this section by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-325, filed 11/28/90, effective 12/29/90.]

WAC 173-360-330 Release detection compliance schedule. Owners and operators of all UST systems shall comply with the release detection requirements of WAC 173-360-330 through 173-360-355 by December 22 of the year listed in the following table:

TABLE: SCHEDULE FOR PHASE-IN OF RELEASE DETECTION

Year System was installed	Year when release detection is required (by December 22 of the year indicated)						
	1989	1990	1991	1992	1993	1994	1995
Before 1965 or date unknown.	RD	P	E				
1965-69..		P/RD		E			
1970-74..		P	RD		E		
1975-79..		P		RD		E	
1980-88..		P			RD		E

New tanks (after December 22, 1988,) immediately upon installation, except that emergency generator tanks installed between 1989 and 1990 must have release detection by 1996 and emergency generator tanks installed after December 29, 1990, must have release detection immediately upon installation.

P- Except for pressurized piping associated with emergency power generator tanks, must begin release detection by December 22, 1992.

RD- Except for emergency power generator tanks, must begin release detection for tanks and suction piping in accordance with WAC 173-360-335 (2)(a), 173-360-350 (2)(b), and 173-360-340.

E- Must begin release detection for emergency power generator tanks and piping in accordance with WAC 173-360-335 (2)(a) and 173-360-350 (2)(a) or (b).

Note: Dates preceding the effective date of this rule correspond to federal requirements under 40 CFR 280 and are included here to reflect conformity to the federal rule.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-330, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-330, filed 11/28/90, effective 12/29/90.]

WAC 173-360-335 Release detection for petroleum UST systems. (1) Owners and operators of new and existing petroleum UST systems shall provide a method, or combination of methods, of release detection that:

(a) Can detect a release from any portion of the tank and the connected underground piping that routinely contains a regulated substance;

(b) Is installed, calibrated, operated, and maintained in accordance with the manufacturer's instructions, including routine maintenance and service checks for operability or running condition; and

(c) Meets the performance requirements in WAC 173-360-345 or 173-360-350.

(2) Owners and operators of petroleum UST systems shall monitor tanks and piping for releases as follows:

(a) Tanks. Tanks shall be monitored at least every thirty days for releases using one of the methods listed in WAC 173-360-345 (6)(e) through (6)(i) except as provided in WAC 173-360-345 (2) through (5).

(b) Piping. Underground piping that routinely contains regulated substances shall be monitored for releases as required under WAC 173-360-350.

(3) Owners and operators of any existing UST system that cannot apply a method of release detection that complies with the applicable requirements of WAC 173-360-330 through 173-360-355 shall complete the closure procedures in WAC 173-360-380 through 173-360-398 by the date on which release detection is required for that UST system under WAC 173-360-330.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-335, filed 11/28/90, effective 12/29/90.]

WAC 173-360-340 Release detection for hazardous substance UST systems. Owners and operators of hazardous substance UST systems shall provide release detection that meets the following requirements:

(1) Release detection at existing hazardous substance UST systems shall meet the requirements for petroleum UST systems in WAC 173-360-335. By December 22, 1998, all existing hazardous substance UST systems shall meet the release detection requirements for new systems in subsection (2) of this section.

(2) Release detection at new hazardous substance UST systems shall employ some method of release containment such as secondary containment systems, double-walled tanks, or external liners (e.g., in a pit or excavation). Such methods shall meet the following requirements:

(a) Secondary containment systems shall be designed, constructed and installed to:

(i) Contain regulated substances released from the tank system until they are detected and removed;

(ii) Prevent precipitation and ground water from entering the external liner and prevent the release of regulated substances to the environment at any time during the operational life of the UST system; and

(iii) Be checked for evidence of a release at least every thirty days.

Note: The provisions of 40 CFR 265.193, Containment and Detection of Releases, may be used to comply with these requirements.

(b) Double-walled tanks shall be designed, constructed, and installed to:

(i) Contain a release from any portion of the inner tank within the outer wall; and

(ii) Detect the failure of the inner wall.

(c) External liners (including vaults) shall be designed, constructed, and installed to:

(i) Contain one hundred percent of the capacity of the largest tank within its boundary;

(ii) Prevent the interference of precipitation or groundwater intrusion with the ability to contain or detect a release of regulated substances; and

(iii) Surround the tank completely (i.e., it is capable of preventing lateral as well as vertical migration of regulated substances).

(d) Underground piping shall be equipped with secondary containment that satisfies the requirements of subsection (2)(a) of this section (e.g., trench liners, jacketing of double-walled pipe). In addition, underground piping that conveys regulated substances under pressure shall be equipped with an automatic line leak detector in accordance with WAC 173-360-350 (3)(a).

(e) Other methods of release detection may be used if owners and operators:

(i) Demonstrate to the department or delegated agency that an alternate method can detect a release of the stored substance as effectively as any of the methods allowed in WAC 173-360-345 (6)(b) through (6)(i) can detect a release of petroleum;

(ii) Provide information to the department or delegated agency on effective corrective action technologies, health risks, and chemical and physical properties of the stored substance, and the characteristics of the UST site; and

(iii) Obtain approval from the department or delegated agency to use the alternate release detection method before the installation and operation of the new UST system.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-340, filed 11/28/90, effective 12/29/90.]

WAC 173-360-345 Methods of release detection for tanks. (1) Any method of release detection for tanks shall meet the performance requirements of this section. In addition, methods used after December 22, 1990, except for methods permanently installed prior to that date, shall be capable of detecting the leak rate or quantity specified for that method in subsection (6)(b), (c), (d), and (e) of this section with a probability of detection of 0.95 and a probability of false alarm of 0.05. (That is, under test conditions, a method will correctly detect at least ninety-five of one hundred actual releases, and will falsely indicate a release no more than five times in one hundred tests of nonleaking systems.)

Note: The establishment of leak indication thresholds is a means of setting a standard for the equipment or method used. It is not in any way meant to imply that actual leak rates less than these limits are allowable. No release is acceptable, and any indication that a release may have occurred should be investigated in accordance with WAC 173-360-360. Manufacturers and tank services providers installing or utilizing leak detection equipment and/or methods are encouraged to follow EPA's standard test procedures for evaluating leak detection methods to demonstrate compliance with the requirements of subsection (1) of this section.

(2) UST systems that meet the new tank or upgraded tank performance standards in WAC 173-360-305 or 173-360-310, and the inventory control requirements in subsection (6) (a) or (b) of this section, may use tank tightness testing (conducted in accordance with subsection (6)(d) of this section) at least every five years until December 22, 1998, or until ten years after the tank is installed or upgraded under WAC 173-360-310(2), whichever is later.

(3) UST systems that do not meet the new tank or upgraded tank performance standards in WAC 173-360-305 or 173-360-310 may use inventory controls (conducted in

accordance with subsection (6) (a) or (b) of this section) and annual tank tightness testing (conducted in accordance with subsection (6)(d) of this section) until December 22, 1998, when the tank shall be upgraded under WAC 173-360-310 or permanently closed under WAC 173-360-385.

(4) Tanks with capacity of one thousand gallons or less may use weekly tank gauging conducted in accordance with subsection (6)(b) of this section.

(5) Tanks that store fuel solely for use by emergency power generators may use the following methods of release detection:

(a) Emergency power generator tanks with nominal capacity of one thousand gallons or less may use monthly tank gauging conducted in accordance with subsection (6)(c) of this section.

(b) Emergency power generator tanks with nominal capacity of five hundred fifty-one to two thousand gallons may use monthly tank gauging conducted in accordance with subsection (6)(c) of this section, in conjunction with annual tank tightness testing conducted in accordance with subsection (6)(d) of this section.

(c) Except as provided in subsection (2) of this section, emergency power generator tanks with nominal capacity greater than two thousand gallons may use weekly tank gauging conducted in accordance with subsection (6)(b) of this section, in conjunction with annual tank tightness testing conducted in accordance with subsection (6)(d) of this section.

(6) Each method of release detection for tanks used to meet the requirements of WAC 173-360-335 shall be conducted in accordance with the following:

(a) Daily inventory control. Daily inventory control (or another test of equivalent performance) shall be conducted in a manner capable of detecting a release of at least 1.0 percent of flow-through plus 130 gallons on a monthly basis in the following manner:

(i) Inventory volume measurements for regulated substance inputs, withdrawals, and the amount still remaining in the tank are recorded each operating day;

(ii) The equipment used is capable of measuring the level of regulated substance in the tank over the full range of the tank's height to the nearest one-eighth of an inch;

(iii) The regulated substance inputs are reconciled with delivery receipts by measurement of the tank inventory volume before and after delivery;

(iv) Deliveries are made through a drop tube that extends to within one foot of the tank bottom;

(v) Dispensing of regulated substances is metered and recorded within the local standards for meter calibration or an accuracy of at least six cubic inches for every five gallons of regulated substances which is withdrawn; and

(vi) The measurement of any water level in the bottom of the tank is made to the nearest one-eighth of an inch at least once a month.

Note: Practices described in the American Petroleum Institute Publication 1621, "Recommended Practice for Bulk Liquid Stock Control at Retail Outlets," may be used, where applicable, as guidance in meeting the requirements of this paragraph.

(b) Weekly tank gauging. Only tanks of one thousand gallons or less nominal capacity may use weekly tank gauging as the sole method of release detection. Tanks of

one thousand to two thousand gallons may use the method in place of daily inventory control in (a) of this subsection, in conjunction with tank tightness testing, as specified in (d) of this subsection. Tanks of greater than two thousand gallons nominal capacity may use this method to meet the requirements of WAC 173-360-330 through 173-360-355 only if such tanks store fuel solely for use by emergency power generators. Weekly tank gauging shall meet the following requirements:

(i) Tank liquid level measurements are taken weekly at the beginning and ending of a period of at least thirty-six hours during which no liquid is added to or removed from the tank;

(ii) Level measurements are based on an average of two consecutive stick readings at both the beginning and ending of the period (that is, four measurements shall be taken, two consecutive measurements at the beginning and two consecutive measurements at the end of the period during which no liquid has been added or removed from the tank);

(iii) The equipment used is capable of measuring the level of regulated substance in the tank over the full range of the tank's height to the nearest one-eighth of an inch;

(iv) If the variation between beginning and ending measurements exceeds the weekly or monthly standards in the following table, a leak may be occurring and the requirements of WAC 173-360-360 through 173-360-375 shall be followed:

Nominal Tank Capacity	Weekly Standard (one test)	Monthly Standard (average of four tests)
550 gallons or less	10 gallons	5 gallons
551-1,000 gallons	13 gallons	7 gallons
1,001-2,000 gallons	26 gallons	13 gallons
2,001 gallons or more*	.75% of capacity	.5% of capacity

(*Emergency Power Generator Tanks only.)

(c) Monthly tank gauging. Only tanks that store fuel solely for use by emergency power generators with a nominal capacity of two thousand gallons or less may use monthly tank gauging as a method of release detection. Such tanks with nominal capacity of five hundred fifty-one to two thousand gallons shall also have an annual tank tightness test conducted in accordance with (d) of this subsection. Monthly tank gauging shall meet the following requirements:

(i) Inventory volume measurements for regulated substance inputs, withdrawals, and the amount still remaining in the tank are recorded whenever inputs or withdrawals occur;

(ii) Tank liquid level measurements reconciled with inventory volume measurements are taken monthly at the beginning and ending of a period of at least twenty-one days, except when extreme snowfall or other travel obstructions occurring in remote locations and preventing access are specifically documented by the owner and operator;

(iii) Level measurements are based on an average of two consecutive readings at both the beginning and ending of the period (that is, four measurements shall be taken, two consecutive measurements at the beginning and two consecutive measurements at the end of the period);

(iv) The equipment used is capable of measuring the level of regulated substance in the tank over the full range of the tank's height to the nearest one-eighth of an inch or a corresponding amount of gallons;

(v) The measurement of any water level in the bottom of the tank is made to the nearest one-eighth of an inch at least once a month;

(vi) If the variation between beginning and ending measurements exceeds the monthly standards in the following table, a leak may be occurring and the requirements of WAC 173-360-360 through 173-360-375 shall be followed:

Nominal Tank Capacity	Monthly Standard (average of four tests)
550 gallons or less	5 gallons
551-1,000 gallons	7 gallons
1,001-2000 gallons	13 gallons

(d) Tank tightness testing. Tank tightness testing (or another test of equivalent performance) shall be capable of detecting at least a 0.1 gallon per hour leak rate from any portion of the tank that routinely contains a regulated substance while accounting for the effects of thermal expansion or contraction of the regulated substance, vapor pockets, tank deformation, evaporation or condensation, and the location of the water table.

(e) Automatic tank gauging. Equipment for automatic tank gauging that tests for the loss of regulated substance and conducts inventory control shall meet the following requirements:

(i) The automatic product level monitor test can detect at least a 0.2 gallon per hour leak rate from any portion of the tank that routinely contains a regulated substance; and

(ii) Daily inventory control (or another test of equivalent performance) is conducted in accordance with the requirements of (a) of this subsection.

(f) Vapor monitoring. Testing or monitoring for vapors within the soil gas of the excavation zone shall meet the following requirements:

(i) The materials used as backfill are sufficiently porous (e.g., gravel, sand, crushed rock) to readily allow diffusion of vapors from releases into the excavation area;

(ii) The stored regulated substance, or a tracer compound placed in the tank system, is sufficiently volatile (e.g., gasoline) to result in a vapor level that is detectable by the monitoring devices located in the excavation zone in the event of a release from the tank;

(iii) The measurement of vapors by the monitoring device is not rendered inoperative by the ground water, rainfall, or soil moisture or other known interferences so that a release could go undetected for more than thirty days;

(iv) The level of background contamination in the excavation zone will not interfere with the method used to detect releases from the tank;

(v) The vapor monitors are designed and operated to detect any significant increase in concentration above background of the regulated substance stored in the tank system, a component or components of that substance, or a tracer compound placed in the tank system;

(vi) In the UST excavation zone, the site is evaluated for its appropriateness for installation of vapor monitors to ensure compliance with the requirements of this subsection and to establish the number and positioning of monitoring wells that will detect releases within the excavation zone from any portion of the tank that routinely contains a regulated substance; and

(vii) Monitoring wells are clearly marked and secured to avoid unauthorized access and tampering.

Note: Monitoring wells must also comply with the minimum standards for construction, maintenance, and abandonment of wells specified in chapter 173-160 WAC.

(g) Ground water monitoring. Testing or monitoring for liquids on or in the ground water shall meet the following requirements:

(i) The regulated substance stored is immiscible in water and has a specific gravity of less than one;

(ii) Ground water is never more than twenty feet from the ground surface and the hydraulic conductivity of the soil(s) between the UST system and the monitoring wells or devices is not less than 0.01 cm/sec (e.g., the soil should consist of gravels, coarse to medium sands, coarse silts or other permeable materials);

(iii) The slotted portion of the monitoring well casing shall be designed to prevent migration of natural soils or filter pack into the well and to allow entry of regulated substance on the water table into the well under both high and low ground-water conditions;

(iv) Monitoring wells shall be sealed from the ground surface to the top of the filter pack;

(v) Monitoring wells or devices intercept the excavation zone or are as close to it as is technically feasible;

(vi) The continuous monitoring devices or manual methods used can detect the presence of at least one-eighth of an inch of free product on top of the ground water in the monitoring wells;

(vii) Within and immediately below the UST system excavation zone, the site is evaluated for its appropriateness for installation of ground water monitors to ensure compliance with the requirements in (g)(i) through (v) of this subsection and to establish the number and positioning of monitoring wells or devices that will detect releases from any portion of the tank that routinely contains a regulated substance; and

(viii) Monitoring wells are clearly marked and secured to avoid unauthorized access and tampering.

Note: Monitoring wells must also comply with the minimum standards for construction, maintenance, and abandonment of wells specified in chapter 173-160 WAC.

(h) Interstitial monitoring. Interstitial monitoring between the UST system and a secondary barrier immediately around or beneath it may be used, but only if the system is designed, constructed and installed to detect a leak from any portion of the tank that routinely contains a regulated substance and also meets one of the following requirements:

(i) For double-walled UST systems, the sampling or testing method can detect a release through the inner wall in any portion of the tank that routinely contains a regulated substance;

Note: The provisions outlined in the Steel Tank Institute's "Standard for Dual Wall Underground Storage Tanks" may be used as guidance for aspects of the design and construction of underground steel double-walled tanks.

(ii) For UST systems with a secondary barrier within the excavation zone, the sampling or testing method used can detect a release between the UST system and the secondary barrier;

(A) The secondary barrier around or beneath the UST system consists of artificially constructed material that is sufficiently thick and impermeable (at least 10^{-6} cm/sec for

the regulated substance stored) to direct a release to the monitoring point and permit its detection;

(B) The barrier is compatible with the regulated substance stored so that a release from the UST system will not cause a deterioration of the barrier allowing a release to pass through undetected;

(C) For cathodically protected tanks, the secondary barrier shall be installed so that it does not interfere with the proper operation of the cathodic protection system;

(D) The ground water, soil moisture, or rainfall will not render the testing or sampling method used inoperative so that a release could go undetected for more than thirty days;

(E) The site is evaluated for its appropriateness for installation of interstitial monitors to ensure that the secondary barrier is always above the ground water and not in a twenty-five-year flood plain, unless the barrier and monitoring designs are for use under such conditions; and

(F) Monitoring wells are clearly marked and secured to avoid unauthorized access and tampering.

(iii) For tanks with an internally fitted liner, an automated device can detect a release between the inner wall of the tank and the liner, and the liner is compatible with the substance stored.

(i) Other methods. Any other type of release detection method, or combination of methods, can be used if:

(i) It can detect a 0.2 gallon per hour leak rate or a release of one hundred fifty gallons within a month with a probability of detection of 0.95 and a probability of false alarm of 0.05; or

(ii) The department or delegated agency may approve another method if the owner and operator can demonstrate that the method can detect a release as effectively as any of the methods allowed in (d) through (i) of this subsection. In comparing methods, the department or delegated agency shall consider the size of release that the method can detect and the frequency and reliability with which it can be detected. If the method is approved, the owner and operator shall comply with any conditions imposed by the department or delegated agency on its use to ensure the protection of human health and the environment.

(7) Tank services providers who perform any of the tank services described in this section shall certify that such services comply with the requirements of this section by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-345, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-345, filed 11/28/90, effective 12/29/90.]

WAC 173-360-350 Methods of release detection for piping. (1) Any method of release detection for piping shall meet the performance requirements of this section, with any performance claims and their manner of determination described in writing by the equipment manufacturer or installer. In addition, methods used after December 22, 1990, except for methods permanently installed prior to that date, shall be capable of detecting the leak rate or quantity specified for that method in subsection (3)(a) and (b) of this section with a probability of detection of 0.95 and a probability of false alarm of 0.05. (That is, under test conditions, a method will correctly detect at least ninety-five of one

hundred actual releases, and will falsely indicate a release no more than five times in one hundred tests of nonleaking systems.)

Note: The establishment of leak indication thresholds is a means of setting a standard for the equipment or method used. It is not in any way meant to imply that actual leak rates less than these limits are allowable. No release is acceptable, and any indication that a release may have occurred should be investigated in accordance with WAC 173-360-360.

(2) Underground piping that routinely contains regulated substances shall be monitored for releases in a manner that meets one of the following requirements:

(a) Pressurized piping. Underground piping that conveys regulated substances under pressure shall:

(i) Be equipped with an automatic line leak detector conducted in accordance with subsection (3)(a) of this section; and

(ii) Have an annual line tightness test conducted by a licensed tank services provider in accordance with subsection (3)(b) of this section or have monthly monitoring conducted in accordance with subsection (3)(c) of this section.

(b) Suction piping. Underground piping that conveys regulated substances under suction shall either have a line tightness test conducted at least every three years and in accordance with subsection (3)(b) of this section, or use a monthly monitoring method conducted in accordance with subsection (3)(c) of this section. No release detection is required for suction piping that is designed and constructed to meet the following standards:

(i) The below-grade piping operates at less than atmospheric pressure;

(ii) The below-grade piping is sloped so that the contents of the pipe will drain back into the storage tank if the suction is released;

(iii) Only one check valve is included in each suction line;

(iv) The check valve is located directly below and as close as practical to the suction pump; and

(v) A method is provided that allows compliance with subsection (2)(b)(ii) through (iv) of this section to be readily determined.

(3) Each method of release detection for piping used to meet the requirements of WAC 173-360-335 shall be conducted in accordance with the following:

(a) Automatic line leak detectors. Methods which alert the operator to the presence of a leak by restricting or shutting off the flow of regulated substances through piping or triggering an audible or visual alarm may be used only if they detect leaks of three gallons per hour at ten pounds per square inch line pressure within one hour. An annual test of the operation of the leak detector shall be conducted in accordance with the manufacturer's requirements.

(b) Line tightness testing. A periodic test of piping may be conducted only if it can detect a 0.1 gallon per hour leak rate at one and one-half times the operating pressure.

(c) Applicable tank methods. Any of the methods in WAC 173-360-345 (6)(f) through (i) may be used if they are designed to detect a release from any portion of the underground piping that routinely contains regulated substances.

(4) Tank services providers who perform any of the tank services described in this section shall certify that such services comply with the requirements of this section by

submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-350, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-350, filed 11/28/90, effective 12/29/90.]

WAC 173-360-355 Release detection recordkeeping.

All UST system owners and operators shall maintain records demonstrating compliance with all applicable requirements of WAC 173-360-330 through 173-360-355. These records shall include the following:

(1) All written performance claims pertaining to any release detection system used, and the manner in which these claims have been justified or tested by the equipment manufacturer or installer, shall be maintained for five years, or for another reasonable period of time determined by the department or delegated agency, from the date of installation;

(2) The results of any sampling, testing, or monitoring shall be maintained for at least five years, or for another reasonable period of time determined by the department or delegated agency, except that the results of tank tightness testing conducted in accordance with WAC 173-360-345 (6)(d) shall be retained until the next test is conducted; and

(3) Written documentation of all calibration, maintenance, and repair of release detection equipment permanently located on-site shall be maintained for at least five years after the servicing work is completed, or for another reasonable time period determined by the department or delegated agency. Any schedules of required calibration and maintenance provided by the release detection equipment manufacturer shall be retained for five years from the date of installation.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-355, filed 11/28/90, effective 12/29/90.]

WAC 173-360-360 Reporting of suspected releases.

Owners and operators of UST systems shall report to the department or delegated agency within twenty-four hours, or another reasonable time period specified by the department or delegated agency, and follow the procedures in WAC 173-360-370 when any of the following conditions apply:

(1) Owners and operators or others discover released regulated substances at the UST site or in the surrounding area (including but not limited to the presence of free product or its constituents in soils, basements, sewer and utility lines, ground water, and/or surface water).

(2) Unusual operating conditions are observed by owners and operators (such as the erratic behavior of product dispensing equipment, the sudden loss of a regulated substance from the UST system, or an unexplained presence of water in the tank), unless system equipment is found to be defective but not leaking, and is immediately repaired or replaced; or

(3) Monitoring results from a release detection method required under WAC 173-360-335 and 173-360-340 indicate that a release may have occurred unless:

(a) A false alarm is confirmed;

(b) The monitoring device is found to be defective, and is immediately repaired, recalibrated or replaced, and additional monitoring does not confirm the initial result; or

(c) In the case of inventory control, a second month of data does not confirm the initial result, except that owners and operators shall immediately investigate all larger-than-normal or reoccurring variations in inventory control results, and report such variations if they are unaccounted for, without waiting to obtain a second month of data.

Note: Other federal, state, and local laws also require reporting, and in some cases investigation, of suspected releases.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-360, filed 11/28/90, effective 12/29/90.]

WAC 173-360-365 Investigation due to off-site impacts.

When required by the department or delegated agency, owners and operators of UST systems shall follow the procedures in WAC 173-360-370 to determine if the UST system is the source of off-site impacts. These impacts include the discovery of regulated substances (including but not limited to the presence of free product or its constituents in soils, basements, sewer and utility lines, ground water, and/or surface water) that has been observed by the department or delegated agency or brought to their attention by another person.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-365, filed 11/28/90, effective 12/29/90.]

WAC 173-360-370 Release investigation and confirmation steps.

Unless corrective action is initiated in accordance with WAC 173-360-399, owners and operators shall immediately investigate and confirm all suspected releases of regulated substances requiring reporting under WAC 173-360-360 within seven days of discovery, or another reasonable time period specified by the department or delegated agency, using either the following steps or another procedure approved by the department or delegated agency:

(1) System test. Owners and operators shall have a licensed tank services provider conduct tests (according to the requirements for tightness testing in WAC 173-360-345 (6)(d) and 173-360-350 (3)(b)) that determine whether a leak exists in any portions of the UST system that routinely contains a regulated substance, including the tank and the attached delivery piping, and in any connected tanks and piping that may or may not be in use. All such portions shall be tested either separately or together or in combinations thereof.

(a) Owners and operators shall have a licensed tank services provider repair, replace, upgrade, or close the UST system, and shall begin corrective action in accordance with WAC 173-360-399 if the test results for the system, tank, or delivery piping indicate that a leak exists.

(b) Further investigation is not required if the test results for the system, tank, and delivery piping do not indicate that a leak exists and if environmental contamination is not the basis for suspecting a release.

(c) Owners and operators shall conduct a site check in accordance with subsection (2) of this section if the test results for the system, tank, and delivery piping do not indicate that a leak exists but environmental contamination is the basis for suspecting a release.

(2) Site check. Owners and operators shall have a person registered by the department to perform site assess-

ments, as specified in WAC 173-360-610, sample for the presence of a release. Such samples shall be taken, analyzed, and results reported to the department or delegated agency in accordance with the department's guidance document for site checks and site assessments, or as otherwise directed by the department or delegated agency, where contamination is most likely to be present at the UST site.

(a) If the site check results indicate that a release has occurred, owners and operators shall report to the department or delegated agency in accordance with WAC 173-360-372 and begin corrective action in accordance with WAC 173-360-399.

(b) If the site check results do not indicate that a release has occurred, further investigation is not required.

(3) Tank services providers who perform any of the tank services described in this section, and persons who perform site checks, shall certify that such services or site checks, as applicable, comply with the requirements of this section by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-370, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-370, filed 11/28/90, effective 12/29/90.]

WAC 173-360-372 Reporting of confirmed releases.

Owners and operators shall report all confirmed releases, including but not limited to those confirmed in accordance with WAC 173-360-370 and 173-360-390, and those required to be reported under WAC 173-360-375, to the department or delegated agency within twenty-four hours.

Note: Other federal, state, and local laws also require reporting, and in some cases cleanup, of confirmed releases.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-372, filed 11/28/90, effective 12/29/90.]

WAC 173-360-375 Cleanup and reporting of spills and overfills. (1) Owners and operators of UST systems shall immediately contain and clean up any spill or overflow of petroleum or hazardous substances in accordance with subsections (2) and (3) of this section. Spills and overfills shall also be reported as follows:

(a) Owners and operators shall immediately report any spill or overflow of petroleum and the results of any related cleanup to the department or delegated agency if the spill or overflow comes in contact with soil, ground water, or surface water. Spills or overfills of petroleum which are above a de minimis amount but do not come in contact with soil, ground water, or surface water shall be reported within twenty-four hours. A de minimis amount of petroleum is any amount that immediately evaporates or that is specified by the department or delegated agency through guidance documents. Spills or overfills of petroleum which do not exceed a de minimis amount and do not come in contact with soil, ground water, or surface water are not required to be reported.

(b) Owners and operators shall immediately report any spill or overflow of a hazardous substance and the results of any related cleanup to the department or delegated agency if the spill or overflow comes in contact with soil, ground water, or surface water. Spills or overfills of hazardous substances which are above a de minimis amount but which do not

come in contact with soil, ground water, or surface water shall also be reported immediately. A de minimis amount of a hazardous substance is any amount that is below the specified reportable quantity under CERCLA. Spills or overfills of hazardous substances which do not exceed a de minimis amount and do not come in contact with soil, ground water, or surface water are not required to be reported.

Note: A release of a hazardous substance equal to or in excess of its reportable quantity under CERCLA (40 CFR 302) must also be reported immediately to the National Response Center under sections 102 and 103 of CERCLA (40 CFR 302.6) and to the appropriate state and local authorities under Title III of the Superfund Amendments and Reauthorization Act of 1986 (40 CFR 355.40).

(2) Containment and cleanup shall include the following actions:

(a) Visually inspect and take immediate action to prevent any further release and/or spreading of the regulated substance into the environment, including surrounding soils, ground water, and surface water;

(b) Eliminate or minimize any fire, explosion, and vapor hazards, and absorb or otherwise contain all free product and provide for proper disposal of such product and any used absorbent materials in accordance with all applicable federal, state, and local requirements. Free product shall not be flushed into storm drains, catch basins, dry wells, monitoring wells, or other locations with a possible connection to surrounding soils, ground water, or surface water; and

(c) Provide for proper disposal of, or treat, any contaminated soils in accordance with all applicable federal, state, and local requirements.

(3) Owners and operators shall take appropriate action in accordance with WAC 173-360-399 in the following cases:

(a) A spill or overflow of petroleum that results in a release to the environment of less than twenty-five gallons or another reasonable amount specified by the department or delegated agency, if cleanup is not or cannot be accomplished within twenty-four hours or another reasonable time period established by the department or delegated agency;

(b) A spill or overflow of petroleum that results in a release to the environment that exceeds twenty-five gallons or another reasonable amount specified by the department or delegated agency;

(c) A spill or overflow of petroleum, regardless of amount, that results in ground water contamination or causes a sheen on ground water or surface water, including such water in dry wells;

(d) A spill or overflow of a hazardous substance that results in a release to the environment that is less than the reportable quantity under CERCLA, if cleanup is not or cannot be accomplished within twenty-four hours or another reasonable time period established by the department or delegated agency; and

(e) A spill or overflow of a hazardous substance that results in a release to the environment that equals or exceeds its reportable quantity under CERCLA (40 CFR 302).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-375, filed 11/28/90, effective 12/29/90.]

WAC 173-360-380 Temporary closure of UST systems. (1) When an UST system is temporarily closed, owners and operators shall continue operation and maintenance of corrosion protection in accordance with WAC 173-360-320, and any release detection in accordance with WAC 173-360-330 through 173-360-355. WAC 173-360-360 through 173-360-375 and 173-360-399 shall be complied with if a release is suspected or confirmed. However, release detection is not required as long as the UST system is empty. The UST system is empty when all materials have been removed using commonly employed practices so that no more than 2.5 centimeters (one inch) of residue, or 0.3 percent by weight of the total capacity of the UST system, remain in the system.

(2) When an UST system is temporarily closed for three months or more, owners and operators shall also comply with the following requirements:

- (a) Leave vent lines open and functioning; and
- (b) Cap and secure all other lines, pumps, entryways, and ancillary equipment.

(3) Any UST system temporarily closed for three months or more shall be tightness tested by a licensed tank services provider in accordance with WAC 173-360-345 (6)(d) and 173-360-350 (3)(b) prior to being put back into service unless the system is subject to and in compliance with the release detection requirements of WAC 173-360-330.

(4) When an UST system is temporarily closed for more than twelve months, owners and operators shall have a licensed tank services provider permanently close the UST system if it does not either meet the performance standards in WAC 173-360-305 for new UST systems or the upgrading requirements in WAC 173-360-310 (2) and (3). Such UST systems shall be permanently closed in accordance with WAC 173-360-385 through 173-360-398 at the end of the twelve-month period unless the department or delegated agency provides an extension before expiration of the twelve-month temporary closure period. Owners and operators shall have a site assessment completed in accordance with WAC 173-360-390 before such an extension is applied for.

(5) Tank services providers who perform any of the tank services described in this section, and persons who perform site assessments, shall certify that such services and site assessments, as applicable, comply with the requirements of this chapter by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12).

(6) Any active permits for those systems being temporarily closed shall be returned to the department within thirty days of completion of the temporary closure activities.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-380, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-380, filed 11/28/90, effective 12/29/90.]

WAC 173-360-385 Permanent closure and change-in-service. (1) At least thirty days before beginning either permanent closure or a change-in-service under subsections (2) and (3) of this section, or within another reasonable time period determined by the department or delegated agency, owners and operators shall notify the department or delegated agency in writing of their intent to permanently close or

make the change-in-service, unless such action is in response to corrective action. The site assessment required under WAC 173-360-390 shall be performed after notifying the department or delegated agency but before completion of the permanent closure or a change-in-service.

(2) Permanent closure shall be completed by a licensed tank services provider within sixty days after expiration of the thirty-day notice, unless a written request for an extension, explaining the reason for the request, is approved by the department or delegated agency. Any UST system not permanently closed by a compliance date that the UST system is subject to, shall be in compliance with the requirement associated with the compliance date, including the payment of fees. Any UST system not in compliance with any such requirement will be subject to the penalties described in WAC 173-360-170.

(3) To permanently close an UST system, the tank services provider shall empty and clean the tank by removing all liquids and accumulated sludges.

Note: Any sludges removed must also be designated and disposed of in accordance with chapter 173-303 WAC.

(4) All tanks taken out of service permanently shall also be either removed from the ground or filled with an inert solid material. All piping shall either be capped (except any vent lines) or removed from the ground.

(5) Continued use of an UST system to store a non-regulated substance is considered a change-in-service. Before a change-in-service, owners and operators shall have a licensed tank services provider empty and clean the tank by removing all liquid and accumulated sludge, and shall have a site assessment conducted in accordance with WAC 173-360-390.

Note: The following cleaning and closure procedures may be used to comply with this section:

(A) American Petroleum Institute Recommended Practice 1604, "Removal and Disposal of Used Underground Petroleum Storage Tanks";

(B) American Petroleum Institute Publication 2015, "Cleaning Petroleum Storage Tanks";

(C) American Petroleum Institute Recommended Practice 1631, "Interior Lining of Underground Storage Tanks," may be used as guidance for compliance with this section; and

(D) The National Institute for Occupational Safety and Health "Criteria for a Recommended Standard...Working in Confined Space" may be used as guidance for conducting safe closure procedures at some hazardous substance tanks.

(5) Tank services providers who perform any of the tank services described in this section, and persons who perform site assessments, shall certify that such services or site assessments, as applicable, comply with the requirements of this section by submitting the appropriate checklist(s) to the department in accordance with WAC 173-360-630(12). Any active tank permits for the systems being closed shall be returned to the department within thirty days of closure activities.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-385, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-385, filed 11/28/90, effective 12/29/90.]

WAC 173-360-390 Site assessment at closure or change-in-service. (1) Before permanent closure or a change-in-service is completed, except as specified in subsections (2), (3), and (4) of this section, owners and operators shall have a person registered by the department to perform site assessments, as specified in WAC 173-360-610, sample for the presence of a release. Such samples shall be taken, analyzed, and the results reported to the department or delegated agency in accordance with the department's guidance document for site assessments, or as otherwise directed by the department or delegated agency, where contamination is most likely to be present at the UST site.

(2) The requirements of this section are satisfied if one of the external release detection methods allowed in WAC 173-360-345 (6)(f) and (g) is employed for the UST system being closed or undergoing a change-in-service, if the following conditions are met:

(a) The external release detection method is operating, at the time of closure or change-in-service, in accordance with the requirements of WAC 173-360-345 (6)(f) or (g), as applicable; and

(b) A report is provided to the department with sufficient information to clearly demonstrate that:

(i) The external release detection method employed was appropriately designed, installed, and operated to adequately detect any releases from the UST system; and

(ii) No release was detected from the UST system.

(3) If the department determines that the conditions specified in subsection (2)(a) and (b) of this section have not been satisfactorily met, the department may require that a site assessment be performed for the site.

(4) If contaminated soils, contaminated ground water, or free product is discovered under subsection (1) of this section, or by any other manner, owners and operators shall report to the department or delegated agency in accordance with WAC 173-360-372 and take appropriate action in accordance with WAC 173-360-399.

(5) Persons who perform site assessments shall certify that such site assessments comply with the requirements of this section by submitting the appropriate checklist to the department in accordance with WAC 173-360-630(12).

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-390, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-390, filed 11/28/90, effective 12/29/90.]

WAC 173-360-395 Applicability to previously closed UST systems. When directed by the department or delegated agency, the owner or operator of an UST system permanently closed or abandoned before December 22, 1988, shall have a person registered to perform site assessments assess the site and shall have a licensed tank services provider close the UST system in accordance with WAC 173-360-380 through 173-360-398 if releases from the UST may, in the judgment of the department or delegated agency, pose a current or potential threat to human health and the environment.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-395, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-395, filed 11/28/90, effective 12/29/90.]

WAC 173-360-398 Closure records. Owners and operators shall maintain records that demonstrate compliance with closure requirements under WAC 173-360-380 through 173-360-398. The results of the site assessment required in WAC 173-360-390 shall be maintained for at least five years after completion of permanent closure or change-in-service in one of the following ways:

(1) By the owners and operators who took the UST system out of service;

(2) By the current owners and operators of the UST system site; or

(3) By mailing these records to the department or delegated agency if they cannot be maintained at the closed facility.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-398, filed 11/28/90, effective 12/29/90.]

WAC 173-360-399 Corrective action requirements. Except as provided in WAC 173-360-375, upon confirmation of a release in accordance with WAC 173-360-370 or 173-360-390, or after a release from the UST system is identified in any other manner, owners and operators shall immediately undertake appropriate measures in accordance with chapter 173-340 WAC and/or this chapter, and any additional measures as directed by the department under chapter 90.48 RCW. Owners and operators shall also report such releases to the department or delegated agency within twenty-four hours in accordance with WAC 173-360-372.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-399, filed 11/28/90, effective 12/29/90.]

PART IV FINANCIAL RESPONSIBILITY REQUIREMENTS

WAC 173-360-400 Applicability. (1) WAC 173-360-400 through 173-360-499 applies to owners and operators of all petroleum underground storage tank (UST) systems except as otherwise provided in this section.

(2) Owners and operators of petroleum UST systems are subject to these requirements if they are in operation on or after the date for compliance established in WAC 173-360-403.

(3) state and federal government entities whose debts and liabilities are the debts and liabilities of a state or the United States are exempt from the requirements of WAC 173-360-400 through 173-360-499.

(4) The requirements of WAC 173-360-400 through 173-360-499 do not apply to owners and operators of any UST system described in WAC 173-360-110 (2) or (3).

(5) If the owner and operator of a petroleum underground storage tank are separate persons, only one person is required to demonstrate financial responsibility; however, both parties are liable in event of noncompliance. Regardless of which party complies, the date set for compliance at a particular facility is determined by the characteristics of the owner as set forth in WAC 173-360-403.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-400, filed 11/28/90, effective 12/29/90.]

WAC 173-360-403 Compliance dates. Owners of petroleum underground storage tanks are required to comply with the requirements of WAC 173-360-400 through 173-360-499 by the following dates:

(1) All petroleum marketing firms owning 1,000 or more USTs and all other UST owners that report a tangible net worth of twenty million dollars or more to the United States Securities and Exchange Commission (SEC), Dun and Bradstreet, the Energy Information Administration, or the Rural Electrification Administration; January 24, 1989, except that compliance with WAC 173-360-410 (2) is required by July 24, 1989.

(2) All petroleum marketing firms owning 100-999 USTs; October 26, 1989.

(3) All petroleum marketing firms owning a combined total of 13-99 USTs which are located at more than one facility; April 26, 1991.

(4) All petroleum UST owners not described in subsections (1), (2), or (3) of this section, including all local government entities; the same as the requirements and deadlines adopted under 40 C.F.R. 280.91.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-403, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-403, filed 11/28/90, effective 12/29/90.]

WAC 173-360-406 Amount and scope of required financial responsibility. (1) Owners or operators of petroleum underground storage tanks shall demonstrate financial responsibility for taking corrective action and for compensating third parties for bodily injury and property damage caused by accidental releases arising from the operation of petroleum underground storage tanks in at least the following per-occurrence amounts:

(a) For owners or operators of petroleum underground storage tanks that are located at petroleum marketing facilities, or that handle an average of more than ten thousand gallons of petroleum per month based on annual throughput for the previous calendar year; one million dollars.

(b) For all other owners or operators of petroleum underground storage tanks; five hundred thousand dollars.

(2) Owners or operators of petroleum underground storage tanks shall demonstrate financial responsibility for taking corrective action and for compensating third parties for bodily injury and property damage caused by accidental releases arising from the operation of petroleum underground storage tanks in at least the following annual aggregate amounts:

(a) For owners or operators of 1 to 100 petroleum underground storage tanks; one million dollars; and

(b) For owners or operators of 101 or more petroleum underground storage tanks, two million dollars.

(3) For the purposes of subsections (2) and (4) of this section only, "a petroleum underground storage tank" means a single containment unit and does not mean combinations of single containment units.

(4) Owners or operators shall review the amount of aggregate assurance provided whenever additional petroleum underground storage tanks are acquired or installed. If the number of petroleum underground storage tanks for which assurance must be provided exceeds one hundred, the owner

or operator shall demonstrate financial responsibility in the amount of at least two million dollars of annual aggregate assurance by the anniversary of the date on which the mechanism demonstrating financial responsibility became effective. If assurance is being demonstrated by a combination of mechanisms, the owner or operator shall demonstrate financial responsibility in the amount of at least two million dollars of annual aggregate assurance by the first-occurring effective date anniversary of any one of the mechanisms combined (other than a financial test or guarantee) to provide assurance.

(5) The amounts of assurance required under this section exclude legal defense costs.

(6) The required per-occurrence and annual aggregate coverage amounts do not in any way limit the liability of the owner or operator.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-406, filed 11/28/90, effective 12/29/90.]

WAC 173-360-410 Allowable mechanisms and combinations of mechanisms. (1) Subject to the limitations of subsections (2) and (3) of this section, an owner or operator may use any one or combination of the mechanisms listed in WAC 173-360-413 through 173-360-436 to demonstrate financial responsibility under WAC 173-360-400 through 173-360-499 for one or more underground storage tanks.

(2) An owner or operator may use a guarantee or surety bond to establish financial responsibility under WAC 173-360-400 through 173-360-499.

(3) An owner or operator may use self-insurance in combination with a guarantee only if, for the purpose of meeting the requirements of the financial test under this rule, the financial statements of the owner or operator are not consolidated with the financial statements of the guarantor.

(4) Except as provided in subsection (5) of this section, if the owner or operator uses separate mechanisms or separate combinations of mechanisms to demonstrate financial responsibility for:

(a) Taking corrective action;

(b) Compensating third parties for bodily injury and property damage caused by sudden accidental releases; or

(c) Compensating third parties for bodily injury and property damage caused by nonsudden accidental releases, the amount of assurance provided by each mechanism or combination of mechanisms shall be in the full amount specified in WAC 173-360-406 (1) and (2).

(5) If an owner or operator uses separate mechanisms or separate combinations of mechanisms to demonstrate financial responsibility for different petroleum underground storage tanks, the annual aggregate required shall be based on the number of tanks covered by each such separate mechanism or combination of mechanisms.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-410, filed 11/28/90, effective 12/29/90.]

WAC 173-360-413 Financial test of self-insurance.

(1) An owner or operator, and/or guarantor, may satisfy the requirements of WAC 173-360-406 by passing a financial test as specified in this section. To pass the financial test of self-insurance, the owner or operator, and/or guarantor shall

meet the criteria of subsection (2) or (3) of this section based on year-end financial statements for the latest completed fiscal year.

(2)(a) The owner or operator, and/or guarantor, must have a tangible net worth of at least ten times:

(i) The total of the applicable aggregate amount required by WAC 173-360-406, based on the number of underground storage tanks for which a financial test is used to demonstrate financial responsibility to the department under this section;

(ii) The sum of the corrective action cost estimates, the current closure and post-closure care cost estimates, and amount of liability coverage for which a financial test is used to demonstrate financial responsibility to EPA under 40 CFR Parts 264.101, 264.143, 264.145, 265.143, 265.145, 264.147, and 265.147 or to a state agency under a state program authorized by EPA under Part 271; and

(iii) The sum of current plugging and abandonment cost estimates for which a financial test is used to demonstrate financial responsibility to EPA under 40 CFR Part 144.63 or to a state agency under a state program authorized by EPA under 40 CFR Part 145.

Note: Titles of the above-referenced CFR citations are as follows: Part 264.101 - Corrective Action for Solid Waste Management Units; Part 264.143 - Financial Assurance for Closure; Part 264.145 - Financial Assurance for Post-Closure Care; Part 265.143 - Financial Assurance for Closure; Part 265.145 - Financial Assurance for Post-Closure Care; Part 264.147 - Liability Requirements; Part 265.147 - Liability Requirements; Part 144.63 - Financial Assurance for Plugging and Abandonment; and Part 145 - State UIC Program Requirements.

(b) The owner or operator, and/or guarantor, must have a tangible net worth of at least ten million dollars.

(c) The owner or operator, and/or guarantor, shall have a letter signed by the chief financial officer as specified in subsection (4) of this section and as set forth in WAC 173-360-470.

(d) The owner or operator, and/or guarantor, shall either:

(i) File financial statements annually with the United States Securities and Exchange Commission, the Energy Information Administration, or the Rural Electrification Administration; or

(ii) Report annually the firm's tangible net worth to Dun and Bradstreet, and Dun and Bradstreet must have assigned the firm a financial strength rating of 4A or 5A.

(e) The firm's year-end financial statements, if independently audited, cannot include an adverse auditor's opinion, a disclaimer of opinion, or a "going concern" qualification.

(3)(a) The owner or operator, and/or guarantor shall meet the financial test requirements of 40 CFR 264.147(f)(1), substituting the appropriate amounts specified in WAC 173-360-406 (2)(a) and (b) for the "amount of liability coverage" each time specified in that section.

(b) The fiscal year-end financial statements of the owner or operator, and/or guarantor, shall be examined by an independent certified public accountant and be accompanied by the accountant's report of the examination.

(c) The firm's year-end financial statements cannot include an adverse auditor's opinion, a disclaimer of opinion, or a "going concern" qualification.

(d) The owner or operator, and/or guarantor, shall have a letter signed by the chief financial officer, worded as specified in subsection (4) of this section.

(e) If the financial statements of the owner or operator, and/or guarantor, are not submitted annually to the United States Securities and Exchange Commission, the Energy Information Administration or the Rural Electrification Administration, the owner or operator, and/or guarantor, shall obtain a special report by an independent certified public accountant stating that:

(i) He or she has compared the data that the letter from the chief financial officer specifies as having been derived from the latest year-end financial statements of the owner or operator, and/or guarantor, with the amounts in such financial statements; and

(ii) In connection with that comparison, no matters came to his attention which caused him to believe that the specified data should be adjusted.

(4) To demonstrate that it meets the financial test under subsection (2) or (3) of this section, the chief financial officer of the owner or operator, and/or guarantor, shall sign, within one hundred twenty days of the close of each financial reporting year, as defined by the twelve-month period for which financial statements used to support the financial test are prepared, a letter worded exactly as set forth in WAC 173-360-470, except that the instructions in brackets are to be replaced by the relevant information and the brackets deleted.

(5) If an owner or operator using the test to provide financial assurance finds that he or she no longer meets the requirements of the financial test based on the year-end financial statements, the owner or operator shall obtain alternative coverage within one hundred fifty days of the end of the year for which financial statements have been prepared.

(6) The director may require reports of financial condition at any time from the owner or operator, and/or guarantor. If the director finds, on the basis of such reports or other information, that the owner or operator, and/or guarantor, no longer meets the financial test requirements of WAC 173-360-413 (2) or (3) and (4), the owner or operator shall obtain alternate coverage within thirty days after notification of such a finding.

(7) If the owner or operator fails to obtain alternate assurance within one hundred fifty days of finding that he or she no longer meets the requirements of the financial test based on the year-end financial statements, or within thirty days of notification by the director that he or she no longer meets the requirements of the financial test, the owner or operator shall notify the director of such failure within ten days.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-413, filed 11/28/90, effective 12/29/90.]

WAC 173-360-416 Guarantee. (1) An owner or operator may satisfy the requirements of WAC 173-360-406 by obtaining a guarantee that conforms to the requirements of this section. The guarantor shall be:

(a) A firm that:

(i) Possesses a controlling interest in the owner or operator;

(ii) Possesses a controlling interest in a firm described under (a)(i) of this subsection; or

(iii) Is controlled through stock ownership by a common parent firm that possesses a controlling interest in the owner or operator; or

(b) A firm engaged in a substantial business relationship with the owner or operator and issuing the guarantee as an act incident to that business relationship.

(2) Within one hundred twenty days of the close of each financial reporting year the guarantor shall demonstrate that it meets the financial test criteria of WAC 173-360-413 based on year-end financial statements for the latest completed financial reporting year by completing the letter from the chief financial officer described in WAC 173-360-413(4) and shall deliver the letter to the owner or operator. If the guarantor fails to meet the requirements of the financial test at the end of any financial reporting year, within one hundred twenty days of the end of that financial reporting year the guarantor shall send by certified mail, before cancellation or nonrenewal of the guarantee, notice to the owner or operator. If the director notifies the guarantor that he no longer meets the requirements of the financial test of WAC 173-360-413 (2) or (3) and (4), the guarantor shall notify the owner or operator within ten days of receiving such notification from the director. In both cases, the guarantee will terminate no less than one hundred twenty days after the date the owner or operator receives the notification, as evidenced by the return receipt. The owner or operator shall obtain alternate coverage as specified in WAC 173-360-460(3).

(3) The guarantee shall be worded as set forth is WAC 173-360-473, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted.

(4) An owner or operator who uses a guarantee to satisfy the requirements of WAC 173-360-406 shall establish a standby trust fund when the guarantee is obtained. Under the terms of the guarantee, all amounts paid by the guarantor under the guarantee will be deposited directly into the standby trust fund in accordance with instructions from the director under WAC 173-360-453. This standby trust fund shall meet the requirements specified in WAC 173-360-436.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-416, filed 11/28/90, effective 12/29/90.]

WAC 173-360-420 Insurance and risk retention group coverage. (1) An owner or operator may satisfy the requirements of WAC 173-360-406 by obtaining liability insurance that conforms to the requirements of this section from a qualified insurer or risk retention group. Such insurance may be in the form of a separate insurance policy or an endorsement to an existing insurance policy.

(2) Each insurance policy shall be amended by an endorsement worded as specified in WAC 173-360-476 or evidenced by a certificate of insurance worded as specified in WAC 173-360-480, except that instructions in brackets shall be replaced with the relevant information and the brackets deleted.

(3) Each insurance policy shall be issued by an insurer or a risk retention group that, at a minimum, is licensed to transact the business of insurance or eligible to provide

insurance as an excess or surplus lines insurer in one or more states.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-420, filed 11/28/90, effective 12/29/90.]

WAC 173-360-423 Surety bond. (1) An owner or operator may satisfy the requirements of WAC 173-360-406 by obtaining a surety bond that conforms to the requirements of this section. The surety company issuing the bond shall be among those listed as acceptable sureties on federal bonds in the latest Circular 570 of the U.S. Department of the Treasury.

(2) The surety bond shall be worded as set forth in WAC 173-360-483, except that instructions in brackets shall be replaced with the relevant information and the brackets deleted.

(3) Under the terms of the bond, the surety will become liable on the bond obligation when the owner or operator fails to perform as guaranteed by the bond. In all cases, the surety's liability is limited to the per-occurrence and annual aggregate penal sums.

(4) The owner or operator who uses a surety bond to satisfy the requirements of WAC 173-360-406 shall establish a standby trust fund when the surety bond is acquired. Under the terms of the bond, all amounts paid by the surety under the bond will be deposited directly into the standby trust fund in accordance with instructions from the director under WAC 173-360-453. This standby trust fund shall meet the requirements specified in WAC 173-360-436.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-423, filed 11/28/90, effective 12/29/90.]

WAC 173-360-426 Letter of credit. (1) An owner or operator may satisfy the requirements of WAC 173-360-406 by obtaining an irrevocable standby letter of credit that conforms to the requirements of this section. The issuing institution shall be an entity that has the authority to issue letters of credit in Washington state and whose letter-of-credit operations are regulated and examined by a federal or state agency.

(2) The letter of credit shall be worded as set forth in WAC 173-360-486, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted.

(3) An owner or operator who uses a letter of credit to satisfy the requirements of WAC 173-360-406 shall also establish a standby trust fund when the letter of credit is acquired. Under the terms of the letter of credit, all amounts paid pursuant to a draft by the director will be deposited by the issuing institution directly into the standby trust fund in accordance with instructions from the director under WAC 173-360-453. This standby trust fund shall meet the requirements specified in WAC 173-360-436.

(4) The letter of credit shall be irrevocable with a term specified by the issuing institution. The letter of credit shall provide that credit be automatically renewed for the same term as the original term, unless, at least one hundred twenty days before the current expiration date, the issuing institution notifies the owner or operator by certified mail of its decision not to renew the letter of credit. Under the terms of the letter of credit, the one hundred twenty days will

begin on the date when the owner or operator receives the notice, as evidenced by the return receipt.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-426, filed 11/28/90, effective 12/29/90.]

WAC 173-360-433 Trust fund. (1) An owner or operator may satisfy the requirements of WAC 173-360-406 by establishing a trust fund that conforms to the requirements of this section. The trustee shall be an entity that has the authority to act as a trustee and whose trust operations are regulated and examined by a federal agency or an agency of the state in which the fund is established.

(2) The wording of the trust agreement shall be identical to the wording specified in WAC 173-360-490, and shall be accompanied by a formal certification of acknowledgment as specified in WAC 173-360-493.

(3) The trust fund, when established, shall be funded for the full required amount of coverage, or funded for part of the required amount of coverage and used in combination with other mechanism(s) that provide the remaining required coverage.

(4) If the value of the trust fund is greater than the required amount of coverage, the owner or operator may submit a written request to the director for release of the excess.

(5) If other financial assurance as specified in WAC 173-360-400 through 173-360-499 is substituted for all or part of the trust fund, the owner or operator may submit a written request to the director for release of the excess.

(6) Within sixty days after receiving a request from the owner or operator for release of funds as specified in subsections (4) or (5) of this section, the director will instruct the trustee to release to the owner or operator such funds as the director specifies in writing.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-433, filed 11/28/90, effective 12/29/90.]

WAC 173-360-436 Standby trust fund. (1) An owner or operator using any one of the mechanisms authorized by WAC 173-360-416, 173-360-423, or 173-360-426 shall establish a standby trust fund when the mechanism is acquired. The trustee of the standby trust fund must be an entity that has the authority to act as a trustee and whose trust operations are regulated and examined by a federal agency or an agency of the state in which the fund is established.

(2)(a) The standby trust agreement or trust agreement shall be worded as set forth in WAC 173-360-490, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted.

(b) The standby trust agreement or trust agreement shall be accompanied by a formal certification of acknowledgment similar to that set forth in WAC 173-360-493.

(3) The director will instruct the trustee to refund the balance of the standby trust fund to the provider of financial assurance if the director determines that no additional corrective action costs or third-party liability claims will occur as a result of a release covered by the financial assurance mechanism for which the standby trust fund was established.

(4) An owner or operator may establish one trust fund as the depository mechanism for all funds assured in compliance with this rule.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-436, filed 11/28/90, effective 12/29/90.]

WAC 173-360-440 Substitution of financial assurance mechanisms by owner or operator. (1) An owner or operator may substitute any alternate financial assurance mechanisms as specified in WAC 173-360-400 through 173-360-499, provided that at all times he maintains an effective financial assurance mechanism or combination of mechanisms that satisfies the requirements of WAC 173-360-406.

(2) After obtaining alternate financial assurance as specified in WAC 173-360-400 through 173-360-499, an owner or operator may cancel a financial assurance mechanism by providing notice to the provider of financial assurance in accordance with requirements for cancellation set forth for the specific mechanism in WAC 173-360-470 through 173-360-490.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-440, filed 11/28/90, effective 12/29/90.]

WAC 173-360-443 Cancellation or nonrenewal by a provider of financial assurance. (1) Except as otherwise provided, a provider of financial assurance may cancel or fail to renew an assurance mechanism by sending a notice of termination by certified mail to the owner or operator.

(a) Termination of a guarantee, a surety bond, or a letter of credit may not occur until one hundred twenty days after the date on which the owner or operator receives the notice of termination, as evidenced by the return receipt.

(b) Termination of insurance or risk retention group coverage, except for nonpayment or misrepresentation by the insured, or state-funded assurance may not occur until sixty days after the date on which the owner or operator receives the notice of termination, as evidenced by the return receipt. Termination for nonpayment of premium or misrepresentation by the insured may not occur until a minimum of ten days after the date on which the owner or operator receives the notice of termination, as evidenced by the return receipt.

(2) If a provider of financial responsibility cancels or fails to renew for reasons other than incapacity of the provider as specified in WAC 173-360-446, the owner or operator shall obtain alternate coverage as specified in this section within sixty days after receipt of the notice of termination. If the owner or operator fails to obtain alternate coverage within sixty days after receipt of the notice of termination, the owner or operator shall notify the director of such failure and submit:

(a) The name and address of the provider of financial assurance;

(b) The effective date of termination; and

(c) The evidence of the financial assurance mechanism subject to the termination maintained in accordance with WAC 173-360-450(2).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-443, filed 11/28/90, effective 12/29/90.]

WAC 173-360-446 Reporting by owner or operator.

(1) An owner or operator shall submit the appropriate forms

listed in WAC 173-360-450(2) documenting current evidence of financial responsibility to the director:

(a) Within thirty days after the owner or operator identifies a release from an underground storage tank required to be reported under WAC 173-360-372, 173-360-375 or 173-360-399;

(b) If the owner or operator fails to obtain alternate coverage as required by WAC 173-360-400 through 173-360-499, within thirty days after the owner or operator receives notice of:

(i) Commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming a provider of financial assurance as a debtor, (ii) Suspension or revocation of the authority of a provider of financial assurance to issue a financial assurance mechanism, (iii) Failure of a guarantor to meet the requirements of the financial test, (iv) Other incapacity of a provider of financial assurance; or

(c) As required by WAC 173-360-413(7) and 173-360-443(2).

(2) An owner or operator shall certify compliance with the financial responsibility requirements of WAC 173-360-400 through 173-360-499 as specified in the new tank notification form when notifying the appropriate state or local agency of the installation of a new underground storage tank under WAC 173-360-200.

(3) The director may require an owner or operator to submit evidence of financial assurance as described in WAC 173-360-450(2) or other information relevant to compliance with WAC 173-360-400 through 173-360-499 at any time.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-446, filed 11/28/90, effective 12/29/90.]

WAC 173-360-450 Recordkeeping. (1) Owners or operators shall maintain evidence of all financial assurance mechanisms used to demonstrate financial responsibility under WAC 173-360-400 through 173-360-499 for an underground storage tank until released from the requirements of WAC 173-360-400 through 173-360-499 under 173-360-456. An owner or operator shall maintain such evidence at the underground storage tank site or the owner's or operator's place of business. Records maintained off-site shall be made available upon request of the department or delegated agency.

(2) An owner or operator shall maintain the following types of evidence of financial responsibility:

(a) An owner or operator using an assurance mechanism specified in WAC 173-360-413 through 173-360-433 shall maintain a copy of the instrument worded as specified.

(b) An owner or operator using a financial test or guarantee shall maintain a copy of the chief financial officer's letter based on year-end financial statements for the most recent completed financial reporting year. Such evidence shall be on file no later than one hundred twenty days after the close of the financial reporting year.

(c) An owner or operator using a guarantee, surety bond, or letter of credit shall maintain a copy of the signed standby trust fund agreement and copies of any amendments to the agreement.

(d) An owner or operator using an insurance policy or risk retention group coverage shall maintain a copy of the

signed insurance policy or risk retention group coverage policy, with the endorsement or certificate of insurance and any amendments to the agreements.

(e) An owner or operator covered by a financial assurance program shall maintain on file a copy of any evidence of coverage supplied by or required by the state.

(f) An owner or operator using an assurance mechanism specified in WAC 173-360-413 through 173-360-433 shall maintain an updated copy of a certification of financial responsibility worded as set forth in WAC 173-360-496, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted.

The owner or operator shall update this certification whenever the financial assurance mechanism(s) used to demonstrate financial responsibility change(s).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-450, filed 11/28/90, effective 12/29/90.]

WAC 173-360-453 Drawing on financial assurance mechanisms. (1) The director shall require the guarantor, surety, or institution issuing a letter of credit to place the amount of funds stipulated by the director, up to the limit of funds provided by the financial assurance mechanism, into the standby trust if:

(a)(i) The owner or operator fails to establish alternate financial assurance within sixty days after receiving notice of cancellation of the guarantee, surety bond, letter of credit, or, as applicable, other financial assurance mechanism; and

(ii) The director determines or suspects that a release from an underground storage tank covered by the mechanism has occurred and so notifies the owner or operator or the owner or operator has notified the director pursuant to WAC 173-360-360 through 173-360-375 or 173-360-399 of a release from an underground storage tank covered by the mechanism; or

(b) The conditions of subsection (2)(a), (b)(i) or (ii) of this section are satisfied.

(2) The director may draw on a standby trust fund when:

(a) The director makes a final determination that a release has occurred and immediate or long-term corrective action for the release is needed, and the owner or operator, after appropriate notice and opportunity to comply, has not conducted corrective action as required under WAC 173-360-399; or

(b) The director has received either:

(i) Certification from the owner or operator and the third-party liability claimant(s) and from attorneys representing the owner or operator and the third-party liability claimant(s) that a third-party liability claim should be paid. The certification shall be worded as set forth in WAC 173-360-499, except that instructions in brackets are to be replaced with the relevant information and the brackets deleted; or

(ii) A valid final court order establishing a judgment against the owner or operator for bodily injury or property damage caused by an accidental release from an underground storage tank covered by financial assurance under WAC 173-360-400 through 173-360-499 and the director determines that the owner or operator has not satisfied the judgment.

(3) If the director determines that the amount of corrective action costs and third-party liability claims eligible for payment under subsection (2) of this section may exceed the balance of the standby trust fund and the obligation of the provider of financial assurance, the first priority for payment shall be corrective action costs necessary to protect human health and the environment. The director shall pay third-party liability claims in the order in which the director receives certifications under subsection (2)(b)(i) of this section and valid court orders under subsection (2)(b)(ii) of this section.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-453, filed 11/28/90, effective 12/29/90.]

WAC 173-360-456 Release from the requirements.

An owner or operator is no longer required to maintain financial responsibility under WAC 173-360-400 through 173-360-499 for an underground storage tank after the tank has been properly closed or, if corrective action is required, after corrective action has been completed and the tank has been properly closed as required by WAC 173-360-380 through 173-360-398.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-456, filed 11/28/90, effective 12/29/90.]

WAC 173-360-460 Bankruptcy or other incapacity of owner or operator. (1) Within ten days after commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming an owner or operator as debtor, the owner or operator shall notify the director by certified mail of such commencement and submit the appropriate forms listed in WAC 173-360-450(2) documenting current financial responsibility.

(2) Within ten days after commencement of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming a guarantor providing financial assurance as debtor, such guarantor shall notify the owner or operator by certified mail of such commencement as required under the terms of the guarantee specified in WAC 173-360-416.

(3) An owner or operator who obtains financial assurance by a mechanism other than the financial test of self-insurance will be deemed to be without the required financial assurance in the event of a bankruptcy or incapacity of its provider of financial assurance, or a suspension or revocation of the authority of the provider of financial assurance to issue a guarantee, insurance policy, risk retention group coverage policy, surety bond, or letter of credit. The owner or operator shall obtain alternate financial assurance as specified in WAC 173-360-400 through 173-360-499 within thirty days after receiving notice of such an event. If the owner or operator does not obtain alternate coverage within thirty days after such notification, he shall notify the director.

(4) Within thirty days after receipt of notification that a state fund or other state assurance has become incapable of paying for assured corrective action or third-party compensation costs, the owner or operator shall obtain alternate financial assurance.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-460, filed 11/28/90, effective 12/29/90.]

WAC 173-360-463 Replenishment of guarantees, letters of credit, or surety bonds. (1) If at any time after a standby trust is funded upon the instruction of the director with funds drawn from a guarantee, letter of credit, or surety bond, and the amount in the standby trust is reduced below the full amount of coverage required, the owner or operator shall by the anniversary date of the financial mechanism from which the funds were drawn:

(a) Replenish the value of financial assurance to equal the full amount of coverage required, or (b) Acquire another financial assurance mechanism for the amount by which funds in the standby trust have been reduced.

(2) For purposes of this section, the full amount of coverage required is the amount of coverage to be provided by WAC 173-360-406. If a combination of mechanisms was used to provide the assurance funds which were drawn upon, replenishment shall occur by the earliest anniversary date among the mechanisms.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-463, filed 11/28/90, effective 12/29/90.]

WAC 173-360-466 Suspension of enforcement. Reserved.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-466, filed 11/28/90, effective 12/29/90.]

WAC 173-360-470 Appendix A—Letter from chief financial officer.

LETTER FROM CHIEF FINANCIAL OFFICER

I am the chief financial officer of [insert: name and address of the owner or operator, or guarantor]. This letter is in support of the use of [insert: "the financial test of self-insurance," and/or "guarantee"] to demonstrate financial responsibility for [insert: "taking corrective action" and/or "compensating third parties for bodily injury and property damage"] caused by [insert: "sudden accidental releases" and/or "nonsudden accidental releases"] in the amount of at least [insert: dollar amount] per occurrence and [insert: dollar amount] annual aggregate arising from operating (an) underground storage tank(s).

Underground storage tanks at the following facilities are assured by this financial test by this [insert: "owner or operator," and/or "guarantor"]: [List for each facility: The name and address of the facility where tanks assured by this financial test are located, and whether tanks are assured by this financial test. If separate mechanisms or combinations of mechanisms are being used to assure any of the tanks at this facility, list each tank assured by this financial test by the tank identification number provided in the notification submitted pursuant to WAC 173-360-200.]

A [insert: "financial test," and/or "guarantee"] is also used by this [insert: "owner or operator," or "guarantor"] to demonstrate evidence of financial responsibility in the following amounts under other EPA regulations or state programs authorized by EPA under 40 CFR Parts 271 and 145:

	Amount
EPA Regulations:	
Closure (264.143 and 265.143)	\$
Post-Closure Care (264.145 and 265.145)	\$
Liability Coverage (264.147 and 265.147)	\$
Corrective Action (264.101(b))	\$
Plugging and Abandonment (144.63)	\$

	Amount
Authorized state programs:	
Closure	\$
Post-Closure Care	\$
Liability Coverage	\$
Corrective Action	\$
Plugging and Abandonment	\$
TOTAL	\$

This [insert: "owner or operator," or "guarantor"] has not received an adverse opinion, a disclaimer of opinion, or a "going concern" qualification from an independent auditor on his financial statements for the latest completed fiscal year.

[Fill in the information for Alternative I if the criteria of WAC 173-360-413(2) are being used to demonstrate compliance with the financial test requirements. Fill in the information for Alternative II if the criteria of WAC 173-360-413(3) are being used to demonstrate compliance with the financial test requirements.]

ALTERNATIVE I

1. Amount of annual UST aggregate coverage being assured by a financial test, and/or guarantee . . . \$
 2. Amount of corrective action, closure and post-closure care costs, liability coverage, and plugging and abandonment costs covered by a financial test, and/or guarantee \$
 3. Sum of lines 1 and 2 \$
 4. Total tangible assets \$
 5. Total liabilities [if any of the amount reported on line 3 is included in total liabilities, you may deduct that amount from this line and add that amount to line 6] \$
 6. Tangible net worth [subtract line 5 from line 4] \$
- Yes No
7. Is line 6 at least \$10 million?
 8. Is line 6 at least 10 times line 3?
 9. Have financial statements for the latest fiscal year been filed with the Securities and Exchange Commission?
 10. Have financial statements for the latest fiscal year been filed with the Energy Information Administration?

11. Have financial statements for the latest fiscal year been filed with the Rural Electrification Administration?

12. Has financial information been provided to Dun and Bradstreet, and has Dun and Bradstreet provided a financial strength rating of 4A or 5A?

[Answer "Yes" only if both criteria have been met]

ALTERNATIVE II

1. Amount of annual UST aggregate coverage being assured by a financial test, and/or guarantee . . . \$
2. Amount of corrective action, closure and post-closure care costs, liability coverage, and plugging and abandonment costs covered by a financial test, and/or guarantee \$
3. Sum of lines 1 and 2 \$
4. Total tangible assets \$
5. Total liabilities [if any of the amount reported on line 3 is included in total liabilities, you may deduct that amount from this line and add that amount to line 6] \$
6. Tangible net worth [subtract line 5 from line 4] \$
7. Total assets in the U.S. [required only if less than 90 percent of assets are located in the U.S.] \$

Yes No

8. Is line 6 at least \$10 million?
 9. Is line 6 at least 6 times line 3?
 10. Are at least 90 percent of assets located in the U.S.? [If "No," complete line 11]
 11. Is line 7 at least 6 times line 3?
- [Fill in either lines 12-15 or lines 16-18:]
12. Current assets \$
 13. Current liabilities \$
 14. Net working capital [subtract line 13 from line 12] \$
- Yes No
15. Is line 14 at least 6 times line 3?
 16. Current bond rating of most recent bond issue
 17. Name of rating service
 18. Date of maturity of bond
 19. Have financial statements for the latest fiscal year been filed with the SEC, the Energy Information Administration, or the Rural Electrification Administration?

[If "No," please attach a report from an independent certified public accountant certifying that there are no material differences between the data as reported in lines 4-18 above and the financial statements for the latest fiscal year.]

[For both Alternative I and Alternative II complete the certification with this statement.]

I hereby certify that the wording of this letter is identical to the wording specified in WAC 173-360-470 as such regulations were constituted on the date shown immediately below.

[Signature]

[Name]

[Title]

[Date]

[Statutory Authority: Chapter 90.76 RCW, 90-24-017, § 173-360-470, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-473 Appendix B—Guarantee.

GUARANTEE

Guarantee made this [date] by name of guaranteeing entity, a business entity organized under the laws of (name of state), herein referred to as guarantor, to the Washington state department of ecology and to any and all third parties, and obligees, on behalf of [owner or operator] of [business address].

Recitals.

(1) Guarantor meets or exceeds the financial test criteria of WAC 173-360-413 (2) or (3) and (4) and agrees to comply with the requirements for guarantors as specified in WAC 173-360-416(2).

(2) [Owner or operator] owns or operates the following underground storage tank(s) covered by this guarantee: [List the number of tanks at each facility and the name(s) and address(es) of the facility(ies) where the tanks are located. If more than one instrument is used to assure different tanks at any one facility, for each tank covered by this instrument, list the tank identification number provided in the notification submitted pursuant to WAC 173-360-200, and the name and address of the facility.] This guarantee satisfies WAC 173-360-400 through 173-360-499 requirements for assuring funding for [insert: "Taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental releases"; if coverage is different for different tanks or locations, indicate the type of coverage applicable to each tank or location] arising from operating the above-identified underground storage tank(s) in the amount of [insert dollar amount] per occurrence and [insert dollar amount] annual aggregate.

(3) [Insert appropriate phrase: "On behalf of our subsidiary" (if guarantor is corporate parent of the owner or operator); "On behalf of our affiliate" (if guarantor is a related firm of the owner or operator); or "Incident to our business relationship with" (if guarantor is providing the guarantee as an incident to a substantial business relationship with owner or operator)] [owner or operator], guarantor

guarantees to the Washington state department of ecology and to any and all third parties that:

In the event that [owner or operator] fails to provide alternate coverage within 60 days after receipt of a notice of cancellation of this guarantee and the director of the Washington state department of ecology has determined or suspects that a release has occurred at an underground storage tank covered by this guarantee, the guarantor, upon instructions from the director, shall fund a standby trust fund in accordance with the provisions of WAC 173-360-453, in an amount not to exceed the coverage limits specified above.

In the event that the director determines that [owner or operator] has failed to perform corrective action for releases arising out of the operation of the above-identified tank(s) in accordance with WAC 173-360-399, the guarantor, upon written instructions from the director, shall fund a standby trust in accordance with the provisions of WAC 173-360-453, in an amount not to exceed the coverage limits specified above.

If [owner or operator] fails to satisfy a judgment or award based on a determination of liability for bodily injury or property damage to third parties caused by ["sudden" and/or "nonsudden"] accidental releases arising from the operation of the above-identified tank(s), or fails to pay an amount agreed to in settlement of a claim arising from or alleged to arise from such injury or damage, the guarantor, upon written instructions from the director, shall fund a standby trust in accordance with the provisions of WAC 173-360-453 to satisfy such judgment(s), award(s), or settlement agreement(s) up to the limits of coverage specified above.

(4) Guarantor agrees that if, at the end of any fiscal year before cancellation of this guarantee, the guarantor fails to meet the financial test criteria of WAC 173-360-413 (2) or (3) and (4), guarantor shall send within 120 days of such failure, by certified mail, notice to [owner or operator]. The guarantee will terminate 120 days from the date of receipt of the notice by [owner or operator], as evidenced by the return receipt.

(5) Guarantor agrees to notify [owner or operator] by certified mail of a voluntary or involuntary proceeding under Title 11 (Bankruptcy), U.S. Code, naming guarantor as debtor, within 10 days after commencement of the proceeding.

(6) Guarantor agrees to remain bound under this guarantee notwithstanding any modification or alteration of any obligation of [owner or operator] pursuant to chapter 173-360 WAC.

(7) Guarantor agrees to remain bound under this guarantee for so long as [owner or operator] shall comply with the applicable financial responsibility requirements of WAC 173-360-400 through 173-360-499 for the above-identified tank(s), except that guarantor may cancel this guarantee by sending notice by certified mail to [owner or operator], such cancellation to become effective no earlier than 120 days after receipt of such notice by [owner or operator], as evidenced by the return receipt.

(8) The guarantor's obligation does not apply to any of the following:

(a) Any obligation of [insert owner or operator] under a workers' compensation, disability benefits, or unemployment compensation law or other similar law;

(b) Bodily injury to an employee of [insert owner or operator] arising from, and in the course of, employment by [insert owner or operator];

(c) Bodily injury or property damage arising from the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle, or watercraft;

(d) Property damage to any property owned, rented, loaned to, in the care, custody, or control of, or occupied by [insert owner or operator] that is not the direct result of a release from a petroleum underground storage tank;

(e) Bodily damage or property damage for which [insert owner or operator] is obligated to pay damages by reason of the assumption of liability in a contract or agreement other than a contract or agreement entered into to meet the requirements of WAC 173-360-406.

(9) Guarantor expressly waives notice of acceptance of this guarantee by the Washington state department of ecology, by any or all third parties, or by [owner or operator].

I hereby certify that the wording of this guarantee is identical to the wording specified in WAC 173-360-473 as such regulations were constituted on the effective date shown immediately below.

Effective date:

[Name of guarantor]

[Authorized signature for guarantor]

[Name of person signing]

[Title of person signing]

Signature of witness or notary:

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-473, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-473, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-476 Appendix C—Endorsement.

ENDORSEMENT

Name: [Name of each covered location]

Address: [Address of each covered location]

Policy Number:

Period of Coverage: [Current policy period]

Name of [insurer or risk retention group]:

Address of [insurer or risk retention group]:

Name of insured:

Address of insured:

Endorsement:

1. This endorsement certifies that the policy to which the endorsement is attached provides liability insurance covering the following underground storage tanks:

[List the number of tanks at each facility and the name(s) and address(es) of the facility(ies) where the tanks are located. If more than one instrument is used to assure different tanks at any one facility, for each tank covered by this instrument, list the tank identification number provided in the notification submitted pursuant to WAC 173-360-200, and the name and address of the facility.]

for [insert: "taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental release"; in accordance with and subject to the limits of liability, exclusions,

conditions, and other terms of the policy; if coverage is different for different tanks or locations, indicate the type of coverage applicable to each tank or location] arising from operating the underground storage tank(s) identified above.

The limits of liability are [insert the dollar amount of the "each occurrence" and "annual aggregate" limits of the insurer's or group's liability; if the amount of coverage is different for different types of coverage or for different underground storage tanks or locations, indicate the amount of coverage for each type of coverage and/or for each underground storage tank or location], exclusive of legal defense costs, which are subject to a separate limit under the policy. This coverage is provided under [policy number]. The effective date of said policy is [date].

2. The insurance afforded with respect to such occurrences is subject to all of the terms and conditions of the policy; provided, however, that any provisions inconsistent with subsections (a) through (e) of this Paragraph 2 are hereby amended to conform with subsections (a) through (e):

a. Bankruptcy or insolvency of the insured shall not relieve the ["insurer" or "group"] of its obligations under the policy to which this endorsement is attached.

b. The ["insurer" or "group"] is liable for the payment of amounts within any deductible applicable to the policy to the provider of corrective action or a damaged third-party, with a right of reimbursement by the insured for any such payment made by the ["insurer" or "group"]. This provision does not apply with respect to that amount of any deductible for which coverage is demonstrated under another mechanism or combination of mechanisms as specified in WAC 173-360-413 through 173-360-433.

c. Whenever requested by the director of the Washington state department of ecology, the ["insurer" or "group"] agrees to furnish to the director a signed duplicate original of the policy and all endorsements.

d. Cancellation or any other termination of the insurance by the ["insurer" or "group"], except for nonpayment of premium or misrepresentation by the insured, will be effective only upon written notice and only after the expiration of 60 days after a copy of such written notice is received by the insured. Cancellation for nonpayment of premium or misrepresentation by the insured will be effective only upon written notice and only after expiration of a minimum of 10 days after a copy of such written notice is received by the insured.

[Insert for claims-made policies:

e. The insurance covers claims otherwise covered by the policy that are reported to the ["insurer" or "group"] within six months of the effective date of cancellation or nonrenewal of the policy except where the new or renewed policy has the same retroactive date or a retroactive date earlier than that of the prior policy, and which arise out of any covered occurrence that commenced after the policy retroactive date, if applicable, and prior to such policy renewal or termination date. Claims reported during such extended reporting period are subject to the terms, conditions, limits, including limits of liability, and exclusions of the policy.]

I hereby certify that the wording of this instrument is identical to the wording in WAC 173-360-476 and that the ["insurer" or "group"] is ["licensed to transact the business

of insurance or eligible to provide insurance as an excess or surplus lines insurer in one or more states").

[Signature of authorized representative of insurer or risk retention group]

[Name of person signing]

[Title of person signing], Authorized Representative of [name of insurer or risk retention group]

[Address of representative]

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-476, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-480 Appendix D—Certificate of insurance.

CERTIFICATE OF INSURANCE

Name: [Name of each covered location]

Address: [Address of each covered location]

Policy number:

Endorsement (if applicable):

Period of coverage: [Current policy period]

Name of [insurer or risk retention group]:

Address of [insurer or risk retention group]:

Name of insured:

Address of insured:

Certification:

1. [Name of insurer or risk retention group], [the "insurer" or "group"], as identified above, hereby certifies that it has issued liability insurance covering the following underground storage tank(s):

[List the number of tanks at each facility and the name(s) and address(es) of the facility(ies) where the tanks are located. If more than one instrument is used to assure different tanks at any one facility, for each tank covered by this instrument, list the tank identification number provided in the notification submitted pursuant to WAC 173-360-200, and the name and address of the facility].

for [insert: "Taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental releases"; in accordance with and subject to the limits of liability, exclusions, conditions, and other terms of the policy; if coverage is different for different tanks or locations, indicate the type of coverage applicable to each tank or location] arising from operating the underground storage tank(s) identified above.

The limits of liability are [insert the dollar amount of the "each occurrence" and "annual aggregate" limits of the insurer's or group's liability; if the amount of coverage is different for different types of coverage or for different underground storage tanks or locations, indicate the amount of coverage for each type of coverage and/or for each underground storage tank or location], exclusive of legal defense costs, which are subject to a separate limit under the policy. This coverage is provided under [policy number]. The effective date of said policy is [date].

2. The ["insurer" or "group"] further certifies the following with respect to the insurance described in Paragraph 1:

a. Bankruptcy or insolvency of the insured shall not relieve the ["insurer" or "group"] of its obligations under the policy to which this certificate applies.

b. The ["insurer" or "group"] is liable for the payment of amounts within any deductible applicable to the policy to the provider of corrective action or a damaged third-party, with a right of reimbursement by the insured for any such payment made by the ["insurer" or "group"]. This provision does not apply with respect to that amount of any deductible for which coverage is demonstrated under another mechanism or combination of mechanisms as specified in WAC 173-360-413 through 173-360-433.

c. Whenever requested by the director of the Washington state department of ecology, the ["insurer" or "group"] agrees to furnish the director a signed duplicate original of the policy and all endorsements.

d. Cancellation or any other termination of the insurance by the ["insurer" or "group"], except for nonpayment of premium or misrepresentation by the insured, will be effective only upon written notice and only after the expiration of 60 days after a copy of such written notice is received by the insured. Cancellation for nonpayment of premium or misrepresentation by the insured will be effective only upon written notice and only after expiration of a minimum of 10 days after a copy of such notice is received by the insured.

[Insert for claims-made policies:

e. The insurance covers claims otherwise covered by the policy that are reported to the ["insurer" or "group"] within six months of the effective date of the cancellation or nonrenewal of the policy except where the new or renewed policy has the same retroactive date or a retroactive date earlier than that of the prior policy, and which arise out of any covered occurrence that commenced after the policy retroactive date, if applicable, and prior to such policy renewal or termination date. Claims reported during such extended reporting period are subject to the terms, conditions, limits, including limits of liability, and exclusions of the policy.]

I hereby certify that the wording of this instrument is identical to the wording in WAC 173-360-480 and that the ["insurer" or "group"] is ["licensed to transact the business of insurance, or eligible to provide insurance as an excess or surplus lines insurer, in one or more states"].

[Signature of authorized representative of insurer]

[Type name]

[Title], authorized representative of [name of insurer or risk retention group]

[Address of representative]

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-480, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-480, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-483 Appendix E—Performance bond.

PERFORMANCE BOND

Date bond executed:

Period of coverage:

Principal: [Legal name and business address of owner or operator]

Type of organization: [Insert "individual," "joint venture," "partnership," or "corporation"]

State of incorporation (if applicable):

Surety(ies): [Name(s) and business address(es)]

Scope of coverage: [List the number of tanks at each facility and the name(s) and address(es) of the facility(ies) where the tanks are located. If more than one instrument is used to assure different tanks at any one facility, for each tank covered by this instrument, list the tank identification number provided in the notification submitted pursuant to WAC 173-360-200, and the name and address of the facility. List the coverage guaranteed by the bond: "Taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental releases" arising from operating the underground storage tank].

Penal sums of bond:

Per occurrence \$

Annual aggregate \$

Surety's bond number:

Know All Persons by These Presents, that we, the principal and surety(ies), hereto are firmly bound to the Washington state department of ecology, in the above penal sums for the payment of which we bind ourselves, our heirs, executors, administrators, successors, and assigns jointly and severally; provided that, where the surety(ies) are corporations acting as co-sureties, we, the Sureties, bind ourselves in such sums jointly and severally only for the purpose of allowing a joint action or actions against any or all of us, and for all other purposes each surety binds itself, jointly and severally with the principal, for the payment of such sums only as is set forth opposite the name of such surety, but if no limit of liability is indicated, the limit of liability shall be the full amount of the penal sums.

Whereas said principal is required under Subtitle I of the Resource Conservation and Recovery Act (RCRA), as amended, to provide financial assurance for [insert: "Taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental releases"; if coverage is different for different tanks or locations, indicate the type of coverage applicable to each tank or location] arising from operating the underground storage tanks identified above, and

Whereas said principal shall establish a standby trust fund as is required when a surety bond is used to provide such financial assurance;

Now, therefore, the conditions of the obligation are such that if the principal shall faithfully ["take corrective action, in accordance with WAC 173-360-399 and the director of the Washington state department of ecology's instructions for," and/or "compensate injured third parties for bodily injury and property damage caused by" either "sudden" or

"nonsudden" or "sudden and nonsudden"] accidental releases arising from operating the tank(s) identified above, or if the principal shall provide alternate financial assurance, as specified in WAC 173-360-400 through 173-360-499, within 120 days after the date the notice of cancellation is received by the principal from the surety(ies), then this obligation shall be null and void; otherwise it is to remain in full force and effect.

Such obligation does not apply to any of the following:

(1) Any obligation of [insert owner or operator] under a workers' compensation, disability benefits, or unemployment compensation law or other similar law;

(2) Bodily injury to an employee of [insert owner or operator] arising from, and in the course of, employment by [insert owner or operator];

(3) Bodily injury or property damage arising from the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle, or watercraft;

(4) Property damage to any property owned, rented, loaned to, in the care, custody, or control of, or occupied by [insert owner or operator] that is not the direct result of a release from a petroleum underground storage tank;

(5) Bodily injury or property damage for which [insert owner or operator] is obligated to pay damages by reason of the assumption of liability in a contract or agreement other than a contract or agreement entered into to meet the requirements of WAC 173-360-406.

The surety(ies) shall become liable on this bond obligation only when the principal has failed to fulfill the conditions described above.

Upon notification by the director of the Washington state department of ecology that the principal has failed to ["take corrective action, in accordance with WAC 173-360-399 and the director's instructions" and/or "compensate injured third parties"] as guaranteed by this bond, the surety(ies) shall either perform ["corrective action in accordance with WAC 173-360-399 and the director's instructions" and/or "third-party liability compensation"] or place funds in an amount up to the annual aggregate penal sum into the standby trust fund as directed by the director under WAC 173-360-453.

Upon notification by the director that the principal has failed to provide alternate financial assurance within 60 days after the date the notice of cancellation is received by the principal from the surety(ies) and that the director has determined or suspects that a release has occurred, the surety(ies) shall place funds in an amount not exceeding the annual aggregate penal sum into the standby trust fund as directed by the director under WAC 173-360-453.

The surety(ies) hereby waive(s) notification of amendments to applicable laws, statutes, rules, and regulations and agrees that no such amendment shall in any way alleviate its (their) obligation on this bond.

The liability of the surety(ies) shall not be discharged by any payment or succession of payments hereunder, unless and until such payment or payments shall amount in the annual aggregate to the penal sum shown on the face of the bond, but in no event shall the obligation of the surety(ies) hereunder exceed the amount of said annual aggregate penal sum.

The surety(ies) may cancel the bond by sending notice of cancellation by certified mail to the principal, provided,

however, that cancellation shall not occur during the 120 days beginning on the date of receipt of the notice of cancellation by the principal, as evidenced by the return receipt.

The principal may terminate this bond by sending written notice to the surety(ies).

In witness thereof, the principal and surety(ies) have executed this Bond and have affixed their seals on the date set forth above.

The persons whose signatures appear below hereby certify that they are authorized to execute this surety bond on behalf of the principal and surety(ies) and that the wording of this surety bond is identical to the wording specified in WAC 173- 360-483 as such regulations were constituted on the date this bond was executed.

PRINCIPAL

[Signature(s)]
[Name(s)]
[Title(s)]
[Corporate seal]

CORPORATE SURETY(IES)

[Name and address]
[State of incorporation:
[Liability limit: \$
[Signature(s)]
[Name(s) and title(s)]
[Corporate seal]

[For every co-surety, provide signature(s), corporate seal, and other information in the same manner as for surety above.]

Bond premium: \$

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-483, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-486 Appendix F—Irrevocable standby letter of credit.

IRREVOCABLE STANDBY LETTER OF CREDIT

[Name and address of issuing institution]
[Name and address of director of the Washington state department of ecology]

Dear Sir or Madam: We hereby establish our Irrevocable Standby Letter of Credit No. . . . in your favor, at the request and for the account of [owner or operator name] of [address] up to the aggregate amount of [in words] U.S. dollars (\$[insert dollar amount]), available upon presentation of

(1) your sight draft, bearing reference to this letter of credit, No. . . . , and

(2) your signed statement reading as follows: "I certify that the amount of the draft is payable pursuant to regulations issued under authority of Subtitle I of the Resource Conservation and Recovery Act of 1976, as amended."

This letter of credit may be drawn on to cover [insert: "taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental

releases" or "accidental releases"] arising from operating the underground storage tank(s) identified below in the amount of [in words] \$[insert dollar amount] per occurrence and [in words] \$[insert dollar amount] annual aggregate:

[List the number of tanks at each facility and the name(s) and address(es) of the facility(ies) where the tanks are located. If more than one instrument is used to assure different tanks at any one facility, for each tank covered by this instrument, list the tank identification number provided in the notification submitted pursuant to WAC 173-360-200, and the name and address of the facility.]

The letter of credit may not be drawn on to cover any of the following:

- (a) Any obligation of [insert owner or operator] under a workers' compensation, disability benefits, or unemployment compensation law or other similar law;
(b) Bodily injury to an employee of [insert owner or operator] arising from, and in the course of, employment by [insert owner or operator];
(c) Bodily injury or property damage arising from the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle, or watercraft;
(d) Property damage to any property owned, rented, loaned to, in the care, custody, or control of, or occupied by [insert owner or operator] that is not the direct result of a release from a petroleum underground storage tank;
(e) Bodily injury or property damage for which [insert owner or operator] is obligated to pay damages by reason of the assumption of liability in a contract or agreement other than a contract or agreement entered into to meet the requirements of WAC 173-360-406.

This letter of credit is effective as of [date] and shall expire on [date], but such expiration date shall be automatically extended for a period of [at least the length of the original term] on [expiration date] and on each successive expiration date, unless, at least 120 days before the current expiration date, we notify [owner or operator] by certified mail that we have decided not to extend this letter of credit beyond the current expiration date. In the event that [owner or operator] is so notified, any unused portion of the credit shall be available upon presentation of your sight draft for 120 days after the date of receipt by [owner or operator], as shown on the signed return receipt.

Whenever this letter of credit is drawn on under and in compliance with the terms of this credit, we shall duly honor such draft upon presentation to us, and we shall deposit the amount of the draft directly into the standby trust fund of [owner or operator] in accordance with your instructions.

We certify that the wording of this letter of credit is identical to the wording specified in WAC 173-360-486 as such regulations were constituted on the date shown immediately below.

[Signature(s) and title(s) of official(s) of issuing institution]

[Date]

This credit is subject to [insert "the most recent edition of the Uniform Customs and Practice for Documentary Credits, published by the International Chamber of Commerce," or "the Uniform Commercial Code"].

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-486, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-490 Appendix G—Trust agreement.

TRUST AGREEMENT

Trust agreement, the "agreement," entered into as of [date] by and between [name of the owner or operator], a Washington state [insert "corporation," "partnership," "association," or "proprietorship"], the "grantor," and [name of corporate trustee], [insert "Incorporated in the state of Washington" or "a national bank"], the "trustee."

Whereas, the department of ecology, "ecology", an agency of the state of Washington, has established certain regulations applicable to the grantor, requiring that an owner or operator of an underground storage tank shall provide assurance that funds will be available when needed for corrective action and third-party compensation for bodily injury and property damage caused by sudden and nonsudden accidental releases arising from the operation of the underground storage tank. The attached Schedule A lists the number of tanks at each facility and the name(s) and addresses of the facility(ies) where the tanks are located that are covered by the standby trust agreement.

[Whereas, the grantor has elected to establish [insert either "a guarantee," "surety bond," or "letter of credit"] to provide all or part of such financial assurance for the underground storage tanks identified herein and is required to establish a standby trust fund able to accept payments from the instrument (This paragraph is only applicable to the standby trust agreement.);

Whereas, the grantor, acting through its duly authorized officers, has selected the trustee to be the trustee under this agreement, and the trustee is willing to act as trustee;

Now, therefore, the grantor and the trustee agree as follows:

Section 1. Definitions. As used in this agreement:

(1) The term "grantor" means the owner or operator who enters into this agreement and any successors or assigns of the grantor.

(2) The term "trustee" means the trustee who enters into this agreement and any successor trustee.

Section 2. Identification of the Financial Assurance Mechanism. This agreement pertains to the [identify the financial assurance mechanism, either a guarantee, surety bond, or letter of credit, from which the standby trust fund is established to receive payments (This paragraph is only applicable to the standby trust agreement.)].

Section 3. Establishment of fund. The grantor and the trustee hereby establish a trust fund, the "fund," for the benefit of the Washington state department of ecology. The grantor and the trustee intend that no third party have access to the fund except as herein provided. [The fund is established initially as a standby to receive payments and shall not consist of any property.] Payments made by the provider of financial assurance pursuant to the director of the department of ecology's instruction are transferred to the trustee and are referred to as the fund, together with all earnings and profits thereon, less any payments or distributions made by the trustee pursuant to this agreement. The fund shall be held by the trustee, IN TRUST, as hereinafter

provided. The trustee shall not be responsible nor shall it undertake any responsibility for the amount or adequacy of, nor any duty to collect from the grantor as provider of financial assurance, any payments necessary to discharge any liability of the grantor established by the department of ecology.

Section 4. Payment for ["corrective action" and/or "third-party liability claims"]. The trustee shall make payments from the fund as the director of the department of ecology shall direct, in writing, to provide for the payment of the costs of [insert: "taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental releases"] arising from operating the tanks covered by the financial assurance mechanism identified in this agreement.

The fund may not be drawn upon to cover any of the following:

(a) Any obligation of [insert owner or operator] under a workers' compensation, disability benefits, or unemployment compensation law or other similar law;

(b) Bodily injury to an employee of [insert owner or operator] arising from, and in the course of, employment by [insert owner or operator];

(c) Bodily injury or property damage arising from the ownership, maintenance, use, or entrustment to others of any aircraft, motor vehicle, or watercraft;

(d) Property damage to any property owned, rented, loaned to, in the care, custody, or control of, or occupied by [insert owner or operator] that is not the direct result of a release from a petroleum underground storage tank;

(e) Bodily injury or property damage for which [insert owner or operator] is obligated to pay damages by reason of the assumption of liability in a contract or agreement other than a contract or agreement entered into to meet the requirements of WAC 173-360-406.

The trustee shall reimburse the grantor, or other persons as specified by the director from the fund for corrective action expenditures and/or third-party liability claims in such amounts as the director shall direct in writing. In addition, the trustee shall refund to the grantor such amounts as the director specifies in writing. Upon refund, such funds shall no longer constitute part of the fund as defined herein.

Section 5. Payments comprising the fund. Payments made to the trustee for the fund shall consist of cash and securities acceptable to the trustee.

Section 6. Trustee management. The trustee shall invest and reinvest the principal and income of the fund and keep the fund invested as a single fund, without distinction between principal and income, in accordance with general investment policies and guidelines which the grantor may communicate in writing to the trustee from time to time, subject, however, to the provisions of this section. In investing, reinvesting, exchanging, selling, and managing the fund, the trustee shall discharge his duties with respect to the trust fund solely in the interest of the beneficiaries and with the care, skill, prudence, and diligence under the circumstances then prevailing which persons of prudence, acting in a like capacity and familiar with such matters, would use in the conduct of an enterprise of a like character and with like aims; except that:

(a) Securities or other obligations of the grantor, or any other owner or operator of the tanks, or any of their affiliates as defined in the Investment Company Act of 1940, as amended, 15 U.S.C. 80a-2(1), shall not be acquired or held, unless they are securities or other obligations of the federal or a state government;

(b) The trustee is authorized to invest the fund in time or demand deposits of the trustee, to the extent insured by an agency of the federal or state government; and

(c) The trustee is authorized to hold cash awaiting investment or distribution uninvested for a reasonable time and without liability for the payment of interest thereon.

Section 7. Commingling and investment. The trustee is expressly authorized in its discretion:

(a) To transfer from time to time any or all of the assets of the fund to any common, commingled, or collective trust fund created by the trustee in which the fund is eligible to participate, subject to all of the provisions thereof, to be commingled with the assets of other trusts participating therein; and

(b) To purchase shares in any investment company registered under the Investment Company Act of 1940, 15 U.S.C. 80a-1 et seq., including one which may be created, managed, underwritten, or to which investment advice is rendered or the shares of which are sold by the trustee. The trustee may vote such shares in its discretion.

Section 8. Express powers of trustee. Without in any way limiting the powers and discretions conferred upon the trustee by the other provisions of this agreement or by law, the trustee is expressly authorized and empowered:

(a) To sell, exchange, convey, transfer, or otherwise dispose of any property held by it, by public or private sale. No person dealing with the trustee shall be bound to see to the application of the purchase money or to inquire into the validity or expediency of any such sale or other disposition;

(b) To make, execute, acknowledge, and deliver any and all documents of transfer and conveyance and any and all other instruments that may be necessary or appropriate to carry out the powers herein granted;

(c) To register any securities held in the fund in its own name or in the name of a nominee and to hold any security in bearer form or in book entry, or to combine certificates representing such securities with certificates of the same issue held by the trustee in other fiduciary capacities, or to deposit or arrange for the deposit of such securities in a qualified central depository even though, when so deposited, such securities may be merged and held in bulk in the name of the nominee of such depository with other securities deposited therein by another person, or to deposit or arrange for the deposit of any securities issued by the United States Government, or any agency or instrumentality thereof, with a Federal Reserve bank, but the books and records of the trustee shall at all times show that all such securities are part of the fund;

(d) To deposit any cash in the fund in interest-bearing accounts maintained or savings certificates issued by the trustee, in its separate corporate capacity, or in any other banking institution affiliated with the trustee, to the extent insured by an agency of the federal or state government; and

(e) To compromise or otherwise adjust all claims in favor of or against the fund.

Section 9. Taxes and expenses. All taxes of any kind that may be assessed or levied against or in respect of the fund and all brokerage commissions incurred by the fund shall be paid from the fund. All other expenses incurred by the trustee in connection with the administration of this trust, including fees for legal services rendered to the trustee, the compensation of the trustee to the extent not paid directly by the grantor, and all other proper charges and disbursements of the trustee shall be paid from the fund.

Section 10. Advice of counsel. The trustee may from time to time consult with counsel, who may be counsel to the grantor, with respect to any questions arising as to the construction of this agreement or any action to be taken hereunder. The trustee shall be fully protected, to the extent permitted by law, in acting upon the advice of counsel.

Section 11. Trustee compensation. The trustee shall be entitled to reasonable compensation for its services as agreed upon in writing from time to time with the grantor.

Section 12. Successor trustee. The trustee may resign or the grantor may replace the trustee, but such resignation or replacement shall not be effective until the grantor has appointed a successor trustee and this successor accepts the appointment. The successor trustee shall have the same powers and duties as those conferred upon the trustee hereunder. Upon the successor trustee's acceptance of the appointment, the trustee shall assign, transfer, and pay over to the successor trustee the funds and properties then constituting the fund. If for any reason the grantor cannot or does not act in the event of the resignation of the trustee, the trustee may apply to a court of competent jurisdiction for the appointment of a successor trustee or for instructions. The successor trustee shall specify the date on which it assumes administration of the trust in writing sent to the grantor and the present trustee by certified mail 10 days before such change becomes effective. Any expenses incurred by the trustee as a result of any of the acts contemplated by this section shall be paid as provided in section 9.

Section 13. Instructions to the trustee. All orders, requests, and instructions by the grantor to the trustee shall be in writing, signed by such persons as are designated in the attached Schedule B or such other designees as the grantor may designate by amendment to Schedule B. The trustee shall be fully protected in acting without inquiry in accordance with the grantor's orders, requests, and instructions. All orders, requests, and instructions by the director of the Washington state department of ecology to the trustee shall be in writing, signed by the director, and the trustee shall act and shall be fully protected in acting in accordance with such orders, requests, and instructions. The trustee shall have the right to assume, in the absence of written notice to the contrary, that no event constituting a change or a termination of the authority of any person to act on behalf of the grantor or the director, hereunder has occurred. The trustee shall have no duty to act in the absence of such orders, requests, and instructions from the grantor and/or the director, except as provided for herein.

Section 14. Amendment of agreement. This agreement may be amended by an instrument in writing executed by the grantor and the trustee, or by the trustee and the director of the department of ecology, if the grantor ceases to exist.

Section 15. Irrevocability and termination. Subject to the right of the parties to amend this agreement as provided

in Section 14, this trust shall be irrevocable and shall continue until terminated at the written direction of the grantor and the trustee, or by the trustee and the director of the department of ecology, if the grantor ceases to exist. Upon termination of the trust, all remaining trust property, less final trust administration expenses, shall be delivered to the grantor.

Section 16. Immunity and indemnification. The trustee shall not incur personal liability of any nature in connection with any act or omission, made in good faith, in the administration of this trust, or in carrying out any directions by the grantor or the director of the department of ecology, issued in accordance with this agreement. The trustee shall be indemnified and saved harmless by the grantor, from and against any personal liability to which the trustee may be subjected by reason of any act or conduct in its official capacity, including all expenses reasonably incurred in its defense in the event the grantor fails to provide such defense.

Section 17. Choice of law. This agreement shall be administered, construed, and enforced according to the laws of the state of Washington, or the Comptroller of the Currency in the case of National Association banks.

Section 18. Interpretation. As used in this agreement, words in the singular include the plural and words in the plural include the singular. The descriptive headings for each section of this agreement shall not affect the interpretation or the legal efficacy of this agreement.

In witness whereof the parties have caused this agreement to be executed by their respective officers duly authorized and their corporate seals (if applicable) to be hereunto affixed and attested as of the date first above written. The parties below certify that the wording of this agreement is identical to the wording specified in WAC 173-360-490 as such regulations were constituted on the date written above.

[Signature of grantor]
[Name of the grantor]
[Title]

Attest:

[Signature of trustee]
[Name of the trustee]
[Title]
[Seal]

Attest:

[Signature of witness]
[Name of witness]
[Title]
[Seal]

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-490, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-493 Appendix H—Certification of acknowledgment.

State of Washington
County of

On this [date], before me personally came [owner or operator] to me known, who, being by me duly sworn, did depose and say that she/he resides at [address], that she/he

is [title] of [corporation], the corporation described in and which executed the above instrument; that she/he knows the seal of said corporation; that the seal affixed to such instrument is such corporate seal; that it was so affixed by order of the board of directors of said corporation; and that she/he signed her/his name thereto by like order.

[Signature of notary public]
[Name of notary public]

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-493, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-496 Appendix I—Certification of financial responsibility.

CERTIFICATION OF FINANCIAL RESPONSIBILITY

[Owner or operator] hereby certifies that it is in compliance with the requirements of WAC 173-360-400 through 173-360-499.

The financial assurance mechanism[s] used to demonstrate financial responsibility under WAC 173-360-400 through 173-360-499 is [are] as follows:

[For each mechanism, list the type of mechanism, name of issuer, mechanism number (if applicable), amount of coverage, effective period of coverage and whether the mechanism covers "taking corrective action" and/or "compensating third parties for bodily injury and property damage caused by" either "sudden accidental releases" or "nonsudden accidental releases" or "accidental releases."]

[Signature of owner or operator]
[Name of owner or operator]
[Title]
[Date]
[Signature of witness or notary]
[Name of witness or notary]
[Date]

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-496, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

WAC 173-360-499 Appendix J—Certification of valid claim.

CERTIFICATION OF VALID CLAIM

The undersigned, as principals and as legal representatives of [insert owner or operator] and [insert name and address of third-party claimant], hereby certify that the claim of bodily injury [and/or] property damage caused by an accidental release arising from operating [owner's or operator's] underground storage tank should be paid in the amount of \$[. . .].

[Signatures]	[Signature(s)]
Owner or Operator	Claimant(s)
Attorney for	Attorney(s) for
Owner or Operator	Claimant(s)
(Notary) Date	(Notary) Date

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-499, filed 11/28/90, effective 12/29/90.]

Reviser's note: The brackets and enclosed material in the text of the above section occurred in the copy filed by the agency.

PART V LOCAL PROGRAMS

Note: RCW 90.76.110 states that the rules adopted under chapter 90.76 RCW preempt and supersede any state or local underground storage tank law, ordinance, or resolution governing any aspect of regulation covered by these regulations. Exceptions are: (1) Local laws, ordinances, and resolutions pertaining to local authority to take immediate action in response to a release of a regulated substance; (2) local laws, ordinances, and resolutions pertaining to permits and fees for the use of underground storage tanks in street right of ways that were in existence prior to July 1, 1990; and (3) underground storage tank ordinances that are more stringent than the federal regulations and the uniform codes adopted under chapter 19.27 RCW and that were in effect on November 1, 1988. These cities, towns, and counties were required by the statute to notify the department of the existence of that ordinance by July 1, 1989. The department has received notification from: City of Spokane, Spokane County, Tacoma-Pierce County, city of Redmond, and city of Renton.

WAC 173-360-500 Local delegation of underground storage tank programs. (1) The department encourages the delegation of underground storage tank program responsibilities to a qualified city, town, or county.

(2) A city, town, or county may apply to the department for delegation of authority to enforce, within its jurisdictional boundaries, the state underground storage tank regulations included in part or all of WAC 173-360-100 through 173-360-399.

(3) A fire protection district or political subdivision may enter into an agreement under chapter 39.34 RCW with a city, town, or county to assume all or a portion of delegated program responsibilities. Department approval shall be obtained prior to the effective date of such agreement, and such agreement shall be part of the city, county, or town's agreement or contract with the department.

(4) A city, town, or county seeking delegation of underground storage tank program activities shall submit a written application to the department, describing the portions of the state program for which delegation is sought. The application shall contain the following:

(a) A description of the scope, structure, and procedures of the proposed program; and

(b) A description, including an organization chart, of the local agency which will operate the program, including:

(i) The number of employees, occupation and general duties of each employee who will carry out the activities of the program;

(ii) An estimate of the cost of establishing and administering the program, including the cost of personnel listed in (b)(i) of this subsection, as well as administrative and technical support.

(5) Within thirty days after receiving the application, the department will review the application for completeness and request any additional information needed in order for the application to be complete.

(6) The department will begin negotiating with the applicant within thirty days of receiving a complete application, in order to establish the following:

(a) The source and amount of funding available to meet the costs listed in subsection (4)(b)(ii) of this section, including any restrictions or limitation upon this funding;

(b) The applicable procedures, including any required permit procedures;

(c) Permit forms, application forms, and reporting forms that will be used in the program;

(d) The methods to be used to assure compliance and enforcement of the program; and

(e) The procedures to be used to coordinate information with the department, including the frequency of reporting and report content.

(7) After finalizing the items listed in subsection (6) of this section, the department will prepare and mail a written agreement or contract to the applicant, which outlines the terms and conditions under which the department will delegate the state underground storage tank program, or portions of the state program, to the applicant. The applicant must sign and return the agreement or contract to the department in order for the agreement or contract to become effective.

(8) In developing agreements or contracts with local governments, the department shall, if possible, provide for an appropriate distribution of resources collected under RCW 90.76.090, while still enabling the department to operate a state program.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-500, filed 11/28/90, effective 12/29/90.]

WAC 173-360-510 Environmentally sensitive areas.

(1) An environmentally sensitive area is an area, proposed by a city, town or county, and designated by the department, which possesses physical characteristics that make it especially vulnerable to threats from leaking underground storage tanks, and in which local underground storage tank requirements more stringent than state-wide requirements are necessary.

(2) Any city, town, or county may apply to the department to have an area within its jurisdictional boundaries designated an environmentally sensitive area. A city, town, or county may submit a joint application with any other city, town, or county for joint administration under chapter 39.34 RCW of a single environmentally sensitive area located in both jurisdictions.

(3) An area that has been designated a sensitive area for the purposes of protecting ground water or surface water from pollution under another statute or regulation will, upon request for designation by the local government, be approved as an environmentally sensitive area for the purposes of WAC 173-360-510. Those areas may include, but are not limited to:

(a) An aquifer identified as the primary source of supply for public water supply systems;

(b) An aquifer underlying a critical water supply service area where the coordinated water system plan established pursuant to chapter 70.116 RCW has identified a need for a ground water management program;

(c) An aquifer designated as a sole source aquifer by the Federal Environmental Protection Agency;

(d) An area designated a certified ground water management area identified under chapter 173-100 WAC; and

(e) An area designated an aquifer protection area, under chapter 36.36 RCW.

(4) The agency requesting designation shall comply with WAC 173-360-530.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-510, filed 11/28/90, effective 12/29/90.]

WAC 173-360-520 Physical criteria for environmentally sensitive areas. Except as provided for in WAC 173-360-510(3), environmentally sensitive areas shall be designated based on the criteria established by the department. One or more of the criteria shall be present and the department will evaluate the application for designation based on the overall sensitivity of the environment and consistency with WAC 173-360-510(1). Those criteria include, but are not limited to:

(1) Ground water that is vulnerable to pollution because of specific hydrogeological characteristics, including but not limited to, recharge areas, permeability, precipitation, direction and quantity of ground water flow, and presence of aquitards;

(2) Proximity to wetlands;

(3) Being located within a 100-year flood plain; or

(4) Proximity to other surface waters that can be shown to have a hydrogeologic link to such ground water as is described in subsection (1) of this section, underlying an area where underground storage tank systems are installed or may be installed, if a leak from such a system has a reasonable chance of reaching ground water.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-520, filed 11/28/90, effective 12/29/90.]

WAC 173-360-530 Application for designation of environmentally sensitive area and approval of local regulations. (1) Designation of an environmentally sensitive area under this chapter is solely for the purposes of implementing chapter 90.76 RCW, and such designation under chapter 90.76 RCW does not establish an environmentally sensitive area under any other law.

(2) The application for designation of an environmentally sensitive area shall consist of a concise, factual report and shall consider the guidelines and criteria set forth in WAC 173-360-520. The local government applicant shall provide sufficient information for the department to determine if the area should be so designated. Information provided by the applicant shall include, but need not be limited to, the following:

(a) A rationale for the proposed designation;

(b) A description of any underground water resource included within the proposed environmentally sensitive area;

(c) The geographic limits of the area where more stringent underground storage tank standards would be required;

(d) Any available maps of the aquifer and recharge area, including water table;

(e) A map of the area to be designated;

(f) A description of the more stringent underground storage tank standards proposed to be required in the area, including underground storage tank technical standards, operating standards, and administrative procedures. When

proposing more stringent standards, the local jurisdiction should consider:

(i) Actions already undertaken by owners or operators to upgrade existing underground storage tank systems to federal or state standards, and the economic impacts of requiring already upgraded systems to meet more stringent standards; and

(ii) The possible impacts of contaminated ground water on human health and the environment and whether underground storage tank systems which have already been upgraded under the requirements of the state or federal rules will effectively prevent leaks which may contaminate ground water.

(g) A description of any other measures in place or considered to protect ground water and/or surface water from environmental threats;

(h) Any written comments submitted by members of the public to the local government regarding the proposed designation of an environmentally sensitive area; and

(i) Documentation of coordination with affected state and local agencies and water user groups.

(3) Additional information may be required by the department if necessary to adequately evaluate the proposal. This information may include, but is not limited to, the following:

(a) The geographic limits of the ground water recharge zone;

(b) The geographic limits of the underground water resource;

(c) The geology within both the recharge zone and the underground water resource;

(d) Location, yield, well depth and present use of wells within the limits of the threatened underground water resource;

(e) Estimated capacity of the underground water resource;

(f) Location, type and number of underground storage tanks existing in the proposed area;

(g) Such other information the department deems necessary.

(4) Prior to submitting the request for designation and approval of more stringent standards to the department, the local government applicant shall hold at least one public hearing for the purpose of receiving comments from the public, affected local, state, and tribal agencies and ground water user groups, regarding the designation proposal. The local government shall provide adequate notice to affected parties.

The local government applicant shall submit the application for designation and approval of more stringent standards to the department and other affected agencies and ground water user groups for their review and comment. Comments shall be submitted to the department.

(5) Within thirty days after receiving the application, the department will review the application for completeness and request any additional information needed in order for the application to be complete.

(a) Prior to approval of the application, the department may, at its discretion, hold a public hearing in the jurisdiction where the environmentally sensitive area is proposed.

(b) The department shall approve or disapprove the application for designation as an environmentally sensitive

area based upon review of the application, comments received, whether the proposed area meets the guidelines and criteria of WAC 173-360-520 and 173-360-530, and whether the proposed local ordinance or resolution is reasonably consistent with previously approved local regulations for similar environmentally sensitive areas.

(6) If application for the designation of an environmentally sensitive area is made later than five years after the date of final adoption of these rules, proposed local ordinances and resolutions shall only apply to new underground storage tank installations.

Ordinances and resolutions described under subsection (1) of this section and disapproved by the department may be modified by the local government and resubmitted to the department for approval.

(7) Proposed local ordinances and resolutions shall become effective when approved by the department.

(8) A local jurisdiction with an approved ordinance or resolution under this chapter may establish local tank fees, in an amount not to exceed fifty percent of the annual state tank fee, if the fee is necessary for enhanced program administration or enforcement. Pursuant to RCW 90.76.090, the fee shall be collected and deposited into the state underground storage tank account.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-530, filed 11/28/90, effective 12/29/90.]

**PART VI
REGISTRATION AND LICENSING
REQUIREMENTS FOR UNDERGROUND STORAGE
TANK SERVICE PROVIDERS AND SERVICE
SUPERVISORS**

Note: Individuals who perform underground tank services may be subject to additional state laws and regulations. These include, but may not be limited to:

- (1) Chapter 18.27 RCW and chapter 296-200 WAC, which apply to individuals who are general and specialty contractors;
- (2) Chapter 18.104 RCW and chapter 173-162 WAC, which apply to individuals who install ground water monitoring wells;
- (3) Chapter 19.28 RCW, chapters 296-46 and 296-40 WAC, which apply to individuals who install and repair impressed current cathodic protection systems; and
- (4) Chapter 49.17 RCW and chapter 296-62 WAC, which apply to individuals engaged in activities involving hazardous chemicals and substances and who perform confined space entry during field activities, and chapter 296-155 WAC, which sets forth safety standards for construction work.

WAC 173-360-600 Purpose of Part VI. The purpose of WAC 173-360-600 through 173-360-690 is to regulate firms and persons that service and inspect underground storage tank systems in order to assure that underground storage tank systems are being serviced in a manner which will protect human health and the environment.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-600, filed 11/28/90, effective 12/29/90.]

WAC 173-360-610 Scope. (1) WAC 173-360-610 through 173-360-690 establishes requirements for:

(a) Registration and licensing of firms that perform services on underground storage tank systems;

(b) Examination, qualification, and licensing of persons who supervise the performance of underground storage tank system service;

(c) Examination and licensing of persons conducting underground storage tank system inspections for determination of compliance with the state underground storage tank regulations; and

(d) Administration and enforcement of these rules by the department.

(2) Except as specified in WAC 173-360-655, 173-360-610 through 173-360-690 applies to any person or firm who performs the installation, retrofitting, decommissioning, testing, site check, site assessment, and inspection for compliance with state regulations, by any person, of underground storage tanks regulated by chapter 90.76 RCW.

(3) A site assessment or site check shall only be performed by a hydrogeologist, geologist, licensed professional engineer, professional soil scientist, certified ground water professional or other person whose experience, education, and/or training meet criteria established by the department. A person performing site assessments and site checks must register with the department on a form provided by the department. No license is required for this activity.

(4) The requirements of this licensing program do not apply to persons performing the activities specified in subsection (2) of this section for tanks which are exempt or deferred from the UST rule, as provided in WAC 173-360-110 (1) and (2).

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-610, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-610, filed 11/28/90, effective 12/29/90.]

WAC 173-360-630 Registration and licensing of tank service providers. (1) Only firms that are licensed by the department shall perform tank services in the state of Washington.

(2) Application for a license shall be accomplished by:

(a) Completing an application form provided by the department, including submission of the following information to the department:

(i) The name, address, and telephone number of the firm;

(ii) The nature of the tank services to be offered;

(iii) A summary of the recent project history of the firm (the two-year period immediately preceding the application) including the number of projects completed by the firm in each tank services category and identification of any other industry or government licenses held by the firm related to specific tank services;

(iv) Identifying the names of employees or principals responsible for on-site project supervision; and

(b) Including a signed statement that certifies that:

"I (name), am the chief executive officer of (company) and do hereby certify that I will comply with the applicable laws, and rules, and procedures pertaining to the regulation of underground storage tanks in the state of Washington and will direct the employees and principals of this company to perform the tank services rendered by this company in a manner that is consistent with these requirements."

(3) Only tank services providers who have obtained a license from the department may install, retrofit, test,

decommission, or inspect for the purpose of determining compliance with state regulations, an underground storage tank system in the state of Washington.

(4) An application for a tank services provider license must be submitted to the department and must include:

(a) The information required by subsection (2)(a) and (b) of this section;

(b) A list of employees licensed by the department to supervise tank services, and identification of the specific tank services for which they are licensed; the date the employee received a license from the department; and the license number of the employee.

(5) The department will review the license application for completeness. If the application is incomplete, the department shall notify the applicant of the deficiencies. The department shall deny, in writing, a license to an applicant who has not satisfied the license application requirements. The department shall issue a license to the applicant after approving the application.

(6) The department shall issue licenses for a period not to exceed two years.

(7) Renewals:

(a) License renewals must be applied for in the same manner as is required for an initial license, pursuant to subsection (4) of this section.

(b) The complete license renewal application shall be submitted to the department no later than thirty days prior to the expiration date of the current license.

(8) The department may suspend or revoke a license if the tank services provider:

(a) Fraudulently obtains or attempts to obtain a license;

(b) Fails at any time to satisfy the requirements for a license or comply with any rules or procedures adopted by the department;

(c) Fails to meet any applicable state or federal standard relating to the service performed under the license; or

(d) Fails to employ and designate a licensed supervisor for each underground storage tank project which is directly overseen by the tank services provider.

(9) A tank services provider who has a license suspended or revoked may reapply for a license after demonstrating to the department that the cause of the revocation has been resolved.

(10) In the event a tank services provider no longer employs a supervisor licensed to perform a particular tank service, the tank services provider must stop providing this service on any regulated underground storage tank system. Work involving this service shall not start until a supervisor licensed for the particular service is again employed by the provider and written notice of the hiring of a licensed supervisor is received by the department.

(11) Any tank services provider licensed by the department under the provisions of this chapter shall:

(a) Comply with WAC 173-360-600 through 173-360-690;

(b) Maintain a current address on file with the department; and

(c) Comply with all federal and state regulations and procedures when performing tank services.

(12)(a) A checklist must be completed for each regulated activity performed. The service provider shall submit the checklist to the department within thirty days following the

completion of an underground storage tank installation, retrofit, decommissioning, or test, using the appropriate form provided by the department. The checklist must be signed by the owner or operator, by an executive officer of the service provider firm, or his or her designee, and by the licensed tank services supervisor.

(b) A checklist must be completed for each site check or site assessment performed. The person performing the site check or site assessment shall submit the checklist to the department within thirty days following the completion of the site check or site assessment. A checklist for a site check or site assessment must be signed by the person registered to perform site assessments (rather than a licensed supervisor) and an executive officer of the firm or his or her designee, and the tank owner or operator.

(c) The firm shall submit an as-built site plan, showing the location of completed tank system installations or retrofitted tank system, including adjacent structures, if present. The as-built site plan shall be submitted on the appropriate form provided by the department, or shall be an 8 1/2 inch by 11 inch single page drawing.

(13) A licensed tank services provider, or person qualified to conduct a site assessment or site check shall report to the department and the tank owner or operator the existence of any confirmed release from an underground tank system that poses a threat to human health and the environment. This report shall be provided to the tank owner or operator immediately, and to the department within seventy-two hours of the discovery of the condition. If the owner or operator are not immediately available, the report should be made immediately to the department.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-630, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-630, filed 11/28/90, effective 12/29/90.]

WAC 173-360-640 Types of licenses. (1) The department will issue the following five separate licenses:

(a) Tank services provider;

(b) Supervision of tank installation and retrofitting;

(c) Supervision of tank decommissioning;

(d) Supervision of tightness testing; and

(e) Supervision of cathodic protection installation and testing.

(2) A tank services supervisor must pass an examination and obtain a license for each activity that person intends to supervise. A firm which obtains a tank services provider license may provide all authorized tank services.

(3) A license will be issued to firms and individuals who meet the qualification requirements of WAC 173-360-630 (2)(a) and (b) or 173-360-650(4), whichever is applicable.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-640, filed 11/28/90, effective 12/29/90.]

WAC 173-360-650 Examination and licensing of tank services supervisors. (1) A licensed tank services supervisor shall be present on site at all times tank service activities are being carried out at a tank installation, retrofit, testing, or decommissioning project unless otherwise determined by the department. These tasks may include but may not be limited to:

(a) Preparing the excavation immediately prior to receiving backfill and placement of the tank into the excavation;

(b) Any movement of the tank vessel, including but not limited to transferring the vessel from the vehicle used to transport it to the project site;

(c) Setting the tank and its associated piping into the excavation, including placing any anchoring devices and strapping, if any, and backfilling to the level of the tank;

(d) Placing and connecting the piping system to the tank vessel;

(e) Installing cathodic protection systems;

(f) All pressure testing of the underground storage tank system, including associated piping, performed during the installation or retrofitting;

(g) Completing the backfill and filling of the installation;

(h) Evaluating preparation for and installing any tank lining system;

(i) Tank purging or inerting;

(j) Removal of the tank, removal of sludge from the tank, and cleaning of the tank;

(k) Removing flammable vapors from tanks;

(l) Excavating around tanks for removal;

(m) Field installation and operational testing of cathodic protection systems;

(n) Inspecting of existing tank and piping systems for corrosion;

(o) Tank or line tightness testing;

(p) Inspection of existing tanks for structural integrity; and

(q) Inspection of existing tank and piping systems for the purpose of determining compliance with the Washington state underground storage tank regulations; and

(r) Installation of release detection equipment.

(2) If a licensed supervisor, or person registered as a site assessor, obtains knowledge, in the course of performing regulated activities, that a regulated underground storage tank has not been registered with the department, or is otherwise out of compliance with the requirements of this chapter, the individual shall inform the tank owner or operator of the notification requirement and any other applicable requirements.

(3) Only persons licensed by the department under this section may perform the duties of a tank services supervisor.

(4) To obtain a license from the department as a tank services supervisor, a person shall take and pass a qualifying examination approved by the department.

(5) Twice each year the department shall offer a qualifying examination for any person who wishes to become licensed to install, remove, test, or retrofit underground storage tank systems. Not less than thirty days prior to offering an examination, the department shall prepare and make available to interested persons, a study guide which may include sample examination questions. The department shall develop and administer the qualifying examinations in a manner consistent with the objectives of this section.

(6) An application for a supervisor examination and license shall be submitted to the department on a form provided at least forty-five days prior to the date of the qualifying examination.

(7) A tank services supervisor license is valid for a period not to exceed two years after the date of issue. Upon issuance of a supervisor's license, the department shall issue an identification card showing the license number and license expiration date to the successful applicant.

The supervisor's license identification card shall be available for inspection at any project site supervised by the licensee.

(8) License renewals shall be applied for in the same manner as the original license, including taking a qualifying examination.

(9) The department may suspend or revoke a supervisor's license for failure to comply with any state or federal law, regulation, or procedure pertaining to underground storage tanks.

(10) If a supervisor's license is revoked, that person may not apply for another supervisor license prior to ninety days after the revocation date.

(11) The requirements of this section are in addition to and not in lieu of any other licensing and registration requirement imposed by other laws or regulations.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-650, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-650, filed 11/28/90, effective 12/29/90.]

WAC 173-360-655 Examination and licensing of persons who perform inspections. Only persons who have the appropriate supervisor license shall conduct underground storage tank system inspections for the purpose of determining compliance with the Washington state underground storage tank regulations. Persons wishing to obtain such a license shall comply with the requirements of WAC 173-360-650. This requirement applies only to inspectors who are employed by the department or by an agency which has received delegation of regulatory authority from the department.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-655, filed 10/29/91, effective 11/29/91; 90-24-017, § 173-360-655, filed 11/28/90, effective 12/29/90.]

WAC 173-360-660 Study guide fees. The department shall make examination study guides available to the public for a fee of ten dollars for each set of study guides.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-660, filed 11/28/90, effective 12/29/90.]

WAC 173-360-670 Penalties. Any person or firm who violates this chapter is subject to a civil penalty not to exceed five thousand dollars for each tank per day of violation, pursuant to RCW 90.76.080(2).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-670, filed 11/28/90, effective 12/29/90.]

WAC 173-360-680 Reciprocity with other states. If the director or director's designee determines that a licensing program established by another state is essentially equivalent to the licensing program created by this chapter, and a person with a valid license from such a state applies to the department on a Washington state form, the department may issue a Washington license. This license shall be valid until the expiration date of the license issued by the previous

state, or the expiration date of the licensing period described in WAC 173-360-630 and 173-360-650, whichever date comes first. The license shall become immediately invalid if revoked by the state in which it was initially issued, and may be revoked by the department as provided in WAC 173-360-650(9).

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-680, filed 11/28/90, effective 12/29/90.]

WAC 173-360-690 Appeals. The revocation of a license may be appealed to the pollution control hearings board, pursuant to chapter 43.21B RCW.

[Statutory Authority: Chapter 90.76 RCW. 90-24-017, § 173-360-690, filed 11/28/90, effective 12/29/90.]

WAC 173-360-695 Inactive license. An individual or firm may voluntarily deactivate their license by notifying the department in writing and requesting that the license be made inactive.

[Statutory Authority: Chapter 90.76 RCW. 91-22-020 (Order 91-26), § 173-360-695, filed 10/29/91, effective 11/29/91.]

Chapter 173-400 WAC

GENERAL REGULATIONS FOR AIR POLLUTION SOURCES

WAC

173-400-010	Policy and purpose.
173-400-020	Applicability.
173-400-030	Definitions.
173-400-040	General standards for maximum emissions.
173-400-050	Emission standards for combustion and incineration units.
173-400-060	Emission standards for general process units.
173-400-070	Emission standards for certain source categories.
173-400-075	Emission standards for sources emitting hazardous air pollutants.
173-400-100	Registration.
173-400-105	Records, monitoring, and reporting.
173-400-110	New source review (NSR).
173-400-115	Standards of performance for new sources.
173-400-120	Bubble rules.
173-400-131	Issuance of emission reduction credits.
173-400-136	Use of emission reduction credits.
173-400-141	Prevention of significant deterioration (PSD).
173-400-151	Retrofit requirements for visibility protection.
173-400-161	Compliance schedules.
173-400-171	Public involvement.
173-400-180	Variance.
173-400-190	Requirements for nonattainment areas.
173-400-200	Creditable stack height and dispersion techniques.
173-400-205	Adjustment for atmospheric conditions.
173-400-210	Emission requirements of prior jurisdictions.
173-400-220	Requirements for board members.
173-400-230	Regulatory actions.
173-400-240	Criminal penalties.
173-400-250	Appeals.
173-400-260	Conflict of interest.

DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER

173-400-080	Compliance schedules. [Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-080, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-080, filed 5/8/79; Order DE 76-38, § 173-400-080, filed 12/21/76. Formerly WAC 18-04-080.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-090	Sensitive area designation. [Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-090, filed 8/20/80; Order DE 76-38, § 173-400-090, filed 12/21/76. Formerly WAC 18-04-090.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-130	Regulatory actions. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-130, filed 5/8/79; Order DE 76-38, § 173-400-130, filed 12/21/76. Formerly WAC 18-04-130.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-135	Criminal penalties. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-135, filed 5/8/79.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-140	Appeals. [Order DE 76-38, § 173-400-140, filed 12/21/76. Formerly WAC 18-04-140.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-150	Variance. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-150, filed 5/8/79; Order DE 76-38, § 173-400-150, filed 12/21/76. Formerly WAC 18-04-150.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-160	Maintenance of pay. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-160, filed 5/8/79.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-400-170	Requirements for boards and director. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-170, filed 5/8/79.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.

WAC 173-400-010 Policy and purpose. (1) It is the policy of the department of ecology (ecology) under the authority vested in it by chapter 43.21A RCW to provide for the systematic control of air pollution from air contaminant sources and for the proper development of the state's natural resources.

(2) It is the purpose of this chapter to establish technically feasible and reasonably attainable standards and to establish rules generally applicable to the control and/or prevention of the emission of air contaminants.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-010, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-010, filed 4/15/83; Order DE 76-38, § 173-400-010, filed 12/21/76. Formerly WAC 18-04-010.]

WAC 173-400-020 Applicability. (1) The provisions of this chapter shall apply state-wide.

(2) An authority may enforce this chapter and may also adopt standards or requirements. These standards or requirements may not be less stringent than the current state air quality rules and may be more stringent than the current

regulations. Unless properly delegated by ecology, authorities do not have jurisdiction over the following sources:

(a) Specific source categories over which the state, by separate regulation, has assumed or hereafter does assume jurisdiction.

(b) Automobiles, trucks, aircraft.

(c) Those sources under the jurisdiction of the energy facility site evaluation council.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-020, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-020, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-020, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-020, filed 5/8/79; Order DE 76-38, § 173-400-020, filed 12/21/76. Formerly WAC 18-04-020.]

WAC 173-400-030 Definitions. The following definitions will apply unless a different meaning is clearly required by context:

(1) "Actual emissions" relating to a particular date means the average rate, in weight per unit time of emitted pollutant during the immediately preceding two-year period of normal operation. Ecology or the authority may allow or require the use of an alternative time period if it is more representative of normal operation. Actual emissions shall be calculated using the unit's actual operating hours, production rates, and types of materials processed, stored, or burned during the selected time period.

Ecology or the authority may presume that unit-specific allowable emissions, which incorporate limits on hours of operation or production rate, are equivalent to the actual emissions of the unit.

(2) "Administrator" shall refer to ecology or the authority unless specifically defined otherwise.

(3) "Adverse impact on visibility" means visibility impairment which interferes with the management, protection, preservation, or enjoyment of the visitor's visual experience of the Federal Class I area. This determination must be made on a case-by-case basis taking into account the geographic extent, intensity, duration, frequency, and time of visibility impairment, and how these factors correlate with (a) times of visitor use of the Federal Class I area, and (b) the frequency and timing of natural conditions that reduce visibility. This term does not include effects on integral vistas.

(4) "Air contaminant" means dust, fumes, mist, smoke, other particulate matter, vapor, gas, odorous substance, or any combination thereof. "Air pollutant" means the same as "air contaminant."

(5) "Air pollution" means the presence in the outdoor atmosphere of one or more air contaminants in sufficient quantities, and of such characteristics and duration as is, or is likely to be, injurious to human health, plant or animal life, or property, or which unreasonably interferes with enjoyment of life and property.

(6) "Allowable emissions" means the emission rate calculated using the maximum rated capacity of the source (unless the source is limited in production rate or hours of operation, or both, by an applicable federally enforceable regulatory order) and the most stringent of (a), (b), or (c) of

this subsection. Physical and process limitations must be considered in determining maximum rated capacity.

(a) Standards as set forth in 40 CFR Part 60 and Part 61, if applicable to the source; or

(b) The applicable state implementation plan emission limitation; or

(c) The emission rate specified by an applicable federally enforceable regulatory order.

(7) "Ambient air" means the surrounding outside air.

(8) "Ambient air quality standard" means an established concentration, exposure time, and frequency of occurrence of air contaminant(s) in the ambient air which shall not be exceeded.

(9) "Authority" means an air pollution control authority activated pursuant to chapter 70.94 RCW that has jurisdiction over the subject source. (This may be delegated by ecology.)

(10) "Best available control technology (BACT)" means an emission limitation (including a visible emission standard) based on the maximum degree of reduction for each air pollutant subject to this regulation which would be emitted from any proposed new or modified source which the permitting authority, on a case-by-case basis, taking into account energy, environmental, and economic impacts and other costs, determines is achievable for such sources or modification through application of production processes, available methods, systems, and techniques, including fuel cleaning or treatment or innovative fuel combustion techniques for control of such air pollutant. In no event shall application of the best available technology result in emissions of any air pollutant which would exceed the emissions allowed by any applicable standard under 40 CFR Part 60 and Part 61. If the reviewing authority determines that technological or economic limitations on the application of measurement methodology to a particular class of sources would make the imposition of an emission standard infeasible, it may instead prescribe a design, equipment, work practice or operational standard, or combination thereof, to meet the requirement of BACT. Such standard shall, to the degree possible, set forth the emission reduction achievable by implementation of such design, equipment, work practice or operation and shall provide for compliance by means which achieve equivalent results. The requirement of RCW 70.94.152 that a new source will provide "all known available and reasonable methods of emission control" is interpreted to mean the same as best available control technology.

(11) "Best available retrofit technology (BART)" means any emission limitation based on the degree of reduction achievable through the application of the best system of continuous emission reduction for each pollutant which is emitted by source. The emission limitation must be established, on a case-by-case basis, taking into consideration the technology available, the costs of compliance, the energy and nonair quality environmental impacts of compliance, any pollution control equipment in use or in existence at the source, the remaining useful life of the source, and the degree of improvement in visibility which may reasonably be anticipated to result from the use of such technology. If an emission limitation is not feasible, a design, equipment, work practice, operational standard, or combination thereof, may be required. Such standards shall, to the degree possible, set forth the emission reductions achieved and provide for

compliance by prescribing appropriate conditions in a regulatory order.

(12) "Bubble" means a set of emission limits which allows an increase in emissions from a given emissions unit(s) in exchange for a decrease in emissions from another emissions unit(s), pursuant to RCW 70.94.155 and WAC 173-400-120.

(13) "Capacity factor" means the ratio of the average load on equipment or a machine for the period of time considered, to the manufacturer's capacity rating of the machine or equipment.

(14) "Class I area" means any federal, state, or Indian land which is classified Class I.

(15) "Combustion and incineration sources" means sources using combustion for waste disposal, steam production, chemical recovery or other process requirements; but excludes open burning.

(16) "Commenced construction" means that the owner or operator has all the necessary preconstruction approvals or permits and either has:

(a) Begun, or caused to begin, a continuous program of actual on-site construction of the source, to be completed within a reasonable time; or

(b) Entered into binding agreements or contractual obligations, which cannot be cancelled or modified without substantial loss to the owner or operator, to undertake a program of actual construction of the source to be completed within a reasonable time.

(17) "Concealment" means any action taken to reduce the observed or measured concentrations of a pollutant in a gaseous effluent while, in fact, not reducing the total amount of pollutant discharged.

(18) "Director" means director of the Washington state department of ecology or duly authorized representative.

(19) "Dispersion technique" means a method which attempts to affect the concentration of a pollutant in the ambient air other than by the use of pollution abatement equipment or integral process pollution controls.

(20) "Ecology" means the Washington state department of ecology.

(21) "Emission" means a release of air contaminants into the ambient air.

(22) "Emission reduction credit (ERC)" means a credit granted pursuant to WAC 173-400-131. This is a voluntary reduction in emissions.

(23) "Emission standard" means an allowable rate of emissions, level of opacity, or prescribing equipment or operating conditions as set forth in a regulation or regulatory order to assure continuous emission control.

(24) "Emissions unit" means any part of a source which emits or would have the potential to emit any pollutant subject to regulation.

(25) "Excess stack height" means that portion of a stack which exceeds the greater of sixty-five meters or the calculated stack height described in WAC 173-400-200(2).

(26) "Fossil fuel-fired steam generator" means a device, furnace, or boiler used in the process of burning fossil fuel for the primary purpose of producing steam by heat transfer.

(27) "Fugitive dust" means a particulate emission made airborne by forces of wind, man's activity, or both. Unpaved roads, construction sites, and tilled land are examples

of areas that originate fugitive dust. Fugitive dust is a type of fugitive emission.

(28) "Fugitive emissions" means emissions which do not pass and which could not reasonably pass through a stack, chimney, vent, or other functionally equivalent opening.

(29) "General process unit" means an emissions unit using a procedure or a combination of procedures for the purpose of causing a change in material by either chemical or physical means, excluding combustion.

(30) "Good engineering practice (GEP)" refers to a calculated stack height based on the equation specified in WAC 173-400-200 (2)(a)(ii).

(31) "Incinerator" means a furnace used primarily for the thermal destruction of waste.

(32) "In operation" means engaged in activity related to the primary design function of the source.

(33) "Integral vista" means a view perceived from within the Class I area of a specific landmark or panorama located outside the boundary of the Class I area.

(34) "Land manager" means the secretary of the federal department or head of the state department or Indian governing body with authority over the Class I area.

(35) "Lowest achievable emission rate (LAER)" means for any source that rate of emissions which reflects:

(a) The most stringent emission limitation which is contained in the implementation plan of any state for such class or category of source, unless the owner or operator of the proposed new or modified source demonstrates that such limitations are not achievable; or

(b) The most stringent emission limitation which is achieved in practice by such class or category of source, whichever is more stringent.

In no event shall the application of this term permit a proposed new or modified source to emit any pollutant in excess of the amount allowable under applicable new source performance standards.

(36) "Major modification" means any physical change or change in the method of operation as defined in WAC 173-400-141.

(37) "Major source" means: Any source which emits or has the potential to emit one hundred tons per year or more of any pollutant regulated by state or federal law.

(38) "Masking" means the mixing of a chemically nonreactive control agent with a malodorous gaseous effluent to change the perceived odor.

(39) "Materials handling" means the handling, transporting, loading, unloading, storage, and transfer of materials with no significant chemical or physical alteration.

(40) "National Emission Standards for Hazardous Air Pollutants (NESHAPS)" means the federal regulations set forth in 40 CFR Part 61.

(41) "Natural conditions" means naturally occurring phenomena that reduce visibility as measured in terms of visual range, contrast, or coloration.

(42) "Net emissions increase" means any emissions increase as defined in WAC 173-400-141.

(43) "New source" means a source which commences construction after the effective date of this chapter. Any addition to, enlargement, modification, replacement, restart after a period of five years of nonoperation, or any alteration of any process or source which may increase emissions or ambient air concentrations of any contaminant for which

federal or state ambient or emission standards have been established shall be construed as construction or installation or establishment of a new source.

(44) "New source performance standards (NSPS)" means the federal regulations set forth in 40 CFR Part 60.

(45) "Nonattainment area" means a clearly delineated geographic area which has been designated by EPA promulgation as exceeding a national ambient air quality standard or standards for one or more of the criteria pollutants.

(46) "Notice of construction" means a written application to permit construction of a new source or modification of an existing source.

(47) "Opacity" means the degree to which an object seen through a plume is obscured, stated as a percentage.

(48) "Open burning" means the combustion of material in an open fire or in an outdoor container, without providing for the control of combustion or the control of the emissions from the combustion. Wood waste disposal in wigwam burners is not considered open burning.

(49) "Particulate matter" or "particulates" means any airborne finely divided solid or liquid material with an aerodynamic diameter smaller than 100 micrometers.

(50) "Particulate matter emissions" means all finely divided solid or liquid material, other than uncombined water, emitted to the ambient air as measured by applicable reference methods, or an equivalent or alternative method specified in 40 CFR Part 60 or by a test method specified in the Washington state implementation plan.

(51) "Parts per million (ppm)" means parts of a contaminant per million parts of gas, by volume, exclusive of water or particulates.

(52) "Person" means an individual, firm, public or private corporation, association, partnership, political subdivision, municipality, or government agency.

(53) "PM-10" means particulate matter with an aerodynamic diameter less than or equal to a nominal 10 micrometers as measured by a reference method based on 40 CFR Part 50 Appendix J and designated in accordance with 40 CFR Part 53 or by an equivalent method designated in accordance with 40 CFR Part 53.

(54) "PM-10 emissions" means finely divided solid or liquid material, with an aerodynamic diameter less than or equal to a nominal 10 micrometers emitted to the ambient air as measured by an applicable reference method, or an equivalent or alternate method, specified in 40 CFR Part 60 or by a test method specified in the Washington state implementation plan.

(55) "Potential to emit" means the maximum capacity of a source to emit a pollutant under its physical and operational design. Any physical or operational limitation on the capacity of the source to emit a pollutant, including air pollution control equipment and restrictions on hours of operation or on the type or amount of material combusted, stored, or processed, shall be treated as part of its design if the limitation or the effect it would have on emissions is federally enforceable. Secondary emissions do not count in determining the potential to emit of a stationary source.

(56) "Prevention of significant deterioration (PSD)" means the program set forth in WAC 173-400-141.

(57) "Projected width" means that dimension of a structure determined from the frontal area of the structure,

projected onto a plane perpendicular to a line between the center of the stack and the center of the building.

(58) "Reasonably attributable" means attributable by visual observation or any other technique the state deems appropriate.

(59) "Reasonably available control technology (RACT)" means the lowest emission limit that a particular source or source category is capable of meeting by the application of control technology that is reasonably available considering technological and economic feasibility. RACT is determined on a case-by-case basis for an individual source or source category taking into account the impact of the source upon air quality, the availability of additional controls, the emission reduction to be achieved by additional controls, the impact of additional controls on air quality, and the capital and operating costs of the additional controls.

RACT requirements for any source or source category may be adopted as an order or regulation after public involvement per WAC 173-400-171.

(60) "Regulatory order" means an order issued by ecology or an authority to an air contaminant source which approves a notice of construction and/or limits emissions and/or establishes other air pollution control requirements.

(61) "Significant emission" means a rate of emission equal to or greater than any one of the following rates:

Pollutant	Tons/Year	Pounds/Day	Pounds/Hour
Carbon monoxide	100		
Nitrogen oxides	40		
Sulfur dioxide	40	800	80
Volatile organic compounds	40		
Particulate matter	25	500	50
PM-10	15		
Lead	.6		
Total reduced sulfur (as H ₂ S)	10		
Total fluoride	3		

(62) "Significant visibility impairment" means visibility impairment which interferes with the management, protection, preservation, or enjoyment of visitor visual experience of the Class I area. The determination must be made on a case-by-case basis, taking into account the geographic extent, intensity, duration, frequency, and time of the visibility impairment, and how these factors correlate with the time of visitor use of the Class I area and frequency and timing of natural conditions that reduce visibility.

(63) "Source" means all of the emissions unit(s) including quantifiable fugitive emissions, which are located on one or more contiguous or adjacent properties under the control of the same person(s) and those activities that are secondary to the production of a single product or functionally related group of products.

(64) "Source category" means all sources of the same type or classification.

(65) "Stack" means any point in a source designed to emit solids, liquids, or gases into the air, including a pipe or duct.

(66) "Stack height" means the height of an emission point measured from the ground-level elevation at the base of the stack.

(67) "Standard conditions" means a temperature of 20°C (68°F) and a pressure of 760mm (29.92 inches) of mercury.

(68) "Sulfuric acid plant" means any facility producing sulfuric acid by the contact process by burning elemental sulfur, alkylation acid, hydrogen sulfide, or acid sludge.

(69) "Total reduced sulfur, (TRS)" means the sum of the sulfur compounds hydrogen sulfide, mercaptans, dimethyl sulfide, dimethyl disulfide, and any other organic sulfides emitted and measured by EPA method 16 or an approved equivalent method and expressed as hydrogen sulfide.

(70) "Total suspended particulate" means particulate matter as measured by the method described in 40 CFR Part 50 Appendix B as in effect on July 1, 1988.

(71) "United States Environmental Protection Agency, (USEPA)" shall be referred to as EPA.

(72) "Visibility impairment" means any perceptible degradation in visibility (visual range, contrast, coloration) not caused by natural conditions.

(73) "Visibility impairment of Class I areas" means visibility impairment within the area and visibility impairment of any formally designated integral vista associated with the area.

(74) "Volatile organic compound, (VOC)" means any organic compound which participates in atmospheric photochemical reactions; that is, any organic compound other than those which the USEPA administrator designates as having negligible photochemical reactivity. VOC may be measured by a reference method, an equivalent method, an alternative method or by procedures specified under 40 CFR Part 60. A reference method, an equivalent method, or an alternative method, however, may also measure nonreactive organic compounds. In such cases, an owner or operator may exclude the nonreactive organic compounds when determining compliance with a standard. This reactivity policy exempts the following compounds per the Federal Register: Methane, ethane, trichlorofluoromethane, dichlorodifluoromethane, chlorodifluoromethane, trifluoromethane, trichlorotrifluoroethane, dichlorotetrafluoroethane, chloropentafluoroethane, methylene chloride, and 1,1,1-trichloroethane (methyl chloroform).

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-030, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331, 70.94.395 and 70.94.510. 85-06-046 (Order 84-48), § 173-400-030, filed 3/6/85. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-030, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-030, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-030, filed 5/8/79; Order DE 76-38, § 173-400-030, filed 12/21/76. Formerly WAC 18-04-030.]

WAC 173-400-040 General standards for maximum emissions. All sources and emissions units are required to meet the emission standards of this chapter. Where an emission standard listed in another chapter is applicable to a specific emissions unit, such standard will take precedent over a general emission standard listed in this chapter. When two or more emissions units are connected to a common stack and the operator elects not to provide the means or facilities to sample emissions from the individual emissions units, and the relative contributions of the individual emissions units to the common discharge are not readily distinguishable, then the emissions of the common stack must meet the most restrictive standard of any of the connected emissions units. Further, all emissions units are required to use reasonably available control technology

(RACT) which may be determined for some sources or source categories to be more stringent than the applicable emission limitations of any chapter of Title 173 WAC. Where current controls are determined to be less than RACT, ecology or the authority shall, on a case-by-case basis, define RACT for each source or source category and issue a regulatory order to the source or sources for installation of RACT.

(1) Visible emissions. No person shall cause or permit the emission for more than three minutes, in any one hour, of an air contaminant from any emissions unit which at the emission point, or within a reasonable distance of the emission point, exceeds twenty percent opacity except:

(a) When the emissions occur due to soot blowing/grate cleaning and the operator can demonstrate that the emissions will not exceed twenty percent opacity for more than fifteen minutes in any eight consecutive hours. The intent of this provision is to permit the soot blowing and grate cleaning necessary to the operation of boiler facilities. This practice, except for testing and trouble shooting, is to be scheduled for the same approximate times each day and ecology or the authority be advised of the schedule.

(b) When the owner or operator of a source supplies valid data to show that the presence of uncombined water is the only reason for the opacity to exceed twenty percent.

(c) When two or more sources are connected to a common stack, ecology or the authority may allow or require the use of an alternate time period if it is more representative of normal operations.

(d) When an alternate opacity limit has been established per RCW 70.94.331 (2)(c).

(2) Fallout. No person shall cause or permit the emission of particulate matter from any source to be deposited beyond the property under direct control of the owner(s) or operator(s) of the source in sufficient quantity to interfere unreasonably with the use and enjoyment of the property upon which the material is deposited.

(3) Fugitive emissions. The owner or operator of any emissions unit engaging in materials handling, construction, demolition or any other operation which is a source of fugitive emission:

(a) If located in an attainment area and not impacting any nonattainment area, shall take reasonable precautions to prevent the release of air contaminants from the operation.

(b) If the emissions unit has been identified as a significant contributor to the nonattainment status of a designated nonattainment area, shall be required to use best available control technology (BACT) to control emissions of the contaminants for which nonattainment has been designated. Significance will be determined by EPA interpretive ruling for PSD and offsets on file with ecology.

(4) Odors. Any person who shall cause or allow the generation of any odor from any source which may unreasonably interfere with any other property owner's use and enjoyment of his property must use recognized good practice and procedures to reduce these odors to a reasonable minimum.

(5) Emissions detrimental to persons or property. No person shall cause or permit the emission of any air contaminant from any source if it is detrimental to the health, safety, or welfare of any person, or causes damage to property or business.

(6) Sulfur dioxide.

No person shall cause or permit the emission of a gas containing sulfur dioxide from any emissions unit in excess of one thousand ppm of sulfur dioxide on a dry basis, corrected to seven percent oxygen for combustion sources, and based on the average of any period of sixty consecutive minutes, except:

When the owner or operator of an emissions unit supplies emission data and can demonstrate to ecology or the authority that there is no feasible method of reducing the concentration to less than one thousand ppm (on a dry basis, corrected to seven percent oxygen for combustion sources) and that the state and federal ambient air quality standards for sulfur dioxide will not be exceeded. In such cases, ecology or the authority may require specific ambient air monitoring stations be established, operated, and maintained by the owner or operator at mutually approved locations. All sampling results will be made available upon request and a monthly summary will be submitted to ecology or the authority.

(7) Concealment and masking. No person shall cause or permit the installation or use of any means which conceals or masks an emission of an air contaminant which would otherwise violate any provisions of this chapter.

(8) Fugitive dust sources.

(a) The owner or operator of a source of fugitive dust shall take reasonable precautions to prevent fugitive dust from becoming airborne and shall maintain and operate the source to minimize emissions.

(b) The owner(s) or operator(s) of any existing source(s) of fugitive dust that has been identified as a significant contributor to a Category I PM-10 area shall be required to use reasonably available control technology to control emissions. Significance will be determined by the definition found in 40 CFR Part 51, Appendix S, as amended through July 1, 1990.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-040, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-040, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-040, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-040, filed 5/8/79; Order DE 76-38, § 173-400-040, filed 12/21/76. Formerly WAC 18-04-040.]

WAC 173-400-050 Emission standards for combustion and incineration units. (1) Combustion and incineration emissions units must meet all requirements of WAC 173-400-040 and, in addition, no person shall cause or permit emissions of particulate matter in excess of 0.23 gram per dry cubic meter at standard conditions (0.1 grain/dscf), except, for an emissions unit combusting wood derived fuels for the production of steam. No person shall allow or permit the emission of particulate matter in excess of 0.46 gram per dry cubic meter at standard conditions (0.2 grain/dscf), as measured by EPA method 5 or approved procedures contained in "Source Test Manual - Procedures For Compliance Testing," state of Washington, department of ecology, as of July 12, 1990, on file at ecology.

(2) For any incinerator, no person shall cause or permit emissions in excess of one hundred ppm of total carbonyls as measured by applicable EPA methods or acceptable

procedures contained in "Source Test Manual - Procedures for Compliance Testing," state of Washington, department of ecology, on file at ecology. Incinerators shall be operated only during daylight hours unless written permission to operate at other times is received from ecology or the authority.

(3) Measured concentrations for combustion and incineration sources shall be adjusted for volumes corrected to seven percent oxygen, except when ecology or the authority determines that an alternate oxygen correction factor is more representative of normal operations.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-050, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-050, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-050, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-050, filed 5/8/79; Order DE 76-38, § 173-400-050, filed 12/21/76. Formerly WAC 18-04-050.]

WAC 173-400-060 Emission standards for general process units. General process units are required to meet all applicable provisions of WAC 173-400-040 and, no person shall cause or permit the emission of particulate material from any general process operation in excess of 0.23 grams per dry cubic meter at standard conditions (0.1 grain/dscf) of exhaust gas. EPA test methods from 40 CFR Appendix A which are adopted by reference and any other approved test procedures which are contained in ecology's "Source Test Manual - Procedures For Compliance Testing" as of July 12, 1990, will be used to determine compliance.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-060, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-060, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-060, filed 8/20/80; Order DE 76-38, § 173-400-060, filed 12/21/76. Formerly WAC 18-04-060.]

WAC 173-400-070 Emission standards for certain source categories. Ecology finds that the reasonable regulation of sources within certain categories requires separate standards applicable to such categories. The standards set forth in this section shall be the maximum allowable standards for emissions units within the categories listed. Except as specifically provided in this section, such emissions units shall not be required to meet the provisions of WAC 173-400-040, 173-400-050 and 173-400-060.

(1) Wigwam burners.

(a) All wigwam burners shall meet all provisions of WAC 173-400-040 (2), (3), (4), (5), (6), and (7).

(b) All wigwam burners shall use RACT. All emissions units shall be operated and maintained to minimize emissions. These requirements may include a controlled tangential vent overfire air system, an adequate underfire system, elimination of all unnecessary openings, a controlled feed and other modifications determined necessary by ecology or the authority.

(c) It shall be unlawful to install or increase the existing use of any burner that does not meet all requirements for new sources including those requirements specified in WAC 173-400-040 and 173-400-050, except operating hours.

(d) Ecology may establish additional requirements for wigwam burners located in sensitive areas as defined by

chapter 173-440 WAC. These requirements may include but shall not be limited to:

(i) A requirement to meet all provisions of WAC 173-400-040 and 173-400-050. Wigwam burners will be considered to be in compliance if they meet the requirements contained in WAC 173-400-040(1). An exception is made for a startup period not to exceed thirty minutes in any eight consecutive hours.

(ii) A requirement to apply BACT.

(iii) A requirement to reduce or eliminate emissions if ecology establishes that such emissions unreasonably interfere with the use and enjoyment of the property of others or are a cause of violation of ambient air standards.

(2) Hog fuel boilers.

(a) Hog fuel boilers shall meet all provisions of WAC 173-400-040 and 173-400-050(1), except that emissions may exceed twenty percent opacity for up to fifteen consecutive minutes once in any eight hours. The intent of this provision is to permit the soot blowing and grate cleaning necessary to the operation of these units. This practice is to be scheduled for the same specific times each day and ecology or the authority shall be notified of the schedule or any changes.

(b) All hog fuel boilers shall utilize RACT and shall be operated and maintained to minimize emissions.

(3) Orchard heating.

(a) Burning of rubber materials, asphaltic products, crankcase oil or petroleum wastes, plastic, or garbage is prohibited.

(b) It is unlawful to burn any material or operate any orchard-heating device that causes a visible emission exceeding twenty percent opacity, except during the first thirty minutes after such device or material is ignited.

(4) Grain elevators.

Any grain elevator which is primarily classified as a materials handling operation shall meet all the provisions of WAC 173-400-040 (2), (3), (4), and (5).

(5) Catalytic cracking units.

(a) All existing catalytic cracking units shall meet all provisions of WAC 173-400-040 (2), (3), (4), (5), (6), and (7) and:

(i) No person shall cause or permit the emission for more than three minutes, in any one hour, of an air contaminant from any catalytic cracking unit which at the emission point, or within a reasonable distance of the emission point, exceeds forty percent opacity.

(ii) No person shall cause or permit the emission of particulate material in excess of 0.46 grams per dry cubic meter at standard conditions (0.20 grains/dscf) of exhaust gas.

(b) All new catalytic cracking units shall meet all provisions of WAC 173-400-115.

(6) Other wood waste burners.

(a) Wood waste burners not specifically provided for in this section shall meet all provisions of WAC 173-400-040.

(b) Such wood waste burners shall utilize RACT and shall be operated and maintained to minimize emissions.

(7) Sulfuric acid plants.

No person shall cause to be discharged into the atmosphere from a sulfuric acid plant, any gases which contain acid mist, expressed as H_2SO_4 , in excess of 0.15 pounds per ton of acid produced. Sulfuric acid production shall be expressed as one hundred percent H_2SO_4 .

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-070, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-070, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-070, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-070, filed 5/8/79; Order DE 76-38, § 173-400-070, filed 12/21/76. Formerly WAC 18-04-070.]

WAC 173-400-075 Emission standards for sources emitting hazardous air pollutants. (1) The emission standards for hazardous air pollutants promulgated by the United States Environmental Protection Agency (EPA) prior to July 1, 1989, as contained in Title 40, Code of Federal Regulations, Part 61, are adopted by reference.

(2) Ecology or the authority may conduct source tests and require access to records, books, files and other information specific to the control, recovery or release of those pollutants registered under 40 CFR Part 61 in order to determine the status of compliance of sources of these contaminants and to carry out its enforcement responsibilities.

(3) Source testing, monitoring and analytical methods for sources of hazardous air pollutants such as: Asbestos, benzene from fugitive emission sources, beryllium, mercury, or vinyl chloride shall conform with the requirements of Title 40, Code of Federal Regulations, Part 61, as promulgated prior to July 1, 1989.

(4) This section shall not apply to any source operating pursuant to a waiver granted by EPA or an exemption granted by the president of the United States during the effective life of such waiver or exemption.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-075, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331, 70.94.395 and 70.94.510. 85-06-046 (Order 84-48), § 173-400-075, filed 3/6/85. Statutory Authority: Chapter 70.94 RCW. 84-10-019 (Order DE 84-8), § 173-400-075, filed 4/26/84. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-075, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-075, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-075, filed 5/8/79; Order DE 76-38, § 173-400-075, filed 12/21/76. Formerly WAC 18-04-075.]

WAC 173-400-100 Registration. The owner or operator of each source within the following source categories shall register the source with ecology or an authority:

- (1) Agricultural drying and dehydrating operations;
- (2) Asphalt plants;
- (3) Beverage can surface coating operations;
- (4) Bulk gasoline terminals;
- (5) Cattle feedlots with facilities for one thousand or more cattle;
- (6) Chemical plants;
- (7) Ferrous foundries;
- (8) Fertilizer plants;
- (9) Flexible vinyl and urethane coating and printing operations;
- (10) Grain handling, seed processing, pea and lentil processing facilities;
- (11) Metallic mineral processing plants;
- (12) Mineralogical processing plants;
- (13) Nonferrous foundries;
- (14) Other metallurgical processing plants;

- (15) Petroleum refineries;
- (16) Power boilers using coal, hog fuel, oil, or other solid or liquid fuel;
- (17) Pressure sensitive tape and label surface coating operations;
- (18) Rendering plants;
- (19) Scrap metal operations;
- (20) Synthetic organic chemical manufacturing industries;
- (21) Sulfuric acid plants;
- (22) Synthetic fiber production facilities;
- (23) Veneer dryers;
- (24) Wood waste incinerators including wigwam burners;
- (25) Other incinerators designed for a capacity of one hundred pounds per hour or more;
- (26) Stationary internal combustion engines rated at five hundred horse power or more;
- (27) Sawmills, including processing for lumber, plywood, shake, shingle, pulpwood insulating board, or any combination thereof;
- (28) Any category of stationary sources to which a federal standard of performance (NSPS) applies;
- (29) Any source which emits a contaminant subject to a National Emission Standard for Hazardous Air Pollutants (NESHAPS);
- (30) Any major source.

Registration shall be on forms to be supplied by ecology or the authority within the time specified on the form.

A report of closure shall be filed within ninety days with ecology or an authority if under their jurisdiction when operations producing emissions permanently cease at any source within the above categories.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-100, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331, 70.94.395 and 70.94.510. 85-06-046 (Order 84-48), § 173-400-100, filed 3/6/85. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-100, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-100, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-100, filed 5/8/79; Order DE 76-38, § 173-400-100, filed 12/21/76. Formerly WAC 18-04-100.]

WAC 173-400-105 Records, monitoring, and reporting. The owner or operator of a source shall upon notification by the director of ecology, maintain records on the type and quantity of emissions from the source and other information deemed necessary to determine whether the source is in compliance with applicable emission limitations and control measures.

(1) Emission inventory. The owner(s) or operator(s) of any air contaminant source shall submit an inventory of emissions from the source each year. The inventory may include stack and fugitive emissions of particulate matter, PM-10, sulfur dioxide, carbon monoxide, total reduced sulfur compounds (TRS), fluorides, lead, VOCs, and other contaminants, and shall be submitted (when required) no later than one hundred five days after the end of the calendar year. The owner(s) or operator(s) shall maintain records of information necessary to substantiate any reported emissions, consistent with the averaging times for the applicable standards.

(2) Monitoring. Ecology shall conduct a continuous surveillance program to monitor the quality of the ambient

atmosphere as to concentrations and movements of air contaminants.

As a part of this program, the director of ecology or an authorized representative may require any source under the jurisdiction of ecology to conduct stack and/or ambient air monitoring and to report the results to ecology.

(3) Investigation of conditions. Upon presentation of appropriate credentials, for the purpose of investigating conditions specific to the control, recovery, or release of air contaminants into the atmosphere, personnel from ecology or an authority shall have the power to enter at reasonable times upon any private or public property, excepting nonmultiple unit private dwellings housing one or two families.

(4) Source testing. To demonstrate compliance, ecology may conduct or require that a test be conducted of the source using approved EPA methods from 40 C.F.R. 60 Appendix A which are adopted by reference, or approved procedures contained in "Source Test Manual - Procedures for Compliance Testing," state of Washington, department of ecology, as of July 12, 1990, on file at ecology. The operator of a source may be required to provide the necessary platform and sampling ports for ecology personnel or others to perform a test of an emissions unit. Ecology shall be allowed to obtain a sample from any emissions unit. The operator of the source shall be given an opportunity to observe the sampling and to obtain a sample at the same time.

(5) Report of startup, shutdown, breakdown or upset condition(s). If a startup, shutdown, breakdown or upset condition occurs which could result in an emissions violation or a violation of an ambient air quality standard, the owner(s) or operator(s) of the source(s) shall take the following actions as applicable:

(a) For a planned condition, such as a startup or shutdown, the condition shall be reported to ecology or the authority in advance of its occurrence.

(b) For an unplanned condition, such as a breakdown or upset, the condition shall be reported to ecology or the authority as soon as possible.

Upon request by ecology or the authority, the owner(s) or operator(s) of the source(s) shall submit a full written report including the known causes, the corrective actions taken, and the preventive measures to be taken to minimize or eliminate the chance of recurrence.

Compliance with the requirements of WAC 173-400-105(5) does not relieve the owner or operator of the source from the responsibility to maintain continuous compliance with all the requirements of this chapter or an applicable chapter nor from the resulting liabilities for failure to comply.

(6) Continuous monitoring and recording. Owners and operators of the following categories of sources shall install, calibrate, maintain and operate equipment for continuously monitoring and recording those emissions specified.

(a) Fossil fuel-fired steam generators.

(i) Opacity, except where:

(A) Steam generator capacity is less than two hundred fifty million BTU per hour heat input; or

(B) Only gaseous fuel is burned.

(ii) Sulfur dioxide, except where steam generator capacity is less than two hundred fifty million BTU per hour

heat input or if sulfur dioxide control equipment is not required.

(iii) Percent oxygen or carbon dioxide where such measurements are necessary for the conversion of sulfur dioxide continuous emission monitoring data.

(iv) General exception. These requirements do not apply to a fossil fuel-fired steam generator with an annual average capacity factor of less than thirty percent, as reported to the Federal Power Commission for calendar year 1974, or as otherwise demonstrated to ecology or the authority by the owner(s) or operator(s).

(b) Sulfuric acid plants.

Sulfur dioxide where production capacity is more than three hundred tons per day, expressed as one hundred percent acid, except for those facilities where conversion to sulfuric acid is utilized primarily as a means of preventing emissions to the atmosphere of sulfur dioxide or other sulfur compounds.

(c) Fluid bed catalytic cracking units catalyst regenerators at petroleum refineries.

Opacity where fresh feed capacity is more than twenty thousand barrels per day.

(d) Wood residue fuel-fired steam generators.

(i) Opacity, except where steam generator capacity is less than one hundred million BTU per hour heat input.

(ii) Continuous monitoring equipment. The requirements of WAC 173-400-105 (6)(e) do not apply to wood residue fuel-fired steam generators, but continuous monitoring equipment required by WAC 173-400-105 (6)(d) shall be subject to approval by ecology.

(e) Owners and operators of those sources required to install continuous monitoring equipment under this chapter shall demonstrate to ecology or the authority, compliance with the equipment and performance specifications and observe the reporting requirements contained in 40 CFR Part 51, Appendix P, Sections 3, 4 and 5, promulgated October 6, 1975, and amended November 7, 1986, which is adopted by reference.

(f) Special considerations. If for reason of physical plant limitations or extreme economic situations, ecology determines that continuous monitoring is not a reasonable requirement, alternative monitoring and reporting procedures will be established on an individual basis. These will generally take the form of stack tests conducted at a frequency sufficient to establish the emission levels over time and to monitor deviations in these levels.

(g) Exemptions. This subsection (6) does not apply to any source which is:

(i) Subject to a new source performance standard. These sources will be governed by WAC 173-400-115.

(ii) Not subject to an applicable emission standard.

(h) Monitoring system malfunctions. A source may be temporarily exempted from the monitoring and reporting requirements of this chapter during periods of monitoring system malfunctions provided that the source owner(s) or operator(s) shows to the satisfaction of ecology or the authority that the malfunction was unavoidable and is being repaired as expeditiously as practicable.

(7) Change in raw materials or fuels. Any change or series of changes in raw material or fuel which will result in a cumulative increase in emissions of sulfur dioxide of forty tons per year or more over that stated in the initial inventory

required by WAC 173-400-105(1) shall require the submittal of sufficient information to ecology or the authority to determine the effect of the increase upon ambient concentrations of sulfur dioxide. Ecology or the authority may issue regulatory orders requiring controls to reduce the effect of such increases. Cumulative changes in raw material or fuel of less than 0.5 percent increase in average annual sulfur content over the initial inventory shall not require such notice.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-105, filed 2/19/91, effective 3/22/91; 87-20-019 (Order 87-12), § 173-400-105, filed 9/30/87.]

WAC 173-400-110 New source review (NSR). (1) Applicability.

(a) A notice of construction must be approved by ecology or the authority prior to the construction, installation, or establishment of a new source or emissions unit which is required to register per WAC 173-400-100.

(b) Ecology or the authority may require a notice of construction prior to the construction, installation, or establishment of any other new source, other than a single family or duplex dwelling.

(c) The notice of construction and new source review shall apply only to the emission unit(s) affected and the contaminants involved.

(d) The owner(s) or operator(s) of any source that is required to register per WAC 173-400-100 shall notify ecology or the authority prior to replacement of air pollution control equipment or process equipment other than equivalent replacement for routine maintenance and repair. Ecology or the authority may determine that a notice of construction is required.

(2) **Additional information.** Within thirty days of receipt of a notice of construction, ecology or the authority may require the submission of additional plans, specifications, and other information necessary for the review of the proposed new or modified source.

(3) **Requirements for new sources.** Ecology or the authority shall review notice(s) of construction, plans, specifications, and other associated information to determine that:

(a) The new source will be in accord with applicable federal and state rules and regulations, including NSPS and NESHAPS and the new source will use BACT for emissions control; and

(b) Requirements for nonattainment areas;

(i) If the new source is a major source or the proposed change is a major modification, it will comply with LAER for emissions of the contaminants for which nonattainment has been designated; and

(ii) If the new source is a major source or the proposed change is a major modification and is located in an area that is not in attainment for carbon monoxide or ozone and the source will emit carbon monoxide or VOCs, it is required that there be an analysis of alternative sites, sizes, and production processes and environmental control techniques for the proposed new source which demonstrates that benefits of the proposed new source significantly outweigh the environmental and social costs imposed as a result of its location, construction, and modification. This analysis is the

responsibility of the applicant, who may use an environmental impact statement prepared under the State Environmental Policy Act (SEPA) or the National Environmental Policy Act (NEPA) as a source of information; and

(iii) The proposed new source will not violate the requirements for reasonable further progress established by the state implementation plan. If the new source is a major source or the proposed change is a major modification, the total new allowable emissions from all sources existing at the time of application for notice of construction plus proposed allowable emissions for the new source, of the contaminants for which nonattainment has been designated, shall be no greater than the total allowable emissions from existing sources, except that: (A) Ecology or the authority may require that new total allowable emissions be reduced to less than existing total allowable emissions, as necessary to achieve air quality attainment goals stated in an approved plan of attainment, and (B) the emissions from the proposed new source may be approved without an offsetting reduction from existing sources if an adequate emissions growth allowance is included in an approved plan of attainment. The above requirements must be met by reducing emissions from existing source(s). Arrangements for such offsetting reduction(s) of actual emissions must be made by the owner(s) or operator(s) of the proposed new source. The proposed new source may be constructed only after the issuance of a regulatory order(s) to the proposed new source and to all the source(s) that provided the offset. The said orders shall include new allowable emissions limits for all the affected sources; and

(iv) If the new source is a major source or the proposed change is a major modification, the owner(s) or operator(s) shall demonstrate that all major sources owned or operated by such person (or persons under common control with such person) in the state which are subject to emission limitations are in compliance or on a schedule for compliance with applicable emission limitations and standards under the Federal Clean Air Act; and

(v) In a locality that does not meet national ambient air quality standards and has not been designated a nonattainment area, a proposed new major source or major modification must reduce the impact of its emissions upon air quality by obtaining sufficient emissions reductions to, at a minimum, compensate for its adverse ambient impact. An ecology approved air quality model shall be used to demonstrate a net air quality benefit where the source would otherwise cause or contribute to a violation of any national ambient air quality standard.

(c) **Requirements for attainment areas.** If the proposed new source is located in an area that is in attainment for contaminants that would be emitted by the source and the source is located in an ozone attainment area if the source would emit VOCs;

(i) The allowable emissions from the proposed new source will not delay the attainment date for an area not in attainment nor cause or contribute to a violation of any national ambient air quality standard. This requirement will be considered to be met if the impact at any location within a nonattainment area or a locality exceeding the applicable standard does not exceed the following levels:

Pollutant	Annual Average	24-Hour Average	8-Hour Average	3-Hour Average	1-Hour Average
CO	-	-	0.5 mg/m ³	-	2 mg/m ³
TSP	1.0 ug/m ³	5 ug/m ³	-	-	-
SO ₂	1.0 ug/m ³	5 ug/m ³	-	25 ug/m ³	30 ug/m ³
PM-10	1.0 ug/m ³	5 ug/m ³	-	-	-
NO ₂	1.0 ug/m ³	-	-	-	-

(ii) The proposed new source will not cause a violation of any ambient air quality standard.

(iii) An offsetting emissions reduction that satisfies the requirements of WAC 173-400-110 (3)(b) may be used to satisfy the requirements of WAC 173-400-110 (3)(c) and (d) if required.

(d) **Visibility requirements.** Any new major source or new major modification shall evaluate the visibility impairment per 40 CFR 52.21(e) for all Class I areas in Washington and neighboring states. The evaluation shall comply with the following:

(i) When the land manager has officially designated visibility to be an important attribute, the owner(s) or operator(s) of the new source shall demonstrate that the potential emissions in combination with emissions from all other sources permitted after January 1, 1982, shall not cause or contribute to a significant visibility impairment.

(ii) Ecology shall upon receipt of an application for a notice of construction notify the land managers of potentially affected areas. Notification shall be in writing and include a copy of all information relevant to the application including the information developed for this section. This information shall be transmitted to the land manager within thirty days of receipt of the application and at least sixty days prior to public hearing on the application for permit to construct.

(iii) All evaluations of visibility impairment required under this section shall use the models on file with ecology or equivalent models approved by ecology or EPA.

(iv) The results of the evaluation shall be sent to the land manager of the affected areas for review and recommendation. The review shall consider the degree of visibility impairment, duration, geographic extent, frequency, and time. The recommendation of the land managers concerning adverse impact on visibility shall be sent to ecology within thirty days of receipt of the evaluation results.

(v) Should ecology concur with the recommendation of the land manager, the notice of construction shall be approved or disapproved according to the recommendation. Ecology may find the review of a land manager inadequate and make its own determination. A finding of significant visibility impairment shall require a disapproval of the notice of construction, unless sufficient mitigating measures are developed.

(vi) Ecology or land managers may demonstrate that the new source would cause impairment of an integral vista officially designated at least six months before the new source submitted a complete application. The protection of an integral vista by controls on the source shall consider the time necessary for compliance, the energy and nonair quality environmental effects of compliance and the productive life of the source.

(vii) Ecology may require visibility monitoring at the site of the new source or potentially affected areas as a part

of the applicable regulatory order. The monitoring period may be before or after construction or both.

(4) **Preliminary determination.** Within thirty days after receipt of all information required, ecology or the authority shall:

(a) Make preliminary determinations on the matters set forth in subsection (3)(b), (c), and (d) of this section if applicable; and

(b) Initiate compliance with the provisions of WAC 173-400-171 relating to public notice and public comment, as applicable.

(5) **Final determination.** If, after review of all information received including public comment, ecology or the authority finds that all the conditions in subsection (3) of this section are satisfied, whichever is applicable, the authority will issue a regulatory order to approve the notice of construction for the proposed new source or modification.

(6) **Appeal of approval.** A notice of construction approval can be appealed to the state pollution control hearings board per RCW 70.94.025.

(7) **Portable sources.** For portable sources which locate temporarily at particular sites, the owner(s) or operator(s) shall be allowed to operate at the temporary location without filing a notice of construction, providing that the owner(s) or operator(s) notifies ecology or the authority of intent to operate at the new location at least thirty days prior to starting the operation, and supplies sufficient information to enable ecology or the authority to determine that the operation will comply with the emission standards for a new source, and will not cause a violation of applicable ambient air quality standards and, if in a nonattainment area, will not interfere with scheduled attainment of ambient standards. The permission to operate shall be for a limited period of time (one year or less) and ecology or the authority may set specific conditions for operation during that period. A temporary source shall be required to comply with all applicable emission standards.

(8) **Commencement of construction.** The owner(s) or operator(s) of the new source shall not commence construction until the applicable notice of construction has been approved.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-110, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-110, filed 4/15/83. Statutory Authority: RCW 70.94.331, 70.94.510, and 70.94.785. 81-03-002 (Order DE 80-53), § 173-400-110, filed 1/8/81. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-110, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-110, filed 5/8/79; Order DE 76-38, § 173-400-110, filed 12/21/76. Formerly WAC 18-04-110.]

WAC 173-400-115 Standards of performance for new sources. Title 40, Code of Federal Regulations, Part 60 (standards of performance for new sources), as promulgated prior to July 1, 1989, is adopted by reference except for sections 60.5 (determination of construction or modification) and 60.6 (review of plans).

(1) Sections 60.5 and 60.6 of Title 40, Code of Federal Regulations, are not incorporated herein because they provide for preconstruction review of new sources only on request. Such review under the state program is mandatory and an order of approval is required prior to construction, installation or establishment of a new source.

(2) As of July 1, 1989, the federal regulations adopted by reference hereby set standards of performance affecting facilities for the following described subparts of 40 CFR Part 60:

Subpart D	Fossil fuel fired steam generators for which construction commenced after August 17, 1971, and prior to September 19, 1978, which have a heat input greater than 73 megawatts but not greater than 250 megawatts
Subpart Da	Electric utility steam generating units for which construction commenced after September 18, 1978, which have a heat input greater than 73 megawatts but not greater than 250 megawatts
Subpart Db	Industrial-commercial-institutional steam generating units for which construction commenced after June 19, 1984, and prior to June 19, 1986, which have a heat input greater than 29 megawatts but less than 73 megawatts
Subpart E	Incinerators
Subpart F	Portland cement plants
Subpart G	Nitric acid plants
Subpart H	Sulfuric acid plants
Subpart I	Asphalt concrete plants
Subpart J	Petroleum refineries which produce less than 25,000 barrels per day of refined products
Subpart K	Storage vessels for petroleum liquid constructed after June 11, 1973, and prior to May 19, 1978, which have a capacity greater than 40,000 gallons
Subpart Ka	Storage vessels for petroleum liquids constructed after May 18, 1978, which have a capacity greater than 40,000 gallons
Subpart Kb	Volatile organic liquid storage vessels (including petroleum liquid storage vessels) constructed, reconstructed, or modified after July 23, 1984
Subpart L	Secondary lead smelters
Subpart M	Brass and bronze ingot production plants
Subpart N	Iron and steel plants
Subpart O	Sewage treatment plants
Subpart S	Primary aluminum reduction plants
Subpart T	Phosphate fertilizer industry: Wet process phosphoric acid plants
Subpart U	Phosphate fertilizer industry: Superphosphoric acid plants
Subpart V	Phosphate fertilizer industry: Diammonium phosphate plants
Subpart W	Phosphate fertilizer industry: Triple superphosphate plants
Subpart X	Phosphate fertilizer industry: Granular triple superphosphate storage facilities
Subpart Y	Coal preparation plants
Subpart Z	Ferroalloy production facilities
Subpart AA	Steel plants: Electric arc furnaces
Subpart BB	Kraft pulp mills
Subpart CC	Glass manufacturing plants

Subpart DD	Grain elevators
Subpart EE	Industrial surface coating: Metal furniture
Subpart GG	Stationary gas turbines
Subpart HH	Lime manufacturing plants
Subpart KK	Lead acid batteries
Subpart LL	Metallic mineral processing plants
Subpart MM	Automobile and light duty truck surface coating operations
Subpart NN	Phosphate rock plants
Subpart PP	Ammonium sulfate manufacture
Subpart QQ	Publication rotogravure printing
Subpart RR	Pressure sensitive tape and label surface coating operations
Subpart SS	Industrial surface coating: Large appliances
Subpart TT	Industrial surface coating: Metal coils
Subpart UU	Asphalt processing and asphalt roofing manufacture
Subpart VV	SOCMI equipment leaks (VOC)
Subpart WW	Beverage can surface coating operations
Subpart XX	Bulk gasoline terminals
Subpart AAA	New residential wood heaters
Subpart FFF	Flexible vinyl and urethane coating and printing
Subpart GGG	Petroleum refineries - compressors and fugitive emission sources
Subpart HHH	Synthetic fiber production facilities
Subpart JJJ	Petroleum dry cleaners
Subpart PPP	Wool fiberglass insulation manufacturing plants

Compliance with the standards for affected facilities within these source categories shall be determined by performance tests and visual observations of opacity as set forth in the regulations adopted by reference.

Note: For fossil fuel fired steam generators referenced by Subpart D and Da above, units greater than 250 megawatts are governed by the energy facility site evaluation council (EFSEC) in Title 463 WAC.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-115, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331, 70.94.395 and 70.94.510. 85-06-046 (Order 84-48), § 173-400-115, filed 3/6/85. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-400-115, filed 4/15/83; 82-16-019 (Order DE 82-20), § 173-400-115, filed 7/27/82. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-115, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-115, filed 5/8/79; Order DE 76-38, § 173-400-115, filed 12/21/76. Formerly WAC 18-04-115.]

WAC 173-400-120 Bubble rules. (1) Applicability. The owner(s) or operator(s) of any source(s) may apply for a bubble for any contaminant regulated by state or federal law for which the emission requirement may be stated as an allowable limit in weight of contaminant per unit time for the emissions units involved.

(2) Conditions. A bubble may be authorized provided the following conditions have been demonstrated to the satisfaction of ecology or the authority.

(a) The contaminants exchanged must be of the same type, that is, particulates for particulates, sulfur dioxide for sulfur dioxide, etc.

(b) The bubble will not interfere with the attainment and maintenance of air quality standards.

(c) The bubble will not result in a delay in compliance by any source, nor a delay in any existing enforcement action.

(d) The bubble will not supersede NSPS, NESHAPS, BACT, or LAER. The emissions of hazardous (NESHAPS) contaminants shall not be increased.

(e) The bubble will not result in an increase in the sum of actual emission rates of the contaminant involved from the emissions units involved.

(f) A bubble may not be authorized only for opacity limits. However, if the emission limit for particulates for a given emissions unit is increased as part of a bubble, the opacity limit for the given emissions unit may be increased subject to the following limitations:

(i) The new opacity limit shall be specific for the given emissions unit;

(ii) The new opacity limit shall be consistent with the new particulates limit;

(iii) An opacity greater than sixty percent shall never be authorized;

(iv) If the given emissions unit emits or has the potential to emit 100 tons per year or more of particulate matter, the opacity shall be monitored continuously.

(g) The emission limits of the bubble are equivalent to existing limits in enforceability.

(h) Concurrently with or prior to the authorization of a bubble, each affected source shall receive or have received a regulatory order that establishes total allowable emissions from the source of the contaminant being bubbled, expressed as weight of the contaminant per unit time. The new total allowable emissions shall be considered RACT.

(i) There will be no net adverse impact upon air quality from the establishment of new emission requirements for a specific source or emissions unit. Determination of net adverse impact shall include but not be limited to public perception of opacity and public perception of odorous contaminants.

(j) Specific situations may require additional demonstration as requested by ecology or the authority.

(3) Jurisdiction. Whenever a bubble application involves emissions units, some of which are under the jurisdiction of ecology and some of which are under the jurisdiction of an authority, approval will require concurrence by both authorities. The new emission limits for each emissions unit will be enforced by the authority of original jurisdiction.

(4) Additional information. Within thirty days, after the receipt of a bubble application and all supporting data and documentation, ecology or the authority may require the submission of additional information needed to review the application.

(5) Approval. Within thirty days after all the required information has been received, ecology or the authority shall approve or deny the application, based on a finding that conditions in subsection (2)(a) through (j) of this section have been satisfied or not. If the application is approved, a regulatory order or equivalent document shall be issued which includes new allowable emissions expressed in weight of pollutant per unit time for each emissions unit involved in the application. The order or equivalent document must include all requirements necessary to assure that conditions in subsection (2)(a) through (j) of this section will be

satisfied. If the bubble depends in whole or in part upon the shutdown of equipment, the regulatory order or equivalent document must prohibit the operation of the affected equipment.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-120, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 89-02-055 (Order 88-39), § 173-400-120, filed 1/3/89; 83-09-036 (Order DE 83-13), § 173-400-120, filed 4/15/83. Statutory Authority: RCW 70.94.331. 80-11-059 (Order DE 80-14), § 173-400-120, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-012 (Order DE 78-21), § 173-400-120, filed 5/8/79; Order DE 76-38, § 173-400-120, filed 12/21/76. Formerly WAC 18-04-120.]

WAC 173-400-131 Issuance of emission reduction credits. (1) Applicability. The owner(s) or operator(s) of any source(s) may apply to ecology or the authority for an emission reduction credit (ERC) if the source proposes to reduce its actual emissions rate for any contaminant regulated by state or federal law for which the emission requirement may be stated as an allowable limit in weight of contaminant per unit time for the emissions unit(s) involved.

(2) Time of application. The application for an ERC must be made prior to or within one hundred eighty days after the emission reduction has been accomplished.

(3) Conditions. An ERC may be authorized provided the following conditions have been demonstrated to the satisfaction of ecology or the authority.

(a) The quantity of emissions in the ERC shall be less than or equal to the old allowable emissions rate or the old actual emissions rate, whichever is the lesser, minus the new allowable emissions rate.

(b) The ERC application must include a description of all the changes that are required to accomplish the claimed emissions reduction, such as, new control equipment, process modifications, limitation of hours of operation, permanent shutdown of equipment, specified control practices, etc.

(c) The ERC must be large enough to be readily quantifiable relative to the source strength of the emissions unit(s) involved, but in no case shall the ERC be for less than one ton per year.

(d) No part of the emission reductions claimed for credit shall have been used as part of a determination of net emission increase, nor as part of an offsetting transaction under WAC 173-400-110 (3)(e), nor as part of a bubble transaction under WAC 173-400-120, nor to satisfy NSPS, BACT, or LAER.

(e) Concurrently with or prior to the authorization of an ERC, the applicant shall receive (have received) a regulatory order that establishes total allowable emissions from the source of the contaminant for which the ERC is requested, expressed as weight of contaminant per unit time. The new allowable emissions shall be considered RACT.

(f) The use of any ERC shall be consistent with all other federal, state, and local requirements of the program in which it is used.

(4) Additional information. Within thirty days after the receipt of an ERC application and all supporting data and documentation, ecology or the authority may require the submission of additional information needed to review the application.

(5) Approval. Within thirty days after all the required information has been received, ecology or the authority shall

approve or deny the application, based on a finding that conditions in subsection (3)(a) through (e) of this section have been satisfied or not. If the ERC application has not been approved or denied within thirty days, the ERC will be automatically approved. If the application is approved, ecology or the authority shall:

(a) Issue a regulatory order or equivalent document to assure that the emissions from the source will not exceed the proposed new allowable emission rate(s) claimed in the ERC application, expressed as weight of pollutant per unit time. The regulatory order or equivalent document must include all requirements that are necessary to provide such assurance. If the ERC depends in whole or in part upon the shutdown of equipment, the regulatory order or equivalent document must prohibit the startup of the affected equipment; and,

(b) Issue a certificate of emission reduction credit. The certificate shall specify the issue date, the contaminant(s) involved, the nonattainment area involved, if applicable, and the person to whom the certificate is issued.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-131, filed 2/19/91, effective 3/22/91.]

WAC 173-400-136 Use of emission reduction credits. (1) Permissible use. An ERC may be used to satisfy the requirements for authorization of a bubble under WAC 173-400-120, as a part of a determination of "net emissions increase," as an offsetting reduction to satisfy the requirements for new source review per WAC 173-400-110 (3)(e), to satisfy requirements for PSD review per WAC 173-400-110 (4)(c), or to satisfy requirements for visibility review per WAC 173-400-110 (4)(e).

(2) Surrender of ERC certificate. When an ERC is used under subsection (1) of this section, the certificate for the ERC must be surrendered to the issuing authority. If only a portion of the ERC is used, the amended certificate will be returned to the owner.

(3) Conditions of use. An ERC may be used only for the contaminant(s) for which it was issued. Ecology or the authority may impose additional conditions of use to account for temporal and spatial differences between the emissions unit(s) that generated the ERC and the emissions unit(s) that use the ERC.

(4) Sale of an ERC. An ERC may be sold or otherwise transferred to a person other than the person to whom it was originally issued. Within thirty days after the transfer of ownership, the certificate must be surrendered to the issuing authority. After receiving the certificate, the issuing authority shall reissue the certificate to the new owner.

(5) Time of use. An unused ERC and any unused portion thereof shall expire ten years after date of original issue.

(6) Discount due to change in SIP. If reductions in emissions beyond those identified in the state implementation plan are required to meet an ambient air quality standard, if the standard cannot be met through controls on operating sources, and if the plan must be revised, an ERC may be discounted by ecology or the authority after public involvement per WAC 173-400-171. Any such discount shall not exceed the percentage of additional emission reduction needed to reach attainment.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-136, filed 2/19/91, effective 3/22/91.]

WAC 173-400-141 Prevention of significant deterioration (PSD). Section 40 CFR 52.21, Subparts (b), (c), (d), (e), (f), (g), (h), (i), (j), (k), (l), (m), (n), (o), (p), (r), (t), (v), and (w), Prevention of Significant Deterioration of Air Quality, as in effect on July 1, 1989, are incorporated by reference with the following additions and modifications:

(1) Construction of "administrator." In 40 CFR 52.21 (b)(17), federally enforceable, (f)(1)(v), (f)(3), and (f)(4)(i), exclusions from increment consumption, (g), redesignation, (l) and (2), air quality models, (p)(2), federal land manager, and (t), disputed permits or redesignations, the word "administrator" shall be construed in its original meaning. In 40 CFR 52.21 (b)(3)(iii) administrator shall mean both the administrator of EPA and the director of ecology.

(2) Contemporaneous. Subpart 40 CFR 52.21 (b)(3)(ii) is changed to read: "An increase or decrease in actual emissions is contemporaneous with the increase from the particular change only if it occurs at the same time or within ten years prior to the change. If a decrease occurred more than one year prior to the change it can only be credited if the decrease has been documented by an emission reduction credit."

(3) Public participation. Subpart 40 CFR 51.166(q) public participation, as in effect July 1, 1989, is hereby incorporated by reference, with the following modifications:

(a) In 40 CFR 51.166 (q)(2)(iv), the word "administrator" shall be construed in its original meaning.

(b) In 40 CFR 51.166 (q)(2)(iv), the phrase "specified time period" shall mean thirty days.

(4) Section 40 CFR 51.166 Subpart (p)(1) Sources Impacting Federal Class I areas - additional requirements - Notice to EPA, as in effect on July 1, 1989, is herein incorporated by reference.

(5) Secondary emissions. Subpart 40 CFR 52.21 (b)(18) is changed to read:

Emissions which would occur as a result of the construction or operation of a major stationary source or major modification, but do not come from the major stationary source or major modification itself. For the purpose of this section, secondary emissions must be specific, well defined, quantifiable, and impact the same general area as the stationary source or modification which causes the secondary emissions. Secondary emissions may include, but are not limited to:

(a) Emissions from ships or trains coming to or from the new or modified stationary source; and

(b) Emissions from any offsite support facility which would not otherwise be constructed or increase its emissions as a result of the construction or operation of the major stationary source or major modification.

(6) List of Class I areas. The following areas are the Class I areas in Washington state as of January 1, 1989:

Mount Rainier National Park
North Cascade National Park
Olympic National Park
Alpine Lakes Wilderness Area
Glacier Peak Wilderness Area
Goat Rocks Wilderness Area

Mount Adams Wilderness Area
Pasayten Wilderness Area.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-141, filed 2/19/91, effective 3/22/91.]

WAC 173-400-151 Retrofit requirements for visibility protection. (1) Determination of best available retrofit technology (BART). Ecology shall identify and analyze each source which may reasonably be anticipated to cause or contribute to impairment of visibility in any mandatory Class I area in Washington and any adjacent state and to determine BART for the contaminant of concern and those additional air pollution control technologies that are to be required to reduce impairment from the source.

(2) Initially defined BART. The owner(s) or operator(s) of any source(s) to which significant visibility impairment of a mandatory Class I area is reasonably attributable shall apply BART for each contaminant contributing to visibility impairment that is emitted at more than 250 tons per year. Each source for which BART is required must install and operate BART as expeditiously as possible, but in no case later than five years after the conditions are included in a regulatory order.

(3) Future definitions of BART. The owner(s) or operator(s) of any source(s) to which significant visibility impairment of a mandatory Class I area is reasonably attributable shall apply BART as new technology becomes available for a contaminant if:

(a) The source emits more than 250 tons per year of the contaminant; and,

(b) The controls representing BART have not previously been required in this section.

(4) Appeal. Any source owner or operator required by this section to install, operate, and maintain BART, may apply to the EPA administrator for an exception from that requirement pursuant to 40 CFR 51.303.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-151, filed 2/19/91, effective 3/22/91.]

WAC 173-400-161 Compliance schedules. (1) **Issuance.** Whenever a source is found to be in violation of an emission standard or other provision of this chapter, ecology or the authority may issue a regulatory order requiring that the source be brought into compliance within a specified time. The order shall contain a schedule for installation, with intermediate benchmark dates and a final completion date, and shall constitute a compliance schedule. Requirements for public involvement (WAC 173-400-171) must be met.

(2) **Federal action.** A source shall be considered to be in compliance with this chapter if all the provisions of its individual compliance schedule included with a regulatory order are being met. Such compliance does not preclude federal enforcement action by the EPA until and unless the schedule is submitted and adopted as an amendment to the state implementation plan.

(3) **Penalties for delayed compliance.** Sources on a compliance schedule but not meeting emissions standards may be subject to penalties as provided in the Federal Clean Air Act.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-161, filed 2/19/91, effective 3/22/91.]

WAC 173-400-171 Public involvement. (1) **Applicability.** Ecology or the authority shall provide public notice prior to the approval or denial of any of the following types of applications or other actions:

(a) Notice of construction for any new or modified source or emissions unit, if a net significant emissions increase for any pollutant regulated by state or federal law would result; or

(b) Any application or other proposed action for which a public hearing is required by PSD rules; or

(c) Any order to determine RACT; or

(d) An order to establish a compliance schedule or a variance; or

(e) The establishment or disestablishment of a nonattainment area, or the changing of the boundaries thereof; or

(f) An order to demonstrate the creditable height of a stack which exceeds the GEP formula height and sixty-five meters, by means of a fluid model or a field study, for the purposes of establishing an emission limitation; or

(g) An order to authorize a bubble; or

(h) Any application or other proposed action made pursuant to this chapter in which there is a substantial public interest according to the discretion of ecology or the authority.

(2) **Public notice.** Public notice shall be made only after all information required by ecology or the authority has been submitted and after applicable preliminary determinations, if any, have been made. The cost of providing public notice shall be borne by the applicant or other initiator of the action. Public notice shall include:

(a) Availability for public inspection in at least one location near the proposed project, of the nonproprietary information submitted by the applicant and of any applicable preliminary determinations, including analyses of the effect(s) on air quality.

(b) Publication in a newspaper of general circulation in the area of the proposed project of notice:

(i) Giving a brief description of the proposal;

(ii) Advising of the location of the documents made available for public inspection;

(iii) Advising of a thirty-day period for submitting written comment to ecology or the authority;

(iv) Advising that a public hearing may be held if ecology or the authority determines within a thirty-day period that significant public interest exists.

(c) A copy of the notice will be sent to the EPA regional administrator.

(3) **Public comment.** No final decision on any application or action of any of the types described in subsection (1) of this section, shall be made until the public comment period has ended and any comments received have been considered. Unless a public hearing is held, the public comment period shall be the thirty-day period for written comment published as provided above. If a public hearing is held the public comment period shall extend through the hearing date and thereafter for such period, if any, as the notice of public hearing may specify.

(4) **Public hearings.** The applicant, any interested governmental entity, any group or any person may request a public hearing within the thirty-day period published as above. Any such request shall indicate the interest of the entity filing it and why a hearing is warranted. Ecology or the authority may, in its discretion, hold a public hearing if it determines significant public interest exists. Any such hearing shall be held upon such notice and at a time(s) and place(s) as ecology or the authority deems reasonable.

(5) **Other requirements of law.** Whenever procedures permitted or mandated by law will accomplish the objectives of public notice and opportunity for comment, such procedures may be used in lieu of the provisions of this section.

(6) **Public information.** Copies of notices of construction, orders, and modifications thereof which are issued hereunder shall be available for public inspection on request at ecology or the authority.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-171, filed 2/19/91, effective 3/22/91.]

WAC 173-400-180 Variance. Any person who owns or is in control of a plant, building, structure, establishment, process, or equipment may apply to ecology for a variance from provisions of this chapter governing the quality, nature, duration, or extent of discharges of air contaminants in accordance with the provisions of RCW 70.94.181.

(1) **Jurisdiction.** Sources in any area over which a local air pollution control authority has jurisdiction shall make application to that authority rather than ecology. Ecology or the authority may grant such variance, but only after public involvement per WAC 173-400-171.

(2) **Full faith and credit.** Variances granted in compliance with state and federal laws by an authority for sources under their jurisdiction will be accepted as variances to this regulation.

(3) **EPA concurrence.** No variance or renewal shall be construed to set aside or delay any requirements of the Federal Clean Air Act except with the approval and written concurrence of the USEPA.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-180, filed 2/19/91, effective 3/22/91.]

WAC 173-400-190 Requirements for nonattainment areas. The development of specific requirements for nonattainment areas shall include consultation with local government in the area and shall include public involvement per WAC 173-400-171.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-190, filed 2/19/91, effective 3/22/91.]

WAC 173-400-200 Creditable stack height and dispersion techniques. (1) **Applicability.** These provisions shall apply to all sources except:

(a) Stacks for which construction had commenced on or before December 31, 1970, except where pollutants are being emitted from such stacks used by sources which were constructed, or reconstructed, or for which major modifications were carried out after December 31, 1970;

(b) Coal-fired steam electric generating units subject to the provisions of Section 118 of the Federal Clean Air Act, which commenced operation before July 1, 1957, and for

whose stacks construction commenced before February 8, 1974;

- (c) Flares;
- (d) Open burning for agricultural or silvicultural purposes as covered under the smoke management plan;
- (e) Residential wood combustion and open burning for which episodic restrictions apply.

These provisions shall not be construed to limit the actual stack height.

(2) Prohibitions. No source may use dispersion techniques or excess stack height to meet ambient air quality standards or PSD increment limitations.

(a) Excess stack height. Excess stack height is that portion of a stack which exceeds the greater of:

(i) Sixty-five meters, measured from the ground level elevation at the base of the stack; or

(ii) $H_g = H + 1.5L$

where: H_g = "good engineering practice" (GEP) stack height, measured from the ground level elevation at the base of the stack,

H = height of nearby structure(s) measured from the ground level elevation at the base of the stack,

L = lesser dimension, height or projected width, of nearby structure(s), subject to the proviso below.

"Nearby," as used in this subsection for purposes of applying the GEP formula means that distance up to five times the lesser of the height or the width dimension of a structure, but not greater than 0.8 kilometer (1/2 mile).

(b) Dispersion techniques. Increasing final exhaust gas plume rise by manipulating source process parameters, exhaust gas parameters, stack parameters, or combining exhaust gases from several existing stacks into one stack; or other selective handling of exhaust gas streams so as to increase the exhaust gas plume rise. This does not include:

(i) The reheating of a gas stream, following the use of a pollution control system, for the purpose of returning the gas to the temperature at which it was originally discharged from the facility generating the gas stream;

(ii) The merging of gas streams where:

(A) The source was originally designed and constructed with such merged gas streams, as demonstrated by the source owner(s) or operator(s).

(B) Such merging is part of a change in operation at the facility that includes the installation of pollution controls and is accompanied by a net reduction in the allowable emissions of a pollutant. This exclusion shall apply only to the emission limitation for the pollutant affected by such change in operation.

(C) Before July 8, 1985, such merging was part of a change in operation at the facility that included the installation of emissions control equipment or was carried out for sound economic or engineering reasons, and not primarily motivated by an intent to gain emissions credit for greater dispersion.

(3) Exception. EPA, ecology, or an authority may require the use of a field study or fluid model to verify the creditable stack height for the source. This also applies to a source seeking credit after the effective date of this rule for an increase in existing stack height up to that established by the GEP formula. A fluid model or field study shall be performed according to the procedures described in the EPA Guideline for Determination of Good Engineering Practice

Height (Technical Support Document of the Stack Height Regulations). The creditable height demonstrated by a fluid model or field study shall ensure that the emissions from a stack do not result in excessive concentrations of any air pollutant as a result of atmospheric downwash, wakes, or eddy effects created by the source itself, nearby structures or nearby terrain features.

(a) "Nearby," as used in this subsection for conducting a field study or fluid model, means not greater than 0.8 km, except that the portion of a terrain feature may be considered to be nearby which falls within a distance of up to ten times the maximum height of the feature, not to exceed two miles if such feature achieves a height 0.8 km from the stack that is at least forty percent of the GEP stack height or twenty-six meters, whichever is greater, as measured from the ground-level elevation at the base of the stack. The height of the structure or terrain feature is measured from the ground-level elevation at the base of the stack.

(b) "Excessive concentration" is defined for the purpose of determining creditable stack height under this subsection and means a maximum ground-level concentration owing to a significant downwash effect which contributes to excursion over an ambient air quality standard. For sources subject to PSD review (WAC 173-400-141 and 40 CFR 52.21) an excessive concentration alternatively means a maximum ground-level concentration owing to a significant downwash effect which contributes to excursion over a PSD increment. The emission rate used in this demonstration shall be the emission rate specified in the state implementation plan, or in the absence of such, the actual emission rate of the source. "Significant downwash effect" means a maximum ground-level concentration due to emissions from a stack due in whole or in part to downwash, wakes, and eddy effects produced by nearby structures or nearby terrain features which individually is at least forty percent in excess of the maximum concentration experienced in the absence of such downwash, wakes, or eddy effects.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-200, filed 2/19/91, effective 3/22/91.]

WAC 173-400-205 Adjustment for atmospheric conditions. Varying the rate of emission of a pollutant according to atmospheric conditions or ambient concentrations of that pollutant is prohibited, except as directed according to air pollution episode regulations.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-205, filed 2/19/91, effective 3/22/91.]

WAC 173-400-210 Emission requirements of prior jurisdictions. Any emissions unit that was under the jurisdiction of an authority and now is under the jurisdiction of ecology, shall meet all emission requirements that were applicable prior to transfer of jurisdiction if those standards are more stringent than the standards of this chapter or the specific chapter relating to that source.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-210, filed 2/19/91, effective 3/22/91.]

WAC 173-400-220 Requirements for board members. (1) **Public interest.** A majority of the members of any ecology or authority board shall represent the public

interest. A majority of the members of such boards, shall not derive any significant portion of their income from persons subject to enforcement orders pursuant to the state and federal clean air acts. An elected public official and the board shall be presumed to represent the public interest. In the event that a member derives a significant portion of his/her income from persons subject to enforcement orders, he/she shall delegate sole responsibility for administration of any part of the program which involves these persons to an assistant.

(2) **Disclosure.** Each member of any ecology or authority board shall adequately disclose any potential conflict of interest in any matter prior to any action or consideration thereon, and the member shall remove themselves from participation as a board member in any action or voting on such matter.

(3) **Define significant income.** For the purposes of this section, "significant portion of income" shall mean twenty percent of gross personal income for a calendar year. In the case of a retired person, "significant portion of income" shall mean fifty percent of income in the form of pension or retirement benefits from a single source other than Social Security. Income derived from employment with local or state government shall not be considered in the determination of "significant portion of income."

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-220, filed 2/19/91, effective 3/22/91.]

WAC 173-400-230 Regulatory actions. Ecology may take any of the following regulatory actions to enforce this chapter to meet the provisions of RCW 43.21B.300 which is incorporated by reference.

(1) **Notice of violation.** Whenever ecology has reason to believe that any provision of this chapter has been violated, it may cause written notice (either by certified mail with return receipt requested or by personal service) to be served on the alleged violator or violators. The notice shall specify the provision of this chapter alleged to be violated and the facts alleged to constitute a violation thereof, and may include an order that necessary corrective action be taken within a reasonable time.

(2) **Civil penalty.** Any person who violates any of the provisions of this chapter shall be subject to a penalty in the form of a fine in an amount not to exceed one thousand dollars per day for each violation. Each such violation shall be separate and distinct and, for a continuing violation, each day's continuance shall be a separate and distinct violation. The penalty shall be imposed by a notice in writing from personnel of ecology or an authority, describing the violation with reasonable detail. Further, the person is subject to a fine of up to five thousand dollars to be levied by the director if requested by the board of a local authority or if the director determines that the penalty is needed for effective enforcement of this chapter. The maximum daily fine imposed for violation of standards by a specific emissions unit is five thousand dollars. Upon written application submitted to ecology within fifteen days after notice has been received the director may remit or mitigate the penalty upon such terms as the director deems proper and when deemed in the best interest to carry out the purpose of this chapter. The mitigation shall not affect or reduce the

penalty imposed by the local board. The maximum daily fine that may be imposed upon any emissions unit for violation of any opacity standard is four hundred dollars.

(3) **Assurance of discontinuance.** Personnel of ecology or an authority may accept an assurance of discontinuance of any act or practice deemed in violation of this chapter. Any such assurance shall specify a time limit during which discontinuance is to be accomplished. Failure to perform the terms of any such assurance shall constitute prima facie proof of a violation of this chapter which make the alleged act or practice unlawful for the purpose of securing an injunction or other relief from the superior court.

(4) **Restraining orders, injunctions.** Whenever any person has engaged in, or is about to engage in, any acts or practices which constitute or will constitute a violation of any provision of this chapter, the director, after notice to such person and an opportunity to comply, may petition the superior court of the county wherein the violation is alleged to be occurring or to have occurred for a restraining order or a temporary or permanent injunction or another appropriate order.

(5) **Emergency episodes.** Ecology may issue such orders as authorized by chapter 173-435 WAC via chapter 70.94 RCW, whenever an air pollution episode forecast is declared.

(6) **Compliance orders.** Ecology may issue a compliance order in conjunction with a notice of violation. The order shall require the recipient of the notice of violation either to take necessary corrective action or to submit a plan for corrective action and a date when such action will be initiated.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-230, filed 2/19/91, effective 3/22/91.]

WAC 173-400-240 Criminal penalties. Persons in violation of Title 173 WAC may be subject to the provisions of RCW 70.94.430.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-240, filed 2/19/91, effective 3/22/91.]

WAC 173-400-250 Appeals. Decisions and orders of ecology or an authority may be appealed to the pollution control hearings board pursuant to chapter 43.21B RCW and chapter 371-08 WAC. PSD permits issued by ecology are appealable only to ecology pursuant to 40 CFR Part 124.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-250, filed 2/19/91, effective 3/22/91.]

WAC 173-400-260 Conflict of interest. All board members and officials acting or voting on decisions affecting air pollution sources, must comply with the Federal Clean Air Act, as it pertains to conflict of interest, and 40 CFR 103(d) which is incorporated by reference.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-400-260, filed 2/19/91, effective 3/22/91.]

Chapter 173-402 WAC

CIVIL SANCTIONS UNDER WASHINGTON CLEAN AIR ACT

WAC

173-402-010	Prior regulations.
173-402-020	Subsequent regulations.

WAC 173-402-010 Prior regulations. No standard, limitation or requirement of any kind applicable to air contaminant sources and in force at the effective date of this chapter shall be construed to require any element of *scienter* before civil sanctions available under the Washington Clean Air Act can be imposed.

[Statutory Authority: RCW 70.94.040, 70.94.141 and 70.94.331. 80-08-024 (Order DE 80-23), § 173-402-010, filed 6/24/80.]

WAC 173-402-020 Subsequent regulations. No standard, limitation or requirement of any kind applicable to air contaminant sources and adopted after the effective date of this chapter shall be construed to require any element of *scienter* before civil sanctions available under the Washington Clean Air Act can be imposed, except to the extent that a *scienter* requirement is provided for expressly.

[Statutory Authority: RCW 70.94.040, 70.94.141 and 70.94.331. 80-08-024 (Order DE 80-23), § 173-402-020, filed 6/24/80.]

Chapter 173-405 WAC
KRAFT PULPING MILLS

WAC

173-405-012	Statement of purpose.
173-405-021	Definitions.
173-405-033	Standards of performance.
173-405-035	Emission standards for sources emitting hazardous air pollutants.
173-405-040	Emission standards.
173-405-045	Creditable stack height and dispersion techniques.
173-405-061	More restrictive emission standards.
173-405-072	Monitoring requirements.
173-405-077	Report of startup, shutdown, breakdown or upset conditions.
173-405-078	Emission inventory.
173-405-086	New source review (NSR).
173-405-087	Prevention of significant deterioration (PSD).
173-405-091	Special studies.

DISPOSITION OF SECTIONS FORMERLY
CODIFIED IN THIS CHAPTER

173-405-011	Statement of policy and purpose. [Order DE 76-35, § 173-405-011, filed 12/28/76. Formerly WAC 18-36-011.] Repealed by 80-11-060 (Order DE 80-15), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
173-405-031	Specific emission standards. [Order DE 76-35, § 173-405-031, filed 12/28/76. Formerly WAC 18-36-031.] Repealed by 80-11-060 (Order DE 80-15), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
173-405-036	General emission standards and nuisance control measures. [Order DE 76-35, § 173-405-036, filed 12/28/76. Formerly WAC 18-36-036.] Repealed by 80-11-060 (Order DE 80-15), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
173-405-041	Emission requirements of prior jurisdictions. [Statutory Authority: RCW 70.94.331. 85-06-048 (Order 84-50), § 173-405-041, filed 3/6/85.] Repealed by 91-05-064 (Order

90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.

173-405-071	Monitoring and reporting. [Order DE 76-35, § 173-405-071, filed 12/28/76. Formerly WAC 18-36-071.] Repealed by 80-11-060 (Order DE 80-15), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
173-405-076	Report of startup, shutdown, breakdown or upset condition. [Order DE 76-35, § 173-405-076, filed 12/28/76. Formerly WAC 18-36-076.] Repealed by 80-04-049 (Order DE 80-7), filed 3/21/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331.
173-405-081	Notice of construction. [Order DE 76-35, § 173-405-081, filed 12/28/76. Formerly WAC 18-36-081.] Repealed by 80-04-049 (Order DE 80-7), filed 3/21/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331.
173-405-090	Operating permit. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-090, filed 8/20/80.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
173-405-101	Exemption. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-101, filed 8/20/80; Order DE 76-35, § 173-405-101, filed 12/28/76. Formerly WAC 18-36-101.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.

WAC 173-405-012 Statement of purpose. These rules are enacted under the provisions of the Washington Clean Air Act as amended (RCW 70.94.395) to:

(1) Assume state jurisdiction over emissions from kraft pulping mills to provide for the systematic control of air pollution in this industry and for the proper development of the state's natural resources; and

(2) Establish technically feasible and reasonably attainable standards and revise such standards as new information and better technology are developed and become available.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-012, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-012, filed 8/20/80.]

WAC 173-405-021 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter shall have the following meanings:

(1) "Kraft mill" means any manufacturing facility which uses an alkaline solution containing sodium hydroxide and/or sodium sulfide, and any other chemical pulping facility, except those covered by chapter 173-410 WAC, to produce pulp and/or paper products from wood fibers. For the purposes of this regulation "kraft mill" is equivalent to "source."

(2) "Noncondensibles" means gases and vapors from the digestion and evaporation processes of a mill that are not condensed with the equipment used in those processes.

(3) "Recovery furnace stack" means the stack from which the products of combustion from the recovery furnace are emitted to the ambient air.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-021, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331. 85-06-048 (Order 84-50), § 173-405-021, filed 3/6/85. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-405-021, filed 4/15/83. Statutory Authority: RCW 70.94.331

and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-021, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-049 (Order DE 80-7), § 173-405-021, filed 3/21/80; Order DE 76-35, § 173-405-021, filed 12/28/76. Formerly WAC 18-36-021.]

WAC 173-405-033 Standards of performance. The provisions of WAC 173-400-115 "Standards of performance for new sources" shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-033, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-405-033, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-033, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-049 (Order DE 80-7), § 173-405-033, filed 3/21/80.]

WAC 173-405-035 Emission standards for sources emitting hazardous air pollutants. The provisions of WAC 173-400-075 "Emission standards for sources emitting hazardous air pollutants" shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-035, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-18-010 (Order DE 83-22), § 173-405-035, filed 8/26/83.]

WAC 173-405-040 Emission standards. In addition to the general applicability of chapters 173-400 and 173-490 WAC to all emission sources; no kraft pulp mill shall cause or permit air contaminant emissions in excess of the limits listed below. Specific emission standards listed in this chapter will take precedence over the general emission standards of chapter 173-400 WAC.

(1) Recovery furnaces.

(a) The particulate emissions from each recovery furnace stack shall not exceed 0.23 grams of particulate per dry cubic meter at standard conditions (0.10 grains/dscf) corrected to eight percent oxygen averaged over three one hour tests.

(b) The TRS emissions from each recovery furnace stack constructed before January 1, 1970, and for recovery furnaces that have direct contact evaporators, shall not exceed 17.5 ppm corrected to eight percent oxygen for a daily average.

(c) The TRS emissions from each recovery furnace constructed after January 1, 1970, which does not have a contact evaporator, shall not exceed 5.0 ppm corrected to eight percent oxygen for a daily average.

(2) Smelt dissolver tank vent. The particulate emissions from smelt dissolver tank vents shall not exceed 0.15 grams per kilogram (0.30 pounds per ton) of solids fired at the associated recovery furnace.

(3) Lime kilns.

(a) The particulate emission from each lime kiln stack shall not exceed 0.30 grams of particulate per dry cubic meter (0.13 grains/dscf) at standard conditions corrected to ten percent oxygen.

(b) The TRS emissions from any lime kiln stack shall not exceed eighty ppm expressed as hydrogen sulfide for more than two consecutive hours in any one day.

(c) The average daily emission of TRS from any lime kiln stack shall not exceed fifty ppm. After January 1, 1985,

TRS emissions from each lime kiln stack shall not exceed twenty ppm corrected to ten percent oxygen for a daily average.

(4) Other TRS emissions units. Noncondensibles from digesters, multiple-effect evaporators and condensate stripper system shall at all times be treated to reduce the emissions of TRS equal to the reduction achieved by thermal oxidation in a lime kiln. A backup treatment system or equivalent approved by ecology must be installed to assure continual treatment.

(5) Other particulate emissions units. The emission of particulates from emissions units other than kraft recovery furnaces, lime kilns, or smelt dissolving tank vents, shall not exceed the following maximums:

(a) 0.46 grams per dry cubic meter at standard conditions (0.2 grains/dscf) corrected to seven percent oxygen, for units which combust wood and wood residue to produce steam and which commenced construction prior to January 1, 1983.

(b) 0.12 grams per dry cubic meter at standard conditions (0.05 grains/dscf) corrected to seven percent oxygen, for units which combust fuel other than wood and wood residue to produce steam, and which commenced construction after January 1, 1983.

(c) 0.23 grams per dry cubic meter at standard conditions (0.1 grains/dscf) corrected to seven percent oxygen in the case of combustion units, for units not classified under (a) or (b) of this subsection.

(6) Opacity. No person shall cause or allow the emission of a plume from any kraft recovery furnace, smelt dissolver tank, or lime kiln, which has an average opacity greater than thirty-five percent for more than six consecutive minutes in any sixty minute period, except as described in WAC 173-405-040(7).

No person shall cause or allow the emission of a plume, from any emissions unit other than a kraft recovery furnace, smelt dissolver tank, or lime kiln, which has an average opacity greater than twenty percent for more than six consecutive minutes in any sixty minute period, except that these provisions do not apply when the emissions occur due to soot blowing/grate cleaning and the operator can demonstrate that the emissions will not exceed twenty percent opacity for more than fifteen minutes in any eight consecutive hours. The intent of this provision is to permit soot blowing and grate cleaning necessary to the operation of the boiler facility. This practice, except for testing and trouble shooting, is to be scheduled for the same approximate times each day and ecology shall be advised of the schedule.

There shall be no more than one violation notice issued in any sixty minute period.

These provisions (of WAC 173-405-040(6)) shall not apply when the presence of uncombined water is the only reason for the opacity of the plume to exceed the applicable maximum.

(7) Each mill may petition for, and ecology may establish by regulatory order, alternate opacity limits for a specific kraft recovery furnace or lime kiln, providing:

(a) The mill can demonstrate compliance; with all other applicable emission limits; and

(b) Best practicable operation and maintenance procedures, as approved by ecology, are continuously employed.

(8) Any person electing to apply for exceptions per the provisions of WAC 173-405-040(7) shall submit a program acceptable to ecology. The program shall include the following information: The amount and concentration of suspended particulate material emitted during best practicable operating procedures, opacity recorded at such emission level, the type of equipment and procedures which will be used to demonstrate compliance and the time required for installation of the equipment.

(9) The opacity provisions of this chapter shall apply until an application is received by ecology, petitioning for a revised limit as allowed by WAC 173-405-040(7). After a petition is received, enforcement of the opacity provisions will be stayed until the application is rejected or a new limit is established.

(10) Operation and maintenance. At all times, including periods of abnormal operation and upset conditions, owners and operators shall, to the extent practicable, maintain and operate any affected facility, including associated air pollution control equipment, in a manner consistent with good air pollution control practice. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to ecology which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

(11) SO₂.

(a) The emission of sulfur dioxide from any recovery furnace or lime kiln shall not exceed five hundred ppm for an hourly average, corrected to eight percent oxygen for a recovery furnace or to ten percent oxygen for a lime kiln.

(b) The emission of sulfur dioxide from any emissions unit other than a recovery furnace or lime kiln shall not exceed one thousand ppm for an hourly average, corrected to seven percent oxygen for combustion units.

(12) Source testing. To demonstrate compliance with this chapter, the provisions of WAC 173-400-105 shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-040, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-405-040, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-040, filed 8/20/80.]

WAC 173-405-045 Creditable stack height and dispersion techniques. The provisions of WAC 173-400-200 shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-045, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-057 (Order 87-50), § 173-405-045, filed 12/16/87.]

WAC 173-405-061 More restrictive emission standards. Ecology may establish more restrictive emission standards for new mills or for mills expanding existing facilities pursuant to WAC 173-400-110.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-061, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-405-061, filed 4/15/83; Order DE 76-35, § 173-405-061, filed 12/28/76. Formerly WAC 18-36-061.]

WAC 173-405-072 Monitoring requirements. Each mill shall conduct routine monitoring of emissions in accordance with a program that has been approved by ecology. Results of the monitoring shall be reported within fifteen days of the end of each calendar month and shall include data as follows:

(1) Particulate: The results of particulate measurements made on each source during the month.

(2) TRS:

(a) The average TRS concentration expressed in units of the standard for each recovery furnace and lime kiln stack.

(b) The date, time and concentration of TRS for each TRS emissions violation and the total numbers of hours that exceed the standard.

(3) Opacity or other continuous monitor:

(a) The date and time of opacity in excess of the standard.

(b) If equipment for continuous monitoring of opacity is not available, continuous monitoring of operating parameters may be required by a regulatory order as an alternate. If an alternate is approved, the date and time of each occurrence in excess of the regulatory order must be reported.

(4) Production: The average daily production of air-dried unbleached pulp.

(5) Other data: Each kraft mill shall furnish, upon request of ecology, such other pertinent data required to evaluate the mill's emissions or emission control program.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-072, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-072, filed 8/20/80.]

WAC 173-405-077 Report of startup, shutdown, breakdown or upset conditions. The provisions of WAC 173-400-105(5) shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-077, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-405-077, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-077, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-049 (Order DE 80-7), § 173-405-077, filed 3/21/80.]

WAC 173-405-078 Emission inventory. The provisions of WAC 173-400-105(1) shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-078, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 89-02-055 (Order 88-39), § 173-405-078, filed 1/3/89; 83-09-036 (Order DE 83-13), § 173-405-078, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-078, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-049 (Order DE 80-7), § 173-405-078, filed 3/21/80.]

WAC 173-405-086 New source review (NSR). The provisions of WAC 173-400-110 shall apply to all new sources and emissions units to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-086, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-405-086, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-060 (Order DE 80-15), § 173-405-086, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-049 (Order DE 80-7), § 173-405-086, filed 3/21/80.]

WAC 173-405-087 Prevention of significant deterioration (PSD). The provisions of WAC 173-400-141 shall apply to all new major sources and major modifications to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-087, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-057 (Order 87-50), § 173-405-087, filed 12/16/87.]

WAC 173-405-091 Special studies. Ecology may require such additional special studies relevant to process emissions and establish completion dates as it determines necessary.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-405-091, filed 2/19/91, effective 3/22/91; Order DE 76-35, § 173-405-091, filed 12/28/76. Formerly WAC 18-36-091.]

**Chapter 173-410 WAC
SULFITE PULPING MILLS**

WAC

- 173-410-012 Statement of purpose.
- 173-410-021 Definitions.
- 173-410-035 Emission standards for sources emitting hazardous air pollutants.
- 173-410-040 Emission standards.
- 173-410-045 Creditable stack height and dispersion techniques.
- 173-410-062 Monitoring requirements.
- 173-410-067 Report of startup, shutdown, breakdown or upset conditions.
- 173-410-071 Emission inventory.
- 173-410-086 New source review (NSR).
- 173-410-087 Prevention of significant deterioration (PSD).
- 173-410-100 Special studies.

**DISPOSITION OF SECTIONS FORMERLY
CODIFIED IN THIS CHAPTER**

- 173-410-011 Statement of policy and purpose. [Order DE 76-36, § 173-410-011, filed 12/28/76. Formerly WAC 18-38-011.] Repealed by 80-11-061 (Order DE 80-16), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
- 173-410-031 Specific emission standards. [Order DE 76-36, § 173-410-031, filed 12/28/76. Formerly WAC 18-38-031.] Repealed by 80-11-061 (Order DE 80-16), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
- 173-410-036 General emission standards and nuisance control measures. [Order DE 76-36, § 173-410-036, filed 12/28/76. Formerly WAC 18-38-036.] Repealed by 80-11-061 (Order DE 80-16), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
- 173-410-041 More restrictive emission standards. [Order DE 76-36, § 173-410-041, filed 12/28/76. Formerly WAC 18-38-041.] Repealed by 80-11-061 (Order DE 80-16), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
- 173-410-042 Emission requirements of prior jurisdictions. [Statutory Authority: RCW 70.94.331. 85-06-048 (Order 84-50), § 173-410-042, filed 3/6/85.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.

- 173-410-051 Compliance. [Order DE 76-36, § 173-410-051, filed 12/28/76. Formerly WAC 18-38-051.] Repealed by 80-11-061 (Order DE 80-16), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
- 173-410-061 Monitoring and reporting. [Order DE 76-36, § 173-410-061, filed 12/28/76. Formerly WAC 18-38-061.] Repealed by 80-11-061 (Order DE 80-16), filed 8/20/80. Statutory Authority: RCW 70.94.331 and 70.94.395.
- 173-410-066 Report of startup, shutdown, breakdown or upset condition. [Order DE 76-36, § 173-410-066, filed 12/28/76. Formerly WAC 18-38-066.] Repealed by 80-04-050 (Order DE 80-8), filed 3/21/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331.
- 173-410-081 Notice of construction. [Order DE 76-36, § 173-410-081, filed 12/28/76. Formerly WAC 18-38-091.] Repealed by 80-04-050 (Order DE 80-8), filed 3/21/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331.
- 173-410-090 Operating permit. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-090, filed 8/20/80.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.
- 173-410-091 Exemptions. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-091, filed 8/20/80; Order DE 76-36, § 173-410-091, filed 12/28/76. Formerly WAC 18-38-081.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.

WAC 173-410-012 Statement of purpose. These rules are enacted under the provisions of the Washington Clean Air Act as amended (RCW 70.94.395) to:

- (1) Assume state jurisdiction over emissions from sulfite pulping mills to provide for the systematic control of air pollution in this industry and for the proper development of the state's natural resources; and
- (2) Establish technically feasible and reasonably attainable standards and revise such standards as new information and better technology are developed and become available.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-012, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-012, filed 8/20/80.]

WAC 173-410-021 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter, shall have the following meanings:

- (1) "Acid plant" means the facility in which the cooking liquor is either manufactured or fortified when not associated with a recovery system.
- (2) "Average daily emission" means total weight of an air contaminant emitted in each month, divided by the number of days of production that month.
- (3) "Average daily production" means air dried tons of unbleached pulp produced in a month, divided by the number of days of production in that month.
- (4) "Blow system" includes the storage chest, tank or pit to which the digester pulp is discharged following the cook.
- (5) "Recovery system" means the process by which all or part of the cooking chemicals may be recovered, and cooking liquor regenerated from spent cooking liquor, including evaporation, combustion, dissolving, fortification,

storage facilities, and emission control equipment associated with the recovery cycle.

(6) "Sulfite pulping mill" means any manufacturing facility which uses a cooking liquor consisting of sulfurous acid, a sulfite or bisulfite salt alone or in any combination, with or without additional mechanical refining or delignification to produce pulp, pulp products or cellulose from wood fibers. For the purposes of this regulation "sulfite pulping mill" is equivalent to "source."

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-021, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331. 85-06-048 (Order 84-50), § 173-410-021, filed 3/6/85. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-410-021, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-021, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-050 (Order DE 80-8), § 173-410-021, filed 3/21/80; Order DE 76-36, § 173-410-021, filed 12/28/76. Formerly WAC 18-38-021.]

WAC 173-410-035 Emission standards for sources emitting hazardous air pollutants. The provisions of WAC 173-400-075 "Emission standards for sources emitting hazardous air pollutants" shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-035, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-18-010 (Order DE 83-22), § 173-410-035, filed 8/26/83.]

WAC 173-410-040 Emission standards. In addition to the general applicability of chapters 173-400 and 173-490 WAC to all emission sources; no sulfite pulping mill shall cause or permit air contaminant emissions in excess of the limits listed below. Specific emission standards listed in this chapter will take precedence over the general emission standards of chapter 173-400 WAC.

(1) Sulfur dioxide.

(a) The total average daily emissions from a sulfite pulping mill, or a portion of a sulfite pulping mill which practices incineration of the spent sulfite liquor, shall not exceed ten grams of sulfur dioxide per kilogram (twenty pounds per ton) of air dried, unbleached pulp produced.

(b) The total average daily emissions from a sulfite pulping mill, or a portion of a sulfite pulping mill that does not incinerate the spent sulfite liquor, shall not exceed two grams of sulfur dioxide per kilogram (four pounds per ton) of air dried, unbleached pulp produced.

(c) The blow system emissions shall not exceed 0.1 grams of sulfur dioxide per minute, on a fifteen minute average, per kilogram (0.2 pounds per ton) of air dried, unbleached pulp discharged from the digester.

(d) Emissions from the recovery system and acid plant shall not exceed 800 ppm of sulfur dioxide for any hourly average.

(e) Emissions from recovery systems constructed after January 24, 1972, shall not exceed 300 ppm of sulfur dioxide for any hourly average.

(f) Emissions from any emissions unit, other than a recovery system, a blow system or an acid plant, shall not exceed 1000 ppm of sulfur dioxide, corrected to seven percent oxygen in the case of combustion unit, for any hourly average.

(2) Particulate.

(a) Emissions of particulate from recovery systems constructed before January 24, 1972, shall not exceed 0.23 grams per dry cubic meter of exhaust at standard conditions (0.10 grains/dscf) corrected to eight percent oxygen.

(b) Emissions of particulate matter from recovery systems constructed after January 24, 1972, shall not exceed 0.14 grams per dry cubic meter of exhaust at standard conditions (0.06 grains/dscf) corrected to eight percent oxygen.

(c) The emission of particulates from emissions units other than acid plants or recovery systems shall not exceed the following maximums:

(i) 0.46 grams per dry cubic meter at standard conditions (0.2 grains/dscf) corrected to seven percent oxygen, for units which combust wood and wood residue to produce steam and which commenced construction prior to January 1, 1983.

(ii) 0.12 grams per dry cubic meter at standard conditions (0.05 grains/dscf) corrected to seven percent oxygen, for units which combust fuel other than wood and wood residue to produce steam, and which commenced construction after January 1, 1983.

(iii) 0.23 grams per dry cubic meter at standard conditions (0.1 grains/dscf) corrected to seven percent oxygen in the case of combustion units, for units not classified under (c) (i) or (ii) of this subsection.

(3) Opacity. No person shall cause or allow the emission of a plume from a recovery system or acid plant which has an average opacity greater than thirty-five percent, for more than six consecutive minutes in any sixty minute period, except as allowed per RCW 70.94.331 (2)(c).

(4) Operation and maintenance. At all times, including periods of abnormal operations and upset conditions, owners and operators shall, to the extent practicable, maintain and operate any affected facility, including associated air pollution control equipment, in a manner consistent with good air pollution control practice. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to ecology which may include, but is not limited to, monitoring results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

(5) No recovery system shall emit total reduced sulfur (TRS) gases in excess of 17.5 ppm for a daily average.

(6) More restrictive limits. Ecology may set more restrictive emissions limits than the specific limits set in this chapter (after public involvement and hearing), if there is reason to believe that the emission(s) from a source is a cause of public nuisance or a cause of violation of ambient air quality standards. The source shall, within ninety days from notification of the more restrictive limits, achieve operation that will prevent further recurrence of the nuisance or violation.

(7) Source testing. To demonstrate compliance with this chapter, the provisions of WAC 173-400-105 shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-040, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-410-040, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-040, filed 8/20/80.]

WAC 173-410-045 Creditable stack height and dispersion techniques. The provisions of WAC 173-400-200 shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-045, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-057 (Order 87-50), § 173-410-045, filed 12/16/87.]

WAC 173-410-062 Monitoring requirements. Each mill shall conduct routine monitoring of emissions in accordance with a program that has been approved by ecology. Results of monitoring shall be reported within fifteen days of the end of each calendar month and shall include data as follows:

(1) For the recovery system and acid plant:

(a) The average daily emissions of sulfur dioxide expressed as grams SO₂ per kilogram of air dried, unbleached pulp produced and the kilograms of SO₂ per day.

(b) Daily average concentration of sulfur dioxide.

(c) The date, time and concentration for each sulfur dioxide emission violation and the total number of hours that exceed the standard.

(d) The results of particulate tests conducted during the month.

(2) For the blow system:

(a) The grams of sulfur dioxide per minute, on a fifteen minute average, per kilogram of air dried, unbleached pulp discharged from the digester.

(b) The average daily production of air dried, unbleached pulp.

(3) Each mill shall furnish, upon request of ecology, such other pertinent data required to evaluate the mill's emission control program.

(4) All measurements shall be made in accordance with WAC 173-400-105.

(5) Each mill shall be required to establish a program approved by ecology for continuous opacity monitoring to demonstrate compliance with WAC 173-410-040(3) and to report the results to ecology in a format and on a schedule set by regulatory order. If equipment for continuous monitoring of opacity is not available, continuous monitoring of operating parameters may be required as an alternate until continuous opacity monitoring equipment is available.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-062, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-062, filed 8/20/80.]

WAC 173-410-067 Report of startup, shutdown, breakdown or upset conditions. The provisions of WAC 173-400-105(5) shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-067, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-410-067, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-067, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-050 (Order DE 80-8), § 173-410-067, filed 3/21/80.]

WAC 173-410-071 Emission inventory. The provisions of WAC 173-400-105(1) shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-071, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 89-02-055 (Order 88-39), § 173-410-071, filed 1/3/89; 83-09-036 (Order DE 83-13), § 173-410-071, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-071, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-050 (Order DE 80-8), § 173-410-071, filed 3/21/80.]

WAC 173-410-086 New source review (NSR). The provisions of WAC 173-400-110 shall apply to all new sources and emissions units to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-086, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-410-086, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-061 (Order DE 80-16), § 173-410-086, filed 8/20/80. Statutory Authority: RCW 43.21A.080, 70.94.011, 70.94.152, and 70.94.331. 80-04-050 (Order DE 80-8), § 173-410-086, filed 3/21/80.]

WAC 173-410-087 Prevention of significant deterioration (PSD). The provisions of WAC 173-400-141 shall apply to all new major sources and major modifications to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-087, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-057 (Order 87-50), § 173-410-087, filed 12/16/87.]

WAC 173-410-100 Special studies. Ecology may require such additional special studies relevant to process emissions and establish completion dates as it finds necessary.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-410-100, filed 2/19/91, effective 3/22/91.]

Chapter 173-415 WAC PRIMARY ALUMINUM PLANTS

WAC

173-415-010	Statement of purpose.
173-415-020	Definitions.
173-415-030	Emission standards.
173-415-040	Standards of performance.
173-415-045	Creditable stack height and dispersion techniques.
173-415-050	New source review (NSR).
173-415-051	Prevention of significant deterioration (PSD).
173-415-060	Monitoring and reporting.
173-415-070	Report of startup, shutdown, breakdown or upset conditions.
173-415-080	Emission inventory.

DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER

173-415-041	Emission requirements of prior jurisdictions. [Statutory Authority: RCW 70.94.331. 85-06-048 (Order 84-50), § 173-415-041, filed 3/6/85.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.
173-415-090	Operating permit. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-

090, filed 8/14/80.] Repealed by 83-09-036 (Order DE 83-13), filed 4/15/83. Statutory Authority: Chapters 43.21A and 70.94 RCW.

WAC 173-415-010 Statement of purpose. These rules are enacted under the provisions of the Washington Clean Air Act as amended (RCW 70.94.395) to:

(1) Assume state jurisdiction over emissions from primary aluminum reduction plants to provide for the systematic control of air pollution in this industry and for the proper development of the state's natural resources; and

(2) Establish technically feasible and reasonably attainable standards and revise such standards as new information and better technology are developed and become available.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-010, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-010, filed 8/14/80. Formerly WAC 18-52-010.]

WAC 173-415-020 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter, shall have the following meanings:

(1) "Fluorides" means compounds of the element fluorine.

(2) "Forage" means grasses, pasture and other vegetation that is normally consumed or is intended to be consumed by livestock.

(3) "Primary aluminum plant" or "primary aluminum reduction plant" or "primary aluminum mill" means a plant which produces aluminum metal from aluminum oxide (alumina). For the purposes of this regulation "primary aluminum plant" is equivalent to "source."

(4) "Potline primary emission control system" means the equipment and procedures designed to collect and remove contaminants from the exhaust gases which are captured at the pot.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-020, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331. 85-06-048 (Order 84-50), § 173-415-020, filed 3/6/85. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-415-020, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-020, filed 8/14/80. Formerly WAC 18-52-021.]

WAC 173-415-030 Emission standards. In addition to the general applicability of chapters 173-400 and 173-490 WAC to all emission sources; all primary aluminum plants are required to meet the emission standards of this chapter. Specific emissions standards listed in this chapter will take precedence over the general emission standards of chapter 173-400 WAC.

(1) Fluoride.

(a) The emission of gaseous and particulate fluorides for all emissions units within a primary aluminum plant shall be restricted so that the plant's emissions will not cause ambient air and forage standards for fluorides established by chapter 173-481 WAC to be exceeded outside the property controlled by the aluminum plant owner(s) or operator(s).

(b) Each potline primary emission control system shall be designed so that the control of fluoride emissions will be

equivalent to a total fluoride collection efficiency of: (i) Eighty percent for vertical stud soderberg and side worked prebake pots, (ii) eighty-five percent for horizontal stud soderberg pots, and (iii) ninety-five percent for center worked prebake pots. A primary emission control system with a design removal efficiency of at least ninety-five percent of the fluoride collected is required.

(2) Particulate. The total emission of particulate matter to the atmosphere from the reduction process (potlines) shall be reduced to the lowest level consistent with reasonably available control technology (RACT) for primary aluminum plants. The emission of solid particulate shall not exceed 7.5 grams per kilogram (fifteen pounds per ton) of aluminum produced on a daily basis.

(3) Visible emissions. Visible emissions from any emissions unit in a primary aluminum plant shall not exceed an average twenty percent opacity for more than six consecutive minutes in any sixty minute period. This provision shall not apply:

(a) When the presence of uncombined water is the only reason for the opacity of the plume to exceed twenty percent; or

(b) When an alternate opacity limit has been established under RCW 70.94.331 (2)(c).

(4) Fugitive emissions. Each primary aluminum plant shall use RACT to prevent fugitive emissions.

(5) Sulfur dioxide.

(a) Total emissions of sulfur dioxide from all emissions units shall not exceed thirty grams of sulfur dioxide per kilogram of aluminum produced on a monthly average (sixty pounds per ton). Those primary aluminum plants which were in excess of the above sulfur dioxide limit on January 1, 1978, will be allowed to emit at the January 1, 1978, level of emissions provided that the owners or operators did demonstrate to ecology by July 1, 1981, by use of modeling and ambient measurements, that the emissions will not cause the ambient standard to be exceeded, and that the limits are placed in a regulatory order(s).

(b) In no case shall any plant cause or permit the emission of a gas containing sulfur dioxide in excess of one thousand parts per million corrected to dry standard conditions for an hourly average.

(6) Operation and maintenance. At all times, including periods of abnormal operation and upset, owners and operators shall, to the extent practicable, maintain an affected facility, and operate and maintain air pollution control equipment associated with such facility in a manner consistent with good air pollution control practice. A plant may elect to establish a program, subject to the approval of ecology, for monitoring each potroom in order to demonstrate good operation and maintenance.

(7) Source testing. To demonstrate compliance with this chapter, the provisions of WAC 173-400-105 shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-030, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-415-030, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-030, filed 8/14/80. Formerly WAC 18-52-031.]

WAC 173-415-040 Standards of performance. The provisions of WAC 173-400-115 "Standards of performance for new sources" shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-040, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-020 (Order DE 82-21), § 173-415-040, filed 7/27/82. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-040, filed 8/14/80. Formerly WAC 18-52-051.]

WAC 173-415-045 Creditable stack height and dispersion techniques. The provisions of WAC 173-400-200 shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-045, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-057 (Order 87-50), § 173-415-045, filed 12/16/87.]

WAC 173-415-050 New source review (NSR). The provisions of WAC 173-400-110 shall apply to all new sources and emissions units to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-050, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-415-050, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-050, filed 8/14/80. Formerly WAC 18-52-056.]

WAC 173-415-051 Prevention of significant deterioration (PSD). The provisions of WAC 173-400-141 shall apply to all new major sources and major modifications to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-051, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-057 (Order 87-50), § 173-415-051, filed 12/16/87.]

WAC 173-415-060 Monitoring and reporting. (1) Each primary aluminum plant shall conduct routine monitoring of emissions, ambient air, and forage in accordance with a program that has been approved by ecology. Results of monitoring shall be reported within thirty days of the end of each calendar month and shall include data as follows:

(a) Ambient air: Twenty-four hour concentrations of gaseous fluoride in the ambient air expressed in micrograms of hydrogen fluoride per cubic meter of ambient air.

(b) Forage: Concentrations of fluoride in forage expressed in parts per million of fluoride on a dried weight basis.

(c) Particulate emissions: Results of all emission sampling conducted during the month for particulates, expressed in grains per standard dry cubic foot, in pounds per day, and in pounds per ton of aluminum produced. The method of calculating pounds per ton shall be as specified in the approved monitoring programs. Particulate data shall be reported as total particulates and percentage of fluoride ion contained therein.

Compliance with WAC 173-415-030(2) shall be determined by measurements of emissions from the potline

primary control system plus measurements of emissions from the roof monitor.

(d) Fluoride emissions: Results of all sampling conducted during the month for fluoride emissions. All results shall be expressed as hydrogen fluoride in parts per million on a volume basis and pounds per day of hydrogen fluoride.

(e) Other emission and ambient air data as specified in the approved monitoring program.

(2) Other data: For ecology to evaluate a plant's emissions or emission control program, each primary aluminum plant shall furnish other data requested by ecology.

(3) Change in raw materials or fuel: Any change or series of changes in raw material or fuel which results in a cumulative increase in emissions of sulfur dioxide of five hundred tons per year or more over that stated in the 1979 inventory required by WAC 173-415-080 shall require the submittal of sufficient information to ecology so that the effect upon ambient concentrations of sulfur dioxide can be determined. Ecology may issue regulatory orders requiring controls to reduce the effect of such increases.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-060, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-060, filed 8/14/80. Formerly WAC 18-52-061 and 18-52-071.]

WAC 173-415-070 Report of startup, shutdown, breakdown or upset conditions. The provisions of WAC 173-400-105(5) shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-070, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 83-09-036 (Order DE 83-13), § 173-415-070, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-070, filed 8/14/80. Formerly WAC 18-52-077.]

WAC 173-415-080 Emission inventory. The provisions of WAC 173-400-105(1) shall apply to all sources to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-415-080, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 43.21A and 70.94 RCW. 89-02-055 (Order 88-39), § 173-415-080, filed 1/3/89; 83-09-036 (Order DE 83-13), § 173-415-080, filed 4/15/83. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-028 (Order DE 80-17), § 173-415-080, filed 8/14/80. Formerly WAC 18-52-086.]

Chapter 173-421 WAC

MOTOR VEHICLE EMISSION CONTROL SYSTEMS

WAC

173-421-010	Purpose.
173-421-020	Assumption of jurisdiction and applicability.
173-421-030	Definitions.
173-421-100	Emission control systems.

WAC 173-421-010 Purpose. This chapter promulgated under RCW 70.94.305 and 70.94.331 establishes requirements to preserve emission control equipment installed on motor vehicles.

[Statutory Authority: Chapter 70.94 RCW. 87-19-078 (Order 87-17), § 173-421-010, filed 9/16/87.]

WAC 173-421-020 Assumption of jurisdiction and applicability. The department finds that the prevention and control of air pollution from motor vehicles should be regulated on a state-wide basis and, hereby assumes jurisdiction over motor vehicles for the purpose of controlling air contaminant emissions from the operation of such motor vehicles.

[Statutory Authority: Chapter 70.94 RCW. 87-19-078 (Order 87-17), § 173-421-020, filed 9/16/87.]

WAC 173-421-030 Definitions. Unless a different meaning is clearly required by context, words and phrases used in this chapter shall have the following meanings; general terms common with other chapters of Title 173 WAC as defined in chapter 173-403 WAC, and terms specific to motor vehicle emission control systems as follows:

"Motor vehicle" means a self-powered operating vehicle or one capable of operating, designed to transport people or property, and of a type required to be licensed for operation on public highways.

[Statutory Authority: Chapter 70.94 RCW. 87-19-078 (Order 87-17), § 173-421-030, filed 9/16/87.]

WAC 173-421-100 Emission control systems. A person shall not remove or render inoperable any component or change any element of design of a motor vehicle including adjustments outside the range of manufacturer's specifications that could affect the amount of air contaminants emitted from that vehicle subject to the following conditions:

(1) Components of emission control systems may be disassembled and assembled for the purpose of repair and maintenance. These components or elements of design shall be restored to proper working order when they are repaired or maintained.

(2) When components of emission control systems require replacement they may be removed and replaced with a part intended by the vehicle manufacturer as a replacement part for that specific vehicle. Under circumstances established by the United States Environmental Protection Agency, an aftermarket replacement part may be used. A replaced part shall be installed and adjusted so that it is in proper working order.

[Statutory Authority: Chapter 70.94 RCW. 87-19-078 (Order 87-17), § 173-421-100, filed 9/16/87.]

Chapter 173-422 WAC

MOTOR VEHICLE EMISSION INSPECTION

WAC	
173-422-010	Purpose.
173-422-020	Definitions.
173-422-030	Vehicle emission inspection requirement.
173-422-035	Registration requirements.
173-422-040	Noncompliance areas.
173-422-050	Emission contributing areas.
173-422-060	Emission standards.
173-422-070	Test procedures.
173-422-080	Vehicle inspection data handling procedures.

173-422-090	Exhaust analyzer specifications.
173-422-100	Testing equipment maintenance and calibration.
173-422-110	Data system requirements.
173-422-120	Quality assurance.
173-422-130	Inspection fees.
173-422-140	Inspection forms and certificates.
173-422-145	Fraudulent certificates of compliance/acceptance.
173-422-150	Inspection personnel requirements.
173-422-160	Fleet and government vehicle testing requirements.
173-422-170	Exemptions.
173-422-175	Fraudulent exemptions.
173-422-180	Air quality standards.
173-422-190	Emission specialist certification.
173-422-195	Listing of certified emission specialists.

WAC 173-422-010 Purpose. This chapter implements the Washington Clean Air Act, chapter 70.94 RCW, as supplemented by the motor vehicle emission inspection provisions codified as chapter 70.120 RCW.

Motor vehicles are the primary emitters of carbon monoxide and emit significant quantities of hydrocarbons and oxides of nitrogen. Emission controls required by the federal government are designed to reduce motor vehicle related air pollution. However, the effectiveness of these controls is substantially reduced through deterioration, maladjustment and tampering. Motor vehicle emission inspection serves to identify high polluting vehicles and to reduce emissions, when such can be accomplished at reasonable cost. These rules establish the emission standards, testing procedures, and associated activities necessary to implement a program of air pollution prevention and control involving motor vehicle emission inspections.

[Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-010, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 80-03-070 (Order DE 79-35), § 173-422-010, filed 2/28/80.]

WAC 173-422-020 Definitions. Unless a different meaning is clearly indicated by context, the following definitions will apply:

(1) "Accuracy" means the degree of correctness by which the true value of a measured sample is determined.

(2) "Calibration gases" mean a blend of hydrocarbon (propane), carbon monoxide (CO), and carbon dioxide using nitrogen as carrier gas. The concentrations are to be traceable to within two percent of NBS standards.

(3) "Certificate of acceptance" means an official form, issued by someone authorized by the department, which certifies that all of the following conditions have been met: The recipient's vehicle initially failed to comply with applicable emission standards, the recipient has provided original receipts proving that more than fifty dollars or one hundred fifty dollars on a 1981 or later model motor vehicle were spent after the first test and before the final test on repairs performed by a "certified emission specialist" solely to meet emission standards, the vehicle on final reinspection again failed to meet such standards, and the repair information section of the test report has been completed and the vehicle has been in use for more than five years or fifty thousand miles, and any component of the vehicle installed by the manufacturer for the purpose of reducing emissions, or its appropriate replacement, is installed and operative.

(4) "Certificate of compliance" means an official form, issued by someone authorized by the department, which

certifies that the recipient's vehicle on inspection complied with applicable emission standards.

(5) "Certified emission specialist" means an individual who has been issued a certificate of instruction by the department as authorized in RCW 70.120.020 (2)(a) and has maintained the certification by meeting requirements of WAC 173-422-190(2).

(6) "Dealer" means a motor vehicle dealer, as defined in RCW 46.70.011, that is licensed pursuant to chapter 46.70 RCW.

(7) "Department" means the department of ecology.

(8) "Drift" means the change in the reading of the analyzer to a given sample over a period of time with no adjustment to the analyzer having been made between the initial and final measurements.

(9) "Emission contributing area" means a land area within whose boundaries are registered motor vehicles that contribute significantly to the violation of motor vehicle related air quality standards in a noncompliance area. (The inspection program implemented by this chapter applies only to vehicles registered in emission contributing areas.)

(10) "Farm vehicle" means any vehicle other than a farm tractor or farm implement which is designed and/or used primarily in agricultural pursuits on farms for the purpose of transporting machinery, equipment, implements, farm products, supplies, and/or farm labor thereon and is only incidentally operated on or moved along public highways for the purpose of going from one farm to another.

(11) "Fleet" means a group of twenty-five or more motor vehicles owned or leased concurrently by one person.

(12) "Gaseous fuel" means liquefied petroleum gases and natural gases in liquefied or gaseous forms.

(13) "Gross vehicle weight (GVW)" means the manufacturer stated gross vehicle weight rating.

(14) "HC and CO emissions" means the concentration of hydrocarbons (measured as n-hexane) and carbon monoxide in the engine exhaust.

(15) "Motor vehicle" means any self-propelled vehicle required to be licensed pursuant to chapter 46.16 RCW.

(16) "Motorcycle" means every motor vehicle having a saddle for the use of the rider and designed to travel on not more than three wheels in contact with the ground, but excluding a farm tractor.

(17) "NBS" means National Bureau of Standards.

(18) "Noncompliance area" means a land area within whose boundaries any air quality standard for any air contaminant from the emissions of motor vehicles will probably be exceeded.

(19) "PPM" means parts per million by volume.

(20) "Repeatability" means the ability of an analyzer to report the same value for successive measurements of the same sample.

(21) "Response" means how quickly there is a change in reading following a change in concentration at the sample probe inlet.

(22) "Sensitivity" means the smallest change in the value of a measured sample that can be detected by the analyzer.

(23) "Zero calibration gases" means air or nitrogen in which total impurities do not exceed 0.01 percent.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-020, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120,

(1992 Ed.)

43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-020, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 80-03-070 (Order DE 79-35), § 173-422-020, filed 2/28/80.]

WAC 173-422-030 Vehicle emission inspection requirement. All motor vehicles, not specifically exempted by WAC 173-422-170, which are registered or reregistered within the boundaries of an emission contributing area, as specified in WAC 173-422-050, are subject to the vehicle emission inspection requirements of this chapter. Neither the department of licensing nor its agents may issue or renew a motor vehicle license for any vehicle registered in an emission contributing area, as that area is established under RCW 70.120.040, unless the application for issuance or renewal is: (1) Accompanied by a valid certificate of compliance issued pursuant to RCW 70.120.060, 70.120.080, or 70.120.090 or a valid certificate of acceptance issued pursuant to RCW 70.120.070; or (2) exempted from this requirement pursuant to RCW 46.16.015(2). The certificates must have a date of validation which is within ninety days of the date of application for the vehicle license or license renewal. Certificates for fleet vehicles may have a date of validation which is within twelve months of the assigned license renewal date.

[Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-030, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 80-03-070 (Order DE 79-35), § 173-422-030, filed 2/28/80.]

WAC 173-422-035 Registration requirements. (1) Persons residing in emission contributing areas as defined under WAC 173-422-050 shall register their motor vehicles within that area, unless business reasons require registration outside of the area.

(2) Any person who violates this section is subject to a civil penalty not to exceed one hundred dollars.

(3) Any civil penalty imposed by the department hereunder shall be appealable to the pollution control hearings board as provided for in chapter 43.21B RCW.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-035, filed 3/6/90, effective 4/6/90.]

WAC 173-422-040 Noncompliance areas. The following areas are designated noncompliance areas for the air contaminants specified: Carbon monoxide

- (1) The city of Seattle.
- (2) The city of Bellevue.
- (3) The city of Spokane.
- (4) The city of Tacoma.
- (5) The city of Vancouver.
- (6) The city of Yakima.
- (7) The city of Everett.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-040, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-040, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-040, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-040, filed 2/28/80.]

WAC 173-422-050 Emission contributing areas. Emission contributing areas within which the motor vehicle emission inspection program applies are designated by the

following United States Postal Service ZIP codes as of the effective dates set forth below:

(1) Puget Sound Region (effective January 1, 1982)

98004	98039
98005	98040
98006	98041
98007	98043
98008	98046
98009	98052
98011	98053
98012	98055
98020	98056
98021	98057
98027	98062
98028	98063
98033	98072
98034	98073
98036	98083
98037	98101 thru 98199, inclusive except 98110

(2) Spokane Region (effective July 1, 1985)

99201	99207
99202	99208
99203	99212
99204	99216
99205	99218
99206	

[Statutory Authority: RCW 70.120.120. 84-09-087 (Order DE 84-7), § 173-422-050, filed 4/18/84. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-050, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-050, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-050, filed 2/28/80.]

WAC 173-422-060 Emission standards. Motor vehicles subject to this chapter shall meet the following emission standards prior to receiving a certificate of compliance.

STANDARDS

Model Year	CO(%)	HC (ppm)
68-74	6.0	1000
75 and later	3.0	600
Except 1981 and later model vehicles manufactured with a catalytic converter the standards are:	1.2	220

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-060, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-060, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-060, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-060, filed 2/28/80.]

WAC 173-422-070 Test procedures. All persons certified by, or under contract to, the department to conduct motor vehicle emission inspections shall use the following test procedures. Variations to the procedures specified may

be used if approved by the department after receipt of evidence that such changes will not interfere with the validity of the test.

(1) A two-speed (idle and 2500 rpm) test with the transmission in neutral or park shall be used to measure vehicle exhaust emissions for carbon monoxide, hydrocarbons, and carbon dioxide. A vehicle with an automatic transmission may be tested in drive for the idle test if the idle rpm in neutral or park exceeds 1200 rpm. However, the idle rpm as tested cannot exceed 1200 rpm unless allowed to do so by the vehicle manufacturer's specifications.

(2) The engine shall be at normal operating temperature during the emission test with all accessories off.

(3) Any vehicle causing an unsafe condition, such as the continuous leaking of any fluid onto the floor, may be rejected from the inspection site.

(4) Vehicles shall be approximately level during the test.

(5) Vehicles with more than one exhaust pipe shall be tested by sampling each tail pipe and averaging the results, unless the exhaust pipes originate from a common point in the exhaust system. Simultaneous sampling from multiple exhaust pipes may also be used.

(6) The following steps shall be taken to prevent excessive dilution. The exhaust sample probe must be inserted at least ten inches into the tail pipe. If this is not possible, an extension boot shall be used. The exhaust emission test results shall not be recorded if the carbon dioxide concentration does not meet or exceed five percent.

(7) If the engine stalls during the test, the engine shall be restarted and one additional attempt will be made to complete the test.

(8) If a vehicle is capable of being operated with either gasoline or gaseous fuels, the vehicle shall be tested using the fuel it is operating on when it enters the testing facility.

(9) If a multiple range analyzer is used, the exhaust analyzer range shall be selected so that the standard for the vehicles being tested is between twenty-five percent and seventy-five percent of full scale, if possible.

(10) Before testing a 1981 and later model Ford Motor Company vehicle with a gross vehicle weight of 8500 pounds or less, or a 1984-85 Honda Prelude, the engine shall be turned off and then restarted.

(11) Increase the engine speed to 2500 ± 300 rpm.

(12) Insert the probe into the tailpipe. After at least thirty seconds record the exhaust emissions averaged over the last five seconds.

(13) Slowly reduce the engine speed to idle (less than 1200 rpm). After at least thirty seconds or when the readings have stabilized at a level meeting the emission standards record the exhaust emissions averaged over the last five seconds.

(14) When readings from multiple exhaust pipes are averaged, steps 10, 11, 12, and 13 shall be repeated for all exhaust pipes.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-070, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-070, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-070, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-070, filed 2/28/80.]

WAC 173-422-080 Vehicle inspection data handling procedures. All persons under contract to the state to conduct motor vehicle emission inspections shall use the following data handling procedures.

- (1) The comparison of the test results with the state's emission standards shall be automated.
- (2) The emission test results, the comparison with the state's emission standards, and certificates of compliance shall be automatically printed.
- (3) The required vehicle identification data shall be entered and validated before the emission test is started.
- (4) Vehicle identification flagged as incorrect by the established validation checks shall be corrected before the emissions test is started.
- (5) The emission test results shall be automatically printed.
- (6) All required data shall be automatically printed on the vehicle inspection reports and stored on bulk storage devices.
- (7) In the case of data handling equipment problems, the vehicle emission test reports and certificates of compliance may be manually completed, but all the data is required to be included on the bulk storage devices submitted to the department.

[Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1), 83-23-115 (Order DE 83-31), § 173-422-080, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120, 82-02-027 (Order DE-81-32), § 173-422-080, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-080, filed 2/28/80.]

WAC 173-422-090 Exhaust analyzer specifications. Only exhaust analyzers meeting the following specifications at the time of certification testing may be used for certification testing. Any person authorized by the department to certify vehicles is solely responsible for insuring that the testing equipment is operating within the following specifications at the time of certification testing.

(1) Accuracy: The readings or the printed test results of the exhaust analyzers compared to the true value of a measured sample shall have the following accuracy tolerances.

HC - Measured as n - hexane	
200 to 220 ppm	±15 ppm
0 to 1000 ppm	±30 ppm
1000 to 2000 ppm	±100 ppm
CO	
1.0 to 1.2%	±0.1%
0 to 5%	±0.2%
5 to 10%	±0.5%
CO ₂	
4 to 6%	±1%

- (2) Calibration: The analyzer shall have the capability of being calibrated electronically and by gas.
- (3) Drift: The drift of the zero reading or any calibration reading of each analyzer shall not exceed 15 ppm HC, 0.1% CO or 0.5% CO₂ in one hour.
- (4) Flow restriction indicator: The analyzer shall be operated within manufacturer's specifications for sample flow. The sampling system shall be equipped with a visual

and/or audible warning that sample flow is not within operating requirements.

(5) Interference effects: Sampling the following concentrations of noninterest gases shall not cause the HC reading to change ±10 ppm: 15% CO₂ in N₂, 10% CO in N₂, 3000 ppm NO in N₂, 10% O₂ in N₂, and 3% H₂O vapor in air.

Sampling the following concentrations of noninterest gases shall not cause the CO reading to change ±0.05%: 15% CO₂ in N₂, 1600 ppm HC in N₂, 3000 ppm NO in N₂, 10% O₂ in N₂, and 3% H₂O vapor in air.

Sampling the following concentrations of noninterest gases shall not cause the CO₂ reading to change ±0.5%: 1600 ppm HC in N₂, 10% CO in N₂, 3000 ppm NO in N₂, 10% O₂ in N₂, and 3% H₂O vapor in air.

(6) Repeatability: The repeatability of the exhaust analyzers used shall be within 10 ppm HC, 0.05% CO and 0.2% CO₂ during five successive measurements of the same sample.

(7) Response: The response of the exhaust analyzers shall be at least ninety-five percent of the final value within fifteen seconds.

(8) Sensitivity: The sensitivity of each analyzer shall be equal to or less than 10 ppm HC, 0.05% CO and 0.2% CO₂.

(9) Range of measurement: The analyzer shall have a range equal to or greater than 0-2000 ppm HC (n-Hexane), 0 to 10% CO, and 0 to 6% CO₂.

[Statutory Authority: Chapter 70.120 RCW, 90-06-062, § 173-422-090, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1), 83-23-115 (Order DE 83-31), § 173-422-090, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120, 82-02-027 (Order DE 81-32), § 173-422-090, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-090, filed 2/28/80.]

WAC 173-422-100 Testing equipment maintenance and calibration. (1) Unless alternative procedures have been approved or required by the department all equipment used in the inspection shall be calibrated and maintained according to the manufacturer's specifications and recommendations. Complete logs as approved by the department shall be kept for maintenance, repair, and calibration.

(2) The following procedures shall be followed by all testing facilities unless equivalent procedures have been approved by the department. Exhaust analyzers and all electronic components that could affect the gas concentration results shall be warmed up for at least thirty minutes prior to performing any test on equipment, calibration, span, or zero checks:

(a) Each test. Before each test can start, the exhaust analyzer readings must be less than 10 ppm HC, 0.1% CO and 0.5% CO₂. If during a test the sampling system flow restriction indicator becomes activated, the test shall be stopped and restarted after the necessary repairs to the analyzer have been completed.

(b) Hourly check. The exhaust analyzer shall not be used to test vehicles unless within an hour prior to the test it was spanned with a calibration gas. The following procedure shall be used:

- (i) Adjust the exhaust analyzer to zero using ambient air or zero calibration gas.
- (ii) Adjust the exhaust analyzer using the electronic span.

(iii) Check the calibration of the exhaust analyzer using a calibration gas of approximately twenty to forty percent of each range.

(iv) Adjust and repair as necessary to insure the accuracy specified in WAC 173-422-090.

(c) Weekly check. The exhaust analyzer shall not be used to test vehicles unless a multipoint calibration has been performed within the last seven days. The following procedure shall be used:

(i) Adjust the exhaust analyzer to zero using ambient air or zero calibration gas.

(ii) Adjust the exhaust analyzer using the electronic span.

(iii) Check the calibration of the exhaust analyzer using calibration gases of approximately twenty, forty, sixty, and eighty percent for each range. (CO₂ must be present at concentrations of at least 2.0%.)

(iv) Adjust and repair as necessary to insure the accuracy specified in WAC 173-422-090 at each calibration point.

(v) Check the calibration of the exhaust analyzer using a calibration gas with a CO concentration of 1.2 to 2.4%, a HC concentration of 150 to 300 ppm measured as n-hexane, and a CO₂ concentration of 4.0 to 6.0%.

(vi) Adjust and repair as necessary to insure the accuracy of the exhaust analyzer is within .05% CO and 6 ppm HC.

(d) Repair check. A multipoint calibration as specified in (c) of this subsection shall be performed before the analyzer is used for certification testing following the replacement of an optical or electronic component that can cause a variation in the analyzer reading.

The manufacturer's recommended procedures to determine any change in the correction factor from the propane calibration gas to n-hexane readings shall be followed.

(e) Leak check. The exhaust analyzer shall not be used to test vehicles unless within one week prior to the testing, CO readings have been taken while introducing calibration gas through the calibration port and through the probe. Discrepancies of over 3% in the readings shall require repair of leaks. No analyzer adjustments shall be permitted during this check. Other leak check procedures may be used if it can be shown to the department's satisfaction that the method identifies leaks as well as the method in this subsection.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-100, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1), 83-23-115 (Order DE 83-31), § 173-422-100, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-100, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-100, filed 2/28/80.]

WAC 173-422-110 Date system requirements. The data system shall consist of the following units:

(1) Vehicle identification terminal. The vehicle identification terminal shall have a standard typewriter formatted keyboard with a visual display to verify data entered. The data entered shall be transferred to the programmable processor on command.

(2) Programmable processor. The programmable processor shall perform the following functions:

(a) Accept and validate vehicle and test data required in WAC 173-422-140 from the vehicle identification terminal, exhaust analyzer, or other sources. Indicate on the vehicle identification terminal any data entered that does not meet the validation criteria.

(b) Convert analog emission measurements to digital information for each analyzer range.

(c) Verify that there is not excessive dilution of the exhaust sample by determining the carbon dioxide concentration and provide carbon dioxide output signal to printer and bulk storage device.

(d) Compare test results to the state's emissions standards. Test results shall be determined by averaging five consecutive readings taken at one second intervals, at fifteen seconds after the probe has been inserted into the tailpipe. The results shall be considered stable and recorded if the readings do not vary more than ten percent of their average or 30 ppm HC, or 0.2% CO, or 1% CO₂, from their average, whichever is greater. If stability has not occurred before thirty seconds of testing, the thirty second reading along with four other consecutive readings shall be averaged and recorded as the result.

(e) Outputs vehicle and test data and established standards for report printout.

(f) Outputs vehicle and test data for storage on bulk storage devices.

(3) Report printer. The report printer shall print the vehicle inspection report and the certificate of compliance. The forms used shall be provided or approved by the department.

(4) Bulk storage devices. All data from the vehicle inspection report and the certificates of compliance shall be written on the bulk storage devices at the same time the printed report(s) are produced.

The data handling system shall be so designed to prevent any data changes on the bulk storage devices that would eliminate or alter the original entry.

Inspection shall be redone if errors result in an incorrect vehicle inspection report.

To insure that the bulk storage devices are compatible with the state's data processing equipment, all bulk storage devices and data handling methods used by the contractor shall be expressly approved by the department.

[Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-110, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-110, filed 2/28/80.]

WAC 173-422-120 Quality assurance. The department, or its designee, will monitor the operation of each authorized emission testing facility with unannounced, unscheduled inspections to check the calibration and maintenance of the exhaust analyzers, test procedures, and records.

Vehicle inspection reports and fiscal reports submitted by inspection station operators will be checked for completeness and accuracy. The department or its designee shall have the right to audit contractor's and subcontractor's records.

The department (or its designee) may conduct unidentified surveillance.

The department (or its designee) may require that the use of an exhaust analyzer be suspended due to a malfunction or incorrect calibration of the analyzer.

[Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1), 83-23-115 (Order DE 83-31), § 173-422-120, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120, 80-03-070 (Order DE 79-35), § 173-422-120, filed 2/28/80.]

WAC 173-422-130 Inspection fees. The fee for the first emission test on each vehicle applicable to a vehicle license year shall be sixteen dollars. If the vehicle fails, one retest will be provided free of charge at any inspection station operated under contract to the state, provided that the retest is applicable to the same vehicle license year. Any additional retests of a failed vehicle applicable to the same vehicle license year will require the payment of sixteen dollars.

Inspection station operators shall forward to the state treasurer within ten working days, the amount of fees due to the state for inspections conducted during the previous month.

The department or its designee shall have the right to audit any inspection station operator's or contractor's records and procedures to substantiate that the operator or contractor is properly collecting and accounting for such fees.

[Statutory Authority: Chapter 70.120 RCW, 90-06-062, § 173-422-130, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.040(7), 87-02-051 (Order DE 86-32), § 173-422-130, filed 1/7/87, effective 4/1/87. Statutory Authority: RCW 70.120.120, 82-02-027 (Order DE 81-32), § 173-422-130, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-130, filed 2/28/80.]

WAC 173-422-140 Inspection forms and certificates. All inspection stations shall use inspection forms and certificates provided or approved by the department. Additional information or materials may be provided to the vehicle operator only if approved by the department.

(1) Vehicle inspection report: The driver of each vehicle tested shall be given a vehicle inspection report on a form to be provided or approved by the department. The inspection station operator shall record the following information.

- (a) Station number (lane number).
- (b) Date and time of test.
- (c) Who conducted the test (name or identification number).
- (d) Vehicle identification number (VIN).
- (e) Odometer reading in thousands of miles.
- (f) Vehicle license number.
- (g) Vehicle model year.
- (h) Make of the vehicle.
- (i) Whether or not the vehicle was manufactured with a catalytic converter. (1981 and later model vehicles only)
- (j) Gross vehicle weight class.
- (k) Emission test results.
- (l) Applicable standards.
- (m) Whether the vehicle has passed or failed the appropriate emission standards.
- (n) The engine speed while the emission readings were taken.
- (o) Carbon dioxide reading.
- (p) First test or retest.

(q) If available at a retest the identification number of an ecology authorized emission specialist who repaired the vehicle following the first test.

(2) Certificate of compliance: The driver of a vehicle meeting the appropriate emission standards shall be issued a certificate of compliance.

(3) Certificate of acceptance: If a vehicle has failed to pass the emission test applicable to any vehicle license year, the vehicle owner may request a certificate of acceptance, if the vehicle has been in use for more than five years or fifty thousand miles, and any component of the vehicle installed by the manufacturer for the purpose of reducing emissions, or its appropriate replacement, is installed and operative. To receive the certificate of acceptance the vehicle owner must provide original receipts totalling at least fifty dollars, for 1980 and earlier model year vehicles or at least one hundred fifty dollars for 1981 and later model year vehicles, dated on or between the date of the first test and the final retest, for costs of repairs performed by a "certified emission specialist" solely devoted to meeting the emission standards.

(4) Form storage: Copies of each certificate of compliance/ acceptance, and all vehicle inspection reports shall be kept on file by the contractor and be available for the department's review for one year after they are issued. This requirement includes forms that are voided for any reason.

(5) Reporting: The inspection station operator shall forward to the department within ten working days after the end of each month (a) an approved storage device containing all data collected from each inspection conducted that month, and (b) a copy of all certificates of acceptance issued that month along with the related vehicle inspection reports and repair and/or parts receipts.

Before the storage device is forwarded to the department, a backup bulk storage device shall be in the possession of the contractor. The backup bulk storage device shall be retained for one year and be available to the department upon request.

[Statutory Authority: Chapter 70.120 RCW, 90-06-062, § 173-422-140, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1), 83-23-115 (Order DE 83-31), § 173-422-140, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120, 82-02-027 (Order DE 81-32), § 173-422-140, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-140, filed 2/28/80.]

WAC 173-422-145 Fraudulent certificates of compliance/acceptance. (1)(a) Obtaining or attempting to obtain a certificate of compliance by (i) providing false information or (ii) any fraudulent means; or

(b) Obtaining or attempting to obtain a certificate of acceptance (i) through the use of receipts or other documentation containing false information, or (ii) any fraudulent means shall be construed as a violation of these rules implementing chapter 70.94 RCW as supplemented by chapter 70.120 RCW.

(2) Any person who commits such violation or who aids or abets another in committing the same shall be subject to a civil penalty not to exceed two hundred fifty dollars for each violation.

(3) For the purposes of this section the term "expended" refers to the net actual cost to the vehicle owner in the purchase of repairs or parts derived after the amount of any rebate, discount or cash-return has been subtracted.

(4) Any civil penalty imposed by the department hereunder shall be appealable to the pollution control hearing board as provided for in chapter 43.21B RCW.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-145, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-145, filed 11/23/83, effective 1/2/84.]

WAC 173-422-150 Inspection personnel requirements. (1) Training. All inspection personnel must successfully complete a training course approved by the department.

(2) Inspection personnel identification. Whenever inspection personnel are in contact with the public they shall wear identification tags visible to the motorist.

[Statutory Authority: RCW 70.120.120. 80-03-070 (Order DE 79-35), § 173-422-150, filed 2/28/80.]

WAC 173-422-160 Fleet and government vehicle testing requirements. Self-inspection of vehicles by a fleet or government agency operator may be authorized by the department. The department may also authorize emission inspection of fleet vehicles by an automotive service or testing facility engaged for such activity. Authorizations to conduct emission tests and issue certificates of compliance under this section are limited to vehicles within the fleet or fleets requesting such authorization. Any person or facility conducting fleet tests under authorization of this section must meet all requirements of this section.

(1) The exhaust analyzers used for certification testing shall meet the specifications in WAC 173-422-090 except for those that pertain to CO₂. (CO₂ does not need to be measured.)

(2) All persons engaged in testing of fleet vehicles must comply with all provisions of this chapter except WAC 173-422-080, 173-422-100 (2)(b)(iii) and (iv) and (c)(iii) and (iv), 173-422-110, 173-422-130, 173-422-140, and 173-422-150. The checks specified in WAC 173-422-100 (2)(c) except (c)(iii) and (iv), in addition to being required weekly, shall be performed after each relocation of the analyzer.

(3) All persons conducting tests for the purpose of issuing certificates for fleets shall be ecology certified emission specialists.

(4) The department will provide test forms upon request. Legibly completed forms with appropriate signature(s) will constitute certificates of compliance for licensing purposes. Any person conducting testing under this section shall forward to the department within ten working days after the end of each month, a copy of each certificate of compliance issued during that month. Copies of each certificate of compliance shall be retained by the person issuing the certificate for at least two years from date of issuance. Alternative arrangements for providing and storing this information using automated data storage devices may be required by the department after one year's notice.

Forms must be purchased from the department in advance of issuance through payment of sixteen dollars to the department for each certificate requested. Refunds or credit may be given for unused certificates returned to the department.

Payment for fleet forms is waived for government fleets.

Test forms provided under this section are official documents. Persons receiving the forms from the department are accountable for each form provided.

Voided forms must be handled the same as certificates of compliance. One copy shall be sent to the department within ten days after the end of the month in which the form was voided and one copy shall be retained by the person accountable for the forms for at least two years after date of voiding. Refunds will not be made for voided forms.

(5) All persons authorized to conduct fleet or government vehicle inspections under this section shall be subject to performance audits and compliance inspections by the department, during normal business hours.

(6) Fleet vehicles may be inspected any time between their scheduled license renewals.

(7) Certificates of acceptance may not be issued under this section.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-160, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-160, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-160, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-160, filed 2/28/80.]

WAC 173-422-170 Exemptions. The following motor vehicles are exempt from the inspection requirement:

(1) Vehicles proportionally registered pursuant to chapter 46.85 RCW.

(2) Vehicles whose model year is 1967 or earlier.

(3) New motor vehicles whose equitable or legal title has never been transferred to a person who in good faith purchases the vehicle for purposes other than resale; this does not exempt motor vehicles that are or have been leased.

(4) Motor vehicles that use propulsion units powered exclusively by electricity.

(5) Motor-driven cycles as defined by RCW 46.04.332.

(6) Motor vehicles powered by diesel engines or two-cycle engines.

(7) Farm vehicles as defined by RCW 46.04.181.

(8) Vehicles exempted from licensing pursuant to RCW 46.16.010.

(9) Mopeds as defined by RCW 46.04.304.

(10) Vehicles garaged and operated out of the emission contributing area.

(11) Vehicles registered with the state but not for highway use.

(12) Used vehicles whose licenses have expired or will expire within thirty days when sold by a Washington licensed motor vehicle dealer.

(13) Motor vehicles fueled exclusively by propane, compressed natural gas, or liquid petroleum gas.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-170, filed 3/6/90, effective 4/6/90. Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-170, filed 11/23/83, effective 1/2/84. Statutory Authority: RCW 70.120.120. 82-02-027 (Order DE 81-32), § 173-422-170, filed 12/31/81; 80-03-070 (Order DE 79-35), § 173-422-170, filed 2/28/80.]

WAC 173-422-175 Fraudulent exemptions. (1) Obtaining or attempting to obtain an exemption from emission inspection requirements by false statements, or failure to comply with the exemption procedures established

to implement WAC 173-422-170, shall be construed as a violation of these rules implementing chapter 70.94 RCW as supplemented by chapter 70.120 RCW.

(2) Any person who commits such violation or who aids or abets another in committing the same shall be subject to a civil penalty not to exceed two hundred fifty dollars for each violation.

(3) Any civil penalty imposed by the department hereunder shall be appealable to the pollution control board as provided for in chapter 43.21B RCW.

[Statutory Authority: RCW 70.120.120, 43.21A.080, 70.94.331 and 70.94.141(1). 83-23-115 (Order DE 83-31), § 173-422-175, filed 11/23/83, effective 1/2/84.]

WAC 173-422-180 Air quality standards. The air quality standards set forth in chapter 173-415 WAC are the air quality standards applicable to the establishment of noncompliance areas pursuant to this chapter.

[Statutory Authority: RCW 70.12.120. 80-03-070 (Order DE 79-35), § 173-422-180, filed 2/28/80.]

WAC 173-422-190 Emission specialist certification.

(1) To become a certified emission specialist an individual shall:

(a) Pass a course of study, approved by the department, on motor vehicle maintenance, engine and exhaust analysis equipment usage, and emission control system repair and maintenance; and

(b) Agree in writing to meet the requirements of subsection (2) of this section.

(2) To maintain certification, a certified emission specialist shall:

(a) Successfully complete a department approved course on emission repair within the second year after the date of certification, and within each second year thereafter;

(b) Sign, including the specialist identification number, all receipts for tune-up and emission repairs or adjustments performed;

(c) Record on all receipts the vehicle's emission readings after the work is completed when an exhaust analyzer is available;

(d) Not tamper with emission control systems, including adjusting an engine outside of the manufacturer's specifications (chapter 173-421 WAC);

(e) Not obtain or attempt to obtain a certificate of acceptance (repair waiver) by providing false information or by any fraudulent means (WAC 173-422-145); and

(f) Not aid or abet any individual in committing a violation of chapter 173-421 WAC or WAC 173-422-145.

(3) The certification of a certified emission specialist may be revoked for a first violation of chapter 173-421 WAC or WAC 173-422-145, for a period of no more than one year, and may be permanently revoked for a second violation of chapter 173-421 WAC or WAC 173-422-145.

The certification of a certified emission specialist may be temporarily revoked for violation of subsection (2) of this section and may be permanently revoked for continued willful violation of subsection (2) of this section.

A certified emission specialist whose certification is revoked permanently or temporarily may appeal to the

pollution control hearings board as provided for in RCW 43.21B.310.

(4) A certified emission specialist whose certification has been temporarily revoked may reapply for certification twelve months after the date of revocation by applying to the department and meeting all requirements of subsection (1) of this section. An application for certification by a permanently revoked certified emission specialist will be denied.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-190, filed 3/6/90, effective 4/6/90.]

WAC 173-422-195 Listing of certified emission specialists. (1) A list of certified emission specialists will be available to the public. Specialists will be listed under their employer's shop name when the shop is approved for listing. The list will be updated by the department at least once every six months.

(2) The employer's name and address will be listed by the department, when the employer agrees in writing to:

(a) Use a properly maintained and correctly calibrated exhaust analyzer as a final check for all tune-up and emission repairs or adjustments;

(b) Have all tune-up and emission repairs or adjustments performed by a certified emission specialist;

(c) Require any person performing tune-up and emission repairs or adjustments to sign the customer's receipt for tune-up and emission repairs or adjustments, and to record the vehicle's emission readings on the receipt after the work is completed;

(d) Require that all employees not aid or abet any person to tamper with emission control systems, including adjusting a vehicle outside of the manufacturer's specifications (chapter 173-421 WAC); and

(e) Require that all employees not aid or abet any person to obtain a fraudulent certificate of compliance (repair waiver) (WAC 173-422-145).

(3) An employer may be removed from the certified emission specialist list for a first violation of chapter 173-421 WAC or WAC 173-422-145 for a period of no more than one year and may be permanently removed after a second violation of chapter 173-421 WAC or WAC 173-422-145.

An employer may be temporarily removed from the certified emission specialist list when failing to comply with the requirements of subsection (2) of this section and may be permanently revoked for continued and willful violation of subsection (2) of this section.

(4) An employer who has been temporarily removed from the certified emission specialist list may reapply for listing twelve months after the date of removal from the listing by applying to the department and meeting all requirements of subsection (2) of this section. An application for listing from an employer permanently removed from the certified emission specialist list will be denied.

(5) An employer who is removed from a certified emission specialist list or denied listing in a certified emission specialist list may appeal to the pollution control hearings board as provided for in RCW 43.21B.310.

(6) A certified emission specialist whose employer is not listed may request to be placed on a separate list available to the public. The employer's name will not be

listed. The specialist may specify an address and phone number to be included in the list.

(7)(a) An employer approved for listing may display the "state certified emission specialist" sign available from the department. Any employer advertising or providing of information to the public based on the department's certification of a certified emission specialist must be able to be discontinued immediately upon revocation of the employer's listing or certification of the certified emission specialist.

(b) An employer violating (a) of this subsection shall be subject to a civil penalty not to exceed two hundred fifty dollars for each violation.

(c) A civil penalty imposed by the department may be appealed to the pollution control hearings board as provided for in RCW 43.21B.310.

[Statutory Authority: Chapter 70.120 RCW. 90-06-062, § 173-422-195, filed 3/6/90, effective 4/6/90.]

Chapter 173-425 WAC OPEN BURNING

WAC

173-425-010	Purpose.
173-425-020	Applicability.
173-425-030	Definitions.
173-425-040	Prohibited materials.
173-425-050	Curtailement during episodes or impaired air quality.
173-425-060	Open burning program for the state.
173-425-070	Open burning permit requirements.
173-425-080	Violations.
173-425-090	Local air authority may issue variance.
173-425-100	Penalties.
173-425-110	Severability.

DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER

173-425-035	Episodes. [Order DE 77-19, § 173-425-035, filed 10/24/77. Formerly WAC 18-12-035.] Repealed by 89-02-055 (Order 88-39), filed 1/3/89. Statutory Authority: Chapters 70.94 and 43.21A RCW.
173-425-036	Curtailement during episodes or impaired air quality. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-036, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-036, filed 1/3/89.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-045	Prohibited materials. [Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-045, filed 1/3/89; Order DE 77-19, § 173-425-045, filed 10/24/77. Formerly WAC 18-12-045.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-055	Exceptions. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-055, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-055, filed 10/24/77. Formerly WAC 18-12-055.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-065	Residential open burning. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-065, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-065, filed 1/3/89; Order DE 77-19, § 173-425-065, filed 10/24/77. Formerly WAC 18-12-065.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.

173-425-075	Commercial open burning. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-075, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-075, filed 10/24/77. Formerly WAC 173-425-075.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-085	Agricultural open burning. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-085, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-085, filed 1/3/89; Order DE 77-19, § 173-425-085, filed 10/24/77. Formerly WAC 18-12-085.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-095	No burn area designation. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-095, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-095, filed 10/24/77. Formerly WAC 18-12-095.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-115	Land clearing projects. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-115, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-115, filed 10/24/77. Formerly WAC 18-12-115.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-120	Department of natural resources—Smoke management plan. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-120, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-120, filed 10/24/77. Formerly WAC 18-12-120.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-130	Notice of violation. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-130, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-130, filed 10/24/77. Formerly WAC 18-12-130.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.
173-425-140	Remedies. [Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-140, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-140, filed 10/24/77. Formerly WAC 18-12-140.] Repealed by 92-24-077 (Order 91-57), filed 12/1/92, effective 1/1/93. Statutory Authority: Chapter 70.94 RCW.

WAC 173-425-010 Purpose. This chapter promulgated under chapter 70.94 RCW, the Washington Clean Air Act, authorizes the department of ecology to implement the provisions of that act. This rule establishes controls for open burning in the state in order to:

(1) Reduce open burning to the greatest extent practical by eliminating it in:

(a) Areas that exceed ambient air quality standards for PM-10 and/or carbon monoxide; and

(b) Urban growth areas or cities with a population of 10,000 or more by December 31, 2000;

(2) For areas where open burning is allowed, establish a limited burning program, including procedures by which open burning may be conducted;

(3) Encourage the development and use of alternate methods of debris disposal.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-010, filed 12/1/92, effective 1/1/93. Statutory Authority: RCW

70.94.331. 90-19-062 (Order 90-10), § 173-425-010, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-010, filed 10/24/77. Formerly WAC 18-12-010.]

WAC 173-425-020 Applicability. (1) No outdoor burning shall occur during a declared period of impaired air quality.

(2) Except as described in subsection (1) of this section and WAC 173-425-050, this chapter applies to all forms of outdoor burning in the state except:

(a) Silvicultural burning (governed by chapter 332-24 WAC).

(b) Agricultural burning (governed by chapter 173-430 WAC).

(c) Recreational fires as defined in WAC 173-425-030(12).

(d) Ceremonial fires as defined in WAC 173-425-030(2).

(e) Burning to improve and maintain fire dependent ecosystems (pursuant to chapter 332-24 WAC).

(3) A local air authority, fire protection authority, county, or conservation district may enforce its own controls that are stricter than those set forth in this chapter.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-020, filed 12/1/92, effective 1/1/93. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-020, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-020, filed 10/24/77. Formerly WAC 18-12-020.]

WAC 173-425-030 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter shall have the following meanings:

(1) "Agricultural burning" means burning of vegetative debris from an agricultural operation necessary for disease or pest control, necessary for crop propagation and/or crop rotation, or where identified as a best management practice by the agricultural burning practices and research task force established in RCW 70.94.650 or other authoritative source on agricultural practices.

(2) "Ceremonial fire" means a fire associated with a Native American ceremony or ritual.

(3) "Department" means department of ecology.

(4) "Episode" means a period when a forecast, alert, warning, or emergency air pollution stage is declared, as stated in chapter 173-435 WAC.

(5) "Impaired air quality" means a condition declared by the department or a local air authority in accordance with the following criteria:

(a) Meteorological conditions are conducive to an accumulation of air contamination concurrent with:

(i) Particulate that is ten micron and smaller in diameter (PM-10) at or above an ambient level of seventy-five micrograms per cubic meter measured on a twenty-four-hour average; or

(ii) Carbon monoxide at an ambient level of eight parts of contaminant per million parts of air by volume (ppm) measured on an eight-hour average.

(b) Air quality that threatens to exceed other limits established by the department or a local air authority.

(6) "Local air authority" means an air pollution control authority activated pursuant to chapter 70.94 RCW that has jurisdiction over the subject source.

(7) "Nonattainment area" means a clearly delineated geographic area which has been designated by the Environmental Protection Agency and promulgated as exceeding a national ambient air quality standard or standards for one or more of the criteria pollutants, which includes carbon monoxide, fine particulate matter (PM-10), sulfur dioxide, ozone, and nitrogen dioxide.

(8) "Nuisance" means an emission of smoke or other emissions from any open fire that unreasonably interferes with the use and enjoyment of the property deposited on.

(9) "Open burning" means all forms of outdoor burning except those listed as exempt in WAC 173-425-020.

(10) "Outdoor burning" means the combustion of material of any type in an open fire or in an outdoor container without providing for the control of combustion or the control of emissions from the combustion.

(11) "Reasonable alternatives" means disposal alternatives to open burning that cost less than eight dollars fifty cents per cubic yard. After July 1993, this amount shall be adjusted periodically by department policy.

(12) "Recreational fire" means barbecues and campfires, using charcoal, natural gas, propane, or natural wood which occur in designated areas or on private property. Fires used for debris disposal purposes are not considered recreational fires.

(13) "Silvicultural burning" means burning on any land the department of natural resources protects per RCW 70.94.030(13), 70.94.660, 70.94.690, and pursuant to chapter 76.04 RCW.

(14) "Urban growth area" means an area defined by RCW 36.70A.030.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-030, filed 12/1/92, effective 1/1/93. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-030, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-425-030, filed 1/3/89; Order DE 77-19, § 173-425-030, filed 10/24/77. Formerly WAC 18-12-030.]

WAC 173-425-040 Prohibited materials. (1) Except as provided in WAC 173-425-020(2), the following materials shall not be burned in any outdoor fire: Garbage, dead animals, asphalt, petroleum products, paints, rubber products, plastics, paper (other than what is necessary to start a fire), cardboard, treated wood, construction debris, metal or any substance (other than natural vegetation) which when burned releases toxic emissions, dense smoke, or odors.

(2) Prohibited materials may be burned in certain circumstances:

(a) Diseased animals and infested material. When ordered by a duly authorized health officer and authorized by the department or local air authority, diseased animals and other infested material may be burned, as required, to keep the infestation from spreading.

(b) Dangerous material. When ordered by a fire protection authority and when authorized by the department or local air authority, fires to dispose of materials presenting a danger to life, property, or public welfare may be burned, if no approved practical alternate method of disposal is available.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-040, filed 12/1/92, effective 1/1/93.]

WAC 173-425-050 Curtailment during episodes or impaired air quality. (1) No outdoor fire shall be ignited:

(a) Whenever the department declares an air pollution episode for the geographical area pursuant to chapter 173-435 WAC; or

(b) Whenever the department or a local air authority declares impaired air quality for the geographical area.

(2) A person responsible for an outdoor fire at the time an episode or impaired air quality is declared shall extinguish that fire. Outdoor burning conducted under the auspices of the department of natural resources for the purpose of burning forest slash pursuant to RCW 70.94.660 through 70.94.670 shall be extinguished by withholding new fuel and allowing the fire to burn down.

(3) Smoke visible from all types of outdoor burning, except silvicultural burning, after a time period of three hours has elapsed from the time of declaration of the episode or impaired air quality shall constitute prima facie evidence of unlawful outdoor burning.

(4) For department of natural resource silvicultural burning, smoke visible from outdoor burning after a time period of ten hours has elapsed from the time of declaration of the episode or impaired air quality shall constitute prima facie evidence of unlawful outdoor burning.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-050, filed 12/1/92, effective 1/1/93.]

WAC 173-425-060 Open burning program for the state. (1) General requirements:

(a) All burning requires a permit as covered in WAC 173-425-070.

(b) Permits shall not be issued, and thus open burning is not allowed, in areas where reasonable alternatives are available. Within ninety days of the effective date, the department shall develop uniform procedures for determining costs of alternatives to open burning.

(c) A fire protection authority may declare a fire hazard in areas where burning is banned and in areas where burning is allowed. If open burning is determined the most appropriate manner to abate the fire hazard, the request must be reviewed and permitted by the local air authority. Permits issued under this section shall provide that:

(i) Prohibited material shall not be burned in any fire;

(ii) No open burning shall be done during a declared period of impaired air quality;

(iii) No reasonable alternative is available.

(d) No open burning shall be allowed in areas that exceed federal or state ambient air quality standards. Such areas shall be defined as carbon monoxide and/or PM-10 nonattainment area, unless otherwise determined pursuant to subsection (2)(a) of this section.

(2) Additional requirements for nonattainment areas.

(a) Phase-out approach. A local air authority may petition the department to use a phase-out approach in portions of a federally designated nonattainment area for carbon monoxide and/or PM-10. The phase-out approach will focus on how to achieve the Washington Clean Air Act goals and eliminate burning in areas that exceed the stan-

dards. The department will review and determine if the petition should be approved. The department may partially approve petitions or approve petitions with conditions based on consideration of the following factors:

(i) Population and population density.

(ii) The ability of the air quality in the region to support open burning based upon geographical and meteorological conditions.

(iii) The presence of a permitting program.

(iv) The extent to which reasonable alternatives to open burning are being developed through solid waste management plans and the schedule for the availability of such reasonable alternatives.

(v) Other factors deemed appropriate by the local air authorities.

(b) Petition evaluation. The petition to use a phase-out approach is due to the department no later than one month after the effective date of this rule. A ban is not effective in areas identified in the petition until after the department makes a ruling on the petition. Upon receiving the petition, the department shall review and make a determination within thirty days. For all federally designated nonattainment areas, open burning shall be banned by the applicable attainment date.

(c) Permits. The department or local air authority may issue permits in banned areas for the following activities:

(i) Fire fighting instruction. Local air authorities or the department may issue permits for fire training fires, pursuant to guidelines and rules of the department of ecology.

(ii) Specific forms. The department or the local air authorities may permit, with conditions, fires set that are part of a defined research project, weed abatement, and smoke training as part of a military training exercise.

(d) Responding to open burning calls. Each affected county shall identify a fire marshal or other appropriate county official for field response and to document open burning complaints or violations using appropriate field notices. In areas where the county has no jurisdiction, the department or the local air authorities will negotiate with the appropriate local agency on field response.

(3) Additional requirements for urban growth areas and cities with a population of ten thousand or more.

(a) Open burning will be banned when reasonable alternatives are available, no later than the end of the year 2,000.

(b) Until open burning is banned, it is allowed subject to the permitting provisions of this chapter.

(c) When open burning is banned, the provisions in subsection (2) of this section apply.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-060, filed 12/1/92, effective 1/1/93.]

WAC 173-425-070 Open burning permit requirements. (1) Permit program. For areas where burning is allowed, the department, local air authorities, fire protection authorities, conservation districts, or counties may issue permits. Those issuing permits are responsible for field response to open burning complaints. Within ninety days of the effective date, the department shall develop minimum standards for a field response program, which addresses

training, staffing, funding, and any other elements deemed appropriate by the department.

(2) Permit program development and assistance.

(a) The department shall provide assistance for implementing a permitting program, including minimum standards which address training, staffing, funding, and any other elements deemed appropriate by the department.

(b) The department shall develop a model permit program and provide guidance on starting and implementing permit programs.

(c) In selecting a permit program, the options range from the minimum - a general rule burn, as described in subsection (5) of this section - to a written permit. A permit program must be in place eight months after the department issues guidelines. If at that time no agreement is reached, the area becomes a no-burn area and falls under the restrictions of WAC 173-425-060(2). The department will conduct a joint public hearing with the conservation districts, local air authorities, counties, and fire districts. The purpose of the hearing is to inform the public that no agreement has been reached.

(d) The department or the local air authorities shall coordinate with the agencies listed in subsection (1) of this section to determine the type of permitting program appropriate for the area.

(3) Fees. The department or the local air authority may charge a fee to cover the administrative cost of a permit program. Fire districts, counties, and conservation districts issuing open burning permits may collect a fee to cover administrative costs. (RCW 70.94.780)

(4) Additional restrictions. The local air authorities and the department may restrict conditions for burning under this section. Burning conditions may include, but are not limited to, restricting burning in sensitive areas per chapter 173-440 WAC, restricting the time period for burning, restricting permissible hours of burning, imposing requirements for good combustion practice, and restricting burning to specified weather conditions.

(5) General rule burn permits. For areas of the state where burning is allowed, agencies listed in subsection (1) of this section may use a general permit by rule. This section provides a minimum (general rule burn) permit. Persons not able to meet all of the requirements of (a) through (i) of this subsection must apply for and receive a written permit. General rule burn permits under this section may be used for the following number of days per year: 1992-1995 - twenty-one days/year; 1995-1998 - fourteen days/year; 1998-2000 - seven days/year; after 2000 - seven days/year. Failure to comply with all the requirements of (a) through (i) of this subsection voids the general rule burn permit and the person burning is subject to the penalty provisions of WAC 173-425-100. A person burning under this section must follow these requirements and any additional restrictions, including those established by cities, counties, or fire protection authorities:

(a) The fire must not include prohibited materials listed in WAC 173-425-040, except what paper is necessary to start the fire.

(b) A person capable of extinguishing the fire must attend it at all times and the fire must be extinguished before leaving it.

(c) No fires are to be within fifty feet of structures.

(d) The pile must not be larger than four feet by four feet by three feet.

(e) Only one pile at a time may be burned, and each pile must be extinguished before lighting another.

(f) No outdoor fire is permitted in or within five hundred feet of forest slash without a written burning permit.

(g) Either the designated permitting authority must be called to confirm burning conditions for each day or current information on burning conditions must be obtained from another designated source.

(h) If the fire creates a nuisance, it must be extinguished.

(i) Permission from a landowner, or owner's designated representative, must be obtained before starting an open fire.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-070, filed 12/1/92, effective 1/1/93.]

WAC 173-425-080 Violations. (1) The local air authority or department may issue a notice of violation to the person responsible for the fire under any of the following:

(a) Conditions of a permit issued under this chapter are violated;

(b) Any open fire is ignited where, under this chapter, such fires are prohibited or where a permit is required and has not been obtained;

(c) Prohibited materials are burned in an open fire;

(d) Any open fire is ignited when a condition of impaired air quality or air pollution episode stage is declared;

(e) Any ignited open fire that is not extinguished when a condition of impaired air quality or air pollution episode is declared;

(f) The fire causes emissions detrimental to health;

(g) The fire causes emissions that unreasonably interfere with property use and enjoyment.

(2) A fire protection authority called to respond to, control, or extinguish an illegal or out-of-control fire may charge and recover from the person responsible for the fire the costs of its response and control action.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-080, filed 12/1/92, effective 1/1/93.]

WAC 173-425-090 Local air authority may issue variance. Local air authorities may adopt variance procedures in their rules. Variance procedures properly adopted comply with this regulation and satisfy the requirement of department review required by RCW 70.94.181. The department, at its discretion, may review variance petitions.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-090, filed 12/1/92, effective 1/1/93.]

WAC 173-425-100 Penalties. Any violation of this chapter may be subject to any penalty or other remedy authorized in chapter 70.94 RCW.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-100, filed 12/1/92, effective 1/1/93. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-425-100, filed 9/17/90, effective 10/18/90; Order DE 77-19, § 173-425-100, filed 10/24/77. Formerly WAC 18-12-100.]

WAC 173-425-110 Severability. The provisions of this regulation are severable. If any provision is held invalid, the application of such provision to other circumstances and the remainder of the regulation shall not be affected.

[Statutory Authority: Chapter 70.94 RCW. 92-24-077 (Order 91-57), § 173-425-110, filed 12/1/92, effective 1/1/93.]

Chapter 173-430 WAC AGRICULTURAL BURNING

WAC

173-430-010	Purpose.
173-430-020	Definitions.
173-430-030	Permits, conditions, and restrictions.
173-430-040	Mobile field burners.
173-430-050	Other approvals.
173-430-060	Study of alternatives.
173-430-070	Fees.
173-430-080	Certification of alternatives.

WAC 173-430-010 Purpose. (1) This chapter, promulgated under chapter 70.94 RCW, as amended, is to assume state jurisdiction over and to control emissions from the burning of field and forage, and turf grasses grown for seed and for the proper development of the state's natural resources.

(2) Authority to enforce all provisions of this regulation, including establishing permit conditions and issuing permits, is delegated to and shall be carried out by all activated air pollution control authorities or ecology for those areas not under the jurisdiction of an authority.

(3) The purpose of this chapter is to:

(a) Minimize adverse effects on air quality from the open burning of field and forage, and turf grasses grown for seed;

(b) Provide for implementation of a research program to explore and identify economical and practical alternative agricultural practices to the open burning of field and forage, and turf grasses grown for seed;

(c) Provide for interim regulation of such burning until practical alternatives are found.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-430-010, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-010, filed 11/9/77. Formerly WAC 18-16-010.]

WAC 173-430-020 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter, shall have the following meanings:

(1) Field and forage grasses: Canarygrass, brome grass, oatgrass, timothy, wheatgrass, and orchardgrass, planted to produce seed.

(2) Straw: All material, other than seed, removed by swathing, combining, or cutting.

(3) Tear-out: Any operation that destroys the existing crop and prepares the area for next year's planting.

(4) Turf grasses: All blue grasses, fescues, bentgrass, and perennial ryegrass, planted to produce seed.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-430-020, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-020, filed 11/9/77. Formerly WAC 18-16-020.]

WAC 173-430-030 Permits, conditions, and restrictions. (1) No open burning of field or forage grasses, or turf grasses shall be undertaken unless a permit has been obtained from ecology or an authority, as appropriate. The issuance, denial, or conditioning of permits shall be governed by consideration of air quality conditions in the area affected by the proposed burning, the time of year, meteorological conditions, the size and duration of the proposed burning activity, the amount of straw removal required, the applicant's need to carry out such burning, and the public's interest in the environment. Permits will be conditioned to minimize air pollution interest in the environment. Permits will be conditioned to minimize air pollution. Until approved alternatives become available, ecology or the authority may limit the number of acres, on a pro rata basis, among those affected for which permits to burn will be issued in order to control emissions.

(2) Burning of acreage not previously under permit may be banned or subject to more restrictive conditions. Burning of field and forage grasses may be restricted, and other measures may be required to minimize air pollution.

Permits issued before 1978 will establish a permit history for the applicant. This permit history will apply to an applicant and not to specific parcels of land and is established only for the maximum amount of acreage included in any permit issued before 1978. Land transferred to a spouse, son, or daughter, will retain a permit history as established by the original applicant.

Any permit denial or restriction may first be applied to applicants without a permit history and to amounts of acreage not included in an applicant's permit history.

Applicants who received permits before 1978 may be given priority for burning the amount of acreage cited in the permit history.

(3) Open burning of field and forage grasses shall be prohibited. However, a permit using restrictions or conditions, may be issued to burn field and forage grasses for disease, pest, or weed control, if such need is certified by a county agent or other agricultural authority; or if such grasses were planted as part of a soil erosion control plan approved by a conservation district.

(4) Open burning of all grasses scheduled for tear-out shall be prohibited unless a permit specifically allows such burning.

(5) Practical alternative production methods and disease controls which would reduce or eliminate open burning shall be used when reasonably available. These methods and controls shall be used regardless of specific provisions of the compliance program described in this section.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-430-030, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-030, filed 11/9/77. Formerly WAC 18-16-030.]

WAC 173-430-040 Mobile field burners. Mobile field burners, and other methods of incineration not classified as open burning, shall not be prohibited by the restrictions in WAC 173-430-030: *Provided*, That emissions do not exceed the following standards:

(1) Visible emissions shall not exceed an opacity of 20 percent for more than three minutes in any one hour;

(2) Particulate emissions shall not exceed 0.1 grains per standard dry cubic foot of exhaust gas, corrected to seven percent oxygen.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-430-040, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-040, filed 11/9/77. Formerly WAC 18-16-040.]

WAC 173-430-050 Other approvals. A person applying for a permit under this chapter is still required to obtain permits, licenses, or approvals required by any other laws, regulations, or ordinances.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-430-050, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-050, filed 11/9/77. Formerly WAC 18-16-050.]

WAC 173-430-060 Study of alternatives. Ecology shall conduct, cause to be conducted, or approve of a study or studies to explore and identify economical and practical alternative practices to open burning of field and forage, and turf grasses. To conduct any such study, ecology may contract with public or private entities. Any approved study shall provide for the identification of such alternatives as soon as possible. Ecology shall annually review the progress of such studies, review provisions of this regulation and available alternatives to open burning and determine if continuing open burning of field and forage, and turf grasses is justified.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-430-060, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-060, filed 11/9/77. Formerly WAC 18-16-060.]

WAC 173-430-070 Fees. (1) To support the study or studies described in WAC 173-430-060, ecology or an authority shall collect a fee of fifty cents per acre of crop to be burned before any permit is issued under WAC 173-430-030. This fee shall be submitted with individual permit applications.

(2) When a permit is granted to burn fewer acres than requested in the permit application, ecology or the authority shall refund to the permit applicant the unused part of the permit fee.

(3) No part of the permit fee will be refunded if a grower decides to burn fewer acres than the permit allows.

(4) After granting any permit and making any refund required under WAC 173-430-070(2), the authority shall transfer the permit fee to ecology.

(5) Ecology shall deposit all permit fees in a special grass seed burning research account in the general fund.

(6) Ecology shall allocate moneys annually from this account to support approved studies provided for in WAC 173-430-060, up to the amount appropriated to ecology for such purpose.

(7) When ecology concludes that enough reasonably available alternative practices to the open burning of field and forage, and turf grasses grown for seed have been developed, and at such time as all costs of any studies have been paid, the grass seed burning research account shall be dissolved. Any money remaining in the account shall revert to the general fund.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-430-070, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-070, filed 11/9/77. Formerly WAC 18-16-070.]

WAC 173-430-080 Certification of alternatives. When enough information on alternative practices to open burning becomes available, ecology shall conduct public hearings to receive testimony from interested parties. If ecology then concludes that any procedure, program, technique, or device is a practical alternative to the open burning of field and forage and turf grasses grown for seed, ecology shall, by order, approve such alternative. After approval, any alternative that is reasonably available shall be used; and open burning of field and forage, and turf grasses grown for seed shall not be allowed.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-430-080, filed 9/17/90, effective 10/18/90; Order DE 77-20, § 173-430-080, filed 11/9/77. Formerly WAC 18-16-080.]

Chapter 173-433 WAC SOLID FUEL BURNING DEVICES

WAC

173-433-010	Purpose.
173-433-020	Applicability.
173-433-030	Definitions.
173-433-100	Emission performance standards.
173-433-110	Opacity standards.
173-433-120	Prohibited fuel types.
173-433-130	General emission standards.
173-433-140	Impaired air quality criteria.
173-433-150	Curtailement.
173-433-170	Retail sales fee.
173-433-200	Regulatory actions and penalties.

WAC 173-433-010 Purpose. This chapter, promulgated under chapters 43.21A and 70.94 RCW, establishes emission standards, certification standards and procedures, curtailment rules, and fuel restrictions for solid fuel burning devices.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 88-01-056 (Order 87-44), § 173-433-010, filed 12/16/87.]

WAC 173-433-020 Applicability. The provisions of this chapter apply to solid fuel burning devices in all areas of the state of Washington.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 88-01-056 (Order 87-44), § 173-433-020, filed 12/16/87.]

WAC 173-433-030 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter, shall have the following meanings:

(1) "Adequate source of heat" means the ability to maintain seventy degrees Fahrenheit at a point three feet above the floor in all normally inhabited areas of a dwelling.

(2) "Certified" means that a woodstove meets emission performance standards when tested by an accredited independent laboratory and labeled according to procedures specified by the EPA in "40 CFR 60 Subpart AAA - Standards of

Performance for Residential Wood Heaters" as amended through July 1, 1990.

(3) "Coal-only heater" means an enclosed, coal burning appliance capable of and intended for residential space heating, domestic water heating, or indoor cooking, which has all of the following characteristics:

(a) An opening for emptying ash which is located near the bottom or the side of the appliance;

(b) A system which admits air primarily up and through the fuel bed;

(c) A grate or other similar device for shaking or disturbing the fuel bed or power driven mechanical stoker; and

(d) The model is listed by a nationally recognized safety testing laboratory for use of coal only, except for coal ignition purposes.

(4) "EPA" means United States Environmental Protection Agency.

(5) "New woodstove" means a woodstove that has not been sold at retail, bargained, exchanged, or given away for the first time by the manufacturer, the manufacturer's dealer or agency, or a retailer, and has not been so used as to become what is commonly known as "second hand" within the ordinary meaning of that term.

(6) "Nonaffected pellet stove" means that a pellet stove has an air-to-fuel ratio equal to or greater than 35.0 when tested by an accredited laboratory in accordance with methods and procedures specified by the EPA in "40 CFR 60 Appendix A, REFERENCE METHOD 28A - MEASUREMENT OF AIR TO FUEL RATIO AND MINIMUM ACHIEVABLE BURN RATES FOR WOOD-FIRED APPLIANCES" as amended through July 1, 1990.

(7) "Retailer" means any person engaged in the sale of solid fuel burning devices directly to the public. A contractor who sells dwellings with solid fuel burning devices installed or a mail order outlet which sells solid fuel burning devices directly to the public is considered to be a solid fuel burning device retailer.

(8) "Seasoned wood" means wood of any species that has been sufficiently dried so as to contain twenty percent or less moisture by weight.

(9) "Solid fuel burning device" (same as solid fuel heating device) means a device that burns wood, coal, or any other nongaseous or nonliquid fuels, and includes any device burning any solid fuel except those prohibited by WAC 173-433-120. This also includes devices used for aesthetic or space-heating purposes in a private residence or commercial establishment, which has a heat input less than one million British thermal units per hour.

(10) "Treated wood" means wood of any species that has been chemically impregnated, painted, or similarly modified to prevent weathering and deterioration.

(11) "Woodstove" (same as "wood heater") means an enclosed solid fuel burning device capable of and intended for residential space heating and domestic water heating that meets the following criteria contained in "40 CFR 60 Subpart AAA - Standards of Performance for Residential Wood Heaters" as amended through July 1, 1990:

(a) An air-to-fuel ratio in the combustion chamber averaging less than 35.0, as determined by EPA Reference Method 28A;

(b) A useable firebox volume of less than twenty cubic feet;

(c) A minimum burn rate less than 5 kg/hr as determined by EPA Reference Method 28;

(d) A maximum weight of 800 kg, excluding fixtures and devices that are normally sold separately, such as flue pipe, chimney, and masonry components not integral to the appliance.

Any combination of parts, typically consisting of but not limited to: Doors, legs, flue pipe collars, brackets, bolts and other hardware, when manufactured for the purpose of being assembled, with or without additional owner supplied parts, into a woodstove, is considered a woodstove.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-030, filed 3/20/91, effective 4/20/91. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-030, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-054 (Order 88-38), § 173-433-030, filed 1/3/89; 88-01-056 (Order 87-44), § 173-433-030, filed 12/16/87.]

WAC 173-433-100 Emission performance standards. Woodstove sales. A person shall not advertise to sell, offer to sell, sell, bargain, exchange, or give away a new woodstove in Washington unless it has been tested to determine its emission performance and heating efficiency and certified and labeled in accordance with procedures and criteria specified in "40 CFR 60 Subpart AAA - Standards of Performance for Residential Wood Heaters" as amended through July 1, 1990.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-100, filed 3/20/91, effective 4/20/91. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-100, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-054 (Order 88-38), § 173-433-100, filed 1/3/89; 88-01-056 (Order 87-44), § 173-433-100, filed 12/16/87.]

WAC 173-433-110 Opacity standards. (1) A person shall not cause or allow emission of a smoke plume from any solid fuel burning device to exceed an average of twenty percent opacity for six consecutive minutes in any one-hour period.

(2) State-wide opacity standard. An authority shall not adopt or enforce an opacity level for solid fuel burning devices that is more stringent than the state-wide standard.

(3) Test method and procedures. Methods and procedures specified by the EPA in "40 CFR 60 Appendix A reference method 9 - VISUAL DETERMINATION OF THE OPACITY OF EMISSIONS FROM STATIONARY SOURCES" as amended through July 1, 1990, shall be used to determine compliance with subsection (1) of this section.

(4) Enforcement. Smoke visible from a chimney, flue or exhaust duct in excess of the opacity standard shall constitute prima facie evidence of unlawful operation of an applicable solid fuel burning device. This presumption may be refuted by demonstration that the smoke was not caused by an applicable solid fuel burning device. The provisions of this requirement shall:

(a) Be enforceable on a complaint basis.

(b) Not apply during the starting of a new fire for a period not to exceed twenty minutes in any four-hour period.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-110, filed 3/20/91, effective 4/20/91. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-110, filed 9/17/90, effective

10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-056 (Order 87-44), § 173-433-110, filed 12/16/87.]

WAC 173-433-120 Prohibited fuel types. A person shall not cause or allow any of the following materials to be burned in a solid fuel burning device:

- (1) Garbage;
- (2) Treated wood;
- (3) Plastic and plastic products;
- (4) Rubber products;
- (5) Animal carcasses;
- (6) Asphaltic products;
- (7) Waste petroleum products;
- (8) Paints and chemicals; or
- (9) Any substance which normally emits dense smoke

or obnoxious odors other than paper to start the fire, properly seasoned fuel wood, or coal with sulfur content less than 1.0% by weight burned in a coal-only heater.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-120, filed 3/20/91, effective 4/20/91. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-120, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-054 (Order 88-38), § 173-433-120, filed 1/3/89; 88-01-056 (Order 87-44), § 173-433-120, filed 12/16/87.]

WAC 173-433-130 General emission standards. In addition to the general applicability of chapter 173-400 WAC to all emission sources;

(1) Emissions detrimental to persons or property. No person shall cause or permit the emission of any air contaminant from an identifiable solid fuel burning device, including any air contaminant whose emission is not otherwise prohibited by this chapter, if the air contaminant emission causes detriment to the health, safety, or welfare of a person, plant or animal, or causes damage to property or business.

(2) Odors. Any person who shall cause or allow the generation of any odor from any solid fuel burning device which may interfere with any other property owner's use or enjoyment of his property must use recognized good practice and procedures to reduce these odors to a reasonable minimum.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-130, filed 3/20/91, effective 4/20/91. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-130, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-054 (Order 88-38), § 173-433-130, filed 1/3/89.]

WAC 173-433-140 Impaired air quality criteria. Impaired air quality shall be determined by ecology or an authority in accordance with the following criteria:

(1) "First stage impaired air quality" - the first stage indicates the presence of:

(a) Particulate matter ten microns and smaller in diameter (PM_{10}) at or above an ambient level of seventy-five micrograms per cubic meter; or

(b) Carbon monoxide at or above an ambient level of eight parts of contaminant per million parts of air by volume (ppm).

(2) "Second stage impaired air quality" - the second stage indicates the presence of particulate matter ten microns and smaller in diameter (PM_{10}) at or above an ambient level of one hundred five micrograms per cubic meter.

(3) On or after July 1, 1995, if an authority has geographically limited the use of solid fuel burning devices as specified under WAC 173-433-150(6), a single stage of impaired air quality will apply within the geographical area defined by the authority. A single stage of impaired air quality indicates the presence of:

(a) Particulate matter ten microns and smaller in diameter (PM_{10}) at or above an ambient level of ninety micrograms per cubic meter; or

(b) Carbon monoxide at or above an ambient level of eight parts of contaminant ppm.

(4) Acceptable ambient air quality measurement methods.

(a) Particulate matter ten microns and smaller in diameter (PM_{10}).

(i) Procedures specified by the EPA in "40 CFR 50, APPENDIX J - REFERENCE METHOD FOR THE DETERMINATION OF PARTICULATE MATTER AS PM_{10} IN THE ATMOSPHERE" as amended through July 1, 1990, shall be used to gather reference ambient PM_{10} data on a twenty-four-hour average.

(ii) More timely ambient PM_{10} measurement methods may be utilized to evaluate air quality impairment if accepted and approved by ecology. Any alternative method for evaluating air quality impairment for the purpose of curtailing solid fuel burning device use must be done at the same location and in parallel to the reference method, and must be related to the reference method by a mathematical relationship with a correlation coefficient of no less than 0.85.

(b) Carbon monoxide (CO) must be measured on an eight-hour average in accordance with procedures specified by the EPA in "40 CFR 50, APPENDIX C - REFERENCE METHOD FOR THE DETERMINATION OF CARBON MONOXIDE IN THE ATMOSPHERE (NON-DISPERSIVE INFRARED PHOTOMETRY)" as amended through July 1, 1990.

(c) All monitors used to measure PM_{10} for evaluation of air quality impairment due to solid fuel burning device use must be sited in accordance with EPA siting criteria in or near affected residential areas.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-140, filed 3/20/91, effective 4/20/91.]

WAC 173-433-150 Curtailment. (1) Whenever ecology or an authority has declared the first stage of impaired air quality for a geographical area a person in a residence or commercial establishment within that geographical area with an adequate source of heat other than a solid fuel burning device shall not operate any solid fuel burning device, unless the solid fuel burning device is one of the following:

(a) A nonaffected pellet stove; or

(b) A woodstove certified and labeled by the EPA under "40 CFR 60 Subpart AAA - Standards of Performance for Residential Wood Heaters" as amended through July 1, 1990; or

(c) A woodstove meeting the "Oregon Department of Environmental Quality Phase 2" emissions standards contained in Subsections (2) and (3) of Section 340-21-115, and certified in accordance with "Oregon Administrative Rules, Chapter 340, Division 21 - Woodstove Certification" dated November 1984.

(2) Whenever ecology or an authority has declared the second stage of impaired air quality for a geographical area a person in a residence or commercial establishment within that geographical area with an adequate source of heat other than a solid fuel burning device shall not operate any solid fuel burning device.

(3) Whenever ecology has declared an air pollution episode at a level above forecast a person in a residence or commercial establishment within that geographical area with an adequate source of heat other than a solid fuel burning device shall not operate any solid fuel burning device.

(4) The following matrix graphically illustrates the applicability of different types of solid fuel burning devices to the provisions of subsections (1) through (3) of this section:

Burn Condition Type of Device	Impaired Air Quality		Episode	
	First Stage	Second Stage	Forecast	Alert, Warning, or Emergency
Pellet Stove (non-affected)	OK	NO	OK	NO
EPA Certified Woodstove	OK	NO	OK	NO
DEQ Phase 2 Woodstove	OK	NO	OK	NO
EPA Exempted Device	NO	NO	OK	NO
All Other Devices	NO	NO	OK	NO

NOTES: "OK" indicates that the device may be operated
 "NO" indicates that the device may not be operated

(5) On or after July 1, 1995, an authority may prohibit use of solid fuel burning devices within specific geographical areas:

(a) The following factors shall be considered in the exercise of this limitation:

(i) The contribution of solid fuel devices that do not meet the standards set forth in "40 CFR 60 Subpart AAA - Standards of Performance for Residential Wood Heaters" as amended through July 1, 1990, to nonattainment of national ambient air quality standards;

(ii) The population density of the applicable geographical area; and

(iii) The public health effects of the use of solid fuel devices which do not meet the standards set forth in "40 CFR 60 Subpart AAA - Standards of Performance for Residential Wood Heaters" as amended through July 1, 1990.

(b) The following solid fuel devices are exempted from this limitation:

(i) Fireplaces;

(ii) Woodstoves certified and labeled by the EPA under "40 CFR 60 Subpart AAA - Standards of Performance for Residential Wood Heaters" as amended through July 1, 1990; or

(iii) Nonaffected pellet stoves.

(c) An authority shall allow an exemption from this subsection for low-income persons who reside in the geographical area affected by this subsection.

(6) On or after July 1, 1995, whenever an authority has declared impaired air quality in accordance with criteria contained in WAC 173-433-140(3) for a geographical area defined under subsection (5) of this section, a person in a

residence or commercial establishment within that geographical area shall not operate any solid fuel burning device.

(7) A person responsible for an applicable solid fuel burning device already in operation at the time an episode is declared shall withhold new solid fuel for the duration of the episode. A person responsible for an applicable solid fuel burning device already in operation at the time impaired air quality is declared shall withhold new solid fuel for the duration of the impaired air quality. Smoke visible from a chimney, flue or exhaust duct after three hours has elapsed from the declaration of the episode or impaired air quality shall constitute prima facie evidence of unlawful operation of an applicable solid fuel burning device. This presumption may be refuted by demonstration that the smoke was not caused by a solid fuel burning device.

(8) Ecology, authorities, health departments, fire departments, or local police forces having jurisdiction in the area may enforce compliance with the above solid fuel burning device curtailment rules after three hours has elapsed from the declaration of the episode or impaired air quality.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-150, filed 3/20/91, effective 4/20/91. Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-150, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-056 (Order 87-44), § 173-433-150, filed 12/16/87.]

WAC 173-433-170 Retail sales fee. (1) A person selling a solid fuel burning device at retail shall collect a fee from the buyer, pursuant to RCW 70.94.483.

(2) The fee shall be:

(a) Set at a minimum of fifteen dollars, until January 1, 1991. Thereafter, ecology may annually increase the fee according to changes in the consumer price index;

(b) Applicable to all new and used solid fuel burning devices, with the exception of built-in masonry fireplaces;

(c) Collected by the retailer at the time of sale and remitted to the department of revenue in conjunction with the retail sales tax under chapter 82.08 RCW.

(3) If the retailer fails to collect and remit the fee to the department of revenue as prescribed in chapter 82.08 RCW, the retailer shall be personally liable to the state for the amount of the fee, with subsequent actions taken in accordance with the collection provisions of chapter 82.32 RCW.

(4) Beginning July 1, 1990, and each calendar quarter thereafter, the funds collected under RCW 70.94.483 shall be used solely for the purposes of public education and enforcement of the solid fuel burning device program. The department shall distribute the funds from the woodstove education and enforcement account as follows:

(a) Sixty-six percent of the funds shall be distributed to those local air authorities with enforcement programs, based upon the fraction of the total state population residing in the counties within their respective jurisdictions. Population figures used to establish this fraction shall be determined by the office of financial management. Where an activated local air authority does not exist or does not implement an enforcement program, or elects not to receive the funds, ecology shall retain the funds that would otherwise be distributed under this subsection; and

(b) Thirty-four percent of the funds shall be distributed to ecology for the purposes of enforcement and educating the public about:

(i) The effects of solid fuel burning device emissions upon health and air quality; and

(ii) Methods of achieving better efficiency and emission performance from solid fuel burning devices.

[Statutory Authority: Chapter 70.94 RCW. 91-07-066 (Order 90-58), § 173-433-170, filed 3/20/91, effective 4/20/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-054 (Order 88-38), § 173-433-170, filed 1/3/89.]

WAC 173-433-200 Regulatory actions and penalties.

A person in violation of this chapter may be subject to the provisions of WAC 173-400-230 Regulatory actions and WAC 173-400-240 Criminal penalties.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-433-200, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 88-01-056 (Order 87-44), § 173-433-200, filed 12/16/87.]

Chapter 173-434 WAC

SOLID WASTE INCINERATOR FACILITIES

WAC

173-434-010	Purpose.
173-434-020	Applicability.
173-434-030	Definitions.
173-434-050	New source review (NSR).
173-434-070	Prevention of significant deterioration (PSD).
173-434-090	Operation and maintenance plan.
173-434-100	Requirement for BACT.
173-434-110	Standards of performance.
173-434-120	Emission standards for hazardous air pollutants.
173-434-130	Emission standards.
173-434-160	Design and operation.
173-434-170	Monitoring and reporting.
173-434-190	Changes in operation.
173-434-200	Emission inventory.
173-434-210	Special studies.

WAC 173-434-010 Purpose. This chapter, promulgated under chapter 70.94 RCW, establishes emissions standards, design requirements, and performance standards for solid waste incinerator facilities.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-010, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-010, filed 3/16/87.]

WAC 173-434-020 Applicability. The provisions of this chapter shall apply state-wide to all solid waste or solid waste derived fuel incinerator facilities that:

(1) Are constructed after January 1, 1985, which are designed to burn twelve or more tons per day; or

(2) Was constructed prior to January 1, 1985, but begins to burn twelve or more tons per day after January 1, 1985.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-020, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-020, filed 3/16/87.]

WAC 173-434-030 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated by reference. Unless a different meaning is clearly required by context, the following words and phrases as used in this chapter, shall have the following meanings.

(1) "Incinerator facility" means all of the emissions unit(s) including quantifiable fugitive emissions, which are located in one or more contiguous or adjacent properties, and are under the control of the same person(s), whose activities are ancillary to the incineration of solid waste.

(2) "Residence time" means the minimum amount of time that a parcel of gas is subject to a given temperature.

(3) "Solid waste" means all putrescible and nonputrescible solid and semisolid wastes, including but not limited to garbage, rubbish, ashes, industrial wastes, swill, demolition and construction wastes, abandoned vehicles or parts thereof, and discarded commodities. This includes all liquid, solid and semisolid materials, which are not primary products of public, private, industrial, commercial, mining, and agricultural operations. Solid waste includes but is not limited to septage from septic tanks, dangerous waste, and problem wastes. Solid waste does not include wood waste or sludge from waste water treatment plants.

(4) "Transmissometer" means a device that measures opacity and conforms to EPA Performance Specification Number 1 in Title 40 Code of Federal Regulations, Part 60, Appendix B as promulgated prior to July 1, 1988.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-030, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-030, filed 3/16/87.]

WAC 173-434-050 New source review (NSR). The conditions of WAC 173-400-110 shall apply to each new source or emissions unit covered by this chapter.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-050, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-434-050, filed 1/3/89. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-050, filed 3/16/87.]

WAC 173-434-070 Prevention of significant deterioration (PSD). The conditions of WAC 173-400-141 shall apply to all new major sources and major modifications covered by this chapter.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-070, filed 9/17/90, effective 10/18/90.]

WAC 173-434-090 Operation and maintenance plan. As part of a condition of approval of the notice of construction, the owner or operator of the incinerator shall develop a plan for the operation and maintenance of all equipment and procedures that can cause or control air pollution. This plan must be approved by ecology or the authority prior to initial startup or testing. Every twenty-four months thereafter, the owner or operator must obtain approval of a new or updated plan to continue operation. The plan may include operating parameters, maintenance procedures and operation personnel training requirements and procedures to assure that the source will comply with all applicable rules, resolutions, regulations, safety practices, and ordinances.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-090, filed 9/17/90, effective 10/18/90.]

WAC 173-434-100 Requirement for BACT. (1) No incinerator facility shall cause or permit air contaminant

emissions in excess of the limits described in this section, as modified by chapter 173-400 WAC if applicable. All incinerator facilities that are required to file a notice of construction are required to use best available control technology (BACT) which is determined on a case-by-case basis at the time of approval of the notice of construction. For some incinerator facilities, this may be more stringent than the emissions limitations of this chapter and may include fuel cleaning or separation.

(2) Whenever more than one regulation applies to the control of air contaminants from an incinerator facility, the more stringent regulation, control, or emission limit shall govern.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-100, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-100, filed 3/16/87.]

WAC 173-434-110 Standards of performance.

Sources and emissions units to which this chapter is applicable, shall comply with any applicable provisions of WAC 173-400-115 "Standards of performance for new sources."

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-110, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-110, filed 3/16/87.]

WAC 173-434-120 Emission standards for hazardous air pollutants. Sources and emissions units to which this chapter is applicable shall comply with any applicable provisions of WAC 173-400-075 "Emission standards for sources emitting hazardous air pollutants."

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-120, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-120, filed 3/16/87.]

WAC 173-434-130 Emission standards. In addition to the general applicability of chapters 173-400 and 173-490 WAC to all emission sources; no incinerator facility shall cause or permit air contaminant emissions in excess of the limits listed below. Specific emission standards listed in this chapter will take precedence over the general emission standards of chapter 173-400 WAC.

(1) Particulate.

(a) For incinerator facilities that are capable of burning two hundred fifty or more tons of solid waste per day, emissions from each stack shall not exceed 0.046 grams of particulate per dry cubic meter at standards conditions (0.020 grains/dscf) corrected to seven percent oxygen for an hourly average.

(b) For incinerator facilities that have a maximum capability of burning less than two hundred fifty tons of solid waste per day, emissions from each stack shall not exceed 0.069 grams of particulate per dry cubic meter at standards conditions (0.030 grains/dscf) corrected to seven percent oxygen for an hourly average.

(2) Hydrogen chloride. The hydrogen chloride emissions from each stack shall not exceed fifty ppm on a volumetric dry basis corrected to seven percent oxygen for an hourly average, except if the owner or operator demonstrates that uncontrolled emissions of hydrogen chloride are reduced by at least eighty percent and a procedure acceptable to ecology or the authority for monitoring is developed.

(3) Sulfur dioxide. The sulfur dioxide emissions from each stack shall not exceed fifty ppm on a volumetric dry basis corrected to seven percent oxygen for an hourly average, except if the owner or operator demonstrates that the uncontrolled emissions of sulfur dioxide are reduced by at least eighty percent and a procedure acceptable to ecology or the authority for monitoring is developed. When more than fifty percent of the heat input is fossil fuel, ecology or the authority may establish a higher sulfur dioxide limit provided that limit meets BACT requirements.

(4) Opacity.

(a) The opacity as measured visually from any incinerator stack shall not exceed an average of five percent opacity for more than six consecutive minutes in any sixty minute period.

(b) The opacity as measured by a transmissometer shall not exceed an average of ten percent opacity for more than six consecutive minutes in any sixty minute period.

(c) The opacity as measured visually shall not exceed an average of zero percent from any emissions unit except incinerator stacks for more than six consecutive minutes in any sixty minute period.

(5) Fugitive emissions. Each operator or owner shall take reasonable precautions to prevent fugitive emissions which includes the paving of all normally traveled roadways within the plant boundary and enclosing or hooding material transfer points.

(6) Source testing. To demonstrate compliance with this chapter, refer to WAC 173-400-105.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-130, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-130, filed 3/16/87.]

WAC 173-434-160 Design and operation. (1)

Combustion zone temperature. Whenever solid waste is being burned, the temperature of the final combustion zone shall not be below 982°C (1800°F) for a fifteen minute average nor below 871°C (1600°F) for any reading.

(2) Residence time. The minimum combustion chamber temperature must be maintained for at least one second (1.0 second) in a zone after the last over fire air has entered the combustion chamber. If over fire air is not used, the combustion chamber shall maintain the minimum combustion temperature or greater for at least one second with all combustion gases. Procedures for determining the residence time shall be a part of the new source review.

(3) Excess air. The combustion gases leaving the final combustion zone must contain at least three percent oxygen measured on a wet basis.

(4) Combustion air. To minimize odor, fugitive emissions and to maintain a negative pressure in the tipping area, the combustion air shall be withdrawn from the tipping area, or shall utilize an equivalent means of odor and fugitive emission control acceptable to ecology or the authority.

(5) Combustion air distribution and control. The air distribution shall be fully controllable where pressurized air is introduced and the air flow shall be monitored and recorded.

(6) Particulate control device temperature. The inlet temperature of the primary particulate control device shall not exceed 177°C (350°F).

(7) Operation. At all times, the owner or operator shall, to the extent practicable, maintain and operate any incinerator facility, including associated air pollution control equipment, in a manner consistent with good air pollution control practice. This may mean that if the emissions limits are being exceeded, no more waste should be fed into the incinerator until the problem is corrected. Determination of whether acceptable operating and maintenance procedures are being used will be based on information available to ecology or the authority which may include, but is not limited to, monitoring and recording results, opacity observations, review of operating and maintenance procedures, and inspection of the source.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-160, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-160, filed 3/16/87.]

WAC 173-434-170 Monitoring and reporting. The owners or operators of each incinerator facility shall conduct routine monitoring of emissions in accordance with a program that has been approved by ecology or the authority. The program must contain quality control and quality assurance procedures.

(1) Monitoring. The owners or operators shall install, operate, and maintain continuous monitors and recorders for the following:

- (a) Opacity;
- (b) Combustion zone temperature;
- (c) Particulate control device temperature;
- (d) Hydrogen chloride and/or sulfur dioxide;
- (e) Oxygen;
- (f) Carbon monoxide;
- (g) Combustion air distribution.

The monitors for opacity, sulfur dioxide, carbon monoxide, and oxygen shall comply with EPA performance specifications in Title 40, Code of Federal Regulations, Part 60, Appendix B as promulgated prior to July 1, 1989.

(2) Reporting. Results of the monitoring shall be reported within fifteen days of the end of each calendar month and shall include but may not be limited to data such as:

(a) The average daily maximum and the daily maximum concentration of each monitored pollutant and the daily amount of solid waste burned.

(b) The date, time, and magnitude of any periods during which the standards were exceeded, and what corrective action was or will be taken.

(c) Any period(s) of monitor down time.

(3) Testing. The owners or operators shall conduct emission tests for particulate, sulfur dioxide and hydrogen chloride on a regular basis. These tests may be used to determine acceptable operating parameters. Testing shall be at least annually for incinerator facilities capable of burning two hundred fifty tons or more of solid waste per day and biennially for other facilities.

(4) Other data. Each owner or operator shall furnish upon request by ecology or the authority, other data required

to evaluate the incinerator's emissions or emissions control program.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-170, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-170, filed 3/16/87.]

WAC 173-434-190 Changes in operation. If a startup, shutdown, breakdown, or upset condition occurs which could result in an emissions violation or a violation of an ambient air quality standard, the owner or operator of the source shall take the following actions as applicable:

(1) For a planned condition, such as a startup or shutdown, the condition shall be reported to ecology or the authority not less than twenty-four hours in advance of its occurrence. For incinerator facilities that normally operate for less than twenty-four hours per day, this provision may be waived provided that daily startup and shutdown procedures are developed that are acceptable to ecology or the authority.

(2) For unplanned conditions, such as a breakdown or upset, the condition shall be reported to ecology or the authority as soon as possible, but no later than the end of the next business day.

If, upon reviewing the available information, ecology or the authority determines that continued operation of any emissions unit is likely to cause a significant risk to the public, it may order an immediate shutdown of the emissions unit.

Upon request ecology or the authority, the owner or operator of the source shall submit a full written report including known causes of any infraction, the corrective actions taken, and the preventive measures to be taken to minimize or eliminate the chance of recurrence.

Compliance with the requirement of WAC 173-434-100, does not relieve the owner or operator of the source from the responsibility to maintain continuous compliance with all the requirements of chapter 173-434 WAC nor from the resulting liabilities for failure to comply.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-190, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-190, filed 3/16/87.]

WAC 173-434-200 Emission inventory. The owner or operator of any solid waste incinerator shall submit an inventory of emissions that complies with WAC 173-400-105. The inventory shall include but may not be limited to stack and fugitive emissions of particulate matter, PM-10, sulfur dioxide, nitrogen oxides, carbon monoxide, volatile organic compounds, hydrogen chloride, and other contaminants.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-434-200, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-434-200, filed 1/3/89. Statutory Authority: Chapter 70.94 RCW. 87-07-041 (Order 86-38), § 173-434-200, filed 3/16/87.]

WAC 173-434-210 Special studies. Ecology or the authority may require such additional special studies relevant to process emissions and establish completion dates as it determines necessary. These special studies may include the requirement to conduct studies of dioxin emissions and control measures.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-434-210, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW, 87-07-041 (Order 86-38), § 173-434-210, filed 3/16/87.]

Chapter 173-435 WAC
EMERGENCY EPISODE PLAN
(Formerly chapter 18-08 WAC)

WAC

173-435-010	Purpose.
173-435-015	Significant harm levels.
173-435-020	Definitions.
173-435-030	Episode stage criteria.
173-435-040	Source emission reduction plans.
173-435-050	Action procedures.
173-435-060	Enforcement.
173-435-070	Sampling sites, equipment, and methods.

WAC 173-435-010 Purpose. These rules implement chapter 70.94 RCW, the Washington State Clean Air Act.

Air pollution episodes occur under meteorological conditions that reduce the effective volume of air into which air contaminants are introduced. When these conditions occur, there is a possible danger that normal operations at air contaminant sources will be detrimental to public health and safety. The avoidance of high contaminant concentrations reaching significant harm levels during an episode requires a plan which will provide for rapid short-term emission reduction. This chapter sets up such an episode avoidance plan.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 89-02-055 (Order 88-39), § 173-435-010, filed 1/3/89; Order DE 77-21, § 173-435-010, filed 10/31/77.]

WAC 173-435-015 Significant harm levels. Significant harm levels are reached when any one of the following pollutant concentrations are measured:

- (1) Sulfur dioxide - 2,620 $\mu\text{g}/\text{m}^3$ (1.0 ppm), 24-hour average.
- (2) PM-10 - 600 micrograms/cubic meter, 24-hour average.
- (3) Carbon monoxide - 57.5 mg/m^3 (50 ppm), 8-hour average, 86.3 mg/m^3 (75 ppm) 4-hour average, 144 mg/m^3 (125 ppm) 1-hour average.
- (4) Ozone - 1,200 $\mu\text{g}/\text{m}^3$ (0.6 ppm) - 2-hour average.
- (5) Nitrogen dioxide - 3,750 $\mu\text{g}/\text{m}^3$ (2.0 ppm) 1-hour average, 938 $\mu\text{g}/\text{m}^3$ (0.5 ppm) 24-hour average.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 89-02-055 (Order 88-39), § 173-435-015, filed 1/3/89.]

WAC 173-435-020 Definitions. Unless a different meaning is clearly required by context, words and phrases used in this chapter shall have the following meanings, general terms common with other chapters as defined in chapter 173-403 WAC, and terms specific to the emergency episode plan as defined below.

- (1) "Air quality control region" means an area designated as an air quality control region by the federal environmental protection agency.
- (2) "Episode stage" means a prescribed level of air contaminants or meteorological conditions where certain control actions are required to prevent ambient pollutant

concentrations from reaching levels which could cause significant harm to the health of persons.

(3) "Emergency action center" means the headquarters for all department actions during an episode stage.

(4) "Hour" means a 60 minute period, beginning and ending on a clock hour.

(5) "8 hours" means any consecutive 8 hours, starting at any clock hour.

(6) "Major source" means any source which is estimated to emit at an annual rate of twenty-five tons per year or more of SO_2 , particulates, or carbon monoxide.

(7) "Source emission reduction plan (SERP)" means a plan developed for an individual air pollution source and approved by the director, which sets forth the actions to be taken at that source upon the declaration of various stages of an episode.

(8) "24 hours" means any consecutive 24 hours, starting at any clock hour.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 89-02-055 (Order 88-39), § 173-435-020, filed 1/3/89; Order DE 77-21, § 173-435-020, filed 10/31/77.]

WAC 173-435-030 Episode stage criteria. The declaration of episode stages shall be in accordance with the following criteria:

(1) **Stage: "First or forecast"** - the forecast stage indicates the presence of meteorological conditions conducive to the accumulation of air contaminants. A forecast stage may be declared when an air stagnation advisory is issued by the national weather service or there is equivalent indication of stagnant atmospheric conditions and conditions are forecast to persist for 24 hours. Declaration of this stage will activate increased air quality surveillance.

(2) **Stage: "Second or alert"** - the alert stage is that concentration of pollutants at which control actions are to begin. An alert will be declared when any one of the following levels is reached:

- (a) SO_2 - 800 $\mu\text{g}/\text{m}^3$ (0.3 ppm), 24-hour average.
- (b) PM-10 - 350 $\mu\text{g}/\text{m}^3$, 24-hour average.
- (c) CO - 17 mg/m^3 (15 ppm), 8-hour average.
- (d) Oxidant (O_3) - 400 $\mu\text{g}/\text{m}^3$ (0.2 ppm) - 1-hour average.

(e) NO_2 - 1130 $\mu\text{g}/\text{m}^3$ (0.6 ppm) 1-hour average, 282 $\mu\text{g}/\text{m}^3$ (0.15 ppm) 24-hour average; and meteorological conditions are such that the pollutant concentrations can be expected to remain at or above the alert levels for 12 or more hours or can be expected to recur within 24 hours unless control actions are taken.

(3) **Stage: "Third or warning"** - the warning stage indicates that air quality is continuing to degrade and that additional control actions are necessary. A warning will be declared when any one of the following levels is reached:

- (a) SO_2 - 1,600 $\mu\text{g}/\text{m}^3$ (0.6 ppm), 24-hour average.
- (b) PM-10 - 420 $\mu\text{g}/\text{m}^3$, 24-hour average.
- (c) CO - 34 mg/m^3 (30 ppm), 8-hour average.
- (d) Oxidant (O_3) - 800 $\mu\text{g}/\text{m}^3$ (0.4 ppm), 1-hour average.
- (e) NO_2 - 2,260 $\mu\text{g}/\text{m}^3$ (1.2 ppm), 1-hour average; 565 $\mu\text{g}/\text{m}^3$ (0.3 ppm), 24-hour average; and meteorological

conditions are such that pollutant concentrations can be expected to remain at or above the warning levels for 12 or

more hours or can be expected to recur within 24 hours unless control actions are taken.

(4) **Stage: "Fourth or emergency"** - the emergency stage indicates that air quality is continuing to degrade toward a level of significant harm to the health of persons and that the most stringent control actions are necessary. An emergency will be declared when any one of the following levels is reached at any monitoring site:

- (a) SO₂ - 2,100 µg/m³ (0.8 ppm), 24-hour average.
- (b) PM-10 - 500 µg/m³, 24-hour average.
- (c) CO - 46 mg/m³ (40 ppm), 8-hour average.
- (d) Oxidant (O₃) - 1,200 µg/m³, (0.6 ppm), 1-hour average.

(e) NO₂ - 3,000 µg/m³ (1.6 ppm), 1-hour average; 750 µg/m³ (0.4 ppm), 24-hour average; and meteorological conditions are such that this condition can be expected to remain at or above emergency levels for 12 or more hours, or can be expected to recur within 24 hours.

(5) **Stage: "Termination"** - once declared, any stage reached by applying these criteria will remain in effect until the criteria for that level are no longer met. At that time, the next lower stage will be declared. When conditions improve to where the criteria are no longer met for any episode stage, the episode will be terminated.

[Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-435-030, filed 1/3/89; Order DE 77-21, § 173-435-030, filed 10/31/77.]

WAC 173-435-040 Source emission reduction plans.

(1) Any person responsible for the operation of a major source, when requested in writing by the director, shall prepare, in consultation with the department, a source emission reduction plan (SERP). This SERP shall be consistent with good industrial practice and safe operating procedures for reducing the emissions of air contaminants into the ambient air during periods of air pollution alert, warning, and emergency.

(2) SERPs shall be in writing and shall show the source of air contamination, describe the manner in which the reduction of air contaminant emissions will be achieved during periods of air pollution alert, warning, and emergency, and give the amount of reduction for each stage.

(3) During periods of air pollution alert, warning, or emergency, SERPs shall be made available, on the premises of sources required under this section to have them, to any person authorized to enforce the provisions of this episode avoidance plan.

(4) SERPs shall be submitted to the director within 30 days after receipt of a request thereof.

(5) SERPs shall be reviewed and approved by the director. If, in the opinion of the director, and SERP does not, in whole or in part, provide for satisfactory emission reduction during an episode, the director may disapprove such SERP, give the reason for disapproval, and require the resubmittal of same within a specified time period.

If within the time period specified, the person responsible fails to submit a SERP satisfactory to the director, the director may revise the SERP to cause it to meet episode avoidance objectives. This revised plan will then be the SERP for the source to which it applies.

(6) SERPs may be amended after submission to the director of a revised SERP. This revised SERP will be processed in the same manner as the originally submitted SERP.

(7) An emission reduction plan for the purpose of reducing motor vehicle emissions during episode stages, will be developed or approved by the department. These plans may include actions to be taken by other governmental units, citizens, and businesses.

[Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-435-040, filed 1/3/89; Order DE 77-21, § 173-435-040, filed 10/31/77.]

WAC 173-435-050 Action procedures. (1) Whenever applicable criteria are met, the director may declare and terminate the forecast, alert, and warning stages of an episode. This declaration shall constitute an order for action in accordance with applicable SERPs.

(2) No open fires shall be ignited during any stage of an episode. Any person responsible for an open fire already ignited shall extinguish that fire when informed that an episode has been declared. Open fires conducted under the auspices of the department of natural resources for the purpose of burning forest slash pursuant to RCW 70.94.660 through 70.94.700 are to be extinguished by withholding new fuel and allowing the fire to burn down.

(3) Whenever applicable criteria are met, the governor may declare and terminate the emergency stage of an episode. This declaration shall constitute an order for action in accordance with applicable SERPs.

(4) Adverse air quality need not be region-wide for any episode stage to be declared. Action procedures may be taken for any area affected or likely to be affected by episode conditions. The declaration of any episode stage shall specify the area to which it applies.

(5) The broadest publicity practicable shall be given to the declaration of any episode stage. Such declaration shall, as soon as possible, be directly communicated to all persons responsible for the carrying out of SERPs within the affected area.

(6) Regardless of whether any episode stages have previously been declared, whenever the governor finds that emissions are causing imminent danger to public health or safety, the governor may declare an air pollution emergency and order the persons responsible for the operation of sources causing the danger, to reduce or discontinue emissions consistent with good operating practice, safe operating procedures, and SERPs, if any.

(7) Whenever an episode stage is declared on the basis of contaminant levels of carbon monoxide, oxidant, or nitrogen dioxide, the director shall take such action as may be required to reduce emissions from motor vehicles. These actions may include, but are not limited to, the rerouting or detouring of traffic. Actions to be taken by cities and businesses will be established and implemented according to plans developed by them and approved by the department. These plans must meet criteria for emission reduction established by the department.

[Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-435-050, filed 1/3/89; Order DE 77-21, § 173-435-050, filed 10/31/77.]

WAC 173-435-060 Enforcement. (1) Whenever any episode stage has been declared, the department shall establish an emergency action center, which shall be the headquarters for all department actions during the episode.

(2) The department shall develop an operations manual, which shall set forth a plan for the receipt, processing, and dissemination of information and data during an episode.

(3) Enforcement with respect to any episode shall be directed from the emergency action center by the director in consultation with the governor's office.

(4) Authorized personnel of the department, the department of social and health services, and the state police shall have the authority to enforce orders of the director or the governor, issued under this chapter, as directed from the emergency action center. In addition, authorized personnel of any local air pollution control agency or local police force shall have the authority to enforce such orders against sources within the area over which that agency or police force has jurisdiction, as directed from the emergency action center.

(5) To determine compliance with any SERP, those persons authorized to enforce orders, hereunder, shall have the authority to enter upon any private or public property, excepting nonmultiple unit private dwellings, housing two families or less. No person shall refuse entry or access to enforcement personnel who request entry and present appropriate credentials.

(6) Whenever it appears that action being taken in compliance with SERPs will not avert imminent danger to public health and safety, the governor may order the following additional measures:

(a) Stopping and prohibiting motor vehicle travel and traffic;

(b) Closing down or restricting the use of any business, commercial, industrial or other establishment or activity which contributes to the emission of contaminants to the air.

(7) Any declaration or order issued in accordance with WAC 173-435-050 shall be effective immediately and shall not be stayed, pending completion of review.

(8) Whenever any order has been issued hereunder, the attorney general, upon the request of the governor or authorized representative, or the director shall petition the superior court of the county in which a source is located for a temporary restraining order for the immediate reduction or discontinuance of emissions from that source.

[Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-435-060, filed 1/3/89; Order DE 77-21, § 173-435-060, filed 10/31/77.]

WAC 173-435-070 Sampling sites, equipment, and methods. (1) Data from all stations shall be considered when determining episode conditions. The department shall specify PM-10 monitoring stations to be operated continuously during any episode stage for episode management purposes. Stations from which episode declarations are based must be located in such a manner that the area represented by that station and the sources contributing to the episode condition can reasonably be determined and corrective actions taken.

(2) Sampling and analysis will be done by federal reference or federal equivalent methods; except the department may approve other sampling and analysis methods for PM-10 if reasonable site specific equivalency with the federal reference method has been demonstrated. This equivalency must be reestablished biennially.

[Statutory Authority: Chapters 70.94 and 43.21A RCW. 89-02-055 (Order 88-39), § 173-435-070, filed 1/3/89; Order DE 77-21, § 173-435-070, filed 10/31/77.]

Chapter 173-440 WAC SENSITIVE AREAS (Formerly chapter 18-06 WAC)

WAC

173-440-010	Purpose.
173-440-020	Applicability.
173-440-030	Definitions.
173-440-040	Sensitive areas designated.
173-440-100	Standards.
173-440-900	Appendix A—Map.

WAC 173-440-010 Purpose. This chapter, promulgated under RCW 70.94.305 and 70.94.331 designates certain geographical areas of the state as sensitive areas after considering population, development and recreational and scenic values; and provides for the imposition of more stringent standards and compliance requirements for certain stationary source categories within these areas than apply to such categories outside sensitive areas.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-440-010, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-19-076 (Order 87-15), § 173-440-010, filed 9/16/87.]

WAC 173-440-020 Applicability. The provisions of this chapter shall apply to all sources of a listed source category located in a sensitive area.

[Statutory Authority: Chapter 70.94 RCW. 87-19-076 (Order 87-15), § 173-440-020, filed 9/16/87.]

WAC 173-440-030 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. Unless a different meaning is clearly required by context, words and phrases as used in this chapter shall have the following meaning: "Sensitive area" means a geographical area designated by this chapter.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-440-030, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-19-076 (Order 87-15), § 173-440-030, filed 9/16/87.]

WAC 173-440-040 Sensitive areas designated. Designated as sensitive areas in the state are:

(1) All cities with a population of 1,000 or more that are not located in a county having an air authority, together with those lands within a zone extending one mile (horizontal measure) from the present city limits. These cities are presently:

- (a) Pullman
- (b) Wenatchee
- (c) Ellensburg
- (d) Clarkston

- (e) Othello
- (f) Omak
- (g) Colville
- (h) Colfax
- (i) Dayton
- (j) Goldendale
- (k) Chelan
- (l) Okanogan
- (m) Cashmere
- (n) Ritzville
- (o) Pomeroy
- (p) Cle Elum
- (q) White Salmon
- (r) Oroville
- (s) Newport
- (t) Coulee Dam
- (u) Davenport
- (v) Chewelah
- (w) Leavenworth
- (x) Brewster
- (y) Wilbur
- (z) Odessa

(2) Those sections of state highways designated on the map incorporated herein as Appendix A (WAC 173-440-900), together with those lands within a zone extending one mile (horizontal measure) to either side of the highway right of way and all incorporated cities or towns bordering the designated sections of highway.

(3) Any area on either side of the Columbia, Snake, or Spokane Rivers within a zone extending one mile (horizontal measure) from the line of mean high water.

[Statutory Authority: Chapter 70.94 RCW. 87-19-076 (Order 87-15), § 173-440-040, filed 9/16/87.]


WAC 173-440-100 Standards. In addition to all other applicable regulations, the following more restrictive standards shall apply in sensitive areas for stationary sources in the categories listed.

Wigwam burners. All wigwam burners shall comply with the requirements of WAC 173-400-070 (1)(d).

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-440-100, filed 9/17/90, effective 10/18/90. Statutory Authority: Chapter 70.94 RCW. 87-19-076 (Order 87-15), § 173-440-100, filed 9/16/87.]

WAC 173-440-900 Appendix A—Map.

Appendix A

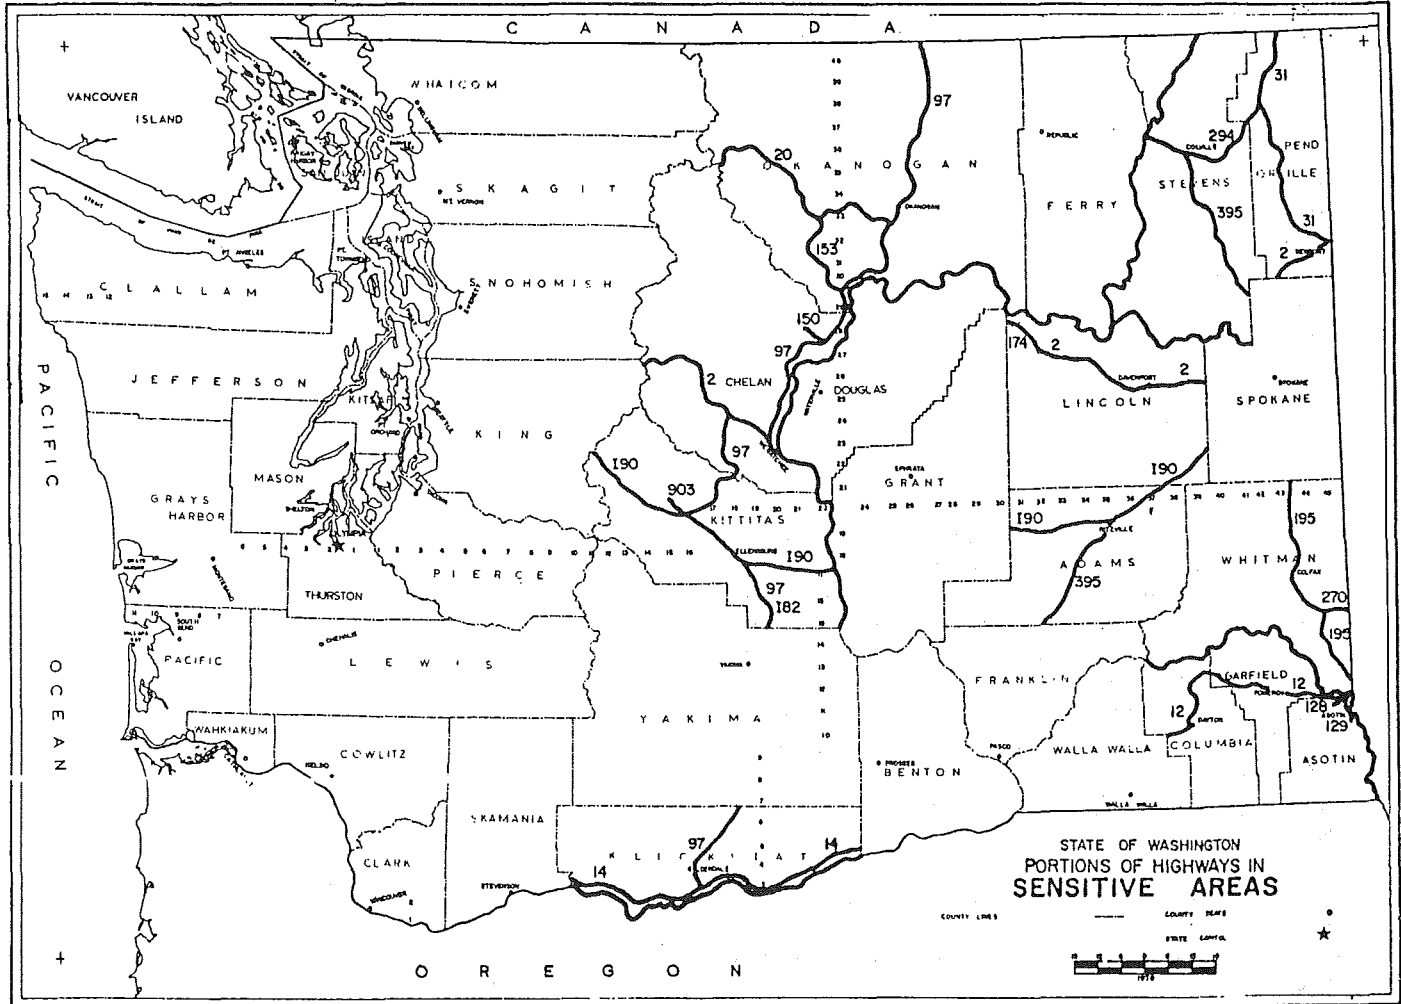

APPENDIX A

[Statutory Authority: Chapter 70.94 RCW. 87-19-076 (Order 87-15), § 173-440-900, filed 9/16/87.]

Chapter 173-450 WAC
ESTABLISHING REQUIREMENTS FOR THE
RECEIPT OF FINANCIAL AID
 (Formerly chapter 18-20 WAC)

WAC

173-450-010	Purpose and applicability.
173-450-020	Definitions.
173-450-030	Limitations.
173-450-040	Applications.
173-450-050	Workable program.
173-450-060	Grant conditions.
173-450-070	Payments.
173-450-080	Changes, amendments and supplemental state financial aid.
173-450-090	Termination.
173-450-100	Federal grants.

WAC 173-450-010 Purpose and applicability. These rules and regulations are promulgated under RCW 70.94.143, 70.94.305, and 70.94.385 of the Washington Clean Air Act to establish standard of eligibility for the granting of state and federal financial aid to air authorities.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-010, filed 9/16/87.]

WAC 173-450-020 Definitions. Unless a different meaning is clearly required by context, words and phrases used in this chapter shall have the following meanings; general terms common with other chapters of Title 173 WAC as defined in chapter 173-403 WAC, and terms specific to requirements for financial aid as follows:

- (1) "Applicant" means an air authority applying for state financial aid under the provisions of chapter 70.94 RCW.
- (2) "Grantee" means an applicant for whom state financial aid has been approved by the department.

(3) "Locally funded portion" or "local funds" means the funds provided to the applicant air authority from sources available to it under chapter 70.94 RCW exclusive of state financial aid or federal funds designated specifically for air pollution.

(4) "Payment period" means the period of time for which money for state and federal financial aid is paid to the grantee upon receipt and approval by the department of a properly executed voucher.

(5) "Workable program" means a comprehensive statement of objectives for the prevention and control of air pollution and the existing and proposed measures to achieve these objectives as described in WAC 173-450-050.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-020, filed 9/16/87.]

WAC 173-450-030 Limitations. State financial aid shall be granted to air authorities qualifying under these regulations subject to the following limitations:

(1) State financial aid shall not exceed an amount equal to fifty percent of the locally funded portion of the annual recurring expenditures of such air authority in each of the first three years during which state financial aid is utilized by the air authority and shall not exceed an amount equal to one hundred percent of the locally funded portion in each following year.

(2) The department may limit the amount of financial aid available to a grantee when it becomes necessary due to the lack of sufficient funds available for distribution to meet the needs of all qualified grantees throughout the state.

(3) The department may limit the amount of financial aid to less than the amount for which the applicant applies when the department determines that proposed items of expenditure are not consistent with air pollution control program needs in the applicant's area of jurisdiction, or are not in the best interests of a coordinated state-wide air pollution control program, or where such items of expenditure duplicate the responsibilities and activities of the department.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-030, filed 9/16/87.]

WAC 173-450-040 Applications. Applications for state financial aid shall be prepared and submitted on forms specified by the department under the following conditions:

(1) Applications shall be filed with the department and the department shall take action as to the disposition of an application within sixty-five days of its first presentation. Applications shall be approved, denied, or deferred: *Provided*, That where action is deferred the applicant shall be advised of the reasons for such deferral and action shall be taken within a reasonable time.

(2) Applications must contain a statement of need for air pollution prevention and control in the applicant's jurisdiction.

(3) The applicant must describe a workable program and its objectives together with a proposed timetable of accomplishment.

(4) The application shall contain the budget of the air authority showing all anticipated revenue and sources of revenue, including requested state financial aid, and shall

show proposed expenditures covering salaries, equipment and accessories, expendable supplies, travel, and such other information as may be deemed necessary by the department.

(5) Any air pollution control activity conducted by the applicant air authority during the twelve-month period immediately prior to the proposed grant period shall be described in the application, including funds budgeted and expended.

(6) It shall be the policy of the department in reviewing applications for state financial aid and in administering such financial aid to take into consideration the following factors:

(a) The implementation of coordinated state-wide air pollution prevention and control.

(b) The responsibilities of the department with respect to its jurisdiction over any areas or type of air contaminant sources and for monitoring the movement of air contaminants throughout the state.

(c) The needs and financial capability of the air authorities in the various areas of the state and the relative effectiveness of the air authorities.

(d) The capability and reasonable potential of the air authorities to perform.

(7) The department will, from time to time, determine or estimate the amount of state financial aid that will be available and advise the applicants, or potential applicants, as to the availability of such aid or supplemental aid.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-040, filed 9/16/87.]

WAC 173-450-050 Workable program. The applicant shall provide sufficient information to show that its workable program is designed to provide for effective prevention and control of air pollution through an orderly progression of development, establishment, and improvement of air pollution control programs.

(1) The initial activity of an applicant shall be the development of a plan designed to provide an evaluation of existing and potential air pollution within the jurisdiction of the applicant, including a general inventory of the types of air contaminant sources and their relative contribution to the air pollution problem; to provide for the initiation of air quality surveillance appropriate to the air contaminant sources over which the applicant will have jurisdiction; and to provide for the development of regulations appropriate to the existing air contaminant sources or those which may be reasonably anticipated.

(2) The establishment and improvement of air pollution control programs which constitute the operating control activity of an applicant, shall be oriented to attaining compliance with requirements and regulations of the applicant with respect to air contaminant sources under its jurisdiction.

(3) Sampling and monitoring programs shall be oriented to surveillance for control purposes with respect to those air contaminant sources under the applicant's jurisdiction, except as may be requested by the department to supplement the state-wide monitoring program.

(4) Budget for personnel, equipment and other operating expenses must be adequate to carry out the program during the grant period for which state financial aid is requested. Total funding from all sources shall provide, as a minimum,

for the equivalent of one full time person: *Provided*, That the department may approve the sharing of personnel with another agency, the utilization of part-time staff, or persons under contract when these methods can be demonstrated as an effective means of carrying out the program and the purposes of the Washington Clean Air Act.

(5) The locally funded portion of the annual operating cost, budgeted and expended in any grant period for which application is made for state financial aid, shall not be less than the locally funded annual expenditure for air pollution control during the twelve-months' period immediately preceding the proposed grant period, unless it can be demonstrated by the applicant that there were necessary nonrecurring expenditures in the previous period or that the program objectives and the purposes of the Washington Clean Air Act can reasonably be met with a reduced expenditure.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-050, filed 9/16/87.]

WAC 173-450-060 Grant conditions. (1) No grant of state funds shall be made to any grantee for a period in excess of twelve months.

(2) Any state financial aid granted shall be used solely for carrying out the program outlined in the approved application or approved amendment as provided in WAC 173-450-040 and 173-450-080.

(3) The grantee shall provide for and maintain such accounting, budgetary, and other fiscal procedures so as to assure the proper and efficient administration of funds. The fiscal records shall be such as to reflect currently the receipt and disposition of all funds including state financial aid. Such records and documents pertinent to the receipt and disposition of funds shall be kept available for review and audit.

(4) As a minimum the grantee shall submit quarterly financial and progress reports to the department.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-060, filed 9/16/87.]

WAC 173-450-070 Payments. (1) Grantees shall initiate requests for payment of state financial aid for the appropriate payment period utilizing properly executed vouchers furnished by the department. The voucher shall state the requested amount of state financial aid and the expenditure of local funds during the payment period. Local funds expended for any item may be shown as the appropriate portion of the total expenditure when the expenditure properly includes the use of, or anticipates, reimbursement with federal or state grant funds.

(2) Upon approval of the voucher by the department, payment for the appropriate payment period shall be authorized.

(3) Payments of state and federal financial aid shall be made by way of reimbursement as contained in the annual agreement payment schedule or otherwise mutually agreed upon, and changed by an amendment to the annual agreement. All expenditures claimed for reimbursement shall be subject to audit.

(4) Final payment of state and federal financial aid shall be based upon approved vouchers applied to the entire grant period.

(5) Vouchers for the final payment period during a grant period shall be submitted by the grantee by the 15th day of July of that year.

(6) The department may withhold approval of the vouchers submitted by the grantee if it finds that said grantee has failed to comply with any of the grant conditions or any other requirement or condition imposed by these regulations or chapter 70.94 RCW, for a period not to exceed thirty days. If at the end of such period the matter has not been resolved and the department has not approved said vouchers, the grantee may request an administrative hearing before the department.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-070, filed 9/16/87.]

WAC 173-450-080 Changes, amendments and supplemental state financial aid. (1) Changes in the workable program of a grantee during the grant period which would not substantially affect the workable program, nor increase the total cost to the state, and which are for the purpose of improving the operation and performance of the workable plan, may be made: *Provided*, That written approval in advance is obtained from the department.

(2) Changes in the workable program of a grantee during the grant period which would significantly alter the workable program shall not be made until the grantee has submitted to, and the department has approved, an amendment to the original application.

(3) Application for supplemental state and federal financial aid may be made by the grantee when notice is given by the department that such supplemental funds have become available. The application shall be made as an amendment to the previously approved workable program of the grantee and shall include proposed additions in or improvements to the workable program and proposed changes in the budget including the additional local funds to be provided. The department may approve additional financial aid to the extent such funds become available having considered the needs of all grantees throughout the state.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-080, filed 9/16/87.]

WAC 173-450-090 Termination. The department may terminate state and federal financial aid, in whole or in part, to any grantee when it finds, after reasonable notice and opportunity for appeal to the director, that the grantee has failed to comply with any of the conditions of the approved application or amendments thereto or any of the requirements or conditions imposed by or pursuant to these regulations or the Washington Clean Air Act.

Upon the effective date of termination, the grantee shall promptly render an accounting and final statement as would similarly be required for request for payment of state financial aid under WAC 173-450-070. The department may authorize payment of the state's share of the amount required to settle at minimum cost any contractual obligations properly incurred by the grantee prior to the date of termina-

tion, if the department finds that the grantee acted in good faith in incurring the obligations.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-090, filed 9/16/87.]

WAC 173-450-100 Federal grants. The standards and requirements of these regulations establishing the eligibility of air authorities for state financial aid shall be equally applicable to the applications of such air authorities for federal grants.

[Statutory Authority: Chapter 70.94 RCW. 87-19-077 (Order 87-16), § 173-450-100, filed 9/16/87.]

**Chapter 173-460 WAC
CONTROLS FOR NEW SOURCES OF TOXIC AIR
POLLUTANTS**

WAC

173-460-010	Purpose.
173-460-020	Definitions.
173-460-030	Requirements, applicability and exemptions.
173-460-040	New source review.
173-460-050	Requirement to quantify emissions.
173-460-060	Control technology requirements.
173-460-070	Ambient impact requirement.
173-460-080	Demonstrating ambient impact compliance.
173-460-090	Second tier analysis.
173-460-100	Request for risk management decision.
173-460-110	Acceptable source impact levels.
173-460-120	Scientific review and amendment of acceptable source impact levels and lists.
173-460-130	Fees.
173-460-140	Remedies.
173-460-150	Class A toxic air pollutants: Known, probable and potential human carcinogens and acceptable source impact levels.
173-460-160	Class B toxic air pollutants and acceptable source impact levels.

WAC 173-460-010 Purpose. (1) Pursuant to chapter 70.94 RCW, Washington Clean Air Act, the purpose of this chapter is to establish the systematic control of new sources emitting toxic air pollutants (TAPs) in order to prevent air pollution, reduce emissions to the extent reasonably possible, and maintain such levels of air quality as will protect human health and safety. Toxic air pollutants include carcinogens and noncarcinogens listed in WAC 173-460-150 and 173-460-160.

(2) This chapter establishes three major requirements:

- (a) Best available control technology for toxics;
- (b) Toxic air pollutant emission quantification;
- (c) Human health and safety protection demonstration.

(3) Policy. It is the policy of ecology to reduce, avoid, or eliminate toxic air pollutants prior to their generation whenever economically and technically practicable.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-010, filed 6/18/91, effective 9/18/91.]

WAC 173-460-020 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. In the event of a conflict between the definitions provided in chapter 173-400 WAC and the definitions provided in this section, the definitions in this section shall govern. Unless a different meaning is

clearly required by context, the following words and phrases as used in this chapter shall have the following meanings. Note: For copies of the above mentioned rule and any other rule cited in this chapter, contact the Department of Ecology, Records Section, Mailstop PV-11, Olympia, WA 98504-8711.

(1) "Acceptable source impact analysis" means a procedure for demonstrating compliance with WAC 173-460-070 and 173-460-080, that compares maximum incremental ambient air impacts with applicable acceptable source impact levels (ASIL).

(2) "Acceptable source impact level (ASIL)" means a concentration of a toxic air pollutant in the outdoor atmosphere in any area which does not have restricted or controlled public access that is used to evaluate the air quality impacts of a single source. There are three types of acceptable source impact levels: Risk-based, threshold-based, and special. Concentrations for these three types of ASILs are determined as provided in WAC 173-460-110. ASILs are listed in WAC 173-460-150 and 173-460-160.

(3) "Authority" means an air pollution control authority activated pursuant to chapter 70.94 RCW that has jurisdiction over the subject source. Ecology is the authority if an air pollution control authority has not been activated or if ecology has jurisdiction over the source pursuant to RCW 70.94.395.

(4) "Best available control technology for toxics (T-BACT)" applies to each toxic air pollutant (TAP) discharged or mixture of TAPs, taking in account the potency quantity and toxicity of each toxic air pollutant or mixture of TAPs discharged in addition to the meaning given in WAC 173-400-030(10).

(5) "Carcinogenic potency factor" means the upper 95th percentile confidence limit of the slope of the dose-response curve and is expressed in units of (mg/kg-day)⁻¹.

(6) "Class A toxic air pollutant (Class A TAP)" means a substance or group of substances listed in WAC 173-460-150.

(7) "Class B toxic air pollutant (Class B TAP)" means any substance that is not a simple asphyxiant or nuisance particulate and that is listed in WAC 173-460-160.

(8) "EPA's Dispersion Modeling Guidelines" means the United States Environmental Protection Agency Guideline on Air Quality Models, EPA 450/2-78-0277R and is hereby incorporated by reference.

(9) "EPA's Risk Assessment Guidelines" means the United States Environmental Protection Agency's Guidelines for Carcinogenic Risk Assessment, 51 FR 33992 (September 24, 1986) and is hereby incorporated by reference.

(10) "Increased cancer risk of one in one hundred thousand" means the 95th percent upper bound on the estimated risk of one additional cancer above the background cancer rate per one hundred thousand individuals continuously exposed to a Class A toxic air pollutant at a given average dose for a specified time.

(11) "Increased cancer risk of one in one million" means the 95th percent upper bound on the estimated risk of one additional cancer above the background cancer rate per one million individuals continually exposed to a Class A toxic air pollutant at a given average dose for a specified time.

(12) "Inhalation Reference Dose (Inhalation RfD)" means a reference dose published in the United States

Environmental Protection Agency Integrated Risk Information System (IRIS).

(13) "Mixture" means a combination of two or more substances mixed in arbitrary proportions.

(14) "New toxic air pollutant source" means a source or emissions unit which may emit toxic air pollutants and which commenced construction after the effective date of this chapter. Addition to, enlargement, modification, replacement, or any alteration of any process or air pollutant source which may increase emissions or ambient air concentrations of any regulated air pollutant, including toxic air pollutants, shall be construed as construction or installation or establishment of a new toxic source.

(15) "Reasonably available control technology for toxics (T-RACT)" applies to each toxic air pollutant (TAP) discharged or mixture of TAPs, taking into account the potency, quantity, and toxicity of each toxic air pollutant or mixture of TAPs discharged in addition to the meaning given in WAC 173-400-030(59).

(16) "Second Tier Analysis" means an optional procedure used after T-BACT and acceptable source impact analysis for demonstrating compliance with WAC 173-460-070. The second tier analysis uses a health impact assessment as provided in WAC 173-460-090, instead of an acceptable source impact level.

(17) "Simple asphyxiant" means a physiologically inert gas or vapor that acts primarily by diluting atmospheric oxygen below the level required to maintain proper levels of oxygen in the blood. Examples of simple asphyxiants are given in Appendix X of the TLV Booklet referred to in subsection (19) of this section and incorporated by reference.

(18) "Threshold limit value-time weighted average (TLV-TWA)" means a concentration limit recommended by the American Conference of Governmental Industrial Hygienists (ACGIH) for a normal eight-hour workday and forty-hour workweek.

(19) "TLV Booklet" means "TLVs, Threshold Limit Values and Biological Exposure Indices for 1987-88," published by the American Conference of Governmental Industrial Hygienists and is hereby incorporated by reference.

(20) "Toxic air pollutant (TAP)" means any Class A or Class B toxic air pollutant listed in WAC 173-460-150 and 173-460-160. The term toxic air pollutant may include particulate matter and volatile organic compounds if an individual substance or a group of substances within either of these classes is listed in WAC 173-460-150 and 173-460-160. The term toxic air pollutant does not include particulate matter and volatile organic compounds as generic classes of compounds.

(21) "Upper bound unit risk factor" means the 95 percent upper confidence limit of an estimate of the extra risk of cancer associated with a continuous 70 year exposure to 1 ug/m³ of a Class A toxic air pollutant.

[Statutory Authority: RCW 70.94.331, 91-13-079 (Order 90-62), § 173-460-020, filed 6/18/91, effective 9/18/91.]

WAC 173-460-030 Requirements, applicability and exemptions. (1) Applicability.

(a) The provisions of this chapter shall apply state-wide. The authority shall enforce WAC 173-460-010, 173-460-020,

173-460-030, 173-460-040, 173-460-050, 173-460-060, 173-460-070, 173-460-080, 173-460-130, 173-460-140, 173-460-150, and 173-460-160.

(b) Except as provided in this chapter, any new toxic air pollutant source listed in (b)(i), (ii), or (iii) of this subsection that may emit a Class A or Class B TAP into the ambient air is subject to these regulations:

(i) Standard industrial classifications:

(A) Major group 10-Metal mining.

(B) Major group 12-Bituminous coal and lignite mining.

(C) Major group 13-Oil and gas extraction.

(D) Manufacturing industries major groups 20-39.

(E) Major group 49-Electric, gas, and sanitary services except 4971 irrigation systems.

(F) Dry cleaning plants, 7216.

(G) General medical surgical hospitals, 8062.

(H) Specialty hospitals, 8069.

(I) National security, 9711.

(ii) Any source or source category listed in WAC 173-400-100, 173-400-115(2), or 173-490-030(1) except WAC 173-490-030 (1)(e) gasoline dispensing facilities.

(iii) Any of the following sources:

(A) Landfills.

(B) Sites subject to chapter 173-340 WAC Model Toxics Control Act—Cleanup regulation.

(2) Exempt sources.

(a) Containers such as tanks, barrels, drums, cans, and buckets are exempt from the requirements of this chapter unless equipped with a vent other than those required solely as safety pressure release devices.

(b) Nonprocess fugitive emissions of toxic air pollutants from stationary sources, such as construction sites, unpaved roads, coal piles, waste piles, and fuel and ash handling operations are exempt from WAC 173-460-060.

(c) The following sources are generally exempt from the requirements of WAC 173-460-050, 173-460-070, 173-460-080, and 173-460-090. However, the authority may on a case-by-case basis, require compliance with these sections if the authority determines that the amount of emissions, nature of pollutant, or source location indicate that the ambient impact should be evaluated.

(i) Perchloroethylene dry cleaners

(ii) Petroleum solvent dry cleaning systems

(iii) Solvent metal cleaners

(iv) Spray coating operations

(v) Abrasive blasting

(d) Demolition and renovation projects involving asbestos removal and disposal are exempt from the requirements of this chapter.

(e) Process vents subject to 40 C.F.R. Parts 264 and 265, Subpart AA are exempt from the requirements of this chapter.

[Statutory Authority: RCW 70.94.331, 91-13-079 (Order 90-62), § 173-460-030, filed 6/18/91, effective 9/18/91.]

WAC 173-460-040 New source review. (1) Applicability. This chapter supplements the new source review requirements of WAC 173-400-110 by adding additional new source review requirements for toxic air pollutant sources. If a notice of construction is required under both chapter 173-400 WAC and this chapter, the written applications shall

be combined. A notice of construction is a written application to permit construction of a new source.

(a) The owner or operator of a new toxic air pollutant source listed in WAC 173-460-030(2) shall notify the authority prior to the construction, installation, or establishment of a new toxic air pollutant source and shall file a notice of construction application with the authority for the proposed emission unit(s). Notification and notice of construction are not required if the source is an exempt source listed in WAC 173-460-030(3) or subsection (2) of this section.

(b) The notice of construction and new source review applies only to the affected emission unit(s) and the contaminants emitted from the emission unit(s).

(c) New source review of a modification is limited to the emission unit or units proposed to be modified and the emission unit or units whose emissions of TAPs may increase as a result of the modification.

(2) The owner or operator of a new toxic air pollutant source listed in WAC 173-460-030(2) is not required to notify or file a notice of construction with the authority if any of the following conditions are met:

(a) Routine maintenance or repair requires equivalent replacement of air pollution control equipment; or

(b) The new source is a minor process change(s) that does not increase capacity and total toxic air pollutant emissions do not exceed the emission rates specified in small quantity emission rate tables in WAC 173-460-080; or

(c) The new source is the result of minor changes in raw material composition and the total toxic air pollutant emissions do not exceed the emission rates specified in the small quantity emission rate tables in WAC 173-460-080.

(3) Additional information. Within thirty days of receipt of a notice of construction, the authority may require the submission of additional plans, specifications, and other information necessary for the review of the proposed new or modified source.

(4) Requirements for new toxic air pollutant sources. The authority shall review notice(s) of construction, plans, specifications, and other associated information to determine that:

(a) The source will be in accord with applicable federal, state, and authority air pollution control rules and regulations;

(b) The source will use T-BACT for emissions control for the toxic air pollutants which are likely to increase;

(c) The source will use T-RACT for emissions control for the toxic air pollutants which are likely to remain the same or decrease; and

(d) Sources required to use T-BACT for emission control demonstrate compliance with WAC 173-460-070 by using the procedures established in WAC 173-460-080 or, failing that, demonstrates compliance, by using the additional procedures in WAC 173-460-090 and/or 173-460-100.

(4) Preliminary determination. Within thirty days after receipt of all information required, the authority shall:

(a) Make preliminary determinations on the matters set forth in this section; and

(b) Initiate compliance with the provisions of WAC 173-400-171 relating to public notice and public comment, as applicable.

(5) Final determination. If, after review of all information received including public comment, the authority finds that all the conditions in this section are satisfied, the authority shall issue a regulatory order to approve the notice of construction for the proposed new source or modification. If the authority finds that the conditions in this section are not satisfied, the authority shall issue an order for the prevention of construction, installation, or establishment of the toxic air pollution source(s). Where ecology has jurisdiction, it will endeavor to make final determinations as promptly as possible.

(6) Appeal of decision. A final notice of construction decision may be appealed to the pollution control hearings board pursuant to chapter 43.21B RCW.

(7) Commencement of construction. The owner(s) or operator(s) of the new source shall not commence construction until the applicable notice of construction has been approved.

(8) Operation and maintenance plan. As a condition of notice of construction approval; prior to start up, the authority may require a plan for the operation and maintenance of all equipment and procedures to assure continuous compliance with this chapter.

(a) A copy of the plan shall be filed with the authority upon request.

(b) The plan shall reflect good industrial practice and may include operating parameters and maintenance procedures, and shall be updated to reflect any changes in good industrial practice.

(c) Submittal of all plans should coincide with the authorities reporting requirements where applicable.

(9) Jurisdiction. Emission of toxic air pollutants that exceed the acceptable source impact levels listed in WAC 173-460-150 and 173-460-160 requires ecology and, if applicable, authority approval as specified in WAC 173-460-090 and 173-460-100.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-040, filed 6/18/91, effective 9/18/91.]

WAC 173-460-050 Requirement to quantify emissions. (1) New sources.

(a) When applying for a notice of construction, an owner or operator of a new toxic air pollution source shall quantify those emissions of each TAP or combination of TAPs that:

(i) Will be used for the modeling procedures in WAC 173-460-080; and

(ii) That may be discharged after applying required control technology. The information shall be submitted to the authority.

(b) Emissions shall be quantified in sufficient detail to determine whether the source complies with the requirements of this chapter.

(2) Small quantity sources.

Sources that choose to use small quantity emission rate tables instead of using dispersion modeling shall quantify emissions as required under WAC 173-460-080, in sufficient detail to demonstrate to the satisfaction of the authority that the emissions are less than the applicable emission rates listed in WAC 173-460-080.

(3) Level of detail.

An acceptable source impact level analysis under WAC 173-460-080, may be based on a conservative estimate of emissions that represents good engineering judgment. If compliance with WAC 173-460-070 and 173-460-080 cannot be demonstrated, more precise emission estimates shall be used prior to WAC 173-460-090.

(4) Mixtures of toxic air pollutants.

(a) An owner or operator of a source that may discharge more than one toxic air pollutant may demonstrate compliance with WAC 173-460-070 and 173-460-080 by:

(i) Quantifying emissions and performing modeling for each TAP individually; or

(ii) Calculate the sum of all TAP emissions and perform modeling for the total TAP emissions and compare maximum ambient levels to the smallest ASIL; or

(iii) Equivalent procedures may be used if approved by ecology.

(b) Dioxin and furan emissions shall be considered together as one TAP and expressed as an equivalent emission of 2,3,7,8 TCDD based on the relative potency of the isomers in accordance with United States Environmental Protection Agency (EPA) guidelines.

Note: Copies of EPA "Interim procedures for estimating risks associated with exposures to mixtures of chlorinated dibenzo-p-dioxins and dibenzofurans (CDDs and CDFs). 1989 Update" are available by requesting EPA /625/3-89/016, March 1989 from ORD Publications (513) 684-7562.

(c) Polyaromatic hydrocarbon (PAH) emissions. The owner or operator of a source that may emit a mixture of polyaromatic hydrocarbon emissions shall quantify the following PAHs and shall consider them together as one TAP equivalent in potency to benzo(a)pyrene: benzo(a)anthracene, benzo(b)fluoranthene, benzo(k)fluoranthene, chrysene, dibenzo(a,h)anthracene, indeno(1,2,3-cd)pyrene, benzo(a)pyrene. The acceptable source impact analysis shall be conducted using the polyaromatic hydrocarbon emission ASIL contained in WAC 173-460-150(3).

(d) Uncontrolled roof vent emissions from primary aluminum smelters. The owner or operator of a primary aluminum smelter that may emit a mixture of polyaromatic hydrocarbons from uncontrolled roof vents shall quantify PAH emissions using either of the following methods:

(i) Quantify PAH emissions using the procedures in (c) of this subsection; or

(ii) Multiply the total particulate emission mass from the uncontrolled roof vents by the percent of the particulate that is extractable organic matter. The percent extractable organic matter shall be considered one percent of total particulate matter unless ecology determines that there is compelling scientific data which demonstrates that the use of this value is inappropriate. The acceptable source impact analysis shall be conducted using the primary aluminum smelter uncontrolled roof vent PAH emission ASIL contained in WAC 173-460-150(3). Note: For example, 100 grams of particulate air emission mass times one percent yields one gram of PAH emissions.

[Statutory Authority: RCW 70.94.331, 91-13-079 (Order 90-62), § 173-460-050, filed 6/18/91, effective 9/18/91.]

WAC 173-460-060 Control technology requirements. Except as provided for in WAC 173-460-040, a

person shall not establish, operate, or cause to be established or operated any new toxic air pollutant source which is likely to increase TAP emissions without installing and operating T-BACT. Satisfaction of the performance requirements listed below fulfill the T-BACT requirement for those particular sources. Authorities may develop and require performance requirements in lieu of T-BACT provided that ecology approves the performance requirements as equivalent to T-BACT.

(1) Perchloroethylene dry cleaners. The entire dryer exhaust shall be vented through a control device which will reduce VOC emissions to 5 kg or less per 100 kg dry weight of cleaned articles.

(a) The control device shall meet one of the following conditions:

(i) The exhaust from a carbon adsorber shall contain less than 100 ppm perchloroethylene as measured over a period of one minute before dilution; or

(ii) The air temperature at the outlet of a refrigerated condenser shall reach seven degrees centigrade or less during the cool-down period. A temperature gauge with a minimum range from negative thirty-two to seventy-five degrees centigrade shall be installed and maintained on the condenser outlet duct; or

(iii) The demonstrated control efficiency for any other control device shall be ninety percent or greater by weight, prior to the discharge to the atmosphere measured over a complete control cycle.

(b) The operation of any perchloroethylene dry cleaner shall meet all of the following conditions:

(i) All leaking components shall be repaired immediately; and

(ii) All filtration cartridges shall be drained in the filter housing or other enclosed container before discarding the cartridges.

(2) Petroleum solvent dry cleaning systems. A petroleum solvent dry cleaning system shall include the following:

(a) All cleaned articles are dried in a solvent recovery dryer or the entire dryer exhaust is vented through a properly functioning control device which will reduce emissions to no more than 3.5 kg of VOC per 100 kg dry weight of cleaned articles; and

(b) All cartridge filtration systems are drained in their sealed housing or other enclosed container before discarding the cartridges; and

(c) All leaking components shall be repaired immediately.

(3) Chromic acid plating and anodizing. The facility-wide uncontrolled hexavalent chromium emissions from plating or anodizing tanks shall be reduced by at least ninety-five percent using either of the following control techniques:

(a) An antimist additive or other equally effective control method approved by ecology or authority; or

(b) The tank is equipped with:

(i) A close capture system which shall be in place and in operation at all times electrical current is applied to the tank; and

(ii) An emission control system which limits hexavalent chromium emissions to no more than 0.15 milligrams per ampere-hour of electrical charge applied to the tank or

uncontrolled emissions shall be reduced by ninety-five percent.

(4) Chromic acid and plating (greater than 1 kilogram). If the facility-wide hexavalent chromium emissions from chromic acid plating and anodizing are greater than 1 kilogram per year after the application of control techniques required by subsection (3) of this section, the facility-wide hexavalent chromium emissions shall be reduced by at least ninety-nine percent using either of the following control techniques:

(a) An antimist additive or other equally effective control method approved by ecology or authority; or

(b) The tank is equipped with:

(i) A close capture system which shall be in place and in operation at all times electrical current is applied to the tank; and

(ii) An emissions control system which limits hexavalent chromium emissions to no more than 0.03 milligrams per ampere-hour of electrical charge applied to the tank or uncontrolled emissions shall be reduced by ninety-nine percent.

(5) Solvent metal cleaners.

(a) Any solvent metal cleaner shall include all of the following equipment:

(i) A cover for the solvent tank which shall be closed at all times except when processing work in the degreaser. However, the cover shall be closed to the maximum extent possible when parts are being degreased;

(ii) A facility for draining cleaned parts such that the drained solvent is returned to the solvent tank;

(iii) For cold solvent cleaners, a freeboard ratio greater than or equal to 0.75;

(iv) Vapor degreasers shall have:

(A) A high vapor cutoff thermostat with manual reset; and

(B) For degreasers with spray devices, a vapor-up thermostat which will allow spray operation only after the vapor zone has risen to the design level; and

(C) Either a freeboard ratio greater than or equal to 0.75 or a refrigerated freeboard chiller; and

(v) ConveyORIZED vapor degreasers shall have:

(A) A drying tunnel or a rotating basket sufficient to prevent cleaned parts from carrying liquid solvent out of the degreaser; and

(B) A high vapor cutoff thermostat with manual reset; and

(C) A vapor-up thermostat which will allow conveyor movement only after the vapor zone has risen to the design vapor level.

(b) The operation of any solvent metal cleaner shall meet the following requirements:

(i) Solvent shall not leak from any portion of the degreasing equipment;

(ii) Solvent, including waste solvent, shall be stored in closed containers and shall be disposed of in such a manner as to prevent its evaporation into the atmosphere;

(iii) For cold cleaners, cleaned parts shall be drained until dripping ceases; and

(iv) Degreasers shall be constructed to allow liquid solvent from cleaned parts to drain into a trough or equivalent device and return to the solvent tank.

(c) For open-top vapor degreasers, solvent drag-out shall be minimized by the following measures:

(i) Racked parts shall be allowed to fully drain;

(ii) The work load shall be degreased in the vapor zone until condensation ceases;

(iii) Spraying operations shall be done within the vapor layer;

(iv) When using a powered hoist, the vertical speed of parts in and out of the vapor zone shall be less than three meters per minute (ten feet per minute);

(v) When the cover is open, the lip of the degreaser shall not be exposed to steady drafts greater than 15.3 meters per minute (fifty feet per minute); and

(vi) When equipped with a lip exhaust, the fan shall be turned off when the cover is closed.

(d) For conveyORIZED vapor degreasers, solvent drag-out shall be minimized by the following measures:

(i) Racked parts shall be allowed to fully drain; and

(ii) Vertical conveyor speed shall be maintained at less than three meters per minute (ten feet per minute).

(6) Abrasive blasting.

(a) Abrasive blasting should be performed inside a booth or hangar designed to capture the blast grit or overspray.

(b) Outdoor blasting of structures or items too large to be reasonably handled indoors should employ control measures such as curtailment during windy periods and enclosure of the area being blasted with tarps.

(c) Outdoor blasting should be performed with either steel shot or an abrasive containing less than one percent (by mass) which would pass through a No. 200 sieve.

(d) All abrasive blasting with sand shall be performed inside a blasting booth or cabinet.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-060, filed 6/18/91, effective 9/18/91.]

WAC 173-460-070 Ambient impact requirement.

When applying for a notice of construction under WAC 173-460-040, the owner or operator of a new toxic air pollutant source which is likely to increase TAP emissions shall demonstrate that emissions from the source are sufficiently low to protect human health and safety from potential carcinogenic and/or other toxic effects. Compliance shall be demonstrated in any area which does not have restricted or controlled public access. The source shall demonstrate compliance by using procedures established in this chapter after complying with the control technology requirements in WAC 173-460-060.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-070, filed 6/18/91, effective 9/18/91.]

WAC 173-460-080 Demonstrating ambient impact compliance. (1) When applying for a notice of construction under WAC 173-460-040, the owner or operator of a new toxic air pollutant source which is likely to increase TAP emissions shall complete an acceptable source impact level analysis for Class A and Class B TAPs. The authority may complete this analysis.

(2) Acceptable source impact analysis.

(a) Carcinogenic effects. The owner or operator shall use dispersion modeling to estimate the maximum incremen-

tal ambient impact of each Class A TAP from the source and compare the estimated incremental ambient values to the Class A acceptable source impact levels in WAC 173-460-150. If applicable, the source may use the small quantity emission rate tables in (e) of this subsection.

(b) Other toxic effects. The owner or operator shall use dispersion modeling to estimate the maximum incremental ambient impact of each Class B TAP from the source and compare the estimated ambient values to the Class B acceptable source impact levels in WAC 173-460-160. If applicable, the source may use the small quantity emission rate tables in (e) of this subsection.

(c) Dispersion modeling. The owner or operator shall use dispersion modeling techniques in accordance with EPA guidelines. If concentrations predicted by dispersion screening models exceed applicable acceptable source impact levels, more refined modeling and/or emission estimation techniques shall be used. Refined modeling techniques shall be approved by ecology and the authority. (Note: EPA's guideline on Air Quality Models, EPA 450/2-78-0277R, can be obtained through NTIS (703) 487-4650).

(d) Averaging times. The owner or operator shall use the averaging times in (d)(i), (ii), (iii) of this subsection unless alternate averaging times are approved by ecology. Ecology may allow the use of an alternate averaging time if it determines that the operating procedures of the source may cause a high concentration of a TAP for a short period and that consideration of potential health effects due to peak exposures may be warranted for the TAP.

(i) An annual average shall be used for Class A TAPs listed in WAC 173-460-150(2).

(ii) The averaging times specified in WAC 173-460-150(3) shall be used for Class A TAPs listed in WAC 173-460-150(3).

(iii) A twenty-four-hour averaging time shall be used for Class B TAPs listed in WAC 173-460-160.

(e) Small quantity emission rates. Instead of using dispersion modeling to show compliance with ambient impact demonstration requirements in WAC 173-460-080 and 173-460-090, a source may use the small quantity emission rate tables for all toxic air pollutants with acceptable source impact levels equal to or greater than 0.001 ug/m3. A source must first meet control technology and emission quantification requirements of WAC 173-460-050 and 173-460-060, then demonstrate that the source emission rate does not exceed the rates specified in the appropriate table below.

SMALL QUANTITY EMISSION RATES
CLASS A TOXIC AIR POLLUTANTS

Acceptable Source Impact Level (Annual ug/m3)	TAP Emissions Pounds per Year (10 meter stack and downwash)
0.001 to 0.0099	0.5
0.01 to 0.06	10
0.07 to 0.12	20
0.13 to 0.99	50
1.0 to 10	500

SMALL QUANTITY EMISSION RATES
CLASS B TOXIC AIR POLLUTANTS

Acceptable Source Impact Level (24 hour ug/m3)	TAP Emissions	
	Pounds per Year	Pounds per Hour
Less than 1	175	0.02
1 to 9.9	175	0.02
10 to 29.9	1,750	0.20
30 to 59.9	5,250	0.60
60 to 99.9	10,500	1.20
100 to 129.9	17,500	2.0
130 to 250	22,750	2.6
Greater than 250	43,748	5.0

(3) Criteria for compliance. Compliance with WAC 173-460-070 is demonstrated if the authority determines that, on the basis of the acceptable source impact analysis, the source's maximum incremental ambient air impact levels do not exceed the Class A or Class B acceptable source impact levels in WAC 173-460-150 and 173-460-160; or, if applicable, the source TAP emission rates do not exceed the rates specified in subsection (2)(e) of this section.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-080, filed 6/18/91, effective 9/18/91.]

WAC 173-460-090 Second tier analysis. (1) Applicability.

(a) The owner or operator who cannot demonstrate class A or class B TAP source compliance with WAC 173-460-070 and 173-460-080 using an acceptable source impact level analysis as provided in WAC 173-460-080(2), may submit a petition requesting ecology perform a second tier analysis evaluation to determine a means of compliance with WAC 173-460-070 and 173-460-080 by establishing allowable emissions for the source. Petitions for second tier analysis evaluation shall be submitted to the local authority or ecology if ecology has jurisdiction over the source. Petitions received by local authorities shall be submitted to ecology within ten days of receipt. A second tier analysis evaluation may be requested when a source wishes to more accurately characterize risks, to justify risks greater than acceptable source impact levels, or to otherwise modify assumptions to more accurately represent risks. Risks may be more accurately characterized by utilizing updated EPA unit risk factors, inhalation reference doses, or other EPA recognized or approved methods. Ecology shall specify the maximum allowable emissions of any class A or class B TAP source based on ecology's second tier analysis evaluation.

(b) Ecology shall evaluate a source's second tier analysis only if:

(i) The authority has advised ecology that other conditions for processing the notice of construction have been met; and

(ii) Emission controls contained in the conditional notice of construction represent at least T-BACT; and

(iii) Ambient concentrations exceed acceptable source impact levels after using more refined emission quantification and air dispersion modeling techniques.

(c) Ecology shall determine whether the conditions in (b)(i), (ii), and (iii) of this subsection for a second tier analysis have been satisfied within ten working days of receipt of all information needed to make the determination. The matter shall be returned to the authority if ecology finds

the conditions for a second tier analysis evaluation have not been met.

(2) Jurisdiction.

(a) Any second tier analysis application submitted by a source wishing to emit toxic air pollutants at levels greater than the acceptable source impact level contained in WAC 173-460-150 or 173-460-160 shall be approved or rejected by ecology.

(b) Any new emission limits approved by ecology as a result of the second tier analysis evaluation shall be enforced by the authority provided the authority approves the new emission limits.

(3) Approval criteria.

(a) Based on the second tier analysis, ecology may approve the emissions of TAPs from a source where ambient concentrations exceed acceptable source impact levels only if it determines that emission controls represent at least T-BACT and the source demonstrates that emissions of Class A TAPs are not likely to result in an increased cancer risk of more than one in one hundred thousand. The emission of Class A TAPs at levels likely to result in an increased cancer risk of more than one in one hundred thousand requires the approval of the director after complying with WAC 173-460-100.

(b) Ecology shall consider the second tier analysis and other information submitted by the applicant as well as department of health comments.

(i) Comments from other agencies and universities with appropriate expertise may also be considered in the decision to approve emissions that exceed acceptable source impact levels.

(ii) Public comments shall be considered if the source applies for a risk management decision under WAC 173-460-100.

(4) Contents of the second tier analysis.

(a) The second tier analysis consists of a health impact assessment. The applicant shall complete and submit a health impact assessment to ecology which includes the following information. Ecology may approve the submittal of less information if it determines that such information is sufficient to perform the second tier analysis evaluation. The health impact assessment shall be prepared in accordance with EPA's risk assessment guidelines as defined in WAC 173-460-020(8).

(i) Demographics such as population size, growth, and sensitive subgroups;

(ii) Toxicological profiles of all toxic air pollutants that exceed the ASIL;

(iii) Characterization of existing pathways and total daily intake for toxic air pollutants that exceed the ASIL;

(iv) Contribution of the proposed source toward total daily intake for toxic air pollutants that exceed the ASIL;

(v) Using existing data, characterization of risk from current exposure to the toxic air pollutants that exceed the ASIL. This includes existing TAP sources in the area, and anticipated risk from the new source;

(vi) Additive cancer risk for all Class A toxic air pollutants which may be emitted by the source;

(vii) Other information requested by ecology and pertinent to ecology's decision to approve the second tier application;

(viii) Uncertainty in the data; and

(ix) Length of exposure and persistence in the environment.

(b) The health assessment shall utilize current scientific information. New scientific information on the toxicological characteristics of toxic air pollutants may be used to justify modifications of upper bound unit risk factors used to calculate ASILs in WAC 173-460-150 and/or absorption rates of individual toxic air pollutants if ecology determines there is compelling scientific data which demonstrates that the use of EPA recognized or approved methods are inappropriate.

(5) Additional information.

(a) If approved by ecology, newly discovered scientific information which was unavailable at the time of the original submission of the health assessment may be used to justify modifications of the original health assessment. Ecology may approve the additional information if the source exercised due diligence at the time of original submission.

(b) Within thirty days after receipt of the second tier analysis and all supporting data and documentation, ecology may require the submission of additional information needed to evaluate the second tier analysis.

(6) Determination.

(a) If the second tier analysis is approved by ecology, ecology will return the petition to the authority and the authority may approve the notice of construction.

(b) The authority shall specify allowable emissions consistent with ecology's second tier analysis evaluation determination expressed in weight of pollutant per unit time for each emissions unit involved in the application. The notice of construction shall also include all requirements necessary to assure that conditions of this chapter and chapter 173-400 WAC are satisfied.

(7) Public notification requirements.

Ecology decisions regarding second tier analysis or decisions under WAC 173-460-100 shall comply with public notification requirements contained in WAC 173-400-171.

[Statutory Authority: RCW 70.94.331, 91-13-079 (Order 90-62), § 173-460-090, filed 6/18/91, effective 9/18/91.]

WAC 173-460-100 Request for risk management decision. (1) Applicability. The owner or operator of a source that emits Class A TAPs that are likely to result in an increased cancer risk of more than one in one hundred thousand may request that ecology establish allowable emissions for the source.

(2) Contents of the application.

The applicant shall meet the submittal requirements of WAC 173-460-090(1) and submit all materials required under WAC 173-460-090 (4) and (5). The applicant may submit the request for a risk management decision concurrently with the second tier analysis application. Prior denial of the second tier analysis application under WAC 173-460-090(6) is not required.

(3) Criteria for approval. Ecology may approve the emissions of TAPs from a source where ambient concentrations are likely to result in an increased cancer risk of more than one in one hundred thousand only if the source first demonstrates the following:

(a) Proposed emission controls represent all known available and reasonable technology; and

(b) Application of all known available toxic air pollution prevention methods to reduce, avoid, or eliminate toxic air pollutants prior to their generation including recycling, chemical substitution, and efforts to redesign processes; and

(c) The proposed changes will result in a greater benefit to the environment as a whole.

(4) Additional methods to reduce toxic air pollutants. In addition to the requirements in subsection (3) of this section, the owner or operator may propose and ecology may consider innovative or established measures that are likely to reduce community exposure to toxic air pollutants provided that such measures are not already required. Examples of innovative measures include but are not limited to:

(a) Reducing vehicle miles traveled to the facility through vanpool programs and transportation management plans;

(b) Permanent removal of woodstoves; and

(c) Purchasing used automobiles. Examples of established methods include, but are not limited to, emission bubbles and offsets.

(5) Public involvement. Ecology will endeavor to initiate public notice and comment within thirty days of receipt of a completed risk management decision application. In addition to the public notice and comment requirements of WAC 173-400-171, the owner or operator shall:

(a) Present the results of the second tier analysis, the proposed emission controls, pollution prevention methods, additional proposed measures, and remaining risks; and

(b) Participate in discussions with and answer questions from the affected community.

(6) Time limitation. The owner or operator shall commence construction within eighteen months of the director's approval.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-100, filed 6/18/91, effective 9/18/91.]

WAC 173-460-110 Acceptable source impact levels.

There are three types of acceptable source impact levels: Risk-based, threshold-based, and special acceptable source impact levels. They are computed as follows:

(1) Risk-based acceptable source impact levels for Class A TAPs. Risk-based acceptable source impact levels means the annual average concentration, in micrograms per cubic meter, that may cause an increased cancer risk of one in one million. Ecology shall calculate the risk-based acceptable source impact levels for Class A TAPs in WAC 173-460-150(2) using the following equation:

$$\text{Risk based ASIL (ug/m3)} = \frac{\text{RISK}}{\text{URF}}$$

*Where:

RISK = Cancer risk level (1 in 1,000,000)

URF = Upper bound unit risk factor as published in IRIS data base or other appropriate sources (ug/m3)-1.

(2) Threshold-based acceptable source impact levels for Class B TAPs. Threshold-based acceptable source impact levels in WAC 173-460-160 shall be determined as follows:

(a) If a Class B TAP has an Environmental Protection Agency Inhalation Reference Dose, the inhalation reference dose and specified averaging time shall be used.

(b) Other Class B TAP acceptable source impact levels shall be determined by dividing the TLV-TWA by three hundred to calculate a twenty-four hour TWA acceptable source impact level.

(3) Special acceptable source impact levels.

(a) Ecology may establish special acceptable source impact levels for TAPs for which upper bound risk factors or TLVs have not been established, or for mixtures of compounds if it determines that the above acceptable source impact level methods are not appropriate, do not adequately protect human health or are overly stringent.

(b) The averaging times for special ASILs are listed in WAC 173-460-150(3).

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-110, filed 6/18/91, effective 9/18/91.]

WAC 173-460-120 Scientific review and amendment of acceptable source impact levels and lists. (1) Ongoing scientific review.

(a) To use the best available scientific information, ecology shall conduct an ongoing review of information concerning whether to add or delete toxic air pollutants to WAC 173-460-150 or 173-460-160, what acceptable source impact levels should be used to review emissions of TAPs, source applicability and exemptions.

(b) A complete review shall be made at least once every three years at which time ecology shall consider scientific information developed by the E.P.A., Washington department of health, other states or other scientific organizations, scientific information provided by any person, and results of second tier analyses evaluations.

(2) Criteria for listing as Class A or Class B TAP.

(a) Ecology shall list a substance or group of substances as Class A or Class B TAPs if the department has reason to believe that the compound or group of compounds are likely to be emitted to the air from an air pollution source and the air emission of such compound or compounds could impact public health. The compounds shall be removed from the list if ecology determines that these conditions no longer exist.

(b) Ecology may list mixtures of compounds as Class A and/or Class B TAPs if ecology determines that the health impact of the emission mixture is likely to be different from the known individual chemical impacts.

(3) Acceptable source impact level (ASIL).

Ecology may adopt an ASIL only if ecology determines that concentrations at that level will not unreasonably endanger human health.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-120, filed 6/18/91, effective 9/18/91.]

WAC 173-460-130 Fees. (1) Pursuant to RCW 70.94.152, ecology or the authority may charge a fee for the review of notices of construction.

(2) The fee imposed under this section may not exceed the cost of reviewing plans, specifications, and other information and administering such notice.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-130, filed 6/18/91, effective 9/18/91.]

WAC 173-460-140 Remedies. Violations of this chapter are subject to the penalty provisions and/or other remedies provided in chapter 70.94 RCW.

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-140, filed 6/18/91, effective 9/18/91.]

WAC 173-460-150 Class A toxic air pollutants: Known, probable and potential human carcinogens and acceptable source impact levels.

(1) TABLE 1
CLASS A TOXIC AIR POLLUTANTS
Known and Probable Carcinogens

CAS #	SUBSTANCE		
75-07-0	Acetaldehyde	60-57-1	Dieldrin
107-13-1	Acrylonitrile	1615-80-1	1,2-Diethylhydrazine
309-00-2	Aldrin	101-90-6	Diglycidyl resorcinol ether
—	Aluminum smelter polyaromatic hydrocarbon emissions	119-90-4	3,3'-Dimethoxybenzidine (ortol-dianisidine)
117-79-3	2-Aminoanthraquinone	77-78-1	Dimethyl sulfate
97-56-3	o-Aminoazotoluene	540-73-8	1,2-Dimethylhydrazine
92-67-1	4-Aminobiphenyl	25321-14-6	Dinitrotoluenes (mixed)
61-82-5	Amitrole	123-91-9	1,4-Dioxane
—	Arsenic and inorganic arsenic compounds	—	Dioxins and furans
1332-21-4	Asbestos	122-66-7	1,2-Diphenylhydrazine
2465-27-2	Auramine (technical grade)	106-93-4	Ethylene Dibromide
56-55-3	Benz(a)anthracene	75-21-8	Ethylene oxide
71-43-2	Benzene	50-00-0	Formaldehyde
92-87-5	Benzidine and its salts	765-34-4	Furium (nitrofuran group)
50-32-8	Benzo(a)pyrene	76-44-8	Glyciadaldehyde
204-99-2	Benzo(b)fluoranthene	118-74-1	Heptachlor
205-82-3	Benzo(j)fluoranthene	319-84-6	Hexachlorobenzene
205-08-9	Benzo(k)fluoranthene	319-85-7	Hexachlorocyclohexane (Lindane) Alpha BHC
1694-09-3	Benzyl violet 4b	580-89-9	Hexachlorocyclohexane (Lindane) Beta BHC
—	Beryllium and compounds	67-72-1	Hexachlorocyclohexane (Lindane) Gamma BHC
111-44-4	Bis(2-chloroethyl)ether	193-39-5	Hexachloroethane
117-81-7	Bis(2-ethylhexyl)phthalate	—	Indeno(1,2,3-cd)pyrene
542-88-1	Bis(chloromethyl)ether and technical-grade chloromethyl methyl ether	301-04-2	Isopropyl oils
106-99-0	1,3-Butadiene	7446-27-7	Lead acetate
3068-88-0	B-Butyrolactone	129-15-7	Lead phosphate
—	Cadmium and compounds	592-62-1	2-Methyl-1-nitroanthraquinone
56-23-5	Carbon tetrachloride	3697-24-3	Methylazoxymethanol & acetate
57-74-9	Chlordane	101-14-4	5-Methylchrysene
74-87-3	Chlorodibromoethane	838-88-0	4,4'-Methylenebis(2-chloroaniline) (MBOCA)
67-66-3	Chloroform	101-77-9	4,4'-Methylenebis(2-methylaniline)
107-30-2	Chloromethyl methyl ether (technical-grade)	13552-44-8	4,4-Methylenedianiline
108-43-0	Chlorophenols	64091-91-4	4,4-Methylenedianiline dihydrochloride
126-99-8	Chloroprene	—	4-(Methylnitrosamino)-1-(3-pyridyl)-1-butanone
—	Chromium, hexavalent metal and compounds	139-91-3	Mirex
—	Coke oven emissions	924-16-3	5-(Morpholinomethyl)-3-((5-nitrofurfurylidene)amino)-2-oxazoli din one
8001-58-9	Creosote	134-32-7	N-Nitrosodi-n-butylamine
135-20-6	Cupferron	7440-02-0	1-Naphthylamine
94-75-7	2,4-D and esters	531-82-8	Nickel and compounds
50-29-3	DDT (1,1,1 Trichloro-2,2-Bis(p-chlorophenyl)-ethane)	759-73-9	N-(4-(5-Nitro-2-furyl)-2-thiazolyl)acetamide
613-35-4	N,N-Diacetylbenzidine	621-64-7	N-Nitroso-n-ethylurea (NEU)
101-80-4	4,4'-Diaminodiphenyl ether	10595-95-6	N-Nitrosodi-n-propylamine
226-36-8	Dibenz(a,h)acridine	59-89-2	N-Nirtosomethylethylamine
53-70-3	Dibenz(a,h)anthracene	86-30-6	N-Nirtosomorpholine
224-42-0	Dibenz(a,j)acridine	55-18-5	N-Nirtosodiphenylamine
189-64-0	Dibenzo(a,h)pyrene	62-75-9	N-Nirtosodiethylamine (diethylnitrosoamine) (DEN)
191-30-0	Dibenzo(a,l)pyrene	602-87-9	N-Nirtosodimethylamine
189-55-9	1,2:7,8-Dibenzopyrene (dibenzo(a,i)pyrene)	1836-75-5	5-Nitroacenaphthene
192-65-4	Dibenzo(a,e)pyrene	59-87-0	Nitrofen
—	1,4-Dichloro-2-butene	555-84-9	Nitrofurans Furazolidone
28434-86-8	3,3'-Dichloro-4,4'-diaminodiphenyl ether	126-85-2	Nitrofurazone
106-46-7	1,4-Dichlorobenzene	302-70-5	1-(5-Nitrofurfurylidene)amino)-2-imidazolidinone
91-94-1	3,3'-Dichlorobenzidine	79-46-9	Nitrogen mustard N-oxide
107-06-2	1,2-Dichloroethane (ethylene chloride)	615-53-2	Nitrogen mustard n-oxide hydrochloride
75-09-2	Dichloromethane (methylene chloride)	2646-17-5	2-Nitropropane
696-28-6	Dichlorophenylarsine (arsenic group)	794-93-4	N-Nitroso-n-methylurethane
78-87-5	1,2-Dichloropropane	127-18-4	Oil orange SS
		63-92-3	Panfuran S (dihydroxymethylfuratrizine)
		—	Perchloroethylene (tetrachloroethylene)
		1336-36-3	Phenoxybenzamine hydrochloride
		3761-53-3	N-Phenyl-2-naphthylamine
		1746-01-6	Polyaromatic Hydrocarbons (PAH)
		139-65-1	Polychlorinated biphenyls (PCBs)
		1314-20-1	Ponceau MX
		584-84-9	P(p)(alpha, alpha, alpha)-Tetra-chlorotoluene
		95-53-4	2,3,7,8-Tetrachlorodibenzo-p-dioxin (2,3,7,8-TCDD)
		8001-35-2	4,4'-Thiodianiline
		55738-54-0	Thorium dioxide
		79-01-6	2,4-Toluene diisocyanate
			o-Toluidine & its hydrochloride
			Toxaphene
			Trans-2((Dimethylamino)methylimino)-5-(5-nitro-2-furyl) vinyl-1,3,4-oxadiazole
			Trichloroethylene

25167-82-2 Trichlorophenol (mixed)
75-01-4 Vinyl Chloride

(2) TABLE II
CLASS A TOXIC AIR POLLUTANTS
WITH ESTABLISHED
ACCEPTABLE SOURCE IMPACT LEVELS

CAS #	SUBSTANCE	10-6 RISK ASIL MICRO- GRAMS/M ³ ANNUAL AVERAGE
75-07-0	Acetaldehyde	0.4500000
107-13-1	Acrylonitrile	0.0150000
309-00-2	Aldrin	0.0002000
—	Arsenic and inorganic arsenic compounds	0.0002300
1332-21-4	Asbestos (Note: fibers/ml)	0.0000042
71-43-2	Benzene	0.1200000
92-87-5	Benizidine and its salts	0.0000150
50-32-8	Benzo(a)pyrene	0.0006000
—	Beryllium and compounds	0.0004200
111-44-4	Bis(2-chloroethyl)ether	0.0030000
542-88-1	Bis(chloromethyl)ether and technical-grade chloromethyl methyl ether	0.0000160
—	Cadmium and compounds	0.0005600
56-23-5	Carbon tetrachloride	0.0670000
57-74-9	Chlordane	0.0027000
67-66-3	Chloroform	0.0430000
108-43-0	Chlorophenols	0.1800000
—	Chromium, hexavalent metal and compounds	0.0000830
—	Coke oven emissions	0.0016000
50-29-3	DDT (1,1,1 Trichloro-2,2-Bis-(p-chlorophenyl)-ethane)	0.0100000
—	1,4-Dichloro-2-butene	0.0003800
107-06-2	1,2-Dichloroethane (ethylene chloride)	0.0400000
75-09-2	Dichloromethane (methylene chloride)	2.0000000
60-57-1	Dieldrin	0.0002000
122-66-7	1,2-Diphenylhydrazine	0.0045000
106-93-4	Ethylene Dibromide	0.0045000
75-21-8	Ethylene oxide	0.0100000
50-00-0	Formaldehyde	0.0770000
76-44-8	Heptachlor	0.0007700
118-74-1	Hexachlorobenzene	0.0020000
67-72-1	Hexachloroethane	0.2500000
127-18-4	Perchloroethylene (tetrachloroethylene)	1.1000000
1746-01-6	2,3,7,8-Tetrachlorodibenzi-p-dioxin (2,3,7,8-TCDD)	0.0000003
8001-35-2	Toxaphene	0.0030000
79-01-6	Trichloroethylene	0.8000000
25167-82-2	Trichlorophenol (mixed)	0.1800000
75-01-4	Vinyl Chloride	0.0230000

(3) TABLE III
CLASS A TOXIC AIR POLLUTANTS
WITH SPECIAL ACCEPTABLE SOURCE
IMPACT LEVELS

CAS #	SUBSTANCE	ASIL MICRO- GRAMS/M ³	AVERAGING TIME
—	Primary aluminum smelter uncontrolled roof vent polyaromatic hydrocarbon (PAH) emissions (Note: Quantify according to WAC 173-460-050 (4)(d))	0.0013	Annual
61-82-5	Amitrole	0.6	24 hour
106-99-0	1,3-Butadiene	73.3	24 hour
126-99-8	B-Chloroprene	116.6	24 hour
94-75-7	2,4-D and esters	33.3	24 hour
106-46-7	1,4-Dichlorobenzene	1500	24 hour
78-87-5	1,2-Dichloropropane	1166.6	24 hour

77-78-1	Dimethyl sulfate	1.6	24 hour
540-73-8	1,2-Dimethylhydrazine	3.3	24 hour
123-91-9	1,4-Dioxane	300	24 hour
58-89-9	Lindane	1.6	24 hour
101-14-4	4,4'-Methylenebis (2-Chloroaniline) (MBOCA)	0.7	24 hour
101-77-9	4,4-Methylenedianiline	2.6	24 hour
7440-02-0	Nickel and compounds	3.3	24 hour
79-46-9	2-Nitropropane	116.6	24 hour
—	Polyaromatic hydrocarbon (PAH) emissions (Note: Quantify according to WAC 173-460-050 (4)(d))	0.0006	Annual
584-84-9	2,4-Toluene diisocyanate	0.1	24 hour
95-53-4	O-Toluidine	30	24 hour

[Statutory Authority: RCW 70.94.331. 91-13-079 (Order 90-62), § 173-460-150, filed 6/18/91, effective 9/18/91.]

WAC 173-460-160 Class B toxic air pollutants and acceptable source impact levels. The following table lists Class B toxic air pollutants and acceptable source impact levels:

CLASS B TOXIC AIR POLLUTANTS AND ACCEPTABLE SOURCE IMPACT LEVELS

CAS#	SUBSTANCE	ASIL MICRO- GRAMS/M ³ TWENTY-FOUR- HOUR AVERAGE
86-88-4	ANTU	1.0
75-07-0	Acetic acid	83.3
108-24-7	Acetic anhydride	66.6
67-64-1	Acetone	5927.4
75-05-8	Acetonitrile	233.1
79-27-6	Acetylene tetrabromide	50.0
107-02-8	Acrolein	0.8
79-06-1	Acrylamide	0.1
79-10-7	Acrylic acid	99.9
107-18-6	Allyl alcohol	16.7
106-92-3	Allyl glycidyl ether (AGE)	73.3
2179-59-1	Allyl propyl disulfide	40.0
7429-90-5	Aluminum, Al alkyls	6.7
7429-90-5	Aluminum, as Al metal dust	33.3
7429-90-5	Aluminum, as Al pyro powders	16.7
7429-90-5	Aluminum, as Al soluble salts	6.7
7429-90-5	Aluminum, as Al welding fumes	16.7
504-29-0	2-Aminopyridine	6.7
7664-41-7	Ammonia	59.9
12125-02-9	Ammonium chloride fume	33.3
3825-26-1	Ammonium perfluorooctanoate	0.3
7773-06-0	Ammonium suflamate	33.3
628-63-7	n-Amyl acetate	1764.9
626-38-0	sec-Amyl acetate	2214.5
62-53-3	Aniline & homologues	33.3
29191-52-4	Anisidine (o-,p- isomers)	1.7
7440-36-0	Antimony & compounds as Sb	1.7
1309-64-4	Antimony trioxide, as Sb	1.7
7784-42-1	Arsine	0.7
8052-42-4	Asphalt (petroleum) fumes	16.7
1912-24-9	Atrazine	16.7
86-50-0	Azinphos-methyl	0.7
7440-39-3	Barium, soluble compounds Ba	1.7
17804-35-2	Benomyl	33.3
94-36-0	Benzoyl Peroxide	16.7
100-44-7	Benzyl chloride	16.7
92-52-4	Biphenyl	5.0
1304-82-1	Bismuth telluride	33.3
1304-82-1	Bismuth telluride Se doped	16.7
1303-96-4	Borates, anhydrous	3.3
1303-96-4	Borates, decahydrate	16.7
1303-96-4	Borates, pentahydrate	3.3

1303-86-2	Boron oxide	33.3	110-82-7	Cyclohexane	3496.5
10294-33-4	Boron tribromide	33.3	108-93-0	Cyclohexanol	666.0
7726-95-6	Boron trifluoride	10.0	108-94-1	Cyclohexanone	333.0
314-40-9	Bromacil	33.3	110-83-8	Cyclohexene	3380.0
7726-95-6	Bromine	2.3	108-91-8	Cyclohexylamine	133.2
7789-30-2	Bromine pentafluoride	2.3	121-82-4	Cyclonite	5.0
75-25-2	Bromoform	16.7	542-92-7	Cyclopentadiene	666.0
106-97-8	Butane	6327.0	287-92-3	Cyclopentane	5727.6
111-76-2	2-Butoxyethanol	399.6	13121-70-5	Cyhexatin	16.7
123-86-4	n-Butyl acetate	2364.3	94-75-7	2,4-D	33.3
105-46-4	sec-Butyl acetate	3163.5	17702-41-9	Decaborane	1.0
540-88-5	tert-Butyl acetate	3163.5	8065-48-3	Demeton	0.3
141-32-2	Butyl acrylate	183.2	117-81-7	Di(2-ethylhexyl)phthalate	16.7
71-36-3	n-Butyl alcohol	499.5	123-42-2	Diacetone alcohol	799.2
78-92-2	sec-Butyl alcohol	1015.7	333-41-5	Diazinon	0.3
75-65-0	tert-Butyl alcohol	999.0	334-88-3	Diazomethane	1.3
1189-85-1	tert-Butyl chromate, as CrO3	0.3	19287-45-7	Diborane	0.3
2426-08-6	n-Butyl glycidyl ether (BGE)	449.6	107-66-4	Dibutyl phosphate	16.7
138-22-7	n-Butyl lactate	83.3	84-74-2	Dibutyl phthalate	16.7
109-79-5	Butyl mercaptan	5.0	102-81-8	2-N-Dibutylaminoethanol	46.6
109-73-9	Butylamine	50.0	594-72-9	1,1-Dichloro-1-nitroethane	33.3
89-72-5	o-sec-Butylphenol	99.9	118-52-5	1,3-Dichloro-5,5-Dimethyl hydantoin	0.7
98-51-1	p-tert-Butyltoluene	199.8	7572-29-4	Dichloroacetylene	1.3
156-62-7	Calcium cyanamide	1.7	95-50-1	o-Dichlorobenzene	999.0
1305-62-0	Calcium hydroxide	16.7	106-46-7	p-Dichlorobenzene	1498.5
1305-78-8	Calcium oxide	6.7	75-71-8	Dichlorodifluoromethane	16483.5
76-22-2	Camphor, synthetic	40.0	75-34-3	1,1-Dichloroethane	2697.3
105-60-2	Caprolactam, dust	3.3	111-44-4	Dichloroethyl ether	99.9
105-60-2	Caprolactam, vapor	66.6	540-59-0	1,2-Dichloroethylene	2630.7
2425-06-1	Captafol	0.3	75-43-4	Dichlorofluoromethane	133.2
133-06-2	Captan	16.7	78-87-5	1,2-Dichloropropane	1165.5
63-25-2	Carbaryl	16.7	542-75-6	Dichloropropene	16.7
1563-66-2	Carbofuran	0.3	75-99-0	2,2-Dichloropropionic acid	20.0
1333-86-4	Carbon black	11.7	76-14-2	Dichlorotetrafluoroethane	23310.0
75-15-0	Carbon disulfide	99.9	62-73-7	Dichlorvas	3.3
558-13-4	Carbon tetrabromide	4.7	141-66-2	Dicrotophos	0.8
353-50-4	Carbonyl fluoride	16.7	77-73-6	Dicyclopentadiene	99.9
120-80-9	Catechol	66.6	102-54-5	Dicyclopentadienyl iron	33.3
21351-79-1	Cesium hydroxide	6.7	60-57-1	Dieldrin	0.8
8001-35-2	Chlorinated camphene	1.7	111-42-2	Diethanolamine	50.0
—	Chlorinated diphenyl oxide	1.7	96-22-0	Diethyl ketone	2347.7
7782-50-5	Chlorine	10.0	84-66-2	Diethyl phthalate	16.7
10049-04-4	Chlorine dioxide	1.0	109-89-7	Diethylamine	99.9
7790-91-2	Chlorine trifluoride	1.3	100-37-8	Diethylaminoethanol	166.5
600-25-9	1-Chloro-1-nitropropane	33.3	111-40-0	Diethylene triamine	13.3
107-20-0	Chloroacetaldehyde	10.0	75-61-6	Difluorodibromomethane	2863.8
532-27-4	a-Chloroacetophenone	1.0	2238-07-5	Diglycidyl ether	1.7
79-04-9	Chloroacetyl chloride	0.7	108-83-8	Diisobutyl ketone	499.5
2698-41-1	o-Chlorobenzylidene malonitrile	1.3	108-18-9	Diisopropylamine	66.6
108-90-7	Chlorobenzene	1165.5	127-19-5	Dimethyl acetamide	116.6
74-97-5	Chlorobromomethane	3496.5	124-40-3	Dimethylamine	59.9
75-45-6	Chlorodifluoromethane	11655.0	121-69-7	Dimethylaniline	83.3
76-15-3	Chloropentafluoroethane	21045.6	68-12-2	Dimethylformamide	99.9
76-06-2	Chloropicrin	2.3	57-14-7	1,1-Dimethylhydrazine	3.3
2039-87-4	o-Chlorostyrene	949.1	131-11-3	Dimethylphthalate	16.7
95-49-8	o-Chlorotoluene	832.5	148-01-6	Dinitolmide	16.7
2921-88-2	Chlorpyrifos	0.7	534-52-1	Dinitro-o-cresol	0.7
7440-47-3	Chromium (II) compounds, as Cr	1.7	528-29-0	Dinitrobenzene, all isomers	3.3
7440-47-3	Chromium (III) compounds, Cr	1.7	78-34-2	Dioxathion	0.7
7440-47-3	Chromium (metal)	1.7	122-39-4	Diphenylamine	33.3
14977-61-8	Chromyl chloride	0.5	123-19-3	Dipropyl ketone	782.6
2971-90-6	Clopidol	33.3	34590-94-8	Dipropylene glycol methyl ether	1998.0
7440-48-4	Cobalt as Co metal Dust and fu	0.2	85-00-7	Diquat	1.7
10210-68-1	Cobalt carbonyl as Co	0.3	97-77-8	Disulfiram	6.7
16842-03-8	Cobalt hydrocarbonyl	0.3	298-04-4	Disulfuton	0.3
7440-50-8	Copper, Dusts and mists, as Cu	3.3	128-37-0	2,6-Ditert. butyl-p-cresol	33.3
7440-50-8	Copper, Fume	0.7	330-54-1	Diuron	33.3
—	Cotton dust, raw	0.7	1321-74-0	Divinyl benzene	166.5
1319-77-3	Cresol, all isomers	73.3	2104-64-5	EPN	1.7
4170-30-3	Crotonaldehyde	20.0	115-29-7	Endosulfan	0.3
299-86-5	Cruformate	16.7	72-20-8	Endrin	0.3
98-82-2	Cumene	815.9	13838-16-9	Enflurane	1914.8
420-04-2	Cyanamide	6.7	141-43-5	Ethanolamine	26.6
151-50-8	Cyanides, as CN	16.7	563-12-2	Ethion	1.3
460-19-5	Cyanogen	66.6	110-80-5	2-Ethoxyethanol	63.3
506-77-4	Cyanogen chloride	2.0	111-15-9	2-Ethoxyethyl acetate	89.9

60-29-7	Ethyl Ether	3996.0	4016-14-2	Isopropyl glycidyl ether (IGE)	799.2
141-78-6	Ethyl acetate	4662.0	75-31-0	Isopropylamine	40.0
140-88-5	Ethyl acrylate	66.6	768-52-5	N-Isopropylaniline	33.3
64-17-5	Ethyl alcohol	6327.0	463-51-4	Ketene	3.0
541-85-5	Ethyl amyl ketone	432.9	3687-31-8	Lead arsenate, as Pb3 (AsO4)2	0.5
100-41-4	Ethyl benzene	1448.6	7758-97-6	Lead chromate, as Cr	0.2
74-96-4	Ethyl bromide	2963.7	68476-85-7	Liquified petroleum gas	5994.0
106-35-4	Ethyl butyl ketone	765.9	7580-67-8	Lithium hydride	0.1
75-00-3	Ethyl chloride	8658.0	1309-48-4	Magnesium oxide fume	33.3
109-94-4	Ethyl formate	999.0	121-75-5	Malathion	33.3
75-08-1	Ethyl mercaptan	3.3	108-31-6	Maleic anhydride	3.3
78-10-4	Ethyl silicate	283.1	7439-96-5	Manganese Dust & compounds	16.7
75-04-7	Ethylamine	59.9	7439-96-5	Manganese Fume	3.3
107-07-3	Ethylene chlorohydrin	10.0	12079-65-1	Manganese cyclopentadienyl tricarbonyl	0.3
107-21-1	Ethylene glycol	416.3	7439-97-6	Mercury, Aryl & inorganic cmpd	0.3
628-96-6	Ethylene glycol dinitrate	1.0	7439-97-6	Mercury, as Hg Alkyl compounds	0.03
107-15-3	Ethylenediamine	83.3	7439-97-6	Mercury, vapors except alkyl	0.2
151-56-4	Ethylenimine	3.3	141-79-7	Mesityl oxide	199.8
16219-75-3	Ethylidene norbornene	83.3	79-41-4	Methacrylic acid	233.1
100-74-3	N-Ethylmorpholine	76.6	16752-77-5	Methomyl	8.3
22224-92-6	Fenamiphos	0.3	72-43-5	Methoxychlor	33.3
115-90-2	Fensulfothion	0.3	109-86-4	2-Methoxyethanol	53.3
55-38-9	Fenthion	0.7	110-49-6	2-Methoxyethyl acetate	79.9
14484-64-1	Ferbam	33.3	150-76-5	4-Methoxyphenol	16.7
12604-58-9	Ferrovandium dust	3.3	137-05-3	Methyl 2-cyanoacrylate	26.6
—	Febrous glass dust	33.3	79-20-9	Methyl acetate	2031.3
—	Fluorides, as F	8.3	74-99-7	Methyl acetylene	5494.5
7782-41-4	Fluorine	6.7	—	Methyl acetylene-propadiene mixture (MAPP)	5994.0
944-22-9	Fonofos	0.3	96-33-3	Methyl acrylate	116.6
75-12-7	Formamide	50.0	67-56-1	Methyl alcohol	865.8
64-18-6	Formic acid	30.0	100-61-8	N-Methyl aniline	6.7
98-01-1	Furfural	26.6	74-83-9	Methyl bromide	66.6
98-00-1	Furfuryl alcohol	133.2	74-87-3	Methyl chloride	349.7
7782-65-2	Germanium tetrahydride	2.0	71-55-6	Methyl chloroform	6327.0
111-30-8	Glutaraldehyde	2.3	8022-00-2	Methyl demeton	1.7
556-52-5	Glycidol	249.8	78-93-3	Methyl ethyl ketone (MEK)	1964.7
7440-58-6	Hafnium	1.7	1338-23-4	Methyl ethyl ketone peroxide	5.0
151-67-7	Halothane	1332.0	107-31-3	Methyl formate	832.5
142-82-5	Heptane (n-Heptane)	5328.0	60-34-4	Methyl hydrazine	1.2
87-68-3	Hexachlorobutadiene	0.8	74-88-4	Methyl iodide	33.3
77-47-4	Hexachlorocyclopentadiene	0.3	110-12-3	Methyl isoamyl ketone	799.2
1335-87-1	Hexachloronaphthalene	0.7	108-11-2	Methyl isobutyl carbinol	333.0
684-16-2	Hexafluoroacetone	2.3	108-10-1	Methyl isobutyl ketone (MIBK)	682.7
822-06-0	Hexamethylene diisocyanate	0.1	624-83-9	Methyl isocyanate	0.2
100-54-3	Hexane (n-Hexane)	599.4	563-80-4	Methyl isopropyl ketone	2347.7
—	Hexane, other isomers	5994.0	74-93-1	Methyl mercaptan	3.3
591-78-6	2-Hexanone (MBK)	66.6	80-62-6	Methyl methacrylate	1365.3
108-84-9	sec-Hexyl acetate	999.0	110-43-0	Methyl n-amyl ketone	782.6
107-41-5	Hexylene glycol	416.3	591-78-6	Methyl n-butyl ketone	66.6
10035-10-6	Hydrogen bromide	33.3	298-00-0	Methyl parathion	0.7
7647-01-0	Hydrogen chloride	23.3	107-87-9	Methyl propyl ketone	2331.0
74-90-8	Hydrogen cyanide	33.3	681-84-5	Methyl silicate	20.0
7664-39-3	Hydrogen fluoride, as F	8.3	98-83-9	a-Methyl styrene	799.2
7722-84-1	Hydrogen peroxide	5.0	126-98-7	Methylacrylonitrile	10.0
7783-07-5	Hydrogen selenide, as Se	0.7	109-87-5	Methylal	10323.0
7783-06-4	Hydrogen sulfide	46.6	74-89-5	Methylamine	40.0
123-31-9	Hydroquinone	6.7	108-87-2	Methylcyclohexane	5328.0
999-61-1	2-Hydroxypropyl acrylate	10.0	25639-42-3	Methylcyclohexanol	782.6
95-13-6	Indene	149.9	583-60-8	o-Methylcyclohexanone	765.9
7440-74-6	Indium, & compounds as In	0.3	12108-13-3	Methylcyclopentadienyl manganese tricarbonyl	0.7
7553-56-2	Iodine	3.3	5124-30-1	Methylene bis (4-cyclo-hexylisocyanate)	0.2
75-47-8	Iodoform	33.3	101-68-8	Methylene bisphenyl isocyanate	0.2
1309-37-1	Iron oxide fume, Fe2O3 as Fe	16.7	101-77-9	4,4'-Methylene dianiline	2.7
13463-40-6	Iron pentacarbonyl, as Fe	2.7	21087-64-9	Metribuzin	16.7
—	Iron salts, soluble as Fe	3.3	7786-34-7	Mevinphos	0.3
123-92-2	Isoamyl acetate	1748.3	7439-98-7	Molybdenum, as Mo soluble cpds	16.7
123-51-3	Isoamyl alcohol	1198.8	7439-98-7	Molybdenum, insoluble cpds	33.3
110-19-0	Isobutyl acetate	2331.0	6923-22-4	Monocrotophos	0.8
78-83-1	Isobutyl alcohol	499.5	110-91-8	Morpholine	233.1
26952-21-6	Isocetyl alcohol	899.1	300-76-5	Naled	10.0
78-59-1	Isophorone	83.3	91-20-3	Napthalene	166.5
4098-71-9	Isophorone diisocyanate	0.1	54-11-5	Nicotine	1.7
109-59-1	Isopropoxyethanol	349.7	1929-82-4	Nitrapyrin	33.3
108-21-4	Isopropyl acetate	3163.5	7697-37-2	Nitric acid	16.7
67-63-0	Isopropyl alcohol	3263.4			
108-20-3	Isopropyl ether	3496.5			

10102-43-9	Nitric oxide	99.9	7803-62-5	Silicon tetrahydride	23.3
100-01-6	p-Nitroaniline	10.0	7440-22-4	Silver, Metal	0.3
98-95-3	Nitrobenzene	16.7	7440-22-4	Silver, soluble compounds Ag	0.03
100-00-5	p-Nitrochlorobenzene	2.0	26628-22-8	Sodium azide	1.0
79-24-3	Nitroethane	1032.3	7631-90-5	Sodium bisulfite	16.7
7783-54-2	Nitrogen trifluoride	99.9	62-74-8	Sodium fluoroacetate	0.2
55-63-0	Nitroglycerin	1.7	1310-73-2	Sodium hydroxide	6.7
75-52-5	Nitromethane	832.5	7681-57-4	Sodium metabisulfite	16.7
108-03-2	1-Nitropropane	299.7	7803-52-3	Stibine	1.7
88-72-2	Nitrotoluene	36.6	57-24-9	Strychnine	0.5
111-84-2	Nonane	3496.5	100-42-5	Styrene	716.0
2234-13-1	Octachloronaphthalene	0.3	1395-21-7	Subtilisins	0.0
111-65-9	Octane	4828.5	3689-24-5	Sulfotep	0.7
8012-95-1	Oil mist, mineral	16.7	2551-62-4	Sulfur hexafluoride	19980.0
20816-12-0	Osmium tetroxide, as Os	0.007	10025-67-9	Sulfur monochloride	20.0
144-62-7	Oxalic acid	3.3	5714-22-7	Sulfur pentafluoride	0.3
7783-41-7	Oxygen difluoride	0.3	7783-60-0	Sulfur tetrafluoride	1.3
8002-74-2	Parafin wax fume	6.7	7664-93-9	Sulfuric acid	3.3
4685-14-7	Paraquat	0.3	2699-79-8	Sulfuryl fluoride	66.6
56-38-2	Parathion	0.3	35400-43-2	Sulprofos	3.3
19624-22-7	Pentaborane	0.0	93-76-5	2,4,5-T	33.3
1321-64-8	Pentachloronaphthalene	1.7	107-49-3	TEPP	0.2
87-86-5	Pentachlorophenol	1.7	7440-25-7	Tantalum, metal & oxide dusts	16.7
109-66-0	Pentane	5994.0	13494-80-9	Tellurium & compounds as Te	0.3
594-42-3	Perchloromethyl mercaptan	2.7	7783-80-4	Tellurium hexafluoride, as Te	0.7
7616-94-6	Perchloryl fluoride	46.6	3383-96-8	Temephos	33.3
108-95-2	Phenol	63.3	26140-60-3	Terphenyls	16.7
92-84-2	Phenothiazine	16.7	76-12-0	1,1,2,2-Tetrachloro-1,2-difluoroethane	13886.1
101-84-8	Phenyl ether	23.3	76-11-9	1,1,1,2-Tetrachloro-2,2-difluoroethane	13886.1
122-60-1	Phenyl glycidyl ether	20.0	79-34-5	1,1,2,2-Tetrachloroethane	23.3
108-98-5	Phenyl mercaptan	6.7	1335-88-2	Tetrachloronaphthalene	6.7
106-50-3	p-Phenylene diamine	0.3	78-00-2	Tetraethyl lead, as Pb	0.3
100-63-0	Phenylhydrazine	66.6	109-99-9	Tetrahydrofuran	1964.7
638-21-1	Phenylphosphine	0.8	175-74-1	Tetramethyl lead, as Pb	0.5
298-02-2	Phorate	0.2	3333-52-6	Tetramethyl succinonitrile	10.0
75-44-5	Phosgene	1.3	509-14-8	Tetranitromethane	26.6
7803-51-2	Phosphine	1.3	7722-88-5	Tetrasodium pyrophosphate	16.7
7664-38-2	Phosphoric acid	3.3	479-45-8	Tetryl	5.0
7723-14-0	Phosphorus	0.3	7440-28-0	Thallium, soluble compounds, Ti	0.3
10025-87-3	Phosphorus oxychloride	2.0	96-69-5	4,4-Thiobis(6-tert, butyl-m-cresol)	33.3
10026-13-8	Phosphorus pentachloride	3.3	68-11-1	Thioglycolic acid	13.3
1314-80-3	Phosphorus pentasulfide	3.3	7719-09-7	Thionyl chloride	16.7
7719-12-2	Phosphorus trichloride	5.0	137-26-8	Thirum	16.7
85-44-9	Phthalic anhydride	20.0	7440-31-5	Tin, Metal	6.7
626-17-5	m-Phthalodinitrile	16.7	7440-31-5	Tin, Organic compounds, as Sn	0.3
1918-02-1	Picloram	33.3	7440-31-5	Tin, oxide & inorganic except SnH4	6.7
88-89-1	Picric acid	0.3	108-88-3	Toluene	1248.8
83-26-1	Pindone	0.3	584-84-9	Toluene-2,4-diisocyanate, (TDI)	0.1
142-64-3	Piperazine dihydrochloride	16.7	108-44-1	m-Toluidine	30.0
7440-06-4	Platinum, Metal	3.3	106-49-0	p-Toluidine	30.0
7440-06-4	Platinum, Soluble salts as Pt	0.0	126-73-8	Tributyl phosphate	8.3
1310-58-3	Potassium hydroxide	6.7	76-13-1	1,1,2-Trichloro-1,2,2-trifluoroethane	25308.0
107-19-7	Propargyl alcohol	6.7	76-03-9	Trichloroacetic acid	23.3
57-57-8	B-Propiolactone	5.0	120-82-1	1,2,4-Trichlorobenzene	133.2
114-26-1	Propoxur	1.7	79-00-5	1,1,2-Trichloroethane	149.9
79-09-4	Propionic acid	99.9	71-55-6	1,1,1-Trichloroethane	6327.0
109-60-4	n-Propyl acetate	2797.2	75-69-4	Trichlorofluoromethane	18648.0
71-23-8	Propyl alcohol	1665.0	1321-65-9	Trichloronaphthalene	16.7
627-13-4	n-Propyl nitrate	349.7	96-18-4	1,2,3-Trichloropropane	199.8
78-87-5	Propylene dichloride	1165.5	121-44-8	Triethylamine	133.2
6423-43-4	Propylene glycol dinitrate	1.0	75-63-8	Trifluorobromomethane	20313.0
107-98-2	Propylene glycol mono-methyl ether	1198.8	552-30-7	Trimellitic anhydride	0.1
75-55-8	Propylene imine	16.7	2551-13-7	Trimethyl benzene	416.3
8003-34-7	Pyrethrum	16.7	121-45-9	Trimethyl phosphite	33.3
110-86-1	Pyridine	50.0	75-50-3	Trimethylamine	79.9
106-51-4	Quinone	1.3	118-96-7	2,4,6-Trinitrotoluene	1.7
108-46-3	Resorcinol	149.9	78-30-8	Triorthoacresyl phosphate	0.3
7440-16-6	Rhodium Metal	3.3	603-34-9	Triphenyl amine	16.7
7440-16-6	Rhodium, Insoluble compounds	3.3	115-86-6	Triphenyl phosphate	10.0
7440-16-6	Rhodium, Soluble compounds	0.03	7440-33-7	Tungsten, Insoluble compounds	16.7
299-84-3	Ronnel	33.3	7440-33-7	Tungsten, Soluble compounds	3.3
83-79-4	Rotenone	16.7	8006-64-2	Turpentine	1864.8
—	Rubber solvent (Naphtha)	5328.0	7440-61-1	Uranium, insoluble & soluble	0.7
7782-49-2	Selenium compounds, as Se	0.7	8032-32-4	VM & P Naphtha	4495.5
7783-79-1	Selenium hexafluoride, as Se	0.7	110-62-3	n-Valeraldehyde	582.8
136-78-7	Sesone	33.3	1314-62-1	Vanadium, as V2O5	0.2

108-05-4	Vinyl acetate	99.9
593-60-2	Vinyl bromide	66.6
106-87-6	Vinyl cyclohexene dioxide	199.8
75-35-4	Vinylidene chloride	66.6
25013-15-4	Vinyl toluene	799.2
81-81-2	Warfarin	0.3
—	Welding fumes	16.7
1477-55-0	m-Xylene a,a'-diamine	0.3
1330-20-7	Xylenes (m-,o-,p-isomers)	1448.6
1300-73-8	Xylidine	33.3
7440-65-5	Yttrium, metal and cpds as Y	3.3
7646-85-7	Zinc chloride fume	3.3
13530-65-9	Zinc chromates	0.03
1314-13-2	Zinc oxide, fume	16.7
7440-67-2	Zirconium compounds, as Zr	16.7

[Statutory Authority: RCW 70.94.331, 91-13-079 (Order 90-62, § 173-460-160, filed 6/18/91, effective 9/18/91).]

Chapter 173-470 WAC
AMBIENT AIR QUALITY STANDARDS FOR
PARTICULATE MATTER
(Formerly chapter 18-40 WAC)

WAC

173-470-010	Purpose.
173-470-020	Applicability.
173-470-030	Definitions.
173-470-100	Ambient air quality standards.
173-470-110	Particle fallout standards.
173-470-150	Method of measurement.
173-470-160	Reporting of data.

WAC 173-470-010 Purpose. This chapter promulgated under RCW 70.94.305 and 70.94.331 establishes maximum acceptable levels for particulate matter in the ambient air. Particulate matter is characterized in criteria developed by the United States Environmental Protection Agency.

[Statutory Authority: Chapter 70.94 RCW, 87-19-080 (Order 87-19), § 173-470-010, filed 9/16/87.]

WAC 173-470-020 Applicability. The provisions of this chapter apply to all areas of the state of Washington.

[Statutory Authority: Chapter 70.94 RCW, 87-19-080 (Order 87-19), § 173-470-020, filed 9/16/87.]

WAC 173-470-030 Definitions. Unless a different meaning is clearly required by context, words and phrases used in this chapter shall have the following meanings; general terms common with other chapters of Title 173 WAC as defined in chapter 173-403 WAC.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 89-02-055 (Order 88-39), § 173-470-030, filed 1/3/89. Statutory Authority: Chapter 70.94 RCW, 87-19-080 (Order 87-19), § 173-470-030, filed 9/16/87.]

WAC 173-470-100 Ambient air quality standards.

(1) The level of the 24-hour ambient air quality standard for total suspended particulate is 150 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$), 24-hour average concentration. The standard is attained when the number of days per calendar year is less than or equal to one for measured 24-hour concentrations above 150 $\mu\text{g}/\text{m}^3$.

(2) The level of the annual standard for total suspended particulate is sixty micrograms per cubic meter ($\mu\text{g}/\text{m}^3$), annual geometric mean. The standard is attained when the

annual geometric mean concentration is less than or equal to 60 $\mu\text{g}/\text{m}^3$.

(3) The level of the 24-hour ambient air quality standard for PM-10 is 150 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$), 24-hour average concentration. The standard is attained when:

(a) The expected number of days per calendar year with a 24-hour average concentration above 150 $\mu\text{g}/\text{m}^3$, as determined in accordance with 40 CFR 50 Appendix K as in effect on July 1, 1988, is equal to or less than one; and

(b) The number of days per calendar year the measured 24-hour average concentration above 150 $\mu\text{g}/\text{m}^3$ is equal to or less than one.

(4) The level of the annual standard for PM-10 is 50 micrograms per cubic meter ($\mu\text{g}/\text{m}^3$), annual arithmetic mean. The standard is attained when the expected annual arithmetic mean concentration, as determined in accordance with 40 CFR 50 Appendix K as in effect on July 1, 1988, is less than or equal to 50 $\mu\text{g}/\text{m}^3$.

[Statutory Authority: Chapters 70.94 and 43.21A RCW, 89-02-055 (Order 88-39), § 173-470-100, filed 1/3/89. Statutory Authority: Chapter 70.94 RCW, 87-19-080 (Order 87-19), § 173-470-100, filed 9/16/87.]

WAC 173-470-110 Particle fallout standards.

Particle fallout shall not exceed the standards enumerated below at the conditions stated.

(1) The particle fallout rate measured at a primary air mass station, ground level monitoring station or special station shall not exceed:

(a) Ten grams per square meter (10 g/m^2) per month in an industrial area; or

(b) Five grams per square meter (5 g/m^2) per month in an industrial area if visual observations show a presence of wood waste and the volatile fraction of the sample exceeds seventy percent.

(c) Five grams per square meter (5 g/m^2) per month in residential and commercial areas.

(d) Three and one-half grams per square meter (3.5 g/m^2) per month in residential and commercial areas if visual observations show the presence of wood waste and the volatile fraction of the sample exceeds seventy percent.

(2) In recognition of natural dust in areas of the state, the following exceptions apply to areas east of the Cascade range crest. When concentrations measured at approved background locations exceed three and one-half grams per square meter (3.5 g/m^2) per month, the particle fallout rate measured at a primary air mass station, ground level monitoring station or special station, shall not exceed:

(a) Six and one-half grams per square meter (6.5 g/m^2) per month plus background in an industrial area; or

(b) One and one-half grams per square meter (1.5 g/m^2) per month plus background in residential and commercial areas.

The provisions of WAC 173-470-110 (1)(b) and (d) pertaining to wood waste shall continue to apply regardless of background.

[Statutory Authority: Chapter 70.94 RCW, 87-19-080 (Order 87-19), § 173-470-110, filed 9/16/87.]

WAC 173-470-150 Method of measurement.

Sampling and analysis for particulate matter shall be conducted according to methods approved by and on file with

the department. Methods equivalent in sensitivity, accuracy, reproducibility, and selectivity to the approved standard method may be used after approval by the department.

[Statutory Authority: Chapter 70.94 RCW. 87-19-080 (Order 87-19), § 173-470-150, filed 9/16/87.]

WAC 173-470-160 Reporting of data. (1) Air authorities sampling for particulate matter shall notify the department of all infractions of these standards. Notification shall be made quarterly. A quarterly summary of all samples greater than the standards shall be submitted within sixty days of the end of each calendar quarter. Quarterly data shall include:

- (a) Location of sampler.
- (b) Time period (day and year).
- (c) Individual concentrations recorded at each air monitoring station.

(d) The applicable geometric or arithmetic mean for each monitoring station (first quarter report only for previous calendar year).

(2) If particulate matter values greater than the standards are measured by the department, the air authority shall be notified quarterly. This notification shall include:

- (a) Location.
- (b) Time or time period.
- (c) Concentrations recorded.
- (d) The applicable geometric or arithmetic mean (first quarter report only for previous calendar year).

[Statutory Authority: Chapter 70.94 RCW. 87-19-080 (Order 87-19), § 173-470-160, filed 9/16/87.]

Chapter 173-474 WAC AMBIENT AIR QUALITY STANDARDS FOR SULFUR OXIDES

(Formerly chapter 18-56 WAC)

WAC

173-474-010	Purpose.
173-474-015	Objective.
173-474-020	Applicability.
173-474-030	Definitions.
173-474-100	Air quality standards.
173-474-150	Measurement method.
173-474-160	Data reporting.

WAC 173-474-010 Purpose. This chapter promulgated under RCW 70.94.305 and 70.94.331 establishes maximum acceptable levels for sulfur dioxide as a measure of the sulfur oxide concentration in the ambient air.

[Statutory Authority: Chapter 70.94 RCW. 87-20-020 (Order 87-22), § 173-474-010, filed 9/30/87.]

WAC 173-474-015 Objective. In recognition of the need to continue improvement of the quality of the air resource, the department intends to work toward the achievement of the following objective: The sulfur oxide concentration measured as sulfur dioxide at a primary air mass station, primary ground level monitoring station, or special station shall not be greater than three-tenths per million (0.3 ppm) average for five minutes.

[Statutory Authority: Chapter 70.94 RCW. 87-20-020 (Order 87-22), § 173-474-015, filed 9/30/87.]

WAC 173-474-020 Applicability. The provisions of this chapter apply to all areas of the state of Washington.

[Statutory Authority: Chapter 70.94 RCW. 87-20-020 (Order 87-22), § 173-474-020, filed 9/30/87.]

WAC 173-474-030 Definitions. Unless a different meaning is clearly required by context, words and phrases used in this chapter shall have the following meanings; general terms common with other chapters of Title 173 WAC as defined in chapter 173-403 WAC, and terms specific to standards for sulfur oxide as follows:

"Period" means any interval of the specified time.

[Statutory Authority: Chapter 70.94 RCW. 87-20-020 (Order 87-22), § 173-474-030, filed 9/30/87.]

WAC 173-474-100 Air quality standards. Sulfur oxide in the ambient air, measured as sulfur dioxide shall not exceed the following values:

(1) Four-tenths parts per million (0.4 PPM) by volume average for a one-hour period more than once per one-year period.

(2) Twenty-five one-hundredths parts per million (0.25 PPM) by volume average for a one-hour period more than twice in a consecutive seven-day period.

(3) One-tenth parts per million (0.1 PPM) by volume average for a one-day period more than once per one-year period.

(4) Two one-hundredths parts per million (0.02 PPM) by volume average for a one-year period.

[Statutory Authority: Chapter 70.94 RCW. 87-20-020 (Order 87-22), § 173-474-100, filed 9/30/87.]

WAC 173-474-150 Measurement method. For determining compliance with this regulation, sulfur oxides shall be measured by methods approved by, and on file with, the department. Other methods equivalent in sensitivity, accuracy, reproducibility, and selectivity to the approved methods may be used after approval by the department.

[Statutory Authority: Chapter 70.94 RCW. 87-20-020 (Order 87-22), § 173-474-150, filed 9/30/87.]

WAC 173-474-160 Data reporting. (1) Air authorities sampling for sulfur oxides shall notify the department of all violations of these standards. The notification shall be submitted quarterly. Summaries shall provide the following information:

- (a) Location of sampler.
- (b) Time period (hours, days, and year).
- (c) Actual concentrations recorded that exceeded the standard.

(2) The department will give quarterly notice to an air authority of infractions of the standards within its jurisdiction. This notice will include:

- (a) Location.
- (b) Time period and dates.
- (c) Concentrations recorded.

[Statutory Authority: Chapter 70.94 RCW, 87-20-020 (Order 87-22), § 173-474-160, filed 9/30/87.]

Chapter 173-475 WAC

AMBIENT AIR QUALITY STANDARDS FOR CARBON MONOXIDE, OZONE, AND NITROGEN DIOXIDE

WAC

173-475-010	Purpose.
173-475-020	Definitions.
173-475-030	Air quality standards.
173-475-040	Measurement methods.
173-475-050	Reporting of data.

WAC 173-475-010 Purpose. These rules implement chapter 70.94 RCW, the Washington State Clean Air Act, and chapter 163, Laws of 1979 ex. sess. The purpose of this chapter is to set statewide air quality standards for carbon monoxide, ozone, and nitrogen dioxide.

[Statutory Authority: RCW 43.21A.080, 70.94.331, 70.120.030, and 70.120.120. 80-03-071 (Order DE 79-36), § 173-475-010, filed 2/29/80.]

WAC 173-475-020 Definitions. (1) "Air quality standard" means an established concentration, exposure time, or frequency of occurrence of a contaminant or multiple contaminants in the ambient air which shall not be exceeded.

(2) "Ambient air" means the surrounding outside air.

(3) "Department" means the state department of ecology.

(4) "National air monitoring stations (NAMS)" means fixed monitoring stations operated by the state and local air pollution control agencies to meet national monitoring objectives. The stations are a subset of the SLAMS network and are sited with emphasis on urban and multi-source areas.

(5) "State and local air monitoring stations (SLAMS)" means stations designed to meet any of four basic monitoring objectives:

(a) To determine highest concentrations expected to occur;

(b) To determine representative concentrations in areas of high population density;

(c) To determine the impact on ambient air pollution levels of significant sources or source categories; and

(d) To determine general background concentration levels.

(6) "Special purpose monitoring stations (SPMS)" means monitoring stations operated by state and local air pollution control agencies to supplement the SLAMS network in order to increase the overall effectiveness of the state's monitoring efforts.

[Statutory Authority: RCW 43.21A.080, 70.94.331, 70.120.030, and 70.120.120. 80-03-071 (Order DE 79-36), § 173-475-020, filed 2/29/80. Formerly chapters 18-32 and 18-46 WAC (part).]

WAC 173-475-030 Air quality standards. (1) Carbon monoxide in the ambient air as measured at a SPMS designated by the department for the purpose of determining compliance with air quality standards, or at any NAMS or SLAMS, shall not exceed the following values:

(a) Nine parts per million (ten milligrams per cubic meter) eight-hour average concentration not to be exceeded

more than once per year at any location where people would be exposed to such concentrations for eight consecutive hours or more. Compliance shall be based on data that begins and ends on a clock hour. There shall be no overlapping of hours in any violation period. A maximum of three violations can occur in any one day.

(b) Thirty-five parts per million (forty milligrams per cubic meter) one-hour average concentration not to be exceeded more than once per year at any location where people would be exposed to such concentrations for one hour or more. Compliance shall be determined from data that begins on a clock hour.

(2) Ozone in the ambient air as measured at a SPMS designated by the department for the purpose of determining compliance with this air quality standard, or at any NAMS or SLAMS, shall not exceed 0.12 parts per million (two hundred and thirty-five milligrams per cubic meter) hourly concentration on more than 1.0 days per calendar year as determined under the following conditions:

(a) Three calendar years of data shall be used in determining compliance with this standard. If three years of data are not available, a minimum of one calendar year must be used;

(b) All hourly measurements must start on the clock hour; and

(c) All daily maximum hourly averages not available for a year shall be accounted for by use of the following equation:

$$e = v + v/n (N-n-z)$$

e = the estimated number of potential times the allowed concentrations are exceeded for the year.

N = the number of required monitoring days in the year.

n = the number of days that valid data was available.

v = the number of days that readings have exceeded compliance level.

z = the number of days that readings are assumed to be less than the level of the standard. If a day should be included is based on whether the daily maximum one-hour reading on both the preceding day and the following day do not exceed 0.09 ppm ozone.

(3) Nitrogen dioxide. The annual arithmetic mean of nitrogen dioxide readings in the ambient air measured at a SPMS designated by the department for the purpose of determining compliance with this air quality standard, or at any NAMS or SLAMS, shall not exceed 0.05 parts per million (one hundred micrograms per cubic meter).

[Statutory Authority: RCW 43.21A.080, 70.94.331, 70.120.030, and 70.120.120. 80-03-071 (Order DE 79-36), § 173-475-030, filed 2/29/80. Formerly WAC 18-32-020 and 18-46-030.]

WAC 173-475-040 Measurement methods. Measurements for determining compliance with WAC 173-475-030 shall be made by equipment and procedures approved by and on file with the department. All methods and procedures shall be available to the public upon request.

[Statutory Authority: RCW 43.21A.080, 70.94.331, 70.120.030, and 70.120.120. 80-03-071 (Order DE 79-36), § 173-475-040, filed 2/29/80. Formerly WAC 18-32-040 and 18-46-040.]

WAC 173-475-050 Reporting of data. Local and regional air pollution control agencies shall notify the department of all occurrences which exceed the applicable standards for carbon monoxide, ozone, or nitrogen dioxide. Notification shall be made quarterly and shall include:

- (a) Location of monitoring sites by address and UTM coordinates;
- (b) Date and time of each violation;
- (c) Concentrations recorded; and
- (d) Method of sampling used.

[Statutory Authority: RCW 43.21A.080, 70.94.331, 70.120.030, and 70.120.120. 80-03-071 (Order DE 79-36), § 173-475-050, filed 2/29/80. Formerly WAC 18-32-050 and 18-46-050.]

Chapter 173-480 WAC

AMBIENT AIR QUALITY STANDARDS AND EMISSION LIMITS FOR RADIONUCLIDES

WAC

173-480-010	Purpose.
173-480-020	Applicability.
173-480-030	Definitions.
173-480-040	Ambient standard.
173-480-050	General standards for maximum permissible emissions.
173-480-060	Emission standards for new and modified emission units.
173-480-070	Emission monitoring and compliance procedures.
173-480-080	Regulatory actions and penalties.

WAC 173-480-010 Purpose. The purpose of this chapter is to define maximum allowable levels for radionuclides in the ambient air and control emissions from specific sources.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-010, filed 5/7/86.]

WAC 173-480-020 Applicability. (1) The ambient air standards shall apply to the entire state. Measurements may be made at all points up to property lines of point, area and fugitive emission sources.

(2) The emission limits of this chapter shall apply to all radionuclide emission units.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-020, filed 5/7/86.]

WAC 173-480-030 Definitions. Unless a different meaning is clearly required by context words and phrases used in this chapter shall have the following meanings: General terms common with other chapters as defined in chapter 173-403 WAC, and terms specific to the standards and limits of radionuclides as defined in this section.

(1) Best available radionuclide control technology "BARCT" means technology which will result in a radionuclide emission limitation based on the maximum degree of reduction for radionuclides which would be emitted from any proposed new or modified emission units which the permitting authority on a case-by-case basis, taking into account energy, environmental, and economic impacts and other costs, determines is achievable for such emission unit or modification through application of production processes or available methods, systems, and techniques. In no event shall application of best available radionuclide technology result in emissions of radionuclides which would exceed the ambient annual standard limitation specified in this chapter.

(2) "Critical organ" means the most exposed human organ or tissue exclusive of the skin (integumentary system) and the cornea.

(3) "Dose equivalent" means the product of absorbed dose and appropriate factors to account for differences in biological effectiveness due to the quantity of radiation and its distribution in the body.

(4) "Radionuclide" means any nuclide that emits radiation.

(5) "Rem" means a unit of dose equivalent radiation.

(6) "Whole body" means all human organs or tissue exclusive of the skin (integumentary system) and the cornea.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-030, filed 5/7/86.]

WAC 173-480-040 Ambient standard. Emissions of radionuclides in the air shall not cause a maximum accumulated dose equivalent of more than 25 mrem/y to the whole body or 75 mrem/y to a critical organ of any member of the public. Doses due to radon-220, radon-222, and their respective decay products are excluded from these limits. Compliance with the standard shall be determined by procedures in WAC 173-480-070.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-040, filed 5/7/86.]

WAC 173-480-050 General standards for maximum permissible emissions. (1) All radionuclide emission units are required to meet the emission standards in this chapter. At a minimum all emission units shall meet WAC 402-10-010 requiring every reasonable effort to maintain radioactive materials in effluents to unrestricted areas, as low as reasonably achievable (ALARA). For the purposes of this chapter, control equipment of facilities operating under ALARA shall be defined as reasonably available control technology (RACT).

(2) PSD: The emission requirements for an emission unit of radionuclides shall be the same for all areas of the state independent of prevention of significant deterioration (PSD) classification.

(3) Whenever another federal or state regulation or limitation in effect controls the emission of radionuclides to the ambient air, the more stringent control of emissions shall govern.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-050, filed 5/7/86.]

WAC 173-480-060 Emission standards for new and modified emission units. (1) Whenever the construction, installation or establishment of a new emission unit subject to this chapter is contemplated, the project shall utilize best available radionuclide control technology (BARCT).

(2) Addition to, enlargement, modification, replacement, alteration of any process or emission unit or replacement of air pollution control equipment which will significantly change potential radionuclide emissions or significantly change the dose equivalent will require the proposed project to utilize best available radionuclide control technology (BARCT) for emission control.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-060, filed 5/7/86.]

WAC 173-480-070 Emission monitoring and compliance procedures. (1) The procedures specified in chapter 402-80 WAC shall be used to determine compliance with the standard. Radionuclide emissions shall be determined and dose equivalents to members of the public shall be calculated using department of social and health services approved sampling procedures, department of social and health services approved models, or other procedures, including those based on environmental measurements that department of social and health services has determined to be suitable.

(2) Compliance with this standard shall be determined by calculating the dose to members of the public at the point of maximum annual air concentration in an unrestricted area where any member of the public may be.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-070, filed 5/7/86.]

WAC 173-480-080 Regulatory actions and penalties.

(1) The department or any activated local air pollution control authority may enforce this chapter with the provisions of WAC 173-403-170, Regulatory actions; and 173-403-180, Criminal penalties.

(2) The responsible person may also be subject to the provisions of RCW 34.04.030, Emergency rules and amendments; 70.98.130, Administrative procedure; 70.98.140, Injunction proceedings; and 70.98.200, Penalties as cited by the department of social and health services.

[Statutory Authority: RCW 70.94.331. 86-10-053 (Order 86-04), § 173-480-080, filed 5/7/86.]

Chapter 173-481 WAC

AMBIENT AIR QUALITY AND ENVIRONMENTAL STANDARDS FOR FLUORIDES

(Formerly chapter 18-48 WAC)

WAC

173-481-010	Purpose.
173-481-020	Applicability.
173-481-030	Definitions.
173-481-100	Forage standards.
173-481-110	Ambient standards.
173-481-150	Compliance with standards.
173-481-160	Sampling and analysis.

WAC 173-481-010 Purpose. This chapter promulgated under RCW 70.94.305 and 70.94.331 establishes fluoride standards for the protection of livestock and vegetation. Standards address the fluoride content of forage and gaseous fluorides in the ambient air.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-010, filed 9/16/87.]

WAC 173-481-020 Applicability. The provisions of this chapter apply to all areas of the state of Washington.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-020, filed 9/16/87.]

WAC 173-481-030 Definitions. Unless a different meaning is clearly required by context, words and phrases used in this chapter shall have the following meanings;

[Title 173 WAC—p 882]

general terms common with other chapters of Title 173 WAC as defined in chapter 173-403 WAC, and terms specific to standards for fluorides as defined below:

(1) "Forage" means grasses, pasture and other vegetation that is consumed or is intended to be consumed by livestock.

(2) "Cured forage" means hay, straw, ensilage that is consumed or is intended to be consumed by livestock.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-030, filed 9/16/87.]

WAC 173-481-100 Forage standards. (1) All sampling to determine compliance with these standards shall be conducted in locations and during time periods consistent with protecting livestock and vegetation.

(2) The fluoride content of forage calculated by dry weight shall not exceed:

(a) Forty parts per million fluoride ion (40 ppm F⁻) average for any twelve consecutive months.

(b) Sixty parts per million fluoride ion (60 ppm F⁻) each month for more than two consecutive months.

(c) Eighty parts per million fluoride ion (80 ppm F⁻) more than once in any two consecutive months.

(3) In areas where cattle are not grazed continually, but are fed cured forage part of the year, the fluoride content of the cured forage shall be used as the forage fluoride content for as many months as it is fed to establish the yearly average.

(4) Cured forage grown for sale as livestock feed shall not exceed forty parts per million fluoride ion (40 ppm F⁻) by dry weight after curing or preparing for sale.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-100, filed 9/16/87.]

WAC 173-481-110 Ambient standards. (1) All sampling to determine compliance with these standards shall be conducted in locations and during time periods consistent with protecting livestock and vegetation.

(2) Gaseous fluorides in the ambient air calculated as HF at standard conditions shall not exceed:

(a) Three and seven-tenths micrograms per cubic meter (3.7 µg/m³) average for any twelve consecutive hours;

(b) Two and nine-tenths micrograms per cubic meter (2.9 µg/m³) average for any twenty-four consecutive hours;

(c) One and seven-tenths micrograms per cubic meter (1.7 µg/m³) average for any seven consecutive days;

(d) Eighty-four one-hundredths micrograms per cubic meter (0.84 µg/m³) average for any thirty consecutive days;

(e) Five-tenths micrograms per cubic meter (0.5 µg/m³) average for the period March 1 through October 31 of any year.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-110, filed 9/16/87.]

WAC 173-481-150 Compliance with standards. When requested by the department, persons emitting fluorides to the ambient air shall demonstrate their compliance with WAC 173-481-100 and 173-481-110 by conducting a monitoring program approved in writing by the department. All monitoring data shall be submitted to the department.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-150, filed 9/16/87.]

WAC 173-481-160 Sampling and analysis. Sampling and analysis shall be in accordance with techniques approved by and on file with the department. Other sampling and methods of analysis which are equivalent in accuracy, sensitivity, reproducibility and applicability under similar conditions may be used after approval by the department.

[Statutory Authority: Chapter 70.94 RCW. 87-19-073 (Order 87-21), § 173-481-160, filed 9/16/87.]

Chapter 173-490 WAC

EMISSION STANDARDS AND CONTROLS FOR SOURCES EMITTING VOLATILE ORGANIC COMPOUNDS (VOC)

WAC

173-490-010	Policy and purpose.
173-490-020	Definitions.
173-490-025	General applicability.
173-490-030	Registration and reporting.
173-490-040	Requirements.
173-490-080	Exceptions and alternative methods.
173-490-090	New source review.
173-490-200	Petroleum refinery equipment leaks.
173-490-201	Petroleum liquid storage in external floating roof tanks.
173-490-202	Leaks from gasoline transport tanks and vapor collection systems.
173-490-203	Perchloroethylene dry cleaning systems.
173-490-204	Graphic arts systems.
173-490-205	Surface coating of miscellaneous metal parts and products.
173-490-207	Surface coating of flatwood paneling.
173-490-208	Aerospace assembly and component coating operations.

DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER

173-490-070	Schedule of control dates. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-070, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-070, filed 5/8/79.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.
173-490-071	Alternative schedule of control dates. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-071, filed 8/20/80.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.
173-490-120	Compliance schedules. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-120, filed 5/8/79.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.
173-490-130	Regulatory actions. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-130, filed 5/8/79.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.
173-490-135	Criminal penalties. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-135, filed 5/8/79.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.
173-490-140	Appeals. [Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-140, filed 5/8/79.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.

173-490-150 Variance. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-150, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-150, filed 5/8/79.] Repealed by 91-05-064 (Order 90-06), filed 2/19/91, effective 3/22/91. Statutory Authority: Chapter 70.94 RCW.

173-490-206 Synthesized pharmaceutical products. [Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-206, filed 8/20/80.] Repealed by 82-16-021 (Order DE 82-22), filed 7/27/82. Statutory Authority: Chapters 70.94 and 43.21A RCW.

WAC 173-490-010 Policy and purpose. (1) It is the policy of the department of ecology (ecology) under the authority vested in it by chapter 43.21A RCW to provide for the systematic control of air pollution from air contaminant sources and for the proper development of the state's natural resources.

(2) It is the purpose of this chapter to establish technically feasible and reasonably attainable standards for sources emitting volatile organic compounds (VOCs) and revise such standards as new information and better technology are developed and become available.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-010, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-010, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-010, filed 5/8/79.]

WAC 173-490-020 Definitions. The definitions of terms contained in chapter 173-400 WAC are by this reference incorporated into this chapter. Unless a different meaning is clearly required by context, the following words and phrases, as used in this chapter, shall have the following meanings:

(1) "Bottom loading" means the filling of a tank through a line entering the bottom of the tank.

(2) "Bulk gasoline plant" means a gasoline storage and transfer facility that receives more than ninety percent of its annual gasoline throughput by transport tank, and reloads gasoline into transport tanks.

(3) "Class II hardboard paneling finish" means finishes which meet the specifications of Voluntary Product Standard PS-59-73 as approved by the American National Standards Institute.

(4) "Closed refinery system" means a system that will process or dispose of those VOCs collected from another system. The mass quantity of collected VOCs emitted to the ambient air from the closed refinery system shall not exceed that required for a disposal system.

(5) "Condensate" means hydrocarbon liquid separated from a gas stream which condenses due to changes in the temperature or pressure and remains liquid at standard conditions.

(6) "Condenser" means a device for cooling a gas stream to a temperature where specific VOCs become liquid and are removed.

(7) "Control system" means one or more control devices, including condensers, that are designed and operated to reduce the quantity of VOCs emitted to the atmosphere.

(8) "Crude oil" means a naturally occurring mixture which consists of hydrocarbons and sulfur, nitrogen or

oxygen derivatives of hydrocarbons which is a liquid at standard conditions.

(9) "Cutback asphalt" means an asphalt that has been blended with petroleum distillates to reduce the viscosity for ease of handling and lower application temperature. An inverted emulsified asphalt shall be considered a cutback asphalt when the continuous phase of the emulsion is a cutback asphalt.

(10) "Disposal system" means a process or device that reduces the mass quantity of the VOC that would have been emitted to the ambient air by at least ninety percent prior to their actual emission.

(11) "Dry cleaning facility" means a facility engaged in the cleaning of fabrics in an essentially nonaqueous solvent by means of one or more washes in solvent, extraction of excess solvent by spinning, and drying by tumbling in an airstream. The facility includes, but is not limited to, any washer, dryer, filter and purification system(s), waste disposal system(s), holding tank(s), pump(s) and attendant piping and valve(s).

(12) "External floating roof" means a storage vessel cover in an open top tank consisting of a double deck or pontoon single deck which rests upon and is supported by the liquid being contained and is equipped with a closure seal or seals to close the space between the roof edge and tank wall.

(13) "Flexographic printing" means the application of words, designs and pictures to a substrate by means of a roll printing technique in which the pattern to be applied is raised above the printing roll and the image carrier is made of rubber or other elastomeric materials.

(14) "Gasoline" means a petroleum distillate which is a liquid at standard conditions and has a true vapor pressure greater than 200 mm of Hg (4 psia) at 20°C, and is used as a fuel for internal combustion engines.

(15) "Gasoline dispensing facility" means any site dispensing gasoline into motor vehicle fuel tanks from stationary storage tanks.

(16) "Gasoline loading terminal" means a gasoline transfer facility that receives more than ten percent of its annual gasoline throughput solely or in combination by pipeline, ship or barge, and loads gasoline into transport tanks.

(17) "Hardboard" means a panel manufactured primarily from interfelted lignocellulosic fibers which are consolidated under heat and pressure in a hot press.

(18) "Hardwood plywood" means plywood whose surface layer is a veneer of hardwood.

(19) "Lease custody transfer" means the transfer of produced crude oil or condensate, after processing or treating in the producing operations, from storage tanks or automatic transfer facilities to pipelines or any other forms of transportation.

(20) "Liquid-mounted seal" means a primary seal mounted in continuous contact with the liquid between the tank wall and the floating roof.

(21) "Liquid service" means equipment that processes, transfers or contains a VOC or VOCs in the liquid phase.

(22) "Low organic solvent coating" refers to coatings which contain less organic solvent than the conventional coatings used by the industry. Low organic solvent coatings

include water-borne, higher solids, electrodeposition and powder coatings.

(23) "Natural finish hardwood plywood panels" means panels whose original grain pattern is enhanced by essentially transparent finishes frequently supplemented by fillers and toners.

(24) "Packaging rotogravure printing" means rotogravure printing upon paper, paper board, metal foil, plastic film, and other substrates, which are, in subsequent operations, formed into packaging products and labels for articles to be sold.

(25) "Petroleum liquids" means crude oil, condensate, and any finished or intermediate products manufactured or extracted in a petroleum refinery.

(26) "Petroleum refinery" means a facility engaged in producing gasoline, aromatics, kerosene, distillate fuel oils, residual fuel oils, lubricants, asphalt, or other products by distilling crude oils or redistilling, cracking, extracting or reforming unfinished petroleum derivatives. Not included are facilities re-refining used motor oils or waste chemicals, processing finished petroleum products, separating blended products, or air blowing asphalt.

(27) "Prime coat" means the first of two or more films of coating applied in an operation.

(28) "Printed interior panels" means panels whose grain or natural surface is obscured by fillers and basecoats upon which a simulated grain or decorative pattern is printed.

(29) "Proper attachment fittings" means hardware for the attachment of gasoline transfer or vapor collection lines that meet or exceed industrial standards or specifications and the standards of other agencies or institutions responsible for safety and health.

(30) "Publication rotogravure printing" means rotogravure printing upon paper which is subsequently formed into books, magazines, catalogues, brochures, directories, newspaper supplements, and other types of printed materials.

(31) "Refinery unit" means a set of components that are a part of a basic process operation, such as distillation, hydrotreating, cracking or reforming of hydrocarbons.

(32) "Roll printing" means the application of words, designs, and pictures to a substrate usually by means of a series of hard rubber or steel rolls each with only partial coverage.

(33) "Rotogravure printing" means the application of words, designs, and pictures to a substrate by means of a roll printing technique which involves intaglio or recessed image areas in the form of cells.

(34) "Single coat" means only one film of coating is applied to the metal substrate.

(35) "Submerged fill line" means a pipe, tube, fitting or other hardware for loading liquids into a tank with either a discharge opening flush with the tank bottom; or with a discharge opening below the lowest normal operating drawoff level or that level determined by a liquid depth two and one half times the fill line diameter when measured in the main portion of the tank, but not in sumps or similar protrusions.

(36) "Submerged loading" means the filling of a tank with a submerged fill line descending nearly to the bottom.

(37) "Suitable closure or cover" means a door, hatch, cover, lid, pipe cap, pipe blind, valve or similar device that prevents the accidental spilling or emitting of VOC. Pressure relief valves, aspirator vents or other devices

specifically required for safety and fire protection are not included.

(38) "Thin particleboard" means a manufactured board one-quarter inch or less in thickness made of individual wood particles which have been coated with a binder and formed into flat sheets by pressure.

(39) "Tileboard" means paneling that has a colored waterproof surface coating.

(40) "Topcoat" means the final film or series of films of coating applied in a two-coat (or more) operation.

(41) "Transport tank" means a container used for shipping gasoline on land.

(42) "True vapor pressure" means the equilibrium partial pressure of a petroleum liquid as determined with methods described in American Petroleum Institute Bulletin 2517, 1980.

(43) "Unit turnaround" means the procedure of shutting down, repairing, inspecting, and restarting a unit.

(44) "Valves not externally regulated" means valves that have no external controls, such as in-line check valves.

(45) "Vapor collection system" means a closed system to conduct vapors displaced from a tank being filled into the tank being emptied, a vapor holding tank, or a vapor control system.

(46) "Vapor control system" means a system designed and operated to reduce or limit the emission of VOCs, or to recover the VOCs to prevent their emission into the ambient air.

(47) "Vapor-mounted seal" means a primary seal mounted so there is an annular vapor space underneath the seal. The annular vapor space is bounded by the bottom of the primary seal, the tank wall, the liquid surface, and the floating roof.

(48) "Volatile organic compound (VOC)" means any organic compound which participates in atmospheric photochemical reactions; that is, any organic compound other than those which the administrator designates as having negligible photochemical reactivity. VOC may be measured by a reference method, an equivalent method, an alternative method or by procedures specified under 40 CFR Part 60. A reference method, an equivalent method, or an alternative method, however, may also measure nonreactive organic compounds. In such cases, an owner or operator may exclude the nonreactive organic compounds when determining compliance with a standard.

(49) "Waxy, heavy pour crude oil" means a crude oil with a pour point of 50°F or higher as determined by the American Society for Testing and Materials Standard D97-66, "Test for Pour Point of Petroleum Oils."

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-020, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-020, filed 7/27/82. Statutory Authority: RCW 70.94.331, 70.94.510, and 70.94.785. 81-03-003 (Order DE 80-54), § 173-490-020, filed 1/8/81. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-020, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-020, filed 5/8/79.]

WAC 173-490-025 General applicability. In addition to the general applicability of chapter 173-400 WAC to all emission sources, specific emission standards listed in this

chapter will take precedence over the general emission standards of chapter 173-400 WAC.

(1) This chapter shall apply to the specified emission sources of VOCs located in or operating within designated ozone nonattainment areas of the state of Washington.

(2) This chapter does not apply to those sources under the jurisdiction of the energy facility site evaluation council (EFSEC).

(3) A source of VOC emissions not belonging to any of the categories listed in WAC 173-490-030 nor specifically identified in any section, but which is located on the same or adjacent property and owned or operated by the same person as a regulated emission source, shall not be required to comply with the regulations of this chapter.

(4) Sources of VOC emissions may be exempted, by the director, from any or all requirements to control or reduce the emissions of VOCs when:

(a) The source is a development operation and the equipment is used exclusively for research, laboratory analysis or determination of product quality and commercial acceptance, provided emissions of VOCs from such operations do not exceed 300 kg (660 lbs) per month; or

(b) The source has emissions of VOCs which do not exceed 18 kg (40 lbs) per month and registration is not required under WAC 173-490-030; or

(c) The source is a spray booth which is used solely for maintenance and utility activities and whose emissions do not exceed 18 kg (40 lbs) per month.

(5) Sources of VOCs may be granted exemptions from emissions standards for a period not to exceed thirty days if the source is a newly permitted source which is to replace a similar permitted source and the new source is intended to utilize the existing emission control system. This provision is intended to apply to a break-in period prior to the shut-down and removal of the existing source.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-025, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-025, filed 7/27/82. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-025, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-025, filed 5/8/79.]

WAC 173-490-030 Registration and reporting. (1) The owner or operator of a stationary emission source of VOCs in the following source categories and located in a designated ozone nonattainment area shall register the source with ecology unless registration is required by an authority or the energy facility site evaluation council (EFSEC).

(a) Petroleum refineries.

(b) Petroleum liquid storage tanks.

(c) Gasoline loading terminals.

(d) Bulk gasoline plants.

(e) Gasoline dispensing facilities.

(f) Surface coaters.

(g) Open top vapor degreasers.

(h) Conveyorized degreasers.

(i) Gasoline transport tanks.

(j) Vapor collection systems.

(k) Perchloroethylene dry cleaning systems.

(l) Graphic arts systems.

(m) Surface coaters of miscellaneous metal parts and products.

(n) Synthesized pharmaceutical manufacturing facilities.

(o) Flatwood panel manufacturers and surface finishing facilities.

(2) A new emission source of VOCs that must comply with any requirements in WAC 173-490-040, 173-490-200, 173-490-201, 173-490-202, 173-490-203, 173-490-204, 173-490-205, 173-490-206 and 173-490-207, shall comply with the requirements of WAC 173-400-100 and shall register with ecology or an authority prior to operation of the new source, and shall submit sufficient information to demonstrate that the new source is capable of complying with the requirements in this chapter. An opportunity shall be provided for an inspection of the new source by ecology or local authority inspectors prior to its operation.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-030, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-030, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-030, filed 5/8/79.]

WAC 173-490-040 Requirements. To demonstrate compliance with this chapter, refer to WAC 173-400-105.

(1) Petroleum refineries.

This chapter shall apply to all petroleum refineries with a crude oil or feed stock capacity greater than one million four hundred thirty thousand liters (9,000 bbl) per day.

(a) Vacuum producing system.

(i) Noncondensable VOC from vacuum producing systems shall be piped to an appropriate firebox, incinerator or to a closed refinery system.

(ii) Hot wells associated with contact condensers shall be tightly covered and the collected VOC introduced into a closed refinery system.

(b) Wastewater separator.

(i) Wastewater separator forebays shall incorporate a floating pontoon or fixed solid cover with all openings sealed, totally enclosing the compartmented liquid contents, or a floating pontoon or a double deck-type cover equipped with closure seals between the cover edge and compartment wall.

(ii) Accesses for gauging and sampling shall be designed to minimize VOC emissions during actual use. All access points shall be closed with suitable covers when not in use.

(c) Process unit turnaround.

(i) The VOC contained in a process unit to be depressurized for turnaround shall be introduced to a closed refinery system, combusted by a flare, or vented to a disposal system.

(ii) The pressure in a process unit following depressurization for turnaround shall be less than five psig before venting to the ambient air.

(iii) Venting or depressurization to the ambient air of a process unit for turnaround at a pressure greater than five psig shall be allowed if the owner demonstrates the actual emission of VOC to the ambient air is less than permitted by WAC 173-490-040 (1)(c)(ii).

(d) Maintenance and operation of emission control equipment. Equipment for the reduction, collection or disposal of VOC shall be maintained and operated in a

manner consistent with the level of maintenance and house-keeping of the overall plant.

(2) Petroleum liquid storage tanks.

(a) All fixed-roof tanks (except as noted in subparagraph (d) of this subsection) storing volatile organic petroleum liquids with a true vapor pressure as stored greater than 78 mm of Hg (1.5 psi) at actual monthly average storage temperatures and having a capacity greater than one hundred fifty thousand liters (40,000 gallons) shall comply with one of the following:

(i) Meet the equipment specifications and maintenance requirements of the federal standards of performance for new stationary sources - Storage Vessels for Petroleum Liquids (40 CFR 60, subpart K); or

(ii) Be retrofitted with a floating roof or internal floating cover using a metallic seal or a nonmetallic resilient seal at least meeting the equipment specifications of the federal standards referred to in WAC 173-490-040 (2)(a)(i) or its equivalent; or

(iii) Be fitted with a floating roof or internal floating cover meeting the manufacturer's specifications in effect when installed.

(b) All seals used in WAC 173-490-040 (2)(a)(ii) and (iii) are to be maintained in good operating condition and the seal fabric shall contain no visible holes, tears or other openings.

(c) All openings not related to safety are to be sealed with suitable closures.

(d) Tanks used for the storage of gasoline in bulk gasoline plants and equipped with vapor balance systems as required in WAC 173-490-040 (4)(b) shall be exempt from the requirements of WAC 173-490-040(2).

(3) Gasoline loading terminals.

(a) This chapter shall apply to all gasoline loading terminals with an average annual daily gasoline throughput greater than seventy-five thousand liters (20,000 gallons).

(b) Loading facilities. Facilities for the purpose of loading gasoline into any transport tank shall be equipped with a vapor recovery system (VRS) as described in WAC 173-490-040 (3)(c) and comply with the following conditions:

(i) The loading facility shall employ submerged or bottom loading for all transport tanks.

(ii) The VRS shall be connected to the transport tank being loaded and shall operate during the entire loading of every transport tank loaded at the facility.

(iii) The loading of all transport tanks shall be performed such that ninety percent by weight of the gasoline vapors displaced during filling are prevented from being released to the ambient air. Emissions from pressure relief valves shall not be included in the controlled emissions when the back pressure in the VRS collection lines is lower than the relief pressure setting of the transport tank's relief valves.

(iv) All loading lines and vapor lines shall be equipped to close automatically upon disconnect. The point of closure shall be on the tank side of any hose or intermediate connecting line.

(c) Vapor recovery system (VRS). The VRS shall be designed and built according to accepted industrial practices and meet the following conditions:

(i) The VRS shall prevent at least ninety percent by weight of the gasoline vapors displaced during loading of each transport tank from entering the ambient air and in no case shall the gasoline vapors emitted to the ambient air exceed eighty milligrams per liter of gasoline loaded.

(ii) The VRS shall be equipped with a signal device to alert personnel when the system is not operating or unintentionally shuts down.

(iii) The back pressure in the VRS collection lines shall not exceed the transport tank's pressure relief settings.

(d) Alternative loading facility. The loading of transport tanks by other means and using other vapor control systems shall require the facility owner to demonstrate that the emission of gasoline vapors to the ambient air is less than eighty milligrams per liter of gasoline loaded.

(4) Bulk gasoline plants.

(a) This chapter shall apply to all bulk gasoline plants with an annual average daily gasoline throughput greater than fifteen thousand liters (4,000 gallons).

(b) Storage tanks. All storage tanks with a capacity greater than two thousand one hundred liters (550 gallons) and used for the storage of gasoline shall comply with the following conditions:

(i) Each storage tank shall be equipped with a submerged fill line.

(ii) Each storage tank shall be equipped for vapor balancing of gasoline vapors with transport tanks during gasoline transfer operations.

(iii) The vapor line fittings on the storage tank side of break points with the transport tank vapor connection pipe or hose shall be equipped to close automatically upon planned or unintentional disconnect.

(iv) The pressure relief valves on storage tanks shall be set at the highest possible pressure consistent with local and state codes for fire and safety.

(c) Transport tanks. All transport tanks, except those meeting the conditions in WAC 173-490-040 (4)(d), transferring gasoline with storage tanks in a bulk gasoline plant shall comply with the following conditions:

(i) The transport tank shall be equipped with the proper attachment fittings to make vapor tight connections for vapor balancing with storage tanks.

(ii) The vapor line fittings on the transport tank side of break points with the storage tank connection pipe or hose shall be equipped to close automatically upon planned or unintentional disconnect.

(iii) The pressure relief valves on transport tanks shall be set at the highest possible pressure consistent with local and state codes for fire and safety.

(d) Transport tanks used for gasoline and meeting all of the following conditions shall be exempt from the requirement to be equipped with any attachment fitting for vapor balance lines:

(i) The transport tank is used exclusively for the delivery of gasoline into storage tanks of a facility exempt from the vapor balance requirements of WAC 173-490-040(5); and

(ii) The transport tank has a total capacity less than fifteen thousand liters (4,000 gallons) and is of a compartmented design and construction requiring the installation of four or more separate vapor balance fittings.

(e) Gasoline transfer operations. No owner or operator of a bulk gasoline plant or transport tank shall allow the transfer of gasoline between a transport tank and a storage tank except under the following conditions:

(i) All tanks shall be submerged filled or bottom loaded.

(ii) The loading of all tanks, except those exempted under WAC 173-490-040 (4)(d) shall be performed such that ninety percent by weight of the gasoline vapors displaced during filling are prevented from being released into the ambient air. Emissions from pressure relief valves shall not be included in the controlled emissions.

(f) Equipment or system failures. Failures or leaks in the vapor balance system shall be limited by the following conditions:

(i) During the months of April, May, June, July, August, September and October, failures of the vapor balance system to comply with this chapter shall require that gasoline transfer operations stop for the failed part of the system. Other transfer points that can operate in compliance may be used.

(ii) Loading or unloading of the transport tank connected to the failed part of the vapor balance system may be completed.

(iii) Breakdowns and upset conditions during all months of the year shall also comply with the provisions of WAC 173-400-105(5).

(g) The owner or operator of a bulk gasoline plant or transport tank shall take all reasonable necessary measures to prevent the spilling, discarding in sewers, storing in open containers or handling of gasoline in a manner on the plant site that will result in evaporation to the ambient air.

(5) Gasoline dispensing facilities (Stage I).

(a) This chapter shall apply to all gasoline dispensing facilities with a total annual gasoline output greater than seven hundred fifty-seven thousand liters (200,000 gallons) or sixty-three thousand one hundred liters (16,670 gallons) per month and total gasoline storage capacity greater than thirty-eight thousand liters (10,000 gallons).

(b) All gasoline storage tanks of the facilities defined in WAC 173-490-040 (5)(a) shall be equipped with submerged or bottom fill lines and fittings for vapor balancing gasoline vapors with the delivery transport tank.

(c) Gasoline storage tanks with offset fill lines shall be exempt from the requirement of WAC 173-490-040 (5)(b) if installed prior to January 1, 1979.

(d) The vapor balance system (for the purpose of measuring compliance with the emission control efficiency) shall consist of the transport tank, gasoline vapor transfer lines, storage tank and all tank vents. The vapor balance system shall prevent at least ninety percent of the displaced gasoline vapors from entering the ambient air. A vapor balance system that is designed, built and operated according to accepted industrial practices will satisfy this requirement.

(e) The owner or operator of a gasoline dispensing facility shall not permit the loading of gasoline into a storage tank equipped with vapor balance fittings unless the vapor balance system is attached to the transport tank and operated satisfactorily.

(6) Surface coaters.

The operation of a coater and dryer, that may serve one or more process lines, shall comply with the following emission limits if the potential uncontrolled emissions of

VOC from the coater, flashoff areas, and dryer would be greater than 18 kg (40 pounds) in any given twenty-four hour period. The emission limits and uncontrolled emission quantity shall include the additional quantity of emissions from the dryer during the twelve hour period after application of the coating.

Process	Limitation	
	Grams/Liter of Coating (Excluding Water)	lb/Gal. of Coating (Excluding Water)
Can Coating		
Sheet basecoat and overvarnish; two-piece can exterior	340	2.8
Two and three piece can interior body spray, two piece can exterior end	510	4.2
Side-seam spray	660	5.5
End sealing compound	440	3.7
Coil coating	310	2.6
Fabric coating	350	2.9
Vinyl coating	450	3.8
Paper coating	350	2.9
Auto and light duty truck coating		
Prime	230	1.9
Topcoat	340	2.8
Repair	580	4.8
Metal furniture coating	360	3.0
Magnet wire coating	200	1.7
Large appliance coating	340	2.8

(7) Open top vapor degreasers.

(a) All open top vapor degreasers shall:

(i) Have a cover that may be readily opened and closed.

When a degreaser is equipped with a lip exhaust, the cover shall be located below the lip exhaust. When a degreaser has a freeboard ratio equal to or greater than 0.75 and the opening is greater than one square meter (10 square feet) the cover shall be power operated.

(ii) Have one of the following:

(A) A freeboard ratio equal to or greater than 0.75; or

(B) A freeboard chiller; or

(C) A closed design such that the cover opens only when the part enters or exits the degreaser.

(iii) Be equipped with at least the following three safety switches:

(A) Condenser-flow switch and thermostat (shuts off sump heat if coolant is either not circulating or too warm); and

(B) Spray safety switch (shuts off spray pump if the vapor level drops excessively); and

(C) Vapor level control thermostat (shuts off sump heat when vapor level rises too high).

(iv) Post a permanent and conspicuous pictograph or instructions clearly explaining the following work practices:

(A) Do not degrease porous or absorbent materials such as cloth, leather, wood or rope.

(B) The cover of the degreaser should be closed at all times except when processing workloads.

(C) When the cover is open the lip of the degreaser should not be exposed to steady drafts greater than 15.3 meters per minute (50 feet per minute).

(D) Rack parts so as to facilitate solvent drainage from the parts.

(E) Workloads should not occupy more than one-half of the vapor-air interface area.

(F) When using a powered hoist, the vertical speed of parts in and out of the vapor zone should be less than 3.35 meters per minute (11 feet per minute).

(G) Degrease the workload in the vapor zone until condensation ceases.

(H) Spraying operations should be done within the vapor layer.

(I) Hold parts in the degreaser until visually dry.

(J) When equipped with a lip exhaust, the fan should be turned off when the cover is closed.

(K) The condenser water shall be turned on before the sump heater when starting up a cold vapor degreaser. The sump heater shall be turned off and the solvent vapor layer allowed to collapse before closing the condenser water when shutting down a hot vapor degreaser.

(L) Water shall not be visible in the solvent stream from the water separator.

(b) A routine inspection and maintenance program shall be implemented for the purpose of preventing and correcting solvent losses. For example, leaks from drain taps, cracked gaskets, and malfunctioning equipment must be repaired immediately.

(c) Sump drainage and transfer of hot or warm solvent shall be carried out using threaded or other leakproof couplings.

(d) Still and sump bottoms shall be kept in closed containers.

(e) Waste solvent shall be stored in covered containers and returned to the supplier or to a firm which processes solvents for disposal.

(8) Conveyorized degreasers.

(a) The owner or operator of conveyorized cold cleaners and conveyorized vapor degreasers shall comply with the following operating requirements:

(i) Exhaust ventilation shall not exceed twenty cubic meters per minute per square meter (65 cfm per ft.²) of degreaser opening, unless necessary to meet OSHA requirements.

(ii) Post in the immediate work area a permanent and conspicuous pictograph or instructions clearly explaining the following work practices:

(A) Rack parts for best drainage.

(B) Maintain vertical speed of conveyed parts to less than 3.35 meters per minute (11 feet per minute).

(C) The condenser water shall be turned on before the sump heater when starting up a cold vapor degreaser. The sump heater shall be turned off and the solvent vapor layer allowed to collapse before closing the condenser water when shutting down a hot vapor degreaser.

(D) Water shall not be visible in the solvent stream from the water separator.

(iii) Vapor degreasers shall be equipped with at least the following three safety switches:

(A) Condenser flow switch and thermostat (shuts off sump heat if coolant is either not circulating or too warm); and

(B) Spray safety switch (shuts off spray pump if the vapor level drops excessively); and

(C) Vapor level control thermostat (shuts off sump heat when vapor level rises too high).

(b) A routine inspection and maintenance program shall be implemented for the purpose of preventing and correcting

solvent losses. For example, leaks from drain taps, cracked gaskets, and malfunctioning equipment must be repaired immediately.

(c) Sump drainage and transfer of hot or warm solvent shall be carried out using threaded or other leakproof couplings.

(d) Still and sump bottoms shall be kept in closed containers.

(e) Waste solvent shall be stored in covered containers and returned to the supplier or to a firm which processes solvents for disposal.

(f) All conveyORIZED cold cleaners and conveyORIZED vapor degreasers with air/vapor interfaces of 2.0 m² or greater shall have a carbon adsorption system, exhausting less than 25 ppm of solvent averaged over a complete adsorption cycle (based on exhaust ventilation of 15 m³ per min per m² of air/vapor area, when downtime covers are open), or a system with control effectiveness equal to or better than a carbon adsorption system.

(9) Cutback asphalt paving.

(a) All paving applications of cutback asphalts are prohibited during the months of April, May, June, July, August, September and October, except as provided for in WAC 173-490-040 (9)(b).

(b) The following paving uses and applications of cutback asphalts are permitted during all months of the year.

(i) As a penetrating prime coat on aggregate bases prior to paving.

(ii) The manufacture of patching mixes used exclusively for pavement maintenance and needed to be stockpiled for times longer than one month.

(iii) All paving uses when the temperature during application is below 10°C (50°F). Any person using cutback asphalt for paving shall demonstrate that the ambient air temperature at 8 a.m. (PST) is below 50°F. The paving application of cutback asphalt when the ambient air temperature is 50°F or higher is in violation of this chapter.

(10) Cold cleaners.

(a) The owners or operators of all cold cleaners shall comply with the following equipment specifications:

(i) Be equipped with a cover that is readily opened and closed.

(ii) Be equipped with a drain rack that returns the drained solvent to the solvent bath.

(iii) Have a freeboard ratio of at least 0.5.

(iv) Have a visible fill line.

(b) An owner or operator of a cold cleaner shall be responsible for following the required operating parameters and work practices. The owner shall post and maintain in the work area of each cold cleaner a pictograph or instructions clearly explaining the following work practices:

(i) The solvent level shall not be above the fill line.

(ii) The spraying of parts to be cleaned shall be performed only within the confines of the cold cleaner.

(iii) The cover of the cold cleaner shall be closed when not in use or when parts are being soaked or cleaned by solvent agitation.

(iv) Solvent-cleaned parts shall be rotated to drain cavities or blind holes and then set to drain until dripping has stopped.

(v) Waste solvent shall be stored in covered containers and returned to the supplier or to a firm which processes solvents for disposal.

(c) The owner or operator shall maintain cold cleaners in good working condition and free of solvent leaks.

(d) If the solvent has a vapor pressure greater than 2.0 kPa (0.3 psi) measured at 38°C (100°F), or if the solvent is agitated or heated, then the cover must be designed so that it can be easily operated with one hand.

(e) If the solvent has a vapor pressure greater than 4.3 kPa (0.6 psi) measured at 38°C (100°F), then the drainage facility must be internal, so that parts are enclosed under the cover while draining. The drainage facility may be external for applications where an internal type cannot fit into the cleaning system.

(f) If the solvent has a vapor pressure greater than 4.3 kPa (0.6 psi) measured at 38°C (100°F), or if the solvent is heated above 50°C (120°F), one of the following solvent vapor control systems must be used:

(i) The freeboard ratio must be equal to or greater than 0.70; or

(ii) Water must be kept over the solvent. The solvent must be more dense and insoluble in water.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-040, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-040, filed 7/27/82. Statutory Authority: RCW 70.94.331, 70.94.510, and 70.94.785. 81-03-003 (Order DE 80-54), § 173-490-040, filed 1/8/81. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-040, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-040, filed 5/8/79.]

WAC 173-490-080 Exceptions and alternative methods. (1) Other emission reduction methods may be used if the source operator demonstrates to ecology that they are at least as effective as the required methods; and

(2) The operation of a natural gas-fired incinerator and associated capture system installed for the purpose of complying with this chapter shall be required only during the months of April, May, June, July, August, September and October, unless the operation of such devices is required for purposes of occupational health or safety, or for the control of toxic substances, malodors, or other regulated pollutants.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-080, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-080, filed 7/27/82. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-080, filed 8/20/80. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-080, filed 5/8/79.]

WAC 173-490-090 New source review. The provisions of WAC 173-400-110 shall apply to all new sources and emissions units to which this chapter is applicable.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-090, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 43.21A.080 and 70.94.331. 79-06-011 (Order DE 78-23), § 173-490-090, filed 5/8/79.]

WAC 173-490-200 Petroleum refinery equipment leaks. (1) Specific applicability. This section shall apply to all petroleum refineries as qualified in WAC 173-490-025.

(2) Provisions for specific processes.

(a) The owner(s) or operator(s) of a petroleum refinery shall:

(i) Develop and conduct a monitoring program consistent with the provisions in WAC 173-490-200(3), 173-490-200(4), 173-490-200(5), and 173-400-105;

(ii) Record all leaking components which have a VOC concentration greater than 10,000 ppm when tested according to the provisions in WAC 173-490-200(3) and place an identification tag on each component consistent with the provisions of WAC 173-490-200 (4)(c);

(iii) Correct and retest the leaking component, as defined in WAC 173-490-200 (2)(a)(ii), as soon as practicable, but not later than fifteen days after the leak is recorded. If a leak continues after all reasonable corrective actions have been taken, then the component shall be repaired or replaced on the next scheduled turnaround.

(iv) Identify all leaking components, as defined in WAC 173-490-200 (2)(a)(ii), that cannot be corrected until the refinery unit is shut down for turnaround.

(b) The owner or operator of a petroleum refinery shall not install or operate a valve at the end of a pipe or line containing VOC unless the pipe or line is sealed with a second suitable closure. Exceptions to this requirement are the ends of a pipe or line connected to pressure relief valves, aspirator vents or other devices specifically required to be open for safety protection. The sealing device may be removed only when a sample is being taken or during maintenance operations.

(3) Testing procedures. To demonstrate compliance with this chapter, refer to WAC 173-400-105(5).

(4) Monitoring.

(a) The owner or operator of a petroleum refinery shall conduct a monitoring program consistent with the following provisions:

(i) Monitor yearly by the methods referenced in WAC 173-490-200(3) all pump seals, pipeline valves in liquid service and process drains;

(ii) Monitor quarterly by the methods referenced in WAC 173-490-200(3) all compressor seals, pipeline valves in gaseous service and pressure relief valves in gaseous service;

(iii) Monitor weekly by visual methods all pump seals;

(iv) Monitor immediately any pump seal from which liquids are observed leaking;

(v) Monitor any relief valve within twenty-four hours after it has vented to the atmosphere; and

(vi) After a leaking component is repaired, monitor for leaks prior to return to service.

(b) Pressure relief devices that are connected to an operating flare header, vapor recovery device, inaccessible valves, storage tank valves, and valves that are not externally regulated are exempt from the monitoring requirements in WAC 173-490-200 (4)(a).

(c) The owner or operator of a petroleum refinery, upon the detection of a leaking component, as defined in WAC 173-490-200 (2)(a)(ii), shall affix a weatherproof and readily visible tag, bearing an identification number and the date the leak is located, to the leaking component. This tag shall remain in place until the leak is corrected.

(5) Recordkeeping.

(a) The owner or operator of a petroleum refinery shall maintain a leaking component's monitoring log as specified in WAC 173-490-200 (2)(a)(ii) that shall contain, at a minimum, the following data:

(i) The name of the process unit where the component is located.

(ii) The type of component (e.g., valve, seal).

(iii) The tag number of the component.

(iv) The date on which a leaking component is discovered.

(v) The date on which a leaking component is repaired.

(vi) The date and instrument reading of the recheck procedure after a leaking component is repaired.

(vii) A record of the calibration of the monitoring instrument.

(viii) Those leaks that cannot be repaired until turnaround.

(ix) The total number of components checked and the total number of components found leaking.

(b) Copies of the monitoring log shall be retained by the owner or operator for a minimum of two years after the date on which the record was made or the report prepared.

(c) Copies of the monitoring log shall immediately be made available to ecology, upon verbal or written request, at any reasonable time.

(6) Reporting. The owner or operator of a petroleum refinery shall notify ecology in writing within forty-five days following each quarterly or annual inspection for component leaks when:

(a) The number of discovered leaks has increased by more than ten percent above the number recorded during the last inspection of the same components;

(b) The number of leaking components has increased for two consecutive quarterly or annual inspections;

(c) The number of leaks not corrected within fifteen days exceeds five percent of the leaks detected;

(d) The next scheduled process unit turnaround needed to repair an uncorrectable leak is more than twelve months away.

(7) Petition for alternative monitoring.

(a) After two complete liquid service inspections and five complete gaseous service inspections, the owner or operator of a petroleum refinery may petition the director for alternative monitoring procedures or a reduction in monitoring frequency.

(b) A petition for alternative monitoring procedures shall contain:

(i) The name and address of the company and the name and telephone number of the responsible person over whose signature the petition is submitted;

(ii) A detailed description of the problems encountered under WAC 173-490-200(4); and

(iii) A detailed description of the alternative monitoring procedures and how this alternative procedure will solve or reduce the problems encountered under WAC 173-490-200(4).

(c) A petition for a reduction in monitoring frequency shall contain:

(i) The information requested in WAC 173-490-200 (7)(b)(i);

(ii) A detailed description of the proposed component-monitoring schedule;

(iii) A demonstration by the owner or operator that the facility is currently operating with a low level of component leaks and is committed to a maintenance program that will assure a frequency and severity of component leaks as good as that attainable under WAC 173-490-200(2).

(d) An approved petition for a reduction in monitoring frequency shall begin with the next quarterly inspection and shall be valid for a period of twelve quarters (three years). At the time of the last inspection in the twelve quarters, a new submittal of the information required in WAC 173-490-200 (7)(c) shall be made if the reduced frequency of monitoring is to continue.

(e) Ecology may approve a part or all of a petition for alternative monitoring requested under WAC 173-490-200 (7)(b) or (c). Approval or disapproval will be in writing and within forty-five calendar days of receipt of the petition by ecology. A failure to approve or disapprove a new petition or petition for renewal within the stated time limit shall be taken as an approval.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-200, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-200, filed 8/20/80.]

WAC 173-490-201 Petroleum liquid storage in external floating roof tanks. (1) Specific applicability.

(a) This section shall apply to all petroleum liquid storage vessels equipped with external floating roofs, having capacities greater than 150,000 liters (40,000 gallons), and as qualified in WAC 173-490-025.

(b) This section does not apply to petroleum liquid storage vessels that:

- (i) Are used to store waxy, heavy pour crude oil; or
- (ii) Have capacities less than 1,600,000 liters (420,000 gallons) and are used to store produced crude oil and condensate prior to lease custody transfer; or
- (iii) Contain a petroleum liquid with a true vapor pressure of less than 10.5 kPa (1.5 psia); or
- (iv) Contain a petroleum liquid with a true vapor pressure less than 27.6 kPa (4.0 psia); are of welded construction; and presently possess a metallic-type shoe seal, a liquid-mounted foam seal, a liquid-mounted liquid filled type seal, or other closure device of demonstrated equivalence approved by ecology; or
- (v) Are of welded construction, equipped with a metallic-type shoe primary seal and have secondary seal from the top of the shoe seal to the tank wall (shoe-mounted secondary seal).

(2) Provisions for specific processes.

(a) No owner(s) or operator(s) of a petroleum liquid storage vessel shall store a petroleum liquid in that vessel unless:

- (i) The vessel has been fitted with:
 - (A) A continuous secondary seal extending from the floating roof to the tank wall (rim-mounted secondary seal); or
 - (B) A closure or other device which controls VOC emissions with an effectiveness equal to or greater than a seal required under WAC 173-490-201 (2)(a)(i)(A) and approved by ecology.
- (ii) All seal closure devices meet the following requirements:

(A) There are no visible holes, tears, or other openings in the seal or seal fabric;

(B) The seal is intact and uniformly in place around the circumference of the floating roof between the floating roof and the tank wall; and

(C) For vapor mounted primary seals, the accumulated area of gaps exceeding 0.32 cm (1/8 inch) in width between the secondary seal and the tank wall shall not exceed 21.2 cm² per meter of tank diameter (1.0 in.² per foot of tank diameter), as determined by the method in WAC 173-490-201(3).

(iii) All openings in the external floating roof, except for automatic bleeder vents, rim space vents, and leg sleeves, are:

(A) Equipped with covers, seals, or lids in the closed position except when the openings are in actual use; and

(B) Equipped with projections into the tank which remain below the liquid surface at all times.

(iv) Automatic bleeder vents are closed at all times except when the roof is floated off or landed on the roof leg supports;

(v) Rim vents are set to open when the roof is being floated off the leg supports or at the manufacturer's recommended setting; and

(vi) Emergency roof drains are provided with slotted membrane fabric covers or equivalent covers which cover at least ninety percent of the area of the opening.

(b) The owner(s) or operator(s) of a petroleum liquid storage vessel with an external floating roof subject to this chapter shall:

(i) Perform routine inspections annually in order to insure compliance with WAC 173-490-201 (2)(a) and the inspection shall include a visual inspection of the secondary seal gap;

(ii) Measure the secondary seal gap annually in accordance with WAC 173-490-201(3) when the floating roof is equipped with a vapor-mounted primary seal; and

(iii) Maintain records of the types of volatile petroleum liquids stored, the maximum true vapor pressure of the liquid as stored, and the results of the inspections performed in WAC 173-490-201 (2)(b)(i) and (ii).

(c) The owner(s) or operator(s) of a petroleum liquid storage vessel with an external floating roof exempted from this chapter by WAC 173-490-201 (1)(b)(iii), but containing a petroleum liquid with a true vapor pressure greater than 7.0 kPa (1.0 psi), shall maintain records of the average monthly storage temperature, the type of liquid, and the maximum true vapor pressure for all petroleum liquids with a true vapor pressure greater than 7.0 kPa.

(d) Copies of all records under WAC 173-490-201 (2)(b) and (c) shall be retained by the owner(s) or operator(s) for a minimum of two years after the date on which the record was made.

(e) Copies of all records required under WAC 173-490-201 shall immediately be made available to the director, upon verbal or written request, at any reasonable time.

(3) Testing and monitoring.

(a) The owner or operator of a storage vessel covered under WAC 173-490-201 shall demonstrate compliance by the methods of this subsection or an alternative method approved by ecology.

(b) A person proposing to measure the seal fit of a storage vessel in order to comply with this section shall notify ecology of the intent to measure not less than five working days before the measurement so the director or a representative may observe the measurement if desired.

(c) Compliance with WAC 173-490-201 (2)(a)(ii)(C) shall be determined by physically measuring the length and width of all gaps around the circumference of the secondary seal in each place where a 0.32 cm (1/8 in.) diameter probe passes freely (without forcing or binding against the seal) between the seal and the tank wall and summing the area of the individual gaps.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-201, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-201, filed 8/20/80.]

WAC 173-490-202 Leaks from gasoline transport tanks and vapor collection systems. (1) Specific applicability.

This section shall apply to all gasoline transport tanks equipped for gasoline vapor collection and all vapor collection systems at gasoline loading terminals, bulk gasoline plants and gasoline dispensing facilities as qualified in WAC 173-490-025 and 173-490-040.

(2) Provisions for specific processes.

(a) The owner(s) or operator(s) of a gasoline loading or unloading facility shall only allow the transfer of gasoline between the facility and a transport tank when a current leak test certification for the transport tank is on file with the facility or a valid inspection sticker is displayed on the vehicle.

(b) The owner(s) or operator(s) of a transport tank shall not make any connection to the tank for the purpose of loading or unloading gasoline, except in the case of an emergency, unless the gasoline transport tank:

(i) Is tested annually according to the test procedure referenced in WAC 173-490-202 (3)(c);

(ii) Sustains a pressure change of no more than 0.75 kilopascals (3 inches of water) in five minutes when pressurized to a gauge pressure of 4.5 kilopascals (18 inches of water) or evacuated to a gauge pressure of 1.5 kilopascals (6 inches of water) during the testing required in WAC 173-490-202 (2)(b)(i);

(iii) Is repaired by the owner(s) or operator(s) and retested within fifteen days of testing if it does not meet the criteria of WAC 173-490-202 (2)(b)(ii);

(c) The owner(s) or operator(s) of a transport tank shall:

(i) Have a current leak test certification for the transport tank on file with each gasoline loading or unloading facility where gasoline is transferred; or

(ii) Display a sticker near the department of transportation certification plate required by 49 CFR 178.340-10b which:

(A) Shows the date that the gasoline tank truck last passed the test required in WAC 173-490-202 (2)(b)(i) and (ii);

(B) Shows the identification number of the gasoline tank truck tank; and

(C) Expires not more than one year from the date of the leak tight test.

(d) The owner(s) or operator(s) of a vapor collection system shall:

(i) Operate the vapor collection system and the gasoline loading equipment during all loadings and unloadings of transport tanks equipped for emission control such that:

(A) A gauge reading of tank pressure will not exceed 4.5 kilopascals (18 inches of water) or vacuum 1.5 kilopascals (6 inches of water);

(B) The concentration of gasoline vapors is below the lower explosive limit (LEL, measured as propane) at all points a distance of 2.5 cm (1 inch) from potential leak sources when measured by the method in WAC 173-490-202(3); and

(C) There are no visible liquid leaks.

(ii) Repair and retest a vapor collection system that exceeds the limits of WAC 173-490-202 (2)(d)(i) within fifteen days.

(e) Ecology may, at any time, monitor a gasoline transport tank and vapor collection system during loading or unloading operations by the procedure in WAC 173-490-202 (3)(d) to confirm continuing compliance with WAC 173-490-202 (2)(b) or (d).

(3) Testing and monitoring.

(a) The owner(s) or operator(s) of a gasoline transport tank or vapor collection system shall, at his own expense, demonstrate compliance with WAC 173-490-202 (2)(a) and (b), respectively. All tests shall be made by, or under the direction of, a person qualified to perform the tests.

(b) The owner(s) or operator(s) of a gasoline transport tank shall notify ecology in writing of the date and location of a certification test at least ten calendar days before the anticipated test date.

(c) To demonstrate compliance with this chapter, refer to WAC 173-400-105.

(d) Monitoring to confirm the continuing existence of leak tight conditions shall be consistent with the procedures on file with and approved by ecology.

(4) Recordkeeping.

(a) The owner(s) or operator(s) of a gasoline transport tank or vapor collection system shall maintain records of all certification tests and repairs for at least two years after the test or repair is completed.

(b) The records of certification tests required by WAC 173-490-202 (4)(a) shall, as a minimum, contain:

(i) The transport tank identification number;

(ii) The initial test pressure and the time of the reading;

(iii) The final test pressure and the time of the reading;

(iv) The initial test vacuum and the time of the reading;

(v) The final test vacuum and the time of the reading;

(vi) At the top of each report page, the company name, date and location of the tests on that page; and

(vii) Name and title of the person conducting the test.

(c) The owner(s) or operator(s) of a gasoline transport tank shall annually certify that the transport tank passed the required tests.

(d) Copies of all records required under WAC 173-490-202 shall immediately be made available to ecology, upon written request, at any reasonable time.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-202, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-202, filed 8/20/80.]

WAC 173-490-203 Perchloroethylene dry cleaning systems. (1) Specific applicability. This section shall apply to all dry cleaning systems using perchloroethylene cleaning solvent and as qualified in WAC 173-490-203 (1)(a) and (b) and 173-490-025.

(a) The following dry cleaning systems are exempt from the requirements of WAC 173-490-203 (2)(a)(i) and (ii):

(i) Coin-operated systems;

(ii) Systems located in a facility with inadequate space to accommodate an adsorber;

(iii) Systems with insufficient steam capacity to desorb adsorbers.

(b) An exemption for the conditions stated in WAC 173-490-203 (2)(a)(i) and (ii) may be granted by ecology when sufficient evidence is submitted by the owner(s) or operator(s) of the dry cleaning system to justify the exemption.

(c) A material balance will be used to determine VOC losses.

(2) Provisions for specific processes.

(a) The owner(s) or operator(s) of a perchloroethylene dry cleaning facility subject to this chapter shall:

(i) Vent the entire dryer exhaust through a properly functioning carbon adsorption system or equally effective control device;

(ii) Emit no more than 100 ppmv when demonstrated in accordance with WAC 173-490-203 (3)(c)(i), of VOCs from the dryer control device before dilution;

(iii) Immediately repair all components found to be leaking liquid VOCs;

(iv) Cook or treat all diatomaceous earth filters so that the residue contains 25 kg or less of VOCs per 100 kg of wet waste material;

(v) Reduce the VOCs from all solvent stills to 60 kg or less per 100 kg of wet waste material;

(vi) Drain all filtration cartridges, in the filter housing or other enclosed container, for at least twenty-four hours before discarding the cartridges; and

(vii) When possible, dry all drained cartridges without emitting VOCs to the atmosphere.

(3) Testing and monitoring.

(a) Compliance with WAC 173-490-203 (2)(a)(i), (vi), and (vii) shall be determined by means of visual inspection.

(b) Compliance with WAC 173-490-203 (2)(a)(iii) shall be determined by means of visual inspection of the following components:

(i) Hose connections, unions, couplings and valves;

(ii) Machine door gaskets and seatings;

(iii) Filter head gasket and seating;

(iv) Pumps;

(v) Base tanks and storage containers;

(vi) Water separators;

(vii) Filter sludge recovery;

(viii) Distillation unit;

(ix) Diverter valves;

(x) Saturated lint from lint basket; and

(xi) Cartridge filters.

(c) Compliance with WAC 173-490-203 (2)(a)(ii) shall be demonstrated by:

(i) A test consistent with the procedures on file with and approved by ecology; or

(ii) The proper installation, operation, and maintenance of equipment that has been demonstrated by the owner(s) or operator(s) to adequately meet the emission limits in WAC 173-490-203 (2)(a)(ii).

(d) Compliance with WAC 173-490-203 (2)(a)(iv) and (v) shall be demonstrated by tests consistent with the procedures on file with and approved by ecology.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-203, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-203, filed 7/27/82. Statutory Authority: RCW 70.94.331, 70.94.510, and 70.94.785. 81-03-003 (Order DE 80-54), § 173-490-203, filed 1/8/81. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-203, filed 8/20/80.]

WAC 173-490-204 Graphic arts systems. (1) Specific applicability.

(a) This section shall apply to all packaging rotogravure, publication rotogravure, specialty printing operations, and flexographic printing facilities that use more than 90 megagrams (100 tons) per year of VOCs as a component of ink, for the thinning of ink, cleaning of presses, press components and equipment; and are covered by WAC 173-490-025.

(b) Machines that have both coating units (apply a uniform layer of material across the entire width of a web) and printing units (forming words, designs, and pictures) shall be included under WAC 173-490-204 rather than WAC 173-490-040(6), Surface coaters.

(2) Provisions for specific processes.

(a) No owner(s) or operator(s) of a packaging rotogravure, publication rotogravure or flexographic printing subject to this regulation and employing solvent containing ink may operate, cause, allow or permit the operation of the facility unless:

(i) The volatile fraction of ink, as it is applied to the substrate, contains twenty-five percent by volume or less of organic solvent and seventy-five percent by volume or more of water;

(ii) The ink as it is applied to the substrate, less water, contains sixty percent by volume or more nonvolatile material; or

(iii) The owner(s) or operator(s) installs and operates a system that captures at least ninety percent by weight and;

(A) A carbon adsorption system which reduces the volatile organic emissions from the capture system by at least ninety percent by weight;

(B) An incineration system which oxidizes at least ninety percent of the nonmethane VOCs (VOC measured as total combustible carbon) to carbon dioxide and water; or

(C) An alternative VOC emission reduction system demonstrated to have at least a ninety percent reduction efficiency, measured across the control system, and has been approved by ecology.

(b) A collection system shall be used with the emission controls of WAC 173-490-204 (2)(a)(iii). The design and operation of the collection system shall be consistent with good engineering practice, and shall provide an overall reduction in the emission of VOCs of at least:

(i) Seventy-five percent where a publication rotogravure process is used; or

(ii) Sixty-five percent where a packaging rotogravure process is used; or

(iii) Sixty percent where a flexographic process is used.

(3) Testing and monitoring.

(a) To demonstrate compliance with this chapter, refer to WAC 173-400-105.

(b) When add-on control equipment is used, continuous monitors of the following parameters shall be installed, periodically calibrated, and operated at all times that the associated control equipment is operating:

(i) Exhaust gas temperature of all incinerators;

(ii) Temperature rise across a catalytic incinerator bed;

(iii) Breakthrough of VOC on a carbon adsorption unit;

and

(iv) Any other continuous monitoring or recording device required by ecology.

(c) The owner or operator of a facility shall be responsible for all expenses of monitoring required by WAC 173-490-204 (3)(b).

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-204, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-204, filed 7/27/82. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-204, filed 8/20/80.]

WAC 173-490-205 Surface coating of miscellaneous metal parts and products. (1) Specific applicability. This section shall apply to surface coating of miscellaneous metal parts and products in the following industries, if the potential uncontrolled emissions of VOC is greater than 10 tons per year and as qualified in WAC 173-490-205 (1)(b), (c), and (d), and 173-490-025.

(a) Miscellaneous metal parts and products shall include:

(i) Large farm machinery (harvesting, fertilizing and planting machines, tractors, combines, etc.);

(ii) Small farm machinery (lawn and garden tractors, lawn mowers, rototillers, etc.);

(iii) Small appliances (fans, mixers, blenders, crock pots, dehumidifiers, vacuum cleaners, etc.);

(iv) Commercial machinery (office equipment, computers and auxiliary equipment, typewriters, calculators, vending machines, etc.);

(v) Industrial machinery (pumps, compressors, conveyor components, fans, blowers, transformers, etc.);

(vi) Fabricated metal products (metal covered doors, frames, etc.); and

(vii) Any other industrial category which coats metal parts or products under the Standard Industrial Classification Code of Major Group 33 (primary metal industries), Major Group 34 (fabricated metal products), Major Group 35 (nonelectric machinery), Major Group 36 (electrical machinery), Major Group 37 (transportation equipment), Major Group 38 (miscellaneous instruments), Major Group 39 (miscellaneous manufacturing industries), Major Group 40 (railroad transportation), and Major Group 41 (transit passenger transportation).

(b) This section is not applicable to the surface coating of the following metal parts and products:

(i) Automobiles and light-duty trucks;

(ii) Metal cans;

(iii) Flat metal sheets and strips in the form of rolls or coils;

(iv) Magnet wire for use in electrical machinery;

(v) Metal furniture;

(vi) Large appliances;

(vii) Airplanes;

(viii) Automobile refinishing;

(ix) Customized top coating of automobiles and trucks, if production is less than thirty-five vehicles per day; and

(x) Exterior of marine vessels.

(c) This chapter applies to the application area, flashoff area, air and forced air drier, and oven used in the surface coating of the metal parts and products in WAC 173-490-205 (1)(a). This chapter also applies to prime coat, top coat, and single coat operations.

(d) The application of coatings whose formulations are controlled by federal specifications and the use of which is required by federal agencies shall be exempt from the emission limits in WAC 173-490-205 (2)(a).

(e) A case-by-case determination of the emission controls best representing RACT may be substituted for the requirements of WAC 173-490-205(2). Such a determination shall be approved by ecology.

(2) Provisions for specific processes.

(a) The owner or operator of a coating application system shall not emit a quantity of VOCs greater than those listed by specific coating, excluding water and as delivered to the application system:

(i) Clear coatings 0.52 kg/liter (4.3 lb/gallon)

(ii) Extreme performance coatings 0.42 kg/liter (3.5 lb/gallon)

(iii) Air dried coatings 0.42 kg/liter (3.5 lb/gallon)

(iv) All others 0.36 kg/liter (3.0 lb/gallon)

(v) Powder coatings 0.05 kg/liter (0.4 lb/gallon)

(b) When more than one emission limitation listed in WAC 173-490-205 (2)(a) applies to a specific coating, the least stringent will apply.

(c) All VOC emissions from solvent washings shall be considered in the emission limitations in WAC 173-490-205 (2)(a), unless the solvent is directed into containers that prevent evaporation into the atmosphere.

(d) The emission limits set forth in WAC 173-490-205 (2)(a) shall be achieved by:

(i) The application of low solvent coating technology; or

(ii) An incineration system that oxidizes at least ninety percent of the VOCs (VOC measured as total combustible carbon) to carbon dioxide and water; or

(iii) An equivalent means of VOC reduction certified by the owner(s) or operator(s) and approved by ecology.

(e) A collection system shall be used together with the incinerator of WAC 173-490-205 (2)(d)(ii). The design and operation of the collection system shall be consistent with good engineering practice and provide for an overall VOC emission reduction necessary to comply with the emission limits of WAC 173-490-205 (2)(a). The required VOC emission reduction shall be calculated on a unit volume of uncured solids basis.

(3) Testing and monitoring.

(a) Ecology may require the owner(s) or operator(s) of a source to demonstrate at his/her own expense, compliance by the methods of WAC 173-490-205 (3)(c).

(b) The owner(s) or operator(s) of a source shall notify ecology at least ten days before a proposed emission

certification test so the director or a representative may observe the test.

(c) To demonstrate compliance with this chapter, refer to WAC 173-400-105.

(d) Ecology may require monitoring of the following parameters:

(i) Exhaust gas temperature of all incinerators;

(ii) Temperature rise across a catalytic incinerator bed; and

(iii) Breakthrough of VOC on a carbon adsorption unit.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-205, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-205, filed 7/27/82. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-205, filed 8/20/80.]

WAC 173-490-207 Surface coating of flatwood paneling. (1) Specific applicability.

(a) This section shall apply to all flatwood panel manufacturers and surface finishing facilities as qualified in WAC 173-490-207 (1)(b) and (c) and 173-490-025.

(b) These chapters shall apply to all operations and equipment that is used to apply, convey and dry (including flashoff areas) a surface pattern or coating on the following products:

(i) Printed interior panels made of hardwood plywood and thin particleboard;

(ii) Natural finish hardwood plywood panels; or

(iii) Hardboard paneling with Class II finishes.

(c) These chapters do not apply to the manufacture of exterior siding, tileboard, or particleboard used as a furniture component.

(2) Provisions for specific processes.

(a) The owner(s) or operator(s) of a facility shall not emit VOCs from a coating application system in excess of:

(i) 2.9 kg per 100 square meters of coated finished product (6.0 lb/1,000 square feet) from printed interior panels, regardless of the number of coats applied;

(ii) 5.9 kg per 100 square meters of coated finished product (12.0 lb/1,000 square feet) from natural finish hardwood plywood panels, regardless of the number of coats applied; and

(iii) 4.9 kg per 100 square meters of coated finished product (10.0 lb/1,000 square feet) from Class II finishes on hardboard panels, regardless of the number of coats applied.

(b) The emission limits in WAC 173-490-207 (2)(a) shall be achieved by:

(i) The application of low solvent content coating technology; or

(ii) An incineration system which oxidizes at least ninety percent of the nonmethane VOCs entering the incinerator (VOC measured as total combustible carbon) to carbon dioxide and water; or

(iii) An equivalent means of VOC removal. The equivalent means must be certified by the owner(s) or operator(s) and approved by ecology.

(c) A capture system shall be used in conjunction with the emission control systems in WAC 173-490-207 (2)(b)(ii) and (iii). The design and operation of the capture system must be consistent with good engineering practice and shall be required to provide for an overall emission reduction

sufficient to meet the emission limitation in WAC 173-490-207 (2)(a).

(3) Testing and monitoring.

(a) Ecology may require the owner or operator of a facility to demonstrate at his/her own expense compliance by the methods of WAC 173-490-207 (3)(c).

(b) The owner(s) or operator(s) of a facility shall notify ecology at least ten days before a proposed emission certification test so the director or a representative may observe the test.

(c) To demonstrate compliance with this chapter, refer to WAC 173-400-105.

(d) Ecology may require monitoring of the following parameters:

(i) Exhaust gas temperature of all incinerators;

(ii) Temperature rise across a catalytic incinerator bed; and

(iii) Breakthrough of VOC on a carbon adsorption unit.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-207, filed 2/19/91, effective 3/22/91. Statutory Authority: RCW 70.94.331 and 70.94.395. 80-11-062 (Order DE 80-18), § 173-490-207, filed 8/20/80.]

WAC 173-490-208 Aerospace assembly and component coating operations. (1) Specific applicability. This section shall apply to all aerospace component coating facilities that emit an annual average of eighteen kilograms (forty pounds) or more of VOCs per operating day and as qualified in WAC 173-490-025.

(2) It shall be unlawful for any person to cause or allow:

(a) The application of any primer or topcoat to aerospace components which contains in excess of:

(i) 650 grams of VOC per liter of primer, less water, as applied.

(ii) 600 grams of VOC per liter of topcoat, less water, as applied.

(b) The application of any temporary protective coating to aerospace components that contains more than 250 grams of VOC per liter of material, less water, as applied.

(c) The use of VOCs of composite vapor pressure of 10.4 kPa (1.5 psia) or greater at a temperature of 21.1°C (70°F) for surface preparation or cleanup, excluding paint removal.

(d) The use of VOCs for the cleanup of spray equipment used in aerospace component coating operations unless 85 percent of the VOCs by weight, are collected and disposed so that they are not emitted to the atmosphere.

(e) The use of a stripper which contains more than 400 grams of VOC per liter or has a composite vapor pressure of VOCs more than 1.3 kPa (0.19 psia) at 21.1°C (70°F).

(3) The emission limits of paragraph (2) shall be achieved by:

(a) The application of reasonably available low solvent coating technology;

(b) A vapor collection and disposal system; or

(c) An equivalent method of VOC reduction certified by the owner(s) or operator(s) and approved by ecology.

(4) The provisions of WAC 173-490-208 (2)(a) and (2)(b) shall not apply to the following materials:

(a) Coatings for masking in chemical etching operations,

(b) Adhesive bonding primer,

- (c) Flight test coatings,
- (d) Space vehicle coatings, or
- (e) Fuel tank coatings.

(5) Upon the submission of an alternative coating evaluation, ecology may determine that a reasonably available low solvent coating does exist for a given application and may exempt the coating from requirements of WAC 173-490-208. All alternative coating evaluations shall contain, as a minimum:

- (a) Types of products to be coated,
- (b) Types of coatings evaluated,
- (c) Results of performance tests,
- (d) Status of research into development of low VOC coatings for the application,
- (e) Feasibility of installing control equipment,
- (f) Mitigating measures that could be implemented to reduce VOC emissions.

[Statutory Authority: Chapter 70.94 RCW. 91-05-064 (Order 90-06), § 173-490-208, filed 2/19/91, effective 3/22/91. Statutory Authority: Chapters 70.94 and 43.21A RCW. 82-16-021 (Order DE 82-22), § 173-490-208, filed 7/27/82.]

Chapter 173-491 WAC

EMISSION STANDARDS AND CONTROLS FOR SOURCES EMITTING GASOLINE VAPORS

WAC

173-491-010	Policy and purpose.
173-491-015	Applicability.
173-491-020	Definitions.
173-491-030	Registration.
173-491-040	Gasoline vapor control requirements.
173-491-050	Compliance schedules.

WAC 173-491-010 Policy and purpose. (1) It is the policy of the department of ecology (ecology) under the authority vested in it by chapters 43.21A and 70.94 RCW to provide for the systematic control of air pollution from air contaminant sources and for the proper development of the state's natural resources.

(2) It is the purpose of this chapter to establish standards for the control of air contaminants emitted from gasoline marketing sources.

[Statutory Authority: RCW 70.94.331. 91-14-101 (Order 90-63), § 173-491-010, filed 7/2/91, effective 8/2/91.]

WAC 173-491-015 Applicability. This chapter shall apply to gasoline marketing operations, including the storage, transport, and transfer of gasoline, including the transfer from storage tanks into transport tanks, and from storage tanks into motor vehicles. The requirements of this chapter supersede any less restrictive requirements of chapter 173-490 WAC, Emission standards and controls for sources emitting volatile organic compounds (VOC).

[Statutory Authority: RCW 70.94.331. 91-14-101 (Order 90-63), § 173-491-015, filed 7/2/91, effective 8/2/91.]

WAC 173-491-020 Definitions. The definitions of terms contained in chapter 173-400 WAC are by this reference incorporated into this chapter. Unless a different meaning is clearly required by context, the following words

and phrases, as used in this chapter, shall have the following meanings:

(1) "Bottom loading" means the filling of a tank through a line entering the bottom of the tank.

(2) "Bulk gasoline plant" means a gasoline storage and transfer facility that receives more than ninety percent of its annual gasoline throughput by transport tank, and reloads gasoline into transport tanks.

(3) "Certified vapor recovery system" means a vapor recovery system which has been certified by the department of ecology. Only Stage II vapor recovery systems with a single coaxial hose can be certified. The department may certify vapor recovery systems certified by the California Air Resources Board as of the effective date of the regulation.

(4) "Gasoline" means a petroleum distillate which is a liquid at standard conditions and has a true vapor pressure greater than four pounds per square inch absolute at twenty degrees C, and is used as a fuel for internal combustion engines. Also any liquid sold as a vehicle fuel with a true vapor pressure greater than four pounds per square inch absolute at twenty degrees C shall be considered "gasoline" for purpose of this regulation.

(5) "Gasoline dispensing facility" means any site dispensing gasoline into motor vehicle fuel tanks from stationary storage tanks.

(6) "Gasoline loading terminal" means a gasoline transfer facility that receives more than ten percent of its annual gasoline throughput solely or in combination by pipeline, ship or barge, and loads gasoline into transport tanks.

(7) "Leak free" means a liquid leak of less than four drops per minute.

(8) "Stage I" means gasoline vapor recovery during all gasoline marketing transfer operations except motor vehicle refueling.

(9) "Stage II" means gasoline vapor recovery during motor vehicle refueling operations from stationary tanks.

(10) "Submerged fill line" means any discharge pipe or nozzle which meets either of the following conditions:

- Where the tank is filled from the top, the end of the discharge pipe or nozzle must be totally submerged when the liquid level is six inches from the bottom of the tank, or;
- Where the tank is filled from the side, the discharge pipe or nozzle must be totally submerged when the liquid level is eighteen inches from the bottom of the tank.

(11) "Submerged loading" means the filling of a tank with a submerged fill line.

(12) "Suitable cover" means a door, hatch, cover, lid, pipe cap, pipe blind, valve, or similar device that prevents the accidental spilling or emitting of gasoline. Pressure relief valves, aspirator vents, or other devices specifically required for safety and fire protection are not included.

(13) "Throughput" means the amount of material passing through a facility.

(14) "Top off" means to attempt to dispense gasoline to a motor vehicle fuel tank after a vapor recovery dispensing nozzle has shut off automatically.

(15) "Transport tank" means a container used for shipping gasoline over roadways.

(16) "True vapor pressure" means the equilibrium partial pressure of a petroleum liquid as determined by methods

described in American Petroleum Institute Bulletin 2517, 1980.

(17) "Upgraded" means the modification of a gasoline storage tank or piping to add cathodic protection, tank lining or spill and overflow protection that involved removal of ground or ground cover above a portion of the product piping.

(18) "Vapor balance system" means a system consisting of the transport tank, gasoline vapor transfer lines, storage tank, and all tank vents designed to route displaced gasoline vapors from a tank being filled with liquid gasoline.

(19) "Vapor collection system" means a closed system to conduct vapors displaced from a tank being filled into the tank being emptied, a vapor holding tank, or a vapor control system.

(20) "Vapor control system" means a system designed and operated to reduce or limit the emission of gasoline vapors emission into the ambient air.

(21) "Vapor-mounted seal" means a primary seal mounted so there is an annular vapor space underneath the seal. The annular vapor space is bounded by the bottom of the primary seal, the tank wall, the liquid surface, and the floating roof.

(22) "Vapor tight" means a leak of less than one hundred percent of the lower explosive limit on a combustible gas detector measured at a distance of one inch from the source or no visible evidence of air entrainment in the sight glasses of liquid delivery hoses.

(23) "Western Washington counties" means the following counties: Clallam, Clark, Cowlitz, Grays Harbor, Island, Jefferson, King, Kitsap, Lewis, Mason, Pacific, Pierce, San Juan, Skagit, Skamania, Snohomish, Thurston, Wahkiakum, and Whatcom.

[Statutory Authority: RCW 70.94.331, 91-14-101 (Order 90-63), § 173-491-020, filed 7/2/91, effective 8/2/91.]

WAC 173-491-030 Registration. (1) The owner or operator of a gasoline loading terminal, bulk gasoline plant, or gasoline dispensing facility subject to the provisions of WAC 173-491-040 (2) through (5) shall register annually the facility with ecology or local air authority. Annual registration shall be made by the owner or operator on a form provided by ecology or local air authority within sixty days of receipt of the form. Such registration form shall require information relevant to determining whether the facility is in compliance with the requirements of this chapter and be accompanied by the following fee: Gasoline loading terminals five hundred dollars, bulk gasoline plants two hundred dollars, gasoline dispensing facilities one hundred dollars, or a greater amount duly adopted by a local air pollution authority. The amount of the fees collected shall only be used to administer the registration program for facilities subject to this chapter.

(2) Administration of the registration program shall include:

(a) Initial registration and annual or other periodic reports from the source owner providing information directly related to air pollution registration.

(b) On-site inspections necessary to verify compliance with registration requirements.

(c) Data storage and retrieval systems necessary for support of the registration program.

(d) Emission inventory reports and emission reduction credits computed from information provided by sources pursuant to registration.

(e) Staff review, including engineering analysis for accuracy and currentness, of information provided by sources pursuant to registration program requirements.

(f) Clerical and other office support provided in direct furtherance of the registration program.

(g) Administrative support provided in directly carrying out the registration program.

(3) Ecology or local air authority will provide a written verification of registration to owners or operators of facilities subject to the provisions of WAC 173-491-040 (2) through (5). Such verification shall be available for inspection by ecology or local air authority personnel during normal business hours.

(4) The owner or operator of a gasoline loading terminal or a gasoline dispensing facility shall maintain total annual gasoline throughput records for the most recent two calendar years. Such records shall be available for inspection by ecology or local air authority personnel during normal business hours.

[Statutory Authority: RCW 70.94.331, 91-14-101 (Order 90-63), § 173-491-030, filed 7/2/91, effective 8/2/91.]

WAC 173-491-040 Gasoline vapor control requirements. (1) Fixed-roof gasoline storage tanks.

(a) All fixed-roof gasoline storage tanks having a nominal capacity greater than forty thousand gallons shall comply with one of the following:

(i) Meet the equipment specifications and maintenance requirements of the federal standards of performance for new stationary sources - Storage Vessels for Petroleum Liquids (40 CFR 60, subpart K).

(ii) Be retrofitted with a floating roof or internal floating cover using a metallic seal or a nonmetallic resilient seal at least meeting the equipment specifications of the federal standards referred to in (a)(i) of this subsection or its equivalent.

(iii) Be fitted with a floating roof or internal floating cover meeting the manufacturer's equipment specifications in effect when it was installed.

(b) All seals used in (a)(ii) and (iii) of this subsection are to be maintained in good operating condition and the seal fabric shall contain no visible holes, tears, or other openings.

(c) All openings not related to safety are to be sealed with suitable closures.

(d) Tanks used for the storage of gasoline in bulk gasoline plants and equipped with vapor balance systems as required in subsection (3)(b) of this section shall be exempt from the requirements of subsection (1) of this section.

(2) Gasoline loading terminals.

(a) This chapter shall apply to all gasoline loading terminals with an average annual gasoline throughput greater than 7.2 million gallons according to the schedule of compliance in WAC 173-491-050.

(b) Loading facilities. Facilities for the purpose of loading gasoline into any transport tank shall be equipped

with a vapor control system (VCS) as described in (c) of this subsection and comply with the following conditions:

(i) The loading facility shall employ submerged or bottom loading for all transport tanks.

(ii) The VCS shall be connected during the entire loading of all transport tanks.

(iii) The loading of all transport tanks shall be performed such that the transfer is at all times vapor tight. Emissions from pressure relief valves shall not be included in the controlled emissions when the back pressure in the VRS collection lines is lower than the relief pressure setting of the transport tank's relief valves.

(iv) All loading lines and vapor lines shall be equipped to close automatically when disconnected. The point of closure shall be on the tank side of any hose or intermediate connecting line.

(c) Vapor control system (VCS). The VCS shall be designed and built according to accepted industrial practices and meet the following conditions:

(i) The VCS shall not allow organic vapors emitted to the ambient air to exceed thirty-five milligrams per liter (three hundred twenty-two milligrams per gallon) of gasoline loaded.

(ii) The VCS shall be equipped with a device to monitor the system while the VCS is in operation.

(iii) The back pressure in the VCS collection lines shall not exceed the transport tank's pressure relief settings.

(3) Bulk gasoline plants.

(a) This section shall apply to all bulk gasoline plants with an average annual gasoline throughput greater than 7.2 million gallons according to the schedule of compliance in WAC 173-491-050.

(b) Deliveries to bulk gasoline plant storage tanks.

(i) The owner or operator of a bulk gasoline plant shall not permit the loading of gasoline into a storage tank equipped with vapor balance fittings unless the vapor balance system is attached to the transport tank and operated properly. The vapor balance system shall prevent at least ninety percent of the displaced gasoline vapors from entering the ambient air. A vapor balance system that is designed, built, and operated according to accepted industrial practices will satisfy this requirement.

(ii) Storage tank requirements. All storage tanks with a nominal capacity greater than five hundred fifty gallons and used for the storage of gasoline shall comply with the following conditions:

(A) Each storage tank shall be equipped with a submerged fill line.

(B) Each storage tank shall be equipped for vapor balancing of gasoline vapors with transport tanks during gasoline transfer operations.

(C) The vapor line fittings on the storage tank side of break points with the transport tank vapor connection pipe or hose shall be equipped to close automatically when disconnected.

(D) The pressure relief valves on storage tanks shall be set at the highest possible pressure consistent with local and state codes for fire and safety but in no case greater than ninety percent of the tank's safe working pressure.

(iii) Transport tank requirements. All transport tanks transferring gasoline to storage tanks in a bulk gasoline plant shall comply with the following conditions:

(A) The transport tank shall be equipped with the proper attachment fittings to make vapor tight connections for vapor balancing with storage tanks.

(B) The vapor line fittings on the transport tank side of break points with the storage tank connection pipe or hose shall be equipped to close automatically when disconnected.

(C) The pressure relief valves on transport tanks shall be set at the highest possible pressure consistent with local and state codes for fire and safety.

(c) Gasoline transfer operations.

(i) No owner or operator of a bulk gasoline plant or transport tank shall allow the transfer of gasoline between a stationary storage tank and a transport tank except when the following conditions exist:

(A) The transport tanks are being submerged filled or bottom loaded.

(B) The loading of all transport tanks, except those exempted under (c)(ii) of this subsection are being performed using a vapor balance system.

(C) The transport tanks are equipped to balance vapors and maintained in a leak tight condition in accordance with subsection (6) of this section.

(D) The vapor return lines are connected between the transport tank and the stationary storage tank and the vapor balance system is operated properly.

(ii) Transport tanks used for gasoline and meeting all of the following conditions shall be exempt from the requirement to be equipped with any attachment fitting for vapor balance lines if:

(A) The transport tank is used exclusively for the delivery of gasoline into storage tanks of a facility exempt from the vapor balance requirements of subsection (4) of this section; and

(B) The transport tank has a total nominal capacity less than four thousand gallons and is constructed so that it would require the installation of four or more separate vapor balance fittings.

(4) Gasoline dispensing facilities (Stage I).

(a) This section shall apply to the delivery of gasoline to gasoline dispensing facilities with an annual gasoline throughput greater than three hundred sixty thousand gallons in accordance with the schedule of compliance in WAC 173-491-050 and all new gasoline dispensing facilities with a total gasoline nominal storage capacity greater than ten thousand gallons.

(b) All gasoline storage tanks of the facilities defined in (a) of this subsection shall be equipped with submerged or bottom fill lines and fittings to vapor balance gasoline vapors with the delivery transport tank.

(c) Gasoline storage tanks with offset fill lines shall be exempt from the requirement of (b) of this subsection if installed prior to January 1, 1979.

(d) The owner or operator of a gasoline dispensing facility shall not permit the loading of gasoline into a storage tank equipped with vapor balance fittings unless the vapor balance system is attached to the transport tank and operated satisfactorily.

(5) Gasoline dispensing facilities (Stage II).

(a) This section shall apply to the refueling of motor vehicles from stationary tanks at all gasoline dispensing facilities located in western Washington counties with an annual gasoline throughput greater than eight hundred forty

thousand gallons with the exception of Clark, King, Pierce, and Snohomish counties where this section shall apply to gasoline dispensing facilities with an annual gasoline throughput greater than six hundred thousand gallons in accordance with the schedule of compliance in WAC 173-491-050 and all new gasoline dispensing facilities with greater than ten thousand gallons gasoline nominal storage capacity in western Washington counties.

(b) All gasoline dispensing facilities subject to this section shall be equipped with a certified Stage II vapor recovery system.

(c) The owner or operator of a gasoline dispensing facility subject to this section shall not transfer or allow the transfer of gasoline from stationary tanks into motor vehicle fuel tanks unless a certified Stage II vapor recovery system is used.

(d) All Stage II vapor recovery equipment shall be installed in accordance with the system's certification requirements and shall be maintained to be leak free, vapor tight, and in good working order.

(e) Whenever a Stage II vapor recovery system component is determined to be defective, the owner or operator shall take the system out of service until it has been repaired, replaced, or adjusted, as necessary.

(f) The owner or operator of each gasoline dispensing facility utilizing a Stage II system shall conspicuously post operating instructions for the system in the gasoline dispensing area. The instructions shall clearly describe how to fuel vehicles correctly using the vapor recovery nozzles and include a warning against topping off. Additionally, the instructions shall include a prominent display of ecology's toll free telephone number for complaints regarding the operation and condition of the vapor recovery nozzles.

(6) Equipment or systems failures.

(a) Specific applicability. This section shall apply to all gasoline transport tanks equipped for gasoline vapor collection and all vapor collection systems at gasoline loading terminals, bulk gasoline plants, and gasoline dispensing facilities as described in subsections (2) through (5) of this section.

During the months of May, June, July, August, and September any failure of a vapor collection system at a bulk gasoline plant or gasoline loading terminal to comply with this section requires the discontinuation of gasoline transfer operations for the failed part of the system. Other transfer points that can continue to operate in compliance may be used. The loading or unloading of the transport tank connected to the failed part of the vapor collection system may be completed during the other months of the year.

(b) Provisions for specific processes.

(i) The owner or operator of a gasoline loading terminal or bulk gasoline plant shall only allow the transfer of gasoline between the facility and a transport tank if a current leak test certification for the transport tank is on file with the facility or a valid inspection sticker is displayed on the vehicle. Certification is required annually.

(ii) The owner or operator of a transport tank shall not make any connection to the tank for the purpose of loading or unloading gasoline, except in the case of an emergency, unless the gasoline transport tank has successfully completed the annual certification testing requirements in (c) of this subsection, and such certification is confirmed either by:

(A) Have on file with each gasoline loading or unloading facility at which gasoline is transferred a current leak test certification for the transport tank; or

(B) Display a sticker near the department of transportation certification plate required by 49 CFR 178.340-10b which:

(I) Shows the date that the gasoline tank truck last passed the test required in (c) of this subsection;

(II) Shows the identification number of the gasoline tank truck tank; and

(III) Expires not more than one year from the date of the leak tight test.

(iii) The owner or operator of a vapor collection system shall:

(A) Operate the vapor collection system and the gasoline loading equipment during all loadings and unloadings of transport tanks equipped for emission control such that:

(I) The tank pressure will not exceed a pressure of eighteen inches of water or a vacuum of six inches of water;

(II) The concentration of gasoline vapors is below the lower explosive limit (LEL, measured as propane) at all points a distance of one inch from potential leak sources; and

(III) There are no visible liquid leaks except for a liquid leak of less than four drops per minute at the product loading connection during delivery.

(IV) Upon disconnecting transfer fittings, liquid leaks do not exceed ten milliliters (0.34 fluid ounces) per disconnect averaged over three disconnects.

(B) Repair and retest a vapor collection system that exceeds the limits of (b)(iii)(A) of this subsection within fifteen days.

(iv) The department or local air authority may, at any time, monitor a gasoline transport tank and vapor collection system during loading or unloading operations by the procedure in (c) of this subsection to confirm continuing compliance with this section.

(c) Testing and monitoring.

(i) The owner or operator of a gasoline transport tank or vapor collection system shall, at his own expense, demonstrate compliance with (a) and (b) of this subsection, respectively. All tests shall be made by, or under the direction of, a person qualified to perform the tests and approved by the department.

(ii) Testing to determine compliance with this section shall use procedures approved by the department.

(iii) Monitoring to confirm continuing leak tight conditions shall use procedures approved by the department.

(d) Recordkeeping.

(i) The owner or operator of a gasoline transport tank or vapor collection system shall maintain records of all certification tests and repairs for at least two years after the test or repair is completed.

(ii) The records of certification tests required by this section shall, as a minimum, contain:

(A) The transport tank identification number;

(B) The initial test pressure and the time of the reading;

(C) The final test pressure and the time of the reading;

(D) The initial test vacuum and the time of the reading;

(E) The final test vacuum and the time of the reading;

(F) At the top of each report page the company name, date, and location of the tests on that page; and

(G) Name and title of the person conducting the test.

(iii) The owner or operator of a gasoline transport tank shall annually certify that the transport tank passed the required tests.

(iv) Copies of all records required under this section shall immediately be made available to the department, upon written request, at any reasonable time.

(e) Preventing evaporation. All persons shall take reasonable measures to prevent the spilling, discarding in sewers, storing in open containers, or handling of gasoline in a manner that will result in evaporation to the ambient air.

[Statutory Authority: RCW 70.94.331, 91-14-101 (Order 90-63), § 173-491-040, filed 7/2/91, effective 8/2/91.]

WAC 173-491-050 Compliance schedules. (1) Fixed-roof gasoline storage tanks. All fixed roof gasoline storage tanks subject to WAC 173-491-040(1) shall comply no later than December 31, 1993.

(2) Gasoline loading terminals. All gasoline loading terminals subject to WAC 173-491-040(2) shall comply no later than December 31, 1993.

(3) Bulk gasoline plants. All bulk gasoline plants subject to the requirements of WAC 173-491-040(3) shall comply no later than December 31, 1993.

(4) Gasoline dispensing facilities - Stage I. All gasoline dispensing facilities subject to the requirements of WAC 173-491-040(4) shall comply no later than December 31, 1993, or whenever the facility is upgraded.

(5) Gasoline dispensing facilities - Stage II. All gasoline dispensing facilities subject to the requirements of WAC 173-491-040(5) shall comply:

(a) When upgraded except any gasoline dispensing facility upgraded or with new tank(s) installed after the effective date of this regulation but before May 1, 1992, need not comply earlier than May 1, 1992.

(b) According to the following schedule:

(i) At least fifty percent of the gasoline dispensing facilities with an annual throughput greater than 1.2 million gallons owned by a business which owns ten or more gasoline dispensing facilities in the state of Washington must comply not later than May 1, 1993. In meeting this requirement, businesses that lease some facilities and operate others must ensure that the percentage of facilities owned and operated which are required to comply with this provision at least equals the percentage of leased facilities required to comply with this provision.

(ii) All gasoline dispensing facilities with an annual throughput greater than 1.2 million gallons not previously required to comply must comply not later than May 1, 1994.

(iii) All gasoline dispensing facilities with an annual throughput greater than six hundred thousand gallons not previously required to comply must comply not later than December 31, 1998.

[Statutory Authority: RCW 70.94.331, 91-14-101 (Order 90-63), § 173-491-050, filed 7/2/91, effective 8/2/91.]

Chapter 173-492 WAC

MOTOR FUEL SPECIFICATIONS FOR OXYGENATED GASOLINE

WAC

173-492-010	Policy and purpose.
173-492-020	Applicability.
173-492-030	Definitions.
173-492-040	Compliance requirements.
173-492-050	Registration requirements.
173-492-060	Labeling requirements.
173-492-070	Control areas and control periods.
173-492-080	Enforcement and compliance.
173-492-090	Unplanned conditions.
173-492-100	Severability.

WAC 173-492-010 Policy and purpose. The purpose of this regulation is to reduce carbon monoxide emissions from gasoline powered motor vehicles, through the winter-time use of oxygenated gasolines, in areas that are either known or expected to exceed health-based air quality standards.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m), 92-24-057 (Order 91-58), § 173-492-010, filed 11/30/92, effective 12/1/92.]

WAC 173-492-020 Applicability. This regulation shall apply to all gasoline offered for sale in the control areas and over the control periods defined in WAC 173-492-070.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m), 92-24-057 (Order 91-58), § 173-492-020, filed 11/30/92, effective 12/1/92.]

WAC 173-492-030 Definitions. The following words and phrases shall have the following meanings:

"Authority" means an air pollution control authority activated pursuant to chapter 70.94 RCW that has jurisdiction over the subject source.

"Blender" means a person who owns oxygenated gasoline which is sold or dispensed from an oxygenate blending facility for use in a control area during a control period.

"Control area" means an area in which only oxygenated gasoline under the oxygenated gasoline program of this chapter may be sold or dispensed. Each control area is a county or group of counties administered by a separate air pollution control authority.

"Control period" means the period during which oxygenated gasoline must be sold or dispensed within the control area.

"Ecology" means the Washington state department of ecology.

"Gasoline" means any fuel sold for use in motor vehicles and motor vehicle engines, and commonly known or sold as gasoline.

"Large volume blender" means blenders that blend and offer for sale or sell one million gallons or more, but less than fifteen million gallons, of oxygenated gasoline per month on average during a control period within a control area.

"Medium volume blender" means blenders that blend and offer for sale or sell one hundred thousand gallons or

more, but less than one million gallons, of oxygenated gasoline per month on average during a control period within a control area.

"Oxygenate" means any substance which, when added to gasoline, increases the amount of oxygen in the gasoline blend. Lawful use of any combination of these substances requires that they be "substantially similar" under section 211 (f)(1) of the federal Clean Air Act (CAA), or be permitted under a waiver granted by the Administrator of the Environmental Protection Agency under the authority of section 211 (f)(4) of the CAA.

"Oxygenated gasoline" means gasoline which contains a measurable amount of oxygenate, generally an alcohol or ether.

"Small volume blender" means blenders that blend and offer for sale or sell less than one hundred thousand gallons of oxygenated gasoline per month on average during a control period within a control area.

"Very large volume blender" means blenders that blend and offer for sale or sell fifteen million gallons or more of oxygenated gasoline per month on average during a control period within a control area.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m). 92-24-057 (Order 91-58), § 173-492-030, filed 11/30/92, effective 12/1/92.]

WAC 173-492-040 Compliance requirements. (1) Retail sales. No gasoline intended as a final product for fueling of motor vehicles within the control areas and control periods as defined in WAC 173-492-070 shall be offered for sale, sold or dispensed by any person unless the gasoline has at least 2.0% oxygen content by weight.

(2) Average blend requirements. Over each two-month interval during the control period, gasoline intended as a final product for fueling of motor vehicles within the control areas defined in WAC 173-492-070 supplied by blenders to purchasers within the control areas defined in WAC 173-492-070 shall average at least 2.7% oxygen by weight, and in no case be less than 2.0% oxygen content by weight.

(3) Reports. Blenders shall provide periodic reports, as stipulated in the blenders registration, to ecology or the authority summarizing how the requirements of subsection (2) of this section were met. With prior approval from ecology or the authority, a credit trading program may be used to comply with these requirements. Such reports shall be on forms provided by ecology or the authority.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m). 92-24-057 (Order 91-58), § 173-492-040, filed 11/30/92, effective 12/1/92.]

WAC 173-492-050 Registration requirements. Each blender shall register with ecology or the authority each year, in each control area where a blender offers for sale, sells, or dispenses gasoline. Each request for registration shall be on forms supplied by ecology or the authority and shall be accompanied by a fee to compensate for the cost of administering the registration program, including on-site inspections necessary to verify compliance with these requirements. The location of each blender facility shall be included in the information provided by the blender at registration. The fee for a control area shall be based on the volume of oxygenat-

ed gasoline sold or offered for sale by the blender in that control area to comply with the provisions of WAC 173-492-040. The following fee table shall apply to blenders who register for the 1992-1993 control periods:

Small Volume Blender	\$ 500
Medium Volume Blender	\$ 1,000
Large Volume Blender	\$ 10,000
Very Large Volume Blender	\$ 25,000

Registration fees to cover the 1993-1994 control periods and beyond shall be set by regulation by ecology or the authority.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m). 92-24-057 (Order 91-58), § 173-492-050, filed 11/30/92, effective 12/1/92.]

WAC 173-492-060 Labeling requirements. In addition to other labeling requirements, fuel dispensing systems delivering oxygenated gasoline shall be conspicuously labeled during the control periods and in the control areas stated in WAC 173-492-070 as follows:

"The gasoline dispensed from this pump is oxygenated and will reduce carbon monoxide pollution from motor vehicles."

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m). 92-24-057 (Order 91-58), § 173-492-060, filed 11/30/92, effective 12/1/92.]

WAC 173-492-070 Control areas and control periods. Beginning in 1992, the oxygenated gasoline requirements of this chapter shall apply to the following control areas during the following control periods:

CONTROL AREA	COUNTIES	CONTROL PERIOD	
		BEGINNING	ENDING
Puget Sound	King, Pierce, Snohomish	November 1	February 29
Southwest	Clark	November 1	February 29
Spokane	Spokane	September 1	February 29

Beginning November 1, 1994, the control areas shall expand, and the requirements of this chapter shall apply to the following control areas during the following control periods:

CONTROL AREA	COUNTIES	CONTROL PERIOD	
		BEGINNING	ENDING
Puget Sound	King, Kitsap, Pierce, Snohomish	November 1	February 29
Southwest	Clark, Cowlitz, Lewis, Skamania, Wahkiakum	November 1	February 29
Northwest	Island, Skagit, Whatcom, San Juan	November 1	February 29
Olympic	Clallam, Grays Harbor, Jefferson, Mason, Pacific, Thurston	November 1	February 29
Spokane	Spokane	September 1	February 29

These oxygenated fuel requirements apply only to the counties on the above list.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m). 92-24-057 (Order 91-58), § 173-492-070, filed 11/30/92, effective 12/1/92.]

WAC 173-492-080 Enforcement and compliance. (1) Compliance with the requirements of this section shall be monitored and enforced by ecology or the authority.

Noncompliance shall be subject to the penalties and other remedies provided in chapter 70.94 RCW.

(2) Ecology or the authority may designate any appropriate agency of the state to assist in the compliance monitoring of this regulation. Ecology shall make every effort to coordinate compliance monitoring of this regulation with the current duties of the department of agriculture division of weights and measures.

(3) Compliance with the standards set forth in this section shall be determined by use of testing methods approved by ecology. The maximum accuracy tolerance of this method shall be limited to +/-0.3% oxygen by weight, or an equivalent tolerance when measured by volume.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m), 92-24-057 (Order 91-58), § 173-492-080, filed 11/30/92, effective 12/1/92.]

WAC 173-492-090 Unplanned conditions. An unplanned condition, such as an unforeseen emergency or "act of God," which may interfere with compliance to this chapter, shall be reported to ecology or the authority as soon as possible. The responsible party shall also submit a full written report within ten days to ecology or the authority, including the known causes, the corrective actions taken, and the preventive measures to be taken to minimize or eliminate the chance of recurrence. Compliance with the requirements of this section does not relieve the responsible party from the responsibility to maintain continuous compliance with all the requirements of this chapter nor from the resulting liabilities for failure to comply. Ecology or the authority must consider the circumstances of the unplanned condition, and may use the circumstances when determining enforcement.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m), 92-24-057 (Order 91-58), § 173-492-090, filed 11/30/92, effective 12/1/92.]

WAC 173-492-100 Severability. The provisions of this regulation are severable and if any provision is held invalid, the application of such provision to the other circumstances and the remainder of this regulation shall not be affected.

[Statutory Authority: Chapter 70.94 RCW and 1990 42 USC 7545 Sec. 211(m), 92-24-057 (Order 91-58), § 173-492-100, filed 11/30/92, effective 12/1/92.]

Chapter 173-495 WAC WEATHER MODIFICATION

WAC

173-495-010	Purpose.
173-495-020	Definitions.
173-495-030	Requirement for licenses and permits.
173-495-040	Requirements for exempt activities.
173-495-045	Requirements for a regular license.
173-495-050	Requirements for a restricted license.
173-495-060	Procedures for issuing license.
173-495-065	Period of license.
173-495-070	Permits requirements.
173-495-080	Permittee's report of operations—Requirement.
173-495-100	Revocation, suspension, modification.
173-495-120	Proof of financial responsibility.

WAC 173-495-010 Purpose. This chapter, promulgated under chapters 43.37 and 70.94 RCW establishes the responsibilities for the supervision and control of all weather modification activities within the state, and representation by the state in all interstate contacts relating to weather modification and control. This regulation provides the basic framework for carrying out the state's responsibility for such a program through the establishment of license and permit requirements and procedures, reporting, and fee requirements. The provisions of this chapter shall apply to all weather modification activities in all parts of the state except as specifically exempted in this chapter.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-495-010, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-010, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-020 Definitions. The definitions of terms contained in chapter 173-400 WAC are incorporated into this chapter by reference. Unless a different meaning is clearly required by context, words and phrases as used in this chapter shall have the following meanings:

(1) "Operation" means the performance of weather modification and control activities using a single permit or license under contract for the purpose of producing or attempting to produce a weather modifying effect within a geographical area.

(2) "Research and development" means theoretical analysis, exploration and experimentation, and the extension of investigative findings of theories of a scientific or technical nature into practical application for experimental and demonstration purposes. This includes the experimental production and testing of models, devices, equipment, materials, and processing.

(3) "Weather modification and control" means changing or attempting to change or control by artificial methods, the natural development of any or all atmospheric cloud forms or precipitation forms which occur in the troposphere.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-495-020, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-020, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-030 Requirement for licenses and permits. No person shall engage in weather modification activities except under and in accordance with a license and a permit issued by ecology, unless specifically exempt from this requirement in WAC 173-495-040.

[Statutory Authority: RCW 70.94.331, 90-19-062 (Order 90-10), § 173-495-030, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-030, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-040 Requirements for exempt activities. The following weather modification and control activity shall be exempt from the license requirement of RCW 43.37.100, the permit requirements of RCW 43.37.100, and the liability requirements of RCW 43.37.190:

(1) All research and experiments related to weather modification control conducted within laboratories.

(2) Those weather modification operations designed to alleviate sudden, unexpected, hazardous conditions which require expeditious localized action for:

(a) Protection against fire

(b) Prevention of frost

(c) Dispersal of fog

(3) Field research and development by institutions of higher learning.

(4) Any person(s) proposing to conduct weather modification and control activities as described in subsection (2) of this section shall notify air programs, department of ecology, headquarters offices in Olympia, Washington, before proceeding of the type of activity to be carried out, the person carrying out the activity and the materials and technique of application to be used.

(5) Any person proposing to conduct weather modification and control activities as described in subsection (3) above shall provide a written description of the proposed program, notice of actual operations ten days prior to commencement, and quarterly reports of operations and status to the Headquarters Office Department of Ecology, Olympia, Washington.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-040, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-040, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-045 Requirements for a regular license. All applicants for a weather modification license shall be certified professional members of the American Meteorological Society or possess the academic achievements and professional experience necessary to receive such certification. In cases where the applicant is an organization, the individual or individuals who will be in control and in charge of the weather modification and control activities shall be required to meet the above standard.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-045, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-045, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-050 Requirements for a restricted license. (1) A restricted license may be issued to an applicant when:

(a) The applicant's proposed weather modification activities are limited solely to those designed to disperse fog over airports; and

(b) The applicant will be fully advised of the pertinent weather information by the meteorologist on duty during the airport fog dispersal activities.

(2) Applicants for restricted licenses are not required to meet the qualifications otherwise imposed by WAC 173-495-040.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-050, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-050, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-060 Procedures for issuing license.

(1) Any person or organization desiring to obtain a license or restricted license shall make an application to ecology on the form prescribed, listing name, business address, etc.

(2) Ecology may require additional information of the applicant to determine competency in the field of meteorology. Such additional information shall be requested of the applicant by certified mail, and shall be submitted in writing.

(3) Prior to the issuance of any license, the applicant shall pay a fee of \$100 to the state of Washington.

(4) The application shall be deemed received by ecology when received at the Headquarters Offices, Department of Ecology, Olympia, Washington, 98504.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-060, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-060, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-065 Period of license. (1) Licenses issued pursuant to chapter 43.37 RCW and these regulations shall be effective for a period of one year, to terminate at the end of the calendar year of issuance.

(2) No later than thirty days prior to the end of the calendar year, the licensee may request a renewal of the license. Ecology shall review the license renewal request after receiving a renewal fee of one hundred dollars made payable to the state of Washington.

(3) In the determination of whether or not to grant a license renewal, ecology shall consider information provided by the applicant of the facts and circumstances used to issue the original permit that were changed or altered. If ecology determines that the licensee no longer meets the requirements of competency in the field of meteorology, ecology may refuse to renew said license.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-065, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-065, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-070 Permits requirements. (1) Each weather modification operation not specifically exempted by statute or these regulations shall require a permit. A separate permit shall be issued for each operation.

(2) A license holder desiring to conduct a weather modification operation shall submit an application for a permit to ecology.

(3) The permit applicant must hold a valid weather modification license from the state of Washington.

(4) The applicant shall publish notice of intention at least once a week for three consecutive weeks in a legal newspaper having general circulation and published within any county in which the operation is to be conducted or affected. If no legal newspaper is published within the appropriate county, publication shall be made in a legal newspaper having a general circulation within the county.

(5) Proof of publication of the notice of intention shall be filed by the licensee with ecology within fifteen days from the date of last publication of the notice.

(6) The notice of intention shall contain at least the following:

(a) The name and address of the licensee;

(b) The nature and object of the intended operation and the person or organization on whose behalf it is to be conducted;

(c) The area in which and the appropriate time during which the operation will be conducted;

(d) The area intended to be affected by the operation; and

(e) The materials and methods to be used in conducting the operation.

(7) The applicant shall furnish proof of financial responsibility, as described in WAC 173-495-120 of this chapter.

(8) The applicant shall pay a permit fee of one and one-half percent of the estimated cost of the operation. The estimated cost will be computed by ecology from available data.

(9) Prior to issuance of a permit, ecology shall state in writing that the weather modification and control activities proposed have been determined to be for the general welfare and public good.

(10) Ecology shall hold an open public hearing at its headquarters office in Olympia prior to any such permit issuance.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-070, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-070, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-080 Permittee's report of operations—Requirement. The permittee shall be required to maintain reports on all operations on a daily basis, and submit twice a month (1st day and 15th day) to ecology. The semi-monthly reports shall include the following information:

- (1) Number of days under contract.
- (2) Number of days of operation and number of hours of each day, for all stations operated.
- (3) The consumption rate and name of seeding agent used.
- (4) A brief summary statement evaluating the past fifteen day period in regard to the seeding potential and experience.
- (5) Location of operations.
- (6) Name and mailing address of each individual, other than the licensee, participating or assisting in the operation.
- (7) A brief statement of projected plans for the coming fifteen day period.
- (8) In the event operations are unexpectedly terminated, a special report covering that fraction of the half-month period of operation is required. All reports must be post-marked not later than one day after due date.
- (9) All such records are public records which shall be open to public inspection.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-080, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-080, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-100 Revocation, suspension, modification. (1) All permits authorized by RCW 43.37.110 shall contain the following provisions: "Ecology may, if it appears that continuing operation under this permit will cause immediate injury to persons or property, terminate or otherwise modify the terms of this permit in order to alleviate an emergency situation by giving notice to the permittee by telegram or other writing."

(2) All permits authorized by RCW 43.37.110 may be revoked, suspended, or modified when ecology has reason to believe that good cause exists and that the revocation, suspension, or modification is required for the general welfare and public good. Any such revocation, suspension, or modification shall not be undertaken prior to written notice by certified mail to the permittee. Opportunity for comment by the permittee shall be allowed. Any final ecology decision shall be in writing.

(3) In the event the applicant desires to appeal any permit revocation, modification, or suspension action by ecology such appeal must be filed with the pollution control hearings board in Olympia within thirty days of ecology's action. An appeal does not constitute a stay.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-100, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-100, filed 12/29/77. Formerly chapter 508-20 WAC.]

WAC 173-495-120 Proof of financial responsibility. A permit applicant shall furnish proof of financial responsibility to ecology by one of the following:

- (1) Copy of insurance policy or binder for the operator.
- (2) A current balance sheet showing sufficient assets to demonstrate financial responsibility.
- (3) Bond for safe performance.
- (4) Such other information as the applicant may provide ecology, in writing, if one of the alternate methods contained in subsections (1) through (3) of this section, is not feasible or available, provided the applicant explains the infeasibility or unavailability.

[Statutory Authority: RCW 70.94.331. 90-19-062 (Order 90-10), § 173-495-120, filed 9/17/90, effective 10/18/90; Order DE 77-29, § 173-495-120, filed 12/29/77.]

Chapter 173-500 WAC

WATER RESOURCES MANAGEMENT PROGRAM ESTABLISHED PURSUANT TO THE WATER RESOURCES ACT OF 1971

WAC

173-500-010	Background.
173-500-020	Purpose.
173-500-030	Authority.
173-500-040	Water resource inventory areas.
173-500-050	Definitions.
173-500-060	General provisions.
173-500-070	Regulation review.
173-500-080	Critical water recourse situation response process.
173-500-990	Map—Water resources inventory areas sub-basins.

WAC 173-500-010 Background. (1) The Water Resources Act of 1971 (chapter 90.54 RCW) sets forth fundamentals of water resource policy to insure that the waters of the state will be protected and fully utilized for the greatest benefit to the people of the state of Washington and, in relation thereto, to provide direction to the department of ecology and other state agencies and officials in carrying out water and related resource programs.

(2) The department was directed, through the adoption of appropriate rules, to develop and implement a comprehensive state water program which would provide a process for making decisions on future water resource allocations and uses.

(3) The act provides that the department of ecology may develop a water program in regional segments so that immediate attention may be given to waters of a give physio-economic region of the state or to specific critical problems of water allocation and use.

(4) The act further directed the department of ecology to modify existing regulations and adopt new regulations to

insure that existing regulatory programs are in accord with the water resource policies of the act.

[Statutory Authority: Chapters 43.27A and 90.54 RCW. 88-13-037 (Order 88-11), § 173-500-010, filed 6/9/88; Order DE 75-23, § 173-500-010, filed 1/6/76.]

WAC 173-500-020 Purpose. The purpose of this chapter is to set forth a program which will provide guidelines to facilitate the further development of the water resources to the extent of their availability for further appropriation and implement the legislative intent as contained in RCW 90.54.040(1). The program shall, where appropriate:

- (1) Identify and foster development of water resource projects;
- (2) Declare preferences or priorities of use by categories;
- (3) Set forth streams closed to future appropriation;
- (4) Establish flows on perennial streams of the state in amounts necessary to provide for preservation of wildlife, fish, scenic, aesthetic, and other environmental values, and navigational values;
- (5) Allocate quantities for beneficial uses;
- (6) Reserve water for future beneficial use;
- (7) Withdraw waters from additional appropriation when sufficient information or data are lacking for the making of sound decisions;
- (8) Establish criteria for limit beyond which further appropriation will not be made;
- (9) Designate areas within the state to be used for management purposes; and
- (10) Be guided by the declaration of fundamentals contained in RCW 90.54.020.

[Order DE 75-23, § 173-500-020, filed 1/6/76.]

WAC 173-500-030 Authority. This regulation is promulgated by the department of ecology under the authority of chapter 90.54 RCW.

[Statutory Authority: Chapters 43.27A and 90.54 RCW. 88-13-037 (Order 88-11), § 173-500-030, filed 6/9/88; Order DE 75-23, § 173-500-030, filed 1/6/76.]

WAC 173-500-040 Water resource inventory areas. For the purposes of this chapter, the state is divided into 62 areas known as water resource inventory areas (WRIAs). The names and numbers of these areas are as follows and are shown on the attached map:

WATER RESOURCES INVENTORY AREAS

WRIA Number, Name

01. Nooksack
02. San Juan
03. Lower Skagit-Samish
04. Upper Skagit
05. Stillaguamish
06. Island
07. Snohomish
08. Cedar-Sammamish
09. Duwamish-Green
10. Puyallup-White
11. Nisqually

12. Chambers-Clover
13. Deschutes
14. Kennedy-Goldsborough
15. Kitsap
16. Skokomish-Dosewallips
17. Quilcene-Snow
18. Elwah-Dungeness
19. Lyre-Hoko
20. Soleduck-Hoh
21. Queets-Quinault
22. Lower Chehalis
23. Upper Chehalis
24. Willapa
25. Grays-Elokoman
26. Cowlitz
27. Lewis
28. Salmon-Washougal
29. Wind-White Salmon
30. Klickitat
31. Rock-Glade
32. Walla Walla
33. Lower Snake
34. Palouse
35. Middle Snake
36. Esquatzel Coulee
37. Lower Yakima
38. Naches
39. Upper Yakima
40. Alkali-Squilchuck
41. Lower Crab
42. Grand Coulee
43. Upper Crab-Wilson
44. Moses Coulee
45. Wenatchee
46. Entiat
47. Chelan
48. Methow
49. Okanogan
50. Foster
51. Nespelem
52. Sanpoil
53. Lower Lake Roosevelt
54. Lower Spokane
55. Little Spokane
56. Hangman
57. Middle Spokane
58. Middle Lake Roosevelt
59. Colville
60. Kettle
61. Upper Lake Roosevelt
62. Pend Oreille

[Order DE 75-23, § 173-500-040, filed 1/6/76.]

WAC 173-500-050 Definitions. For purposes of this chapter and subsequent regulations formulated for planning and management within individual water resource inventory areas, the following definitions shall be used:

(1) "Allocation" means the designating of specific amounts of the water resource for specific beneficial uses.

(2) "**Appropriation**" means the process of legally acquiring the right to specific amounts of the public water resource for application to beneficial uses.

(3) "**Base flow**" means a level of streamflow established in accordance with provisions of chapter 90.54 RCW required in perennial streams to preserve wildlife, fish, scenic, aesthetic, and other environmental and navigational values.

(4) "**Beneficial uses**" are uses of water for domestic, stock watering, industrial, commercial, agricultural, irrigation, hydroelectric power production, mining, fish and wildlife maintenance and enhancement, recreational, and thermal power production purposes, and preservation of environmental and aesthetic values, and all other uses compatible with the enjoyment of the public waters of the state.

(5) "**Consumptive use**" means use of water whereby there is a diminishment of the water source.

(6) "**Department**" means the Washington state department of ecology.

(7) "**Hydrograph**" is a graph showing the variations of streamflow (or stream discharge) with respect to time during a year as determined at a specific cross-sectional location on the stream.

(8) "**Low flow**" means those flow level limitations appearing as provisions on permits and certificates issued by the department, or its predecessors, prior to the effective dates of chapters 173-501 through 173-599 WAC.

(9) "**Nonconsumptive use**" is a type of water use where either there is no diversion from a source body, or where there is no diminishment of the source.

(10) "**Perennial stream**" means a stream the natural flow of which is normally continuous at any given location.

(11) "**Stream management unit**" means stream segments, reaches, or tributaries, each containing a control station, that are identified on stream reach maps in adopted water resource management program documents as units for defining base flow levels.

(12) "**Water right**" means a right to make beneficial use of public waters of the state.

[Order DE 75-23, § 173-500-050, filed 1/6/76.]

WAC 173-500-060 General provisions. (1) The provisions of this chapter shall apply to chapters 173-501 through 173-599 WAC unless the language of said chapters is clearly to the contrary.

(2) As sufficient data are obtained for each WRIA and/or grouping thereof in the state to enable the department to formulate a water resource planning and management program for such area, the department shall by regulation establish policies for the beneficial use of public waters pursuant to RCW 90.54.040.

(3) Water rights established prior to the effective date of rules adopted under chapters 173-500 and 173-501 through 173-599 WAC shall not be affected by such rules.

(4) **Low flow limitations to prevail** (1) Notwithstanding the establishment of base flows established hereunder, existing low flow limitations shall remain in effect.

(5) **Base flow provisions for water rights.**

(a) Surface water and/or ground water appropriation permits, issued subsequent to the effective dates of chapters

173-501 through 173-599 WAC, that will allow either direct diversion from or have a measurable effect on streams where base flow limitations of this chapter, and any such permits or certificates shall be appropriately conditioned to assure maintenance of said base flows.

(b) The base flow provisions for any water right located in a stream management unit shall specifically describe the base flow levels for the control station in that unit and shall refer generally to other downstream base flow requirements that may also become controlling and critical to the use of water under such right.

(6) **Base flow changes.** If it becomes necessary to change a control station location or to add new control stations to improve management capability, the department shall develop streamflow relationships, by accepted engineering procedures, between previously established control station locations and the new location for use in regulating water rights that are subject to base flow limitations.

(7) **Minimum water flows and levels.** The provisions of this chapter shall in no manner be interpreted to preclude utilization of chapter 90.22 RCW.

(8) **Priorities or allocation by use categories - limitations.** Nothing in chapters 173-501 through 173-599 WAC relating to priorities or allocations by use shall be construed to apply to water rights or the historic water use patterns that predate the individual management regulations.

[Order DE 75-23, § 173-500-060, filed 1/6/76.]

WAC 173-500-070 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.27A and 90.54 RCW. 88-13-037 (Order 88-11), § 173-500-070, filed 6/9/88.]

WAC 173-500-080 Critical water recourse situation response process. In areas subject to the department of ecology's jurisdiction, where there may be current or anticipated critical water resource or related water quality concerns, the local government(s), the state or the affected federally recognized tribe(s) may request that representatives from all three governmental entities and, as needed, appropriate federal agencies agree to the designation of the area as a critical water resource situation. All represented parties must agree to the designation. Upon designation, an intergovernmental group will be convened.

The purpose of the intergovernmental group is to cooperatively design a consultation strategy to address the problem(s) which triggered this critical situation response process.

The legal rights and remedies available to the three governmental entities shall not be compromised or abridged by participation in the critical situation response process. However, all of the parties agree to undertake a good faith effort to resolve the critical water resource situation without first resorting to legal action.


When the intergovernmental group determines that a critical water resource situation exists or requires further evaluation or data collection, the parties will consider applying those tools necessary to protect the resources.

These tools must be exercised within 12 months or as otherwise agreed to by the parties, and include, but are not limited to: Targeted conservation, efficiency, reuse; compliance and enforcement; dispute resolution assistance, memoranda of understanding and other agreements; local government restrictions on permit issuance or moratoria; basin withdrawal by adoption of administrative regulations under RCW 90.54.050 or limited state permit issuance.

[Statutory Authority: Chapters 34.05 and 90.54 RCW. 91-18-011 (Order 91-25), § 173-500-080, filed 8/23/91, effective 9/23/91.]

WAC 173-500-990 Map—Water resources inventory areas sub-basins.

WATER RESOURCES INVENTORY AREAS SUB-BASINS.

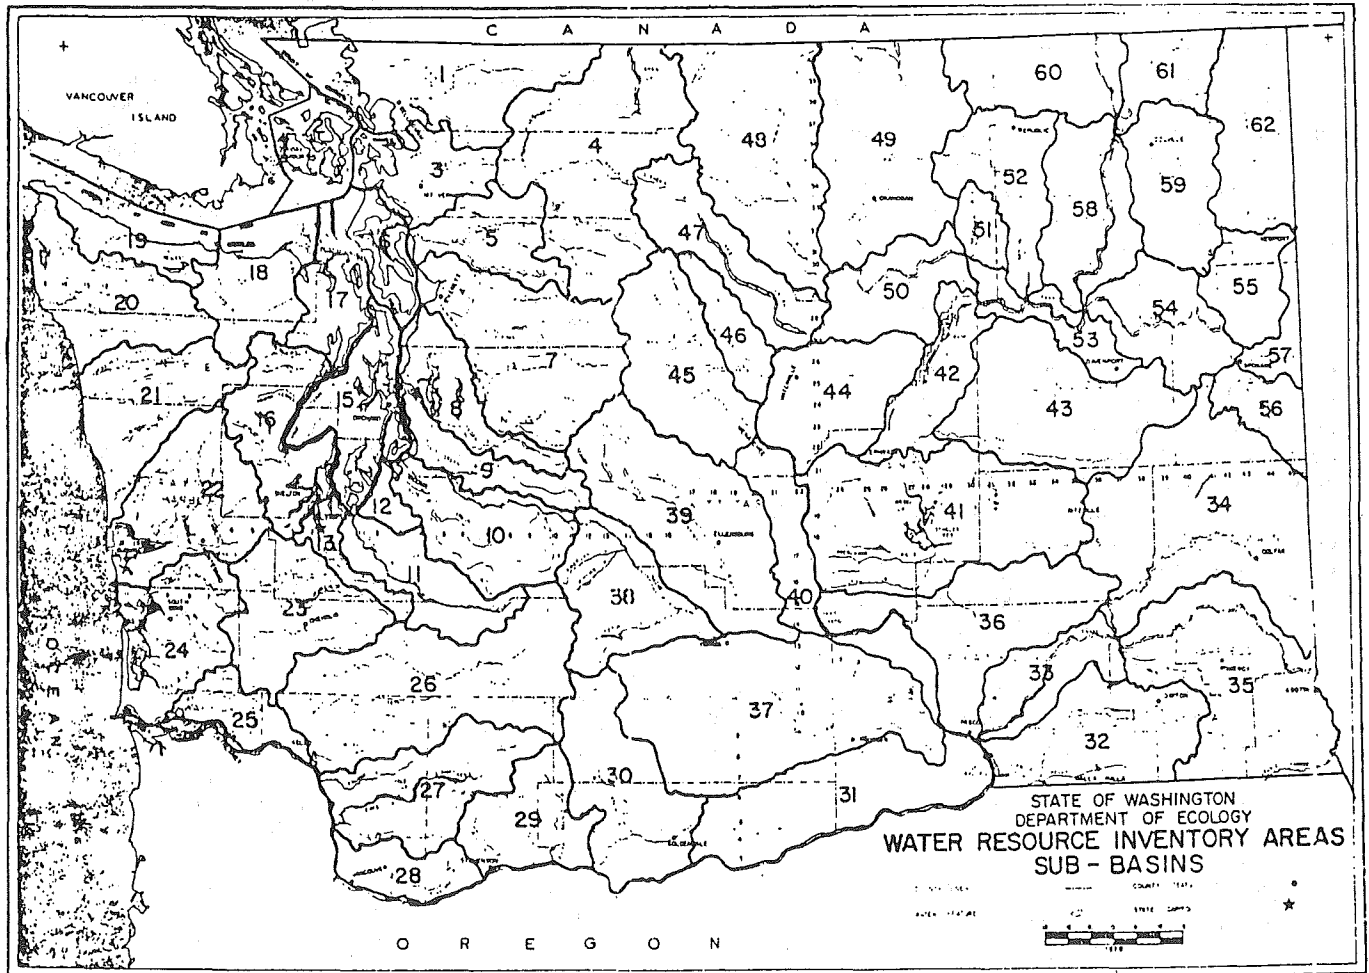

[Order DE 75-23, Map (codified as WAC 173-500-990), filed 1/6/76.]

**Chapter 173-501 WAC
INSTREAM RESOURCES PROTECTION
PROGRAM—NOOKSACK WATER RESOURCE
INVENTORY AREA (WRIA) 1**

WAC

- 173-501-010 General provision.
- 173-501-020 Purpose.
- 173-501-030 Establishment of instream flows.

- 173-501-040 Surface water source limitations to further consumptive appropriation.
- 173-501-050 Lakes.
- 173-501-060 Ground water.
- 173-501-070 Exemptions.
- 173-501-080 Policy statement for future permitting actions.
- 173-501-090 Enforcement.
- 173-501-095 Appeals.
- 173-501-100 Regulation review.

WAC 173-501-010 General provision. These rules apply to waters within the Nooksack water resource invento-

ry area (WRIA 1), as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW

(Water Resources Act of 1971), chapter 90.22 RCW (Minimum water flows and levels), and in accordance with chapter 173-500 WAC (Water resources management program).

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-010, filed 12/4/85.]

WAC 173-501-020 Purpose. Chapter 90.54 RCW (Water Resources Act of 1971) requires that utilization and management of waters of the state be guided by a number of fundamentals, including:

Uses of water for domestic, stock watering, industrial, commercial, agricultural, irrigation, hydroelectric power production, mining, fish and wildlife maintenance and enhancement, recreational, and thermal power production purposes, and preservation of environmental and aesthetic values, and all other uses compatible with the enjoyment of the public waters of the state, are declared to be beneficial. (RCW 90.54.020(1))

The quality of the natural environment shall be protected and, where possible, enhanced as follows:

Perennial rivers and streams of the state shall be retained with base flows necessary to provide for preservation of wildlife, fish, scenic, aesthetic and other environmental values, and navigational values. Lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served. (RCW 90.54.020 (3)(a))

Waters of the state shall be of high quality. Regardless of the quality of the waters of the state, all wastes and other materials and substances proposed for entry into said waters shall be provided with all known, available, and reasonable methods of treatment prior to entry. Notwithstanding that standards of quality established for the waters of the state would not be violated, wastes and other materials and substances shall not be allowed to enter such waters which will reduce the existing quality thereof, except in those situations where it is clear that overriding considerations of the public interest will be served. (RCW 90.54.020 (3)(b))

The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Nooksack water resource inventory area with instream flows and levels necessary to provide for preservation of wildlife, fish, scenic, aesthetic, and other environmental values, and navigational values, as well as recreation and water quality.

In administering and enforcing this regulation, the department's actions shall be consistent with the provisions of chapter 90.54 RCW.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-020, filed 12/4/85.]

WAC 173-501-030 Establishment of instream flows.

(1) Stream management units and associated control stations are established as follows:

Stream Management Unit Information

Control Station No. Stream Management Unit Name	Control Station by River Mile and Section, Township and Range	Stream Management Reach
Anderson Creek Gage # WDOE-2109-00	1.4 Section 19 T. 39 N., R. 4 E.	From confluence with Nooksack River to headwaters, including all tributaries.
Bells Creek Gage # WDOE-2073-00	0.5 Section 21 T. 39 N., R. 5 E.	From confluence with Nooksack River to headwaters, including all tributaries.
Bertrand Creek Gage # WDOE-2124-00	1.0 Section 26 T. 40 N., R. 2 E.	From U.S./Canada border to confluence with Nooksack River, including all tributaries.
California Creek Gage # WDOE-2134-00	3.0 Section 21 T. 40 N., R. 1 E.	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
Canyon Creek Gage # WDOE-2045-00	0.2 Section 35 T. 40 N., R. 6 E.	From confluence with N. Fk. Nooksack River to headwaters, including all tributaries.
Canyon Creek at Kulshan Gage # 12-2085-00	0.2 Section 27 T. 39 N., R. 5 E.	From confluence with N. Fk. Nooksack River to headwaters, including all tributaries.
Cornell Creek Gage # WDOE-2057-00	0.6 Section 1 T. 39 N., R. 6 E.	From the confluence with N. Fk. Nooksack River to headwaters, including all tributaries.
Dakota Creek near Blaine Gage #12-2140-00	3.5 Section 9 T. 40 N., R. 1 E.	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
Deer Creek Gage # WDOE-2130-50	0.2 Section 28 T. 39 N., R. 2 E.	From the confluence with Tenmile Creek to headwaters, including all tributaries.
Fishtrap Creek at Lynden Gage # 12-2120-00	6.9 Section 16 T. 40 N., R. 3 E.	From U.S./Canada border to confluence with Nooksack River, including all tributaries.
Gallop Creek Gage # WDOE-2056-00	0.3 Section 7 T. 39 N., R. 7 E.	From the confluence with N. Fk. Nooksack River to headwaters, including all tributaries.
Hutchinson Creek Gage # WDOE-2101-00	1.8 Section 36 T. 38 N., R. 5 E.	From confluence with South Fork Nooksack River to headwaters, including all tributaries.
Johnson Creek Gage # WDOE-2149-00	0.5 Section 35 T. 41 N., R. 4 E.	From U.S./Canada border to headwaters including all tributaries.
Kendall Creek Gage # 12-2065-00	0.1 Section 3 T. 39 N., R. 5 E.	From the confluence with N. Fk. Nooksack River to headwaters, including all tributaries.

Maple Creek Gage # WDOE-2059-00	0.8 Section 30 T. 40 N., R. 6 E.	From confluence with N. Fk. Nooksack River to headwaters, including all tributaries.
Nooksack River (at Deming) 12-2105-00	36.6 Section 31 T. 39 N., R. 5 E.	From confluence with Smith Creek to confluence of North Fork and Middle Fork Nooksack Rivers.
Nooksack River (at Ferndale) 12-2131-00	5.8 Section 29 T. 39 N., R. 2 E.	From influence of mean annual high tide at low instream flow levels to confluence with, and including, Smith Creek.
Nooksack River (Middle Fork) 12-2080-00	5.0 Section 13 T. 38 N., R. 5 E.	From confluence with North Fork to headwaters.
Nooksack River (North Fork) 12-2072-00	44.1 Section 10 T. 39 N., R. 5 E.	From confluence with Middle Fork to headwaters.
Nooksack River (South Fork) 12-2090-00	5.0 Section 19 T. 38 N., R. 5 E.	From confluence with Nooksack River (mainstem) to headwaters.
Porter Creek Gage # WDOE-2084-00	0.7 Section 11 T. 38 N., R. 5 E.	From the confluence with M. Fk. Nooksack R. to headwaters, including all tributaries.
Racehorse Creek Gage # WDOE-2071-00	1.5 Section 11 T. 39 N., R. 5 E.	From confluence with N. Fk. Nooksack River to headwaters, including all tributaries.
Saar Creek Gage # 12-2155-00	0.2 Section 31 T. 41 N., R. 5 E.	From U.S./Canada border to headwaters, including all tributaries.
Silver Creek Gage # WDOE-2132-00	2.0 Section 4 T. 38 N., R. 2 E.	From confluence with Nooksack River to headwaters, including all tributaries.
Skookum Creek near Wickersham Gage # 12-2095-00	0.1 Section 27 T. 37 N., R. 5 E.	From confluence with South Fork Nooksack River to headwaters, including all tributaries.
Smith Creek Gage # WDOE-2111-00	0.8 Section 22 T. 39 N., R. 4 E.	From confluence with Nooksack River to headwaters, including all tributaries.
Sumas River near Sumas Gage # 12-2145-00	2.1 Section 2 T. 41 N., R. 4 E.	From U.S./Canada border to headwaters including all tributaries.
Tenmile Creek at Laurel Gage # 12-2129-00	4.4 Section 13 T. 39 N., R. 2 E.	From confluence with Nooksack River to headwaters, including all tributaries.
Terrell Creek Gage # WDOE-2133-00	2.2 Section 31 T. 40 N., R. 1 E.	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
Wiser Lake Creek Gage # WDOE-2126-00	0.7 Section 2 T. 39 N., R. 2 E.	From confluence with Nooksack River to headwaters, including all tributaries.

Instream Flows in the Nooksack WRIA
(Instantaneous cubic feet per second)

Month	Day	WDOE-2109-00 Anderson Cr.	WDOE-2073-00 Bells Cr.	WDOE-2124-00 Bertrand Cr.	WDOE-2134-00 California Cr.
Jan.	1	50	4*	90*	40*
	15	50	4*	90*	40*
Feb.	1	50	4*	90*	40*
	15	50	3*	90*	40*
Mar.	1	50	2*	90*	40*
	15	50	2*	90*	25*
Apr.	1	40	3*	80*	18*
	15	31	4*	60*	13*
May	1	25*	5*	50*	9*
	15	20*	6*	40*	6*
Jun.	1	16*	6*	33*	4*
	15	13*	6*	25*	3*
Jul.	1	10*	3*	21*	2*
	15	8*	2*	17*	2*
Aug.	1	6*	1*	13*	2*
	15	6*	1*	13*	2*
Sep.	1	6*	1*	13*	2*
	15	6*	1*	13*	2*
Oct.	1	8*	1*	13*	2*
	15	11*	2*	20*	2*
Nov.	1	15*	3*	30*	4*
	15	20	4*	40*	7*
Dec.	1	30	4*	60*	15*
	15	50	4*	90*	40*

*Denotes closure period. No further consumptive rights issued for use during this time.

Month	Day	WDOE-2045-00 Canyon Creek	WDOE-2085-00 Canyon (Lk) Cr.	WDOE-2057-00 Cornell Creek
Jan.	1	150	50	20
	15	150	50	20
Feb.	1	150	50	20
	15	150	50	20
Mar.	1	150	50	20
	15	150	50	20
Apr.	1	150	50	20
	15	150	50	20
May	1	150	50	20
	15	150	50	20
Jun.	1	150	50	15
	15	150	50	9
Jul.	1	150*	50*	25*
	15	80*	30*	3*
Aug.	1	40*	15*	3*
	15	40*	10*	3*
Sep.	1	40*	10*	3*
	15	40*	10*	3*
Oct.	1	55*	20*	5*
	15	80*	23*	10*
Nov.	1	90*	27*	20*
	15	110	32	20
Dec.	1	130	40	20
	15	150	43	20

(2) Instream flows are established for the stream management units in WAC 173-501-030(1) as follows:

Month	Day	12-2140-00 Dakota Creek	WDOE-2130-50 Deer Creek	12-2120-00 Fishtrap Cr.
Jan.	1	60*	10*	55*
	15	60*	10*	55*

Feb.	1	60*	10*	55*
	15	60*	10*	55*
Mar.	1	60*	10*	55*
	15	40*	10*	55*
Apr.	1	30*	8*	45*
	15	20*	6*	35*
May	1	15*	5*	30*
	15	10*	4*	25*
Jun.	1	7*	3*	20*
	15	5*	2*	15*
Jul.	1	4*	2*	12*
	15	3*	1*	10*
Aug.	1	3*	1*	8*
	15	3*	1*	8*
Sep.	1	3*	1*	8*
	15	3*	1*	8*
Oct.	1	3*	2*	18*
	15	4*	2*	20*
Nov.	1	5*	3*	30*
	15	10*	4*	40*
Dec.	1	20*	5*	55*
	15	60*	7*	55*

	15	10*	1700	1700
Oct.	1	20*	1700	1700
	15	20*	2050	2050
Nov.	1	20*	2050	2300
	15	20	2050	2500
Dec.	1	20	2050	2900
	15	20	2050	2900

Month Day	WDOE-2056-00 Gallop Creek	WDOE-2101-00 Hutchinson Creek	WDOE-2149-00 Johnson Creek	12-2065-00 Kendall Cr.
Jan.	1	12	60	60*
	15	12	60	60*
Feb.	1	12	60	60*
	15	12	60	60*
Mar.	1	12	60	60*
	15	12	60	60*
Apr.	1	12	60	60*
	15	12	60	45*
May	1	12	60	35*
	15	12	60	25*
Jun.	1	12	60	20*
	15	12	60	15*
Jul.	1	12*	60*	12*
	15	8*	40*	9*
Aug.	1	6*	25*	9*
	15	5*	15*	9*
Sep.	1	5*	15*	9*
	15	5*	15*	9*
Oct.	1	5*	25*	9*
	15	5*	30*	9*
Nov.	1	8*	35*	13*
	15	12	40	20*
Dec.	1	12	50	30*
	15	12	60	60*

Month Day	12-2080-00	12-2072-00	12-2090-00
	Nooksack River (Middle Fork)	Nooksack River (North Fork nr. Deming)	Nooksack River (South Fork)
Jan.	1	275	1100
	15	275	1100
Feb.	1	380	1100
	15	380	1100
Mar.	1	380	1100
	15	380	1100
Apr.	1	380	1100
	15	380	1100
May	1	380	1100
	15	450	2000
Jun.	1	525	2000
	15	525	2000
Jul.	1	525	2000
	15	400	2000
Aug.	1	275	1100
	15	275	1100
Sep.	1	275	1100*
	15	275	1100*
Oct.	1	275	1100*
	15	275	1100*
Nov.	1	275	1100*
	15	275	1100
Dec.	1	275	1100
	15	275	1100

Month Day	WDOE-2059-00 Maple Creek	12-2105-00 Nooksack R. (at Deming)	12-2131-00 Nooksack R. (at Ferndale)
Jan.	1	20	2050
	15	20	2050
Feb.	1	20	2150
	15	30	2350
Mar.	1	30	2350
	15	30	2350
Apr.	1	30	2350
	15	30	2350
May	1	30	3325
	15	30	3400
Jun.	1	30	3400
	15	30	3400
Jul.	1	20*	3400
	15	20*	2950
Aug.	1	20*	1700
	15	10*	1700
Sep.	1	10*	1700

Month Day	WDOE-2084-00 Porter Creek	WDOE-2071-00 Racehorse Cr.	WDOE-2155-00 Saar Creek
Jan.	1	10	60
	15	10	60
Feb.	1	10	60
	15	10	60
Mar.	1	10	60
	15	10	60
Apr.	1	10	60
	15	10	80
May	1	10	80
	15	10	90
Jun.	1	10	90
	15	10	90
Jul.	1	10*	50*
	15	6*	35*
Aug.	1	3*	20*
	15	3*	20*
Sep.	1	3*	20*
	15	3*	20*
Oct.	1	3*	20*
	15	6*	30*
Nov.	1	10*	35*
	15	10	40
Dec.	1	10	47
	15	10	55

Month Day	WDOE-2132-00 Silver Creek	12-2095-00 Skookum Cr.	WDOE-2111-00 Smith Creek
Jan.	1	12	115
	15	12	115
Feb.	1	12	115
	15	12	115

Mar.	1	12	115	40
	15	12	115	40
Apr.	1	12	115	40
	15	12	115	60
May	1	12*	115	60*
	15	9*	115	60*
Jun.	1	7*	115	60*
	15	6*	115	40*
Jul.	1	4*	115*	35*
	15	3*	66*	25*
Aug.	1	3*	66*	15*
	15	3*	66*	10*
Sep.	1	3*	66*	10*
	15	3*	66*	10*
Oct.	1	4*	66*	15*
	15	4*	80*	20*
Nov.	1	6*	115*	23*
	15	10	115	25
Dec.	1	12	115	30
	15	12	115	35

(3) Instream flow hydrographs, as represented in Appendix A of the document entitled Nooksack Instream Resources Protection Program, shall be used for identification of instream flows on those days not specifically identified in WAC 173-501-030(2).

(4) Future consumptive water right permits issued hereafter for diversion of surface water in the Nooksack WRIA and perennial tributaries shall be expressly subject to instream flows established in WAC 173-501-030 (1) through (3) as measured at the appropriate gage, preferably the nearest one downstream and at all other downstream control stations, except for those uses described in WAC 173-501-070 (1) through (3).

(5) Projects that would reduce the flow in a section of stream's length (e.g., hydroelectric projects that withdraw streamflow from some length of the channel) are considered consumptive with respect to the affected stream reach. Such projects will be subject to instream flow requirements as specified by the department. These flows will be those established in WAC 173-501-030 (1) through (3) and WAC 173-501-040, or may be flows specifically tailored to that particular project and stream reach. When studies are required to determine such reach and project-specific flow requirements, the department will require the project proponent to conduct such studies in consultation with affected state and federal agencies and Indian tribes.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2), 85-24-073 (Order 85-19), § 173-501-030, filed 12/4/85.]

Month Day	12-2145-00 Sumas River	12-2129-00 Tenmile Cr.	WDOE- 2133-00 Terrell Cr.	WDOE- 2126-00 Wiser Lk. Cr.	
Jan.	1	100*	40*	12	11
	15	100*	40*	12	11
Feb.	1	100*	40*	12	11
	15	100*	40*	12	11
Mar.	1	100*	40*	12	11
	15	100*	40*	12	11
Apr.	1	100*	40*	12	9
	15	100*	40*	12	7
May	1	70*	30*	8*	6*
	15	60*	22*	5*	5*
Jun.	1	40*	17*	4*	4*
	15	35*	12*	3*	3*
Jul.	1	25*	10*	2*	2*
	15	20*	7*	2*	2*
Aug.	1	20*	5*	2*	2*
	15	20*	5*	2*	2*
Sep.	1	20*	5*	2*	2*
	15	20*	6*	2*	2*
Oct.	1	20*	7*	2*	2*
	15	20*	10*	2*	2*
Nov.	1	35*	15*	3*	3*
	15	60*	20*	5	6
Dec.	1	80*	30*	7	8
	15	100*	40*	12	11

WAC 173-501-040 Surface water source limitations to further consumptive appropriation. (1) The following table indicates the status of streams, tributaries and lakes affected by this chapter.

Source Name	Tributary To	Former Administrative Status	Status Under Regulation	Period of Closure	Flow Established
Anderson Creek	Nooksack River	low flow	partial year closure	May 1-Oct. 31	WAC 173-501-030(2)
Bells Creek	North Fork Nooksack	open	closure	year round	WAC 173-501-030(2)
Bertrand Creek	Nooksack River	closure	closure	year round	WAC 173-501-030(2)
Black Slough	Nooksack - South Fork	low flow	low flow		
California Creek	Drayton Harbor	closure	closure	year round	WAC 173-501-030(2)
Canyon Creek	North Fork Nooksack	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Canyon (Lake) Creek	Middle Fork Nooksack	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Chuckanut Creek	Chuckanut Bay	low flow	closure	year round	natural flow
Colony Creek					
(incl. Whitehall)	Samish Bay	open	closure	year round	natural flow
Cornell Creek	North Fork Nooksack	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Dakota Creek	Drayton Harbor	closure	closure	year round	WAC 173-501-030(2)
Deer Creek	Barrett Lake (Tenmile)	closure	closure	year round	WAC 173-501-030(2)

Fishtrap Creek (incl. Double Ditch)	Nooksack River	closure	closure	year round	WAC 173-501-030(2)
Fourmile Creek	Tenmile Creek	closure	closure	year round	
Gallop Creek	North Fork Nooksack	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Hutchinson Creek	South Fork Nooksack	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Johnson Creek	Sumas River	closure	closure	year round	WAC 173-501-030(2)
Kamm Ditch/ Stickney Slough	Nooksack River	closure	closure	year round	natural flow
Kendall Creek	North Fork Nooksack	open	closure	year round	WAC 173-501-030(2)
Maple Creek	North Fork Nooksack	open	closure	July 1-Oct. 31	WAC 173-501-030(2)
Nooksack River - mainstem	Bellingham Bay	low flow	minimum flow (new flow)		WAC 173-501-030(2)
Nooksack River - Middle Fk.	Nooksack River	low flow	minimum flow (new flow)		WAC 173-501-030(2)
Nooksack River - North Fk.	Nooksack River	low flow	partial year closure	Sept. 1-Oct. 31	WAC 173-501-030(2)
Nooksack River - South Fk.	Nooksack River	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Oyster Creek	Samish Bay	open	closure	year round	natural flow
Padden Creek	Bellingham Bay	open	closure	year round	natural flow
Porter Creek	Middle Fork Nooksack	open	partial year closure	July 1-Oct. 1	WAC 173-501-030(2)
Racehorse Creek	North Fork Nooksack	open	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Saar Creek	Vedder Canal-Canada	open	closure	year round	WAC 173-501-030(2)
Saxon Creek	South Fork Nooksack	open	closure	year round	natural flow
Silver Creek	Nooksack River	low flow	partial year closure	May 1-Oct. 31	WAC 173-501-030(2)
Skookum Creek	South Fork Nooksack	low flow	partial year closure	July 1-Oct. 31	WAC 173-501-030(2)
Smith Creek	Nooksack River	low flow	partial year closure	May 1-Oct. 31	WAC 173-501-030(2)
Squalicum Creek	Bellingham Bay	closure	closure	year round	
Sumas River	Vedder Canal-Canada	closure	closure	year round	WAC 173-501-030(2)
Tenmile Creek	Nooksack River	closure	closure	year round	WAC 173-501-030(2)
Terrell Creek	Birch Bay	open	partial year closure	May 1-Oct. 31	WAC 173-501-030(2)
Thompson Creek	Glacier Cr./N. Fk.	open	partial year closure	July 1-Oct. 31	natural flow
Unnamed Stream - Elder Ditch/Scott Ditch	Nooksack River	low flow	low flow		
Unnamed stream - White Creek	Colony Creek	closure	closure		
Whatcom Creek*	Bellingham Bay	open	closure	year round	natural flow
Wiser Lake Creek	Nooksack River	low flow	partial year closure	May 1-Oct. 31	WAC 173-501-030(2)
Lummi Indian Reservation Streams		closure	closure		
Barrett Lake	Tenmile Creek	closure	closure		NA
Green Lake	Fourmile Creek	closure	closure		NA
Lake Terrell	Terrell Creek	closure	closure		NA
Lake Whatcom**	Whatcom Creek	court-ordered lake level	closure	year round	
Wiser Lake	Wiser Lake Creek	closure	closure		NA

For streams listed as "natural flow," insufficient data are available to develop instream flows outside the closure period. Water right applications for consumptive use will be considered on a case by case basis in consultation with the departments of fisheries and game; tribes will also be notified.

Streams which are not specifically listed in this regulation are affected by the regulation if they are tributary to streams or lakes listed herein; otherwise such streams are not affected.

*No exemptions. See WAC 173-501-070(2).

**Lake Whatcom and its tributaries are closed to all further consumptive appropriation; however, any water right applications for consumptive use which were on file with the department of ecology on August 7, 1985 shall be exempt from the closure through the period extending one year from the effective date of this chapter.

(2) When a project (as described in WAC 173-501-030(5)) is proposed on a stream that is closed to further appropriations, the department shall deny the water right application unless the project proponent can adequately de-

monstrate that the project does not conflict with the intent of the closure.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-040, filed 12/4/85.]

WAC 173-501-050 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-050, filed 12/4/85.]

WAC 173-501-060 Ground water. If department investigations determine that there is significant hydraulic continuity between surface water and the proposed ground water source, any water right permit or certificate issued shall be subject to the same conditions as affected surface

waters. If department investigations determine that withdrawal of ground water from the source aquifers would not interfere with stream flow during the period of stream closure or with maintenance of minimum instream flows, then applications to appropriate public ground waters may be approved.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-060, filed 12/4/85.]

WAC 173-501-070 Exemptions. (1) Nothing in this chapter shall affect existing water rights, perfected riparian rights, federal Indian and non-Indian reserved rights, appropriate or otherwise existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric, or water storage reservoir or related facilities.

(2) Single domestic, (including up to 1/2 acre lawn and garden irrigation and associated noncommercial stockwatering) shall be exempt from the provisions established in this chapter, except that Whatcom Creek is closed to any further appropriation, including otherwise exempted single domestic use. For all other streams, when the cumulative impact of single domestic diversions begins to significantly affect the quantity of water available for instream uses, then any water rights issued after that time shall be issued for in-house use only, if no alternative source is available.

(3) Nonconsumptive uses which are compatible with the intent of this chapter may be approved.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-070, filed 12/4/85.]

WAC 173-501-080 Policy statement for future permitting actions. (1) No rights to divert or store public surface waters of WRIA 1 shall hereafter be granted which shall conflict with the purpose of this chapter except as provided in RCW 90.54.020 (3)(a).

(2) Consistent with the provisions of chapter 90.54 RCW, it is the policy of the department to preserve an appropriate minimum instream flow in all perennial streams and rivers as well as the water levels in all lakes in the Nooksack WRIA by encouraging the use of alternate sources of water which include (a) ground water, (b) storage water, or (c) acquisition of existing water rights.

[Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-080, filed 12/4/85.]

WAC 173-501-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-501-090, filed 6/9/88. Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-090, filed 12/4/85.]

WAC 173-501-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this

chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-501-095, filed 6/9/88.]

WAC 173-501-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-501-100, filed 6/9/88. Statutory Authority: RCW 90.54.020 (3)(a) and 90.54.040 (1) and (2). 85-24-073 (Order 85-19), § 173-501-100, filed 12/4/85.]

Chapter 173-507 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—SNOHOMISH RIVER BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 7

WAC

- 173-507-010 General provision.
- 173-507-020 Establishment of instream flows.
- 173-507-030 Surface water source limitations to further consumptive appropriations.
- 173-507-040 Ground water.
- 173-507-050 Exemptions.
- 173-507-060 Future rights.
- 173-507-070 Enforcement.
- 173-507-075 Appeals.
- 173-507-080 Regulation review.

WAC 173-507-010 General provision. These rules apply to surface waters within the Snohomish River basin, WRIA-7 (see WAC 173-500-040). Chapter 173-500 WAC, the general rules of the department of ecology for the implementation of the comprehensive water resources program, applies to this chapter 173-507 WAC.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-010, filed 9/6/79.]

WAC 173-507-020 Establishment of instream flows.

(1) Instream flows are established for stream management units with monitoring to take place at certain control stations as follows:

STREAM MANAGEMENT UNIT INFORMATION

Control Station No. Stream Management Unit Name	Control Station by River Mile and Section, Township and Range	Affected Stream Reach Including Tributaries
12.1330.00 So. Fk. Skykomish River	51.6 28-27-10E	From confluence with N. Fk. Skykomish River to headwaters.
12.1381.50 Sultan River	5.1 17-28-8E	From mouth to headwaters.
12.1411.00 Skykomish River	25.0 12-27-6E	From mouth to headwaters, excluding So. Fk. Skykomish River and Sultan River.
12.1430.00 No. Fk. Snoqualmie	2.2 26-24-8E	From mouth to headwaters.

12.1445.00	40.0	From Snoqualmie Falls to headwaters, excluding No. Fork Snoqualmie River.	Feb.	1	1550	280	190
Snoqualmie River	19-24-8E			15	1550	280	190
			Mar.	1	1550	280	190
				15	1550	280	190
12.1485.00	8.7	From mouth to headwaters.	Apr.	1	1550	280	190
Tolt River	31-26-8E			15	1550	280	190
			May	1	1550	280	190
				15	1550	280	190
12.1490.00	23.0	From confluence with Harris Creek to Snoqualmie Falls, excluding Tolt River.	June	1	1550	280	190
Snoqualmie River	9-25-7E			15	1550	280	190
				15	1550	280	165
12.	2.5	From mouth to confluence with Harris Creek, including Harris Creek.	July	1	1550	280	140
Snoqualmie River	26-27-6E			15	1100	240	120
			Aug.	1	770	170	120
				15	600	120	120
12.1554.00	1.9	From mouth to headwaters.	Sept.	1	600	120	120
Pilchuck River	18-28-6E			15	600	120	120
			Oct.	1	820	190	185
				15	1100	280	190
12.1508.00	20.4	From influence of mean annual high tide at low base flow levels to confluence with Skykomish River and Snoqualmie River, excluding Pilchuck River.	Nov.	1	1550	280	190
Snohomish River	16-27-6E			15	1550	280	190
			Dec.	1	1550	280	190
				15	1550	280	190

(2) Instream flows established for the stream management units in WAC 173-507-020(1) are as follows:

INSTREAM FLOWS IN THE SNOHOMISH RIVER BASIN
(in Cubic Feet per Second)

Month	Day	12.1330.00 So.Fk. Skykomish	12.1411.00 Skykomish	12.1430.00 No.Fk* Snoqualmie	No.Fk.** Snoqualmie
Jan.	1	900	2200	260	200
	15	900	2200	260	200
Feb.	1	900	2200	260	200
	15	900	2200	260	200
Mar.	1	900	2200	260	200
	15	900	2200	300	200
Apr.	1	1100	2650	300	200
	15	1250	3250	300	200
May	1	1250	4000	300	200
	15	1250	4900	300	200
June	1	1250	4900	300	200
	15	1250	4900	300	200
July	1	1250	3250	300	200
	15	950	2170	195	140
Aug.	1	650	1450	130	100
	15	450	1000	130	100
Sept.	1	450	1000	130	100
	15	450	1000	130	100
Oct.	1	550	1300	130	130
	15	700	1700	165	165
Nov.	1	900	2200	210	200
	15	900	2200	260	200
Dec.	1	900	2200	260	200
	15	900	2200	260	200

*Normal year flows must be maintained at all times unless a critical condition is declared by the director. The director, or his designee, may authorize, in consultation with the state departments of fisheries and wildlife, a reduction in instream flows during a critical condition period. At no time are diversions subject to this regulation permitted for any reason when flows fall below the following critical year flows, except where a declaration of overriding considerations of public interest is made by the director.

**Critical year flows represent flows below which the department believes substantial damage to instream values will occur.

Month	Day	12.1381.50 Sultan	12.1445.00 Snoqualmie (above Falls)	12.1485.50 Tolt River*	Tolt River**
Jan.	1		1550	280	190
	15		1550	280	190

*Normal year flows must be maintained at all times unless a critical condition is declared by the director. The director, or his designee, may authorize, in consultation with the state departments of fisheries and wildlife, a reduction in instream flows during a critical condition period. At no time are diversions subject to this regulation permitted for any reason when flows fall below the following critical year flows, except where a declaration of overriding considerations of public interest is made by the director.

**Critical year flows represent flows below which the department believes substantial damage to instream values will occur.

Month	Day	12.1490.00 Snoqualmie (Carnation)	12. Snoqualmie (mouth)	12.1554.00 Pilchuck R.	12.1508.00 Snohomish R.
Jan.	1	2500	2800	300	6000
	15	2500	2800	300	6000
Feb.	1	2500	2800	300	6000
	15	2500	2800	300	6000
Mar.	1	2500	2800	300	6000
	15	2500	2800	300	6000
Apr.	1	2500	2800	300	6000
	15	2500	2800	300	6500
May	1	2500	2800	300	7200
	15	2500	2800	300	8000
June	1	2500	2800	300	8000
	15	2500	2800	300	8000
July	1	1850	2180	220	5700
	15	1300	1550	160	4000
Aug.	1	950	1080	120	2800
	15	700	800	85	2000
Sept.	1	700	800	85	2000
	15	700	800	85	2000
Oct.	1	1050	1200	130	2900
	15	1650	1850	200	4000
Nov.	1	2500	2800	300	6000
	15	2500	2800	300	6000
Dec.	1	2500	2800	300	6000
	15	2500	2800	300	6000

(3) Instream flow hydrographs, as represented in the document entitled "Snohomish River instream resource protection program," shall be used for definition of instream flows on those days not specifically identified in WAC 173-507-020(2).

(4) All consumptive water rights hereafter established shall be expressly subject to the instream flows established in WAC 173-507-020 (1) through (3).

(5) At such time as the departments of fisheries and/or wildlife and the department of ecology agree that additional stream management units should be defined, other than those specified in WAC 173-507-020(1), the department of ecology shall identify additional control stations and management units on streams and tributaries within the basin and shall set instream flows where possible for those stations as provided in chapters 90.22 and 90.54 RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-507-020, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-020, filed 9/6/79.]

WAC 173-507-030 Surface water source limitations to further consumptive appropriations. (1) The department, having determined further consumptive appropriations would harmfully impact instream values, adopts instream flows as follows confirming surface water source limitations previously established administratively under authority of chapter 90.03 RCW and RCW 75.20.050.

LOW FLOW LIMITATIONS

Stream	Limitation	Point of Measurement
Evans Creek, Tributary to Lake Beecher	No diversion when flow drops below 2.0 cfs.	800 ft. So. and 800 ft. east of center of Sec. 7, T. 27 N., R. 6 E.W.M.
Foye Creek Tributary to Riley Slough	No diversion when flow drops below 4.0 cfs.	750 ft. So. and 325 ft. east of N1/4 cor. of Sec. 18, T. 27 N., R. 6 E.W.M.
French Creek, Tributary to Snohomish River	No diversion when flow drops below 0.75 cfs.	125 ft. No. and 1300 ft. west of E1/4 of Sec. 20, T. 28 N., R. 6 E.W.M.
Langlois Creek Tributary to Tolt River	No diversion when flow drops below 3.0 cfs.	1040 ft. No. and 1250 ft. east of SW1/4 cor. of Sec. 22, T. 25 N., R. 7 E.W.M.
Tate Creek, Tributary to No. Fk. Snoqualmie River	No diversion when flow drops below 2.0 cfs.	900 ft. east and 870 ft. No. of W1/4 cor. of Sec. 26, T. 24 N., R. 8 E.W.M.
Tulalip Creek, Tributary to Tulalip Bay	No diversion when flow drops below 2.5 cfs.	1125 ft. west and 125 ft. No. of S1/4 cor. of Sec. 22, T. 30 N., R. 4 E.W.M.
Unnamed Stream (Coon Creek), Tributary to Pilchuck River.	No diversion when flow drops below 1.0 cfs.	480 ft. No. and 240 ft. west of center of Sec. 19, T. 30 N., R. 7 E.W.M.
Unnamed Stream (Coon Creek), Tributary to Pilchuck River	One-half of low flow must be bypassed.	800 ft. east and 1100 ft. So. of W1/4 cor. of Sec. 19, R. 30 N., R. 7 E.W.M.
Unnamed Stream, Tributary to Cherry Creek	No diversion when flow drops below 1.0 cfs.	1000 ft. So. and 400 ft. west of NE cor. of Sec. 16, T. 26 N., R. 7 E.W.M.
Unnamed Stream, Tributary to McCoy Creek	No diversion when flow drops below 0.5 cfs.	600 ft. west and 100 ft. No. of SE cor. of Sec. 5, T. 27 N., R. 8 E.W.M.

Unnamed Stream, Tributary to Snoqualmie River	No diversion when flow drops below 30.0 cfs.	350 ft. west and 900 ft. No. of SE cor. of Sec. 5, T. 27 N., R. 8 E.W.M.
Unnamed Stream (Solberg Creek), Tributary to Snoqualmie River	No diversion when flow drops below 2.0 cfs.	600 ft. west and 1050 ft. No. of E cor. of Sec. 12, T. 25 N., R. 6 E.W.M.
Unnamed Stream, Tributary to Snoqualmie River	One-half of low flow must be bypassed.	500 ft. So. and 1120 ft. east of center Sec. 28, T. 25 N., R. 7 E.W.M.
Unnamed Stream, Tributary to Snoqualmie River	No diversion when flow falls below 1.0 cfs.	600 ft. No. of E1/4 cor. of Sec. 28, T. 25 N., R. 7 E.W.M.
Wood Creek, Tributary to Snohomish River	No diversion when flow drops below 0.75 cfs.	335 ft. No. and 130 ft. east of S1/4 cor. of Sec. 8, T. 28 N., R. 5 E.W.M.
Woods Creek Tributary to Skykomish River	No diversion when flow drops below 11.0 cfs.	Immediately below confl. of West Fork in SE1/4NW1/4 Sec. 33, T. 28 N., R. 7 E.W.M.
Woods Creek, Tributary to Skykomish River	No diversion when flow drops below 6.0 cfs.	Immediately above said confl. of West Fork.
Woods Creek, Tributary to Skykomish River	No diversion when flow drops below 2.5 cfs.	Immediately above confl. of Roesigner Cr. in NE1/4NW1/4 of Sec. 3, T. 28 N., R. 7 E.W.M.
Woods Creek, Tributary to Skykomish River	No diversion when flow drops below 0.5 cfs.	Roesigner Creek, immediately above said confl. with Woods Creek.
Woods Creek, Tributary to Skykomish River	No diversion when flow drops below 5.0 cfs.	West Fork, immediately above said confl. with Woods Creek.
Woods Creek, Tributary to Skykomish River	No diversion when flow drops below 2.5 cfs.	West Fork when it crosses the No. line of Sec. 5, T. 28 N., R. 7 E.W.M.
Unnamed Lake (Morris Lake), Tributary to Horseshoe Lake	No diversion when flow drops below 1.0 cfs.	Lake outlet at NE1/4NE1/4 of Sec. 9, T. 25 N., R. 7 E.W.M.

Note: Affected stream reaches extend from mouth to headwaters and include all tributaries in the contributing drainage area unless specifically excluded.

(2) The department, having determined there are no waters available for further appropriation through the establishment of rights to use water consumptively, closes the following streams to further consumptive appropriation for the periods indicated. These closures confirm surface water source limitations previously established administratively under authority of chapter 90.03 RCW and RCW 75.20.050.

SURFACE WATER CLOSURES

Stream	Date of Closure	Period of Closure
Griffin Creek, Tributary to Snoqualmie River	9/22/53	All year

Harris Creek, Tributary to Snoqualmie River	1/20/44	All year
Little Pilchuck Creek, Tributary to Pilchuck River	5/6/52	All year
May Creek, Tributary to Wallace River	10/13/53	All year
Patterson Creek, Tributary to Snoqualmie River	2/19/52	All year
Quilceda Creek, Tributary to Ebey Slough	6/10/46	All year
Raging River, Tributary to Snoqualmie River	9/20/51	All year
Unnamed Stream (Bodell Creek), Tributary to Pilchuck River	9/6/51	All year

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-030, filed 9/6/79.]

WAC 173-507-040 Ground water. In future permitting actions relating to ground water withdrawals, the natural interrelationship of surface and ground waters shall be fully considered in water allocation decisions to assure compliance with the meaning and intent of this regulation.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-040, filed 9/6/79.]

WAC 173-507-050 Exemptions. (1) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric or water storage reservoir or related facilities.

(2) Domestic inhouse use for a single residence and stock watering, except that related to feed lots, shall be exempt.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-050, filed 9/6/79.]

WAC 173-507-060 Future rights. No right to divert or store public surface waters of the Snohomish WRIA 7 shall hereafter be granted which shall conflict with the instream flows and closures established in this chapter. Future rights for nonconsumptive uses, subject to the conditions herein established, may be granted.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-060, filed 9/6/79.]

WAC 173-507-070 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-507-070, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-070, filed 9/6/79.]

WAC 173-507-075 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-507-075, filed 6/9/88.]

WAC 173-507-080 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-507-080, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-003 (Order DE 79-8), § 173-507-080, filed 9/6/79.]

Chapter 173-508 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—CEDAR-SAMMAMISH BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 8

WAC

173-508-010	Authority.
173-508-020	Purpose.
173-508-030	Closures and instream flows.
173-508-040	Table 1—Cedar-Sammamish basin—WRIA 8.
173-508-050	Ground water.
173-508-060	Instream flows for the Cedar River.
173-508-070	Future rights.
173-508-080	Exemptions.
173-508-090	Enforcement.
173-508-095	Appeals.
173-508-100	Regulation review.

WAC 173-508-010 Authority. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), and in accordance with chapter 173-500 WAC (water resource management program).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-010, filed 9/6/79. Formerly chapter 173-30 WAC.]

WAC 173-508-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in Lake Washington drainages with instream flows and levels necessary to provide for preservation of wildlife, fish, scenic, aesthetic and other environmental values, navigational values, and to preserve water quality.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-020, filed 9/6/79.]

WAC 173-508-030 Closures and instream flows. (1) The department of ecology has determined that additional diversions of water from the Lake Washington drainage system would deplete instream flows and lake levels required to support the uses described in WAC 173-508-020. Therefore, lakes and streams contributing to the Lake Washington drainage above the Hiram M. Chittenden Locks, excluding the Cedar River drainage, shall be closed to further consumptive appropriations. Regulation to protect

instream flows in the Cedar River and its tributaries shall be undertaken pursuant to WAC 173-508-060.

(2) WAC 173-508-040—Table 1, includes specific named and unnamed surface water sources in water resource inventory area 8 with restrictions indicated. All tributaries in the Lake Washington drainage not specifically included in Table 1 are closed.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-030, filed 9/6/79.]

WAC 173-508-040 Table 1—Cedar-Sammamish basin—WRIA 8.

Stream or Lake	Tributary to	Restriction
(Little) Bear Creek	Sammamish River	Closure
Cedar River (including tributaries)	Lake Washington	Instream Flow Levels
Coal Creek	Lake Washington	Closure
Cottage Lake Creek and tributaries, Bear Creek	Sammamish River	Closure
Evans Creek		Closure
Haller Lake	Thornton Creek	Closure
Issaquah Creek	Sammamish Lake	Closure
N. Fork Issaquah		Closure
E. Fork Issaquah		Closure
Unnamed Stream		Closure
Fifteen Mile Creek		Closure
Holder Creek		Closure
Carey Creek		Closure
Lake Washington	Puget Sound	Closure
Sammamish River	Lake Washington	Closure
Lake Sammamish	Sammamish River	Closure
Tibbetts Creek	Sammamish Lake	Closure
Pine Lake and Unnamed Stream (Pine Lake Creek)	Sammamish Lake	Closure
Laughing Jacobs Creek	Sammamish Lake	Closure
Larson Lake (including tributaries)	Lake Washington	Closure
Lyon Creek	Lake Washington	Closure
Martha Lake	Swamp Creek	Closure
May Creek	Lake Washington	Closure
McAleer Creek		Closure
Lake Ballinger (McAleer Lake)	Lake Washington	Closure
Mercer Slough	Lake Washington	Closure
Kelsey Creek		Closure
Kinsley Creek		Closure
Mercer Slough Creek		Closure
North Creek	Sammamish River	Closure
Silver Lake		Closure
Pipers Creek	Puget Sound	Closure
Rock Creek	Cedar River	Closure
Swamp Creek	Sammamish River	Closure
Unnamed Springs	Sammamish Lake	Closure
Unnamed Stream (11-26-3E)	Puget Sound	Closure
Unnamed Stream (12-24-5E)	Sammamish Lake	Closure
Unnamed Stream (Jones Creek)	Cedar River	Closure
Unnamed Stream (Juanita Creek)	Lake Washington	Closure
Unnamed Stream (Northrup Creek)	Lake Washington	Closure
Unnamed Stream (Wildcat Creek)	Sammamish River	Closure
Thornton Creek	Lake Washington	Closure

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-040, filed 9/6/79.]

WAC 173-508-050 Ground water. In future permitting actions relating to ground water withdrawals, the natural interrelationship of surface and ground waters shall be fully considered in water allocation decisions to assure compliance with the intent of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-050, filed 9/6/79.]

WAC 173-508-060 Instream flows for the Cedar River. (1) The instream flows established in this section apply to waters of the Cedar River and affect the entire watershed drained by the Cedar River including all tributaries thereto.

(2) Instream flows established in this section shall be measured at the existing U.S. Geological Survey gaging station No. 12.1190.00 on the Cedar River at Renton, Washington.

(3) Except as provided herein (critical year flows), water flows in the Cedar River and tributaries thereto shall, to the extent depletion under existing rights and natural flow conditions permit, be maintained throughout each year at levels which, during the time periods designated, do not fall below the following measurements:

(a) Normal Year Flow

January 1 to June 20:	370 cfs
June 20 to July 15:	Linear decrease from 370 cfs on June 20 to 130 cfs on July 15
July 15 to September 10:	130 cfs
September 10 to September 20:	Linear increase from 130 cfs on September 10 to 200 cfs on September 20
September 20 to October 1:	200 cfs
October 1 to October 10:	Linear increase from 200 cfs on October 1 to 370 cfs on October 10
October 10 to January 1:	370 cfs

Normal year flows must be maintained at all times unless a critical condition is declared by the director. If natural Cedar River flows fall below the 1 in 10 year Cedar River flow frequency, the director, or his designee, may authorize flows below the normal year flows, but not lower than the critical year flow except where a declaration of overriding considerations of public interest is made by the director. All requests to deplete below the established instream flow level will be considered on a case-by-case basis.

(b) Critical Year Flow

January 1 to June 15:	250 cfs
June 15 to July 1:	Linear decrease from 250 cfs on June 15 to 110 cfs on July 1
July 1 to October 1:	110 cfs
October 1 to November 1:	Linear increase from 110 cfs on October 1 to 250 cfs on November 1
November 1 to January 1:	250 cfs

Critical year flows represent flows below which the department believes substantial damage to instream values will occur. Critical year flows are expected to be met unless

natural Cedar River flows fall below the one in fifty year Cedar River flow frequency.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-060, filed 9/6/79.]

WAC 173-508-070 Future rights. No water rights to divert or store public surface waters of the Cedar-Sammamish basin WRIA 8 shall hereafter be granted which shall conflict with the instream flows and closures established in this chapter. Future rights for nonconsumptive uses may be granted under the provisions of this chapter.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-508-070, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-070, filed 9/6/79.]

WAC 173-508-080 Exemptions. (1) Nothing in this chapter shall affect any existing water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter; nor shall it affect existing rights relating to the operation of any navigation, hydroelectric or water storage reservoir or related facilities.

(2) Domestic inhouse use for a single residence and stock watering, except that related to feedlots, shall be exempt from this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-080, filed 9/6/79.]

WAC 173-508-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-508-090, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-090, filed 9/6/79.]

WAC 173-508-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-508-095, filed 6/9/88.]

WAC 173-508-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-508-100, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 79-10-002 (Order DE 79-9), § 173-508-100, filed 9/6/79.]

Chapter 173-509 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—GREEN-DUWAMISH RIVER BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 9

WAC

173-509-010	Purpose.
173-509-015	Background.
173-509-020	General provision.
173-509-030	Establishment of instream flows.
173-509-040	Surface water source limitations to further consumptive appropriations.
173-509-050	Ground water.
173-509-060	Future rights.
173-509-070	Exemptions.
173-509-080	Enforcement.
173-509-085	Appeals.
173-509-090	Regulation review.
173-509-100	Implementation.

WAC 173-509-010 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Green-Duwamish drainage basin with instream flows and levels necessary for preservation and protection of wildlife, fish, scenic, aesthetic and other environmental values, recreational and navigational values, and to preserve water quality. Nothing in this chapter shall preclude the future issuance of regulations and/or signing of intergovernmental agreements which attempt to optimize the total public use of the basin water resources, providing they are consistent with the intent of this chapter. The instream flow rules presented here are for preservation of the existing resources so that when future planning or development occurs on this river these resources will be available.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-010, filed 6/6/80.]

WAC 173-509-015 Background. The Green-Duwamish River basin has been modified significantly since settlement of the area. Urbanization in the lower basin has influenced water quality and diversions for municipal and industrial water supply have altered the stream flow of the Green-Duwamish River. Ground water has been developed for consumptive use within the basin. The White River originally had a confluence with the Green River near Auburn but since 1906 it has been diverted into the Puyallup River. A dam on the Black River near Tukwila prevents water from the Green River from flowing into Lake Washington during periods of high flow. In 1913 the city of Tacoma commenced diversions for municipal and industrial uses. Since 1962 the Green-Duwamish River has been influenced by the operation of the Howard A. Hanson Dam, a Corps of Engineers flood control project with authorization to provide instream flow maintenance of at least 110 cfs for fisheries conservation purposes. The operation has also considered drinking water quality requirements of the city of Tacoma.

The Green-Duwamish River basin is a natural rearing and spawning area primarily for steelhead trout and chinook, coho and chum salmon. Fish hatcheries are located on tributary streams and these contribute to total numbers of fish produced by the river system. The river itself and the

shoreline also offer easily accessible recreational opportunities.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-015, filed 6/6/80.]

WAC 173-509-020 General provision. These rules apply to all waters within the Green-Duwamish River basin, WRIA 9 (see WAC 173-500-040). This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), and in accordance with chapter 173-500 WAC (water resources management program). The provisions of this chapter apply, as a matter of state law, to future water right authorizations issued pursuant to the state's water rights codes.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-020, filed 6/6/80.]

WAC 173-509-030 Establishment of instream flows.

(1) Instream flows are established for stream management units with monitoring to take place at certain control stations as follows:

STREAM MANAGEMENT UNIT INFORMATION

Control Station No. Stream Management Unit Name	Control Station by River Mile and Section, Township and Range	Affected Stream Reach Including Tributaries
12.1130.00 Green River near Auburn, WA	32.0 17-21-5	From influence of mean annual high tide at low instream flow levels (approximately River Mile 11.0) to USGS Gage #12.1067.000
12.1067.00 Green River near Palmer, WA	60.4 13-21-7	From USGS Gage #12.1067.000 to headwaters.

The Palmer gage will be used to condition future water rights upstream from that gage. The Auburn gage will be used to condition future water right appropriations downstream from the Palmer gage. If it becomes necessary to change a control station location to improve measurement accuracy or management capability, the department shall do so under provisions in WAC 173-500-060(6).

(2) Instream flows established for the stream management units in WAC 173-509-030(1) are as follows:

INSTREAM FLOWS FOR FUTURE WATER RIGHTS IN THE GREEN-DUWAMISH RIVER BASIN (in Cubic Feet per Second)

Month	Day	12.1130.00 Normal Year Green River Near Auburn	12.1067.00 Normal Year Green River Near Palmer	12.1067.00 Critical Year Green River Near Palmer
Jan.	1	650	300	300
	15	650	300	300

Feb.	1	650	300	300
	15	650	300	300
Mar.	1	650	300	300
	15	650	300	300
Apr.	1	650	300	300
	15	650	300	300
May	1	650	300	300
	15	650	300	300
June	1	650	300	300
	15	650	300	210
July	1	550	300	150
	15	300	150	150
Aug.	1	300	150	150
	15	300	150	150
Sept.	1	300	150	150
	15	300	150	150
Oct.	1	300	190	150
	15	350	240	150
Nov.	1	550	300	190
	15	550	300	240
Dec.	1	650	300	300
	15	650	300	300

(a) Future water right holders subject to regulation by the Palmer gage will not be allowed to continue diversions when flows fall below the normal year instream flows at the Palmer gage unless a critical condition is declared by the director. The director, or his designee, may authorize, in consultation with the state departments of fisheries and wildlife, a reduction in instream flows during a critical condition period. At no time will diversions subject to regulation by the Palmer gage be continued when flows fall below the critical year instream flows at Palmer. At no time will diversions subject to regulation by the Auburn gage be continued when flows fall below the normal year instream flows at Auburn. When a declaration of overriding considerations of public interest is made by the director, these requirements may be modified or waived. A declaration of overriding consideration because of drought conditions shall not be made when natural flows equal or exceed the one-in-fifty year low flow condition. The director shall consult with the directors of the state departments of wildlife and fisheries before making a declaration of overriding consideration. Any declaration of critical conditions or overriding considerations of public interest made by the director shall be communicated to all basin resource agencies, water purveyors, and local general purpose governments, and include the reason for such declaration and its expected duration.

(b) The director will consider declaring a critical period when:

(1) In the spring the basin runoff volume forecast of May 1 is not adequate to meet the sum of any rights which the city of Tacoma may have established through historical usage prior to the adoption of this regulation plus the normal year instream flows plus the volume required to replenish the conservation storage.

(2) In the summer and fall the sum of the reservoir inflows extrapolated from current observations plus the volume of water in storage at Howard A. Hanson Dam is not adequate to meet the sum of any rights which the city of Tacoma may have established through historical usage prior to the adoption of this regulation plus the normal year instream flows. Within five days the director will inform the major affected water right holders of the extent of the

allowed deviation from the normal year instream flows. Once a deviation from normal year instream flows is allowed, the water resources shall be evaluated at least every 7 days to see if additional deviation is warranted. Before allowing deviation from the normal year instream flows, water conservation practices and use of other sources shall be considered.


(c) In addition to other necessary provisions, any diversion of the natural flow, including diversion to storage under future water rights shall cease (or be regulated to the extent necessary) when the flow at the applicable control station falls below (or is less than) the instream flows established by this regulation and made a condition of said future water right. Said future water rights are subject to the rights and authority of the Corps of Engineers to utilize for storage and conservation flows, the natural inflow to the

Howard A. Hanson reservoir and to all other prior water right holders' authorized use of natural flows, including any rights that the city of Tacoma may have established through historical usage. The use of stored waters is not to be impaired, limited, or diminished by this regulation.

The department recognizes that from time to time the Corps of Engineers may establish a minimum reservoir level which is necessary to provide conservation flows with a high measure of assurance. When the reservoir falls below this level it may be necessary for the Corps of Engineers to replenish conservation storage. When this occurs, water rights subject to the provisions of this chapter may be temporarily regulated or diminished and the actual stream discharge diminished.

(3) Instream flows, as represented in Figure 1, shall be used for definition of instream flows on those days not specifically identified in WAC 173-509-030(2).

FIGURE 1 - PROPOSED INSTREAM FLOWS FOR FUTURE WATER RIGHTS IN THE GREEN-DUWAMISH RIVER BASIN

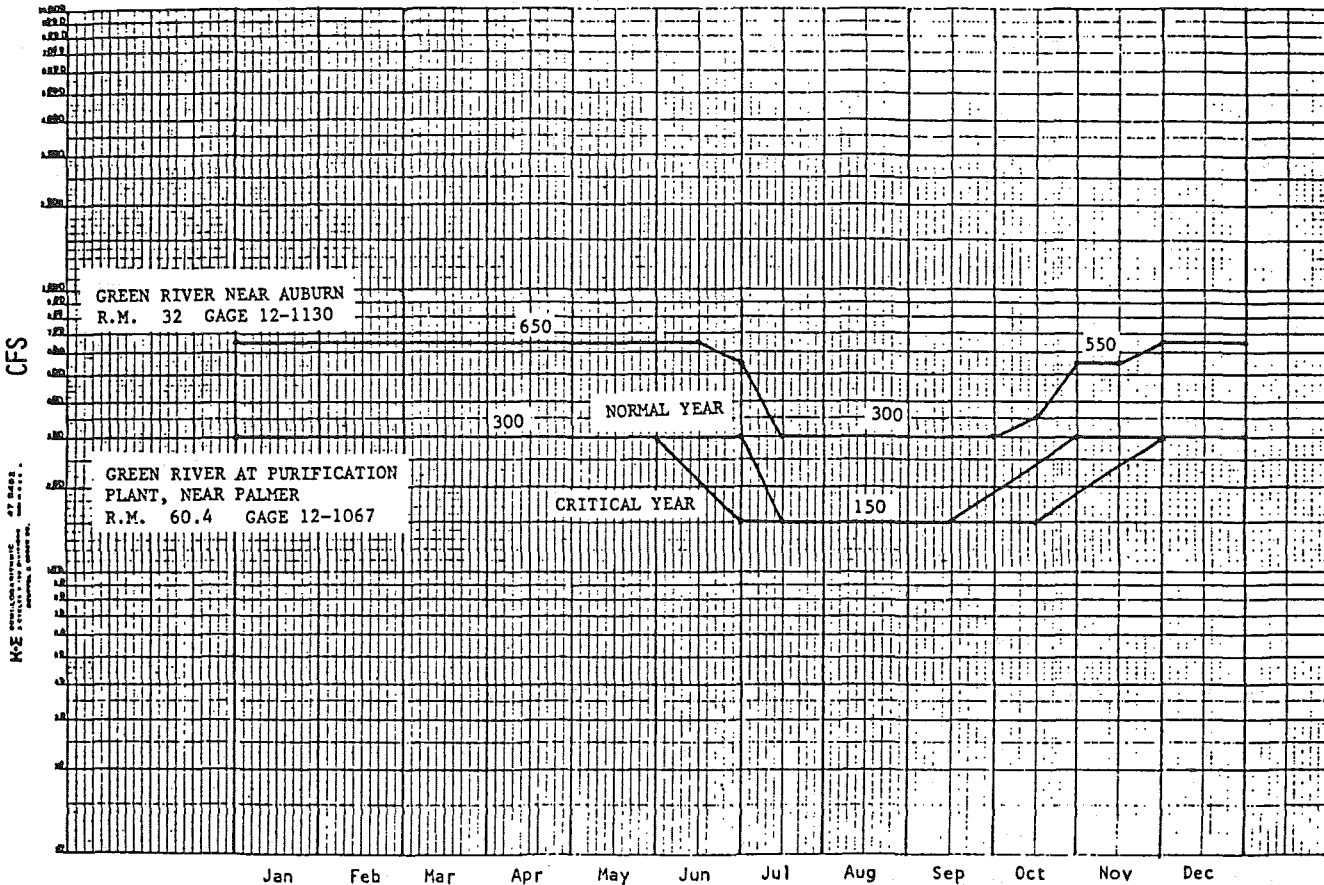

(4) All consumptive water rights hereafter established shall be expressly subject to the instream flows established in WAC 173-509-030 (1) through (3). However, nothing in this section shall prohibit the release or diversion of stored water or the use of any water course as a means for its conveyance in accordance with RCW 90.03.030.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-509-030, filed 6/9/88. Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-030, filed 6/6/80.]

WAC 173-509-040 Surface water source limitations to further consumptive appropriations. (1) The depart-

ment, having determined there are no waters available for further appropriation through the establishment of rights to use water consumptively, closes the following streams to further consumptive appropriation for the periods indicated. These closures confirm surface water source limitations previously established administratively under authority of chapter 90.03 RCW and RCW 75.20.050.

SURFACE WATER CLOSURES

Stream	Date of Administrative Closure	Period of Administrative Closure
All tributaries of Green River SE1/4SE1/4 sec. 14, T.32 N., R.4E.	8/19/53	All year
Deep Creek (including Hyde Lk.), tributary to Deep Lake NW1/4SE1/4 sec. 18, T.21N., R.7E.	4/17/53	All year
Unnamed stream (Des Moines Creek, Tributary to Puget Sound) SW1/4SW1/4 sec. 8, T.22N., R.4E.	8/22/52	All year
Unnamed stream (Garrison Creek), Tributary to Black River (indirect) NW1/4NW1/4NW1/4 sec. 6, T.22N., R.5E.	10/18/51	All year
Unnamed stream (Miller Creek) (Maybrook Creek), Tributary to Puget Sound NE1/4NE1/4 sec. 36, T.23N., R.3E.	1/7/46	All year
Unnamed stream (Springbrook Creek), Tributary to Black River NE1/4SE1/4SW1/4 sec. 13, T.23N., R.4E.	11/14/45	All year

(2) The department, having determined that maximum lake levels have been established by court decree for certain lakes in WRIA 9, adopts the following lake levels. These maximum lake levels confirm lake levels previously established by order of the superior court for King County.

MAXIMUM LAKE LEVELS

Lakes	Lake Level Established	Date of Order
Angle Lake	349.27 ft. at MSL	4/21/75
Star Lake	324.46 ft. at MSL	9/20/50
Lake Sawyer (Tributary to Covington Creek)	518.94 ft. at MSL	8/5/52

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-040, filed 6/6/80.]

WAC 173-509-050 Ground water. Future groundwater withdrawal permits will not be affected by this chapter unless such withdrawal would clearly have an adverse impact upon the surface water system contrary to the intent and objectives of this chapter.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-050, filed 6/6/80.]

WAC 173-509-060 Future rights. No right to divert or store public waters of the Green-Duwamish River basin, WRIA 9, shall be granted which shall conflict with the purposes of this chapter: *Provided however*, Withdrawals of water which would conflict with said purposes may be authorized in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-060, filed 6/6/80.]

WAC 173-509-070 Exemptions. (1) Nothing in this chapter shall affect water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric or water storage reservoir or related facilities, including but not limited to: (a) Howard Hanson Dam storage and operation as authorized in the Flood Control Act of May 17, 1950; (b) any existing right the city of Tacoma may have.

(2) Domestic inhouse use for a single residence and stock watering, except that related to feed lots, shall be exempt from the provisions of this chapter.

(3) Storage projects may be approved if they are not in conflict with the purposes of this chapter.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-070, filed 6/6/80.]

WAC 173-509-080 Enforcement. In the enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-509-080, filed 6/9/88. Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-080, filed 6/6/80.]

WAC 173-509-085 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-509-085, filed 6/9/88.]

WAC 173-509-090 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions. The director shall initiate a review of the rules by appointing a committee of major affected water right holders, basin resource management interests, and governmental agencies.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-509-090, filed 6/9/88. Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-090, filed 6/6/80.]

WAC 173-509-100 Implementation. In the event the COE is authorized to change the operation of Howard Hanson Dam in order to meet the stream flows established in this chapter and so advises the director, these regulations shall be reviewed by the department within 180 days of the COE authorization to determine, what, if any, amendments are required to maintain the integrity and purpose of this chapter.

[Statutory Authority: RCW 90.22.020, 90.54.020 and 90.54.040. 80-07-005 (Order DE 79-32), § 173-509-100, filed 6/6/80.]

Chapter 173-510 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—PUYALLUP RIVER BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 10

WAC

173-510-010	General provision.
173-510-020	Purpose.
173-510-030	Establishment of instream flows.
173-510-040	Surface water source limitations to further consumptive appropriations.
173-510-050	Ground water.
173-510-060	Lakes.
173-510-070	Exemptions.
173-510-080	Future rights.
173-510-090	Enforcement.
173-510-095	Appeals.
173-510-100	Regulation review.

WAC 173-510-010 General provision. These rules apply to waters within the Puyallup River basin, WRIA 10, as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-010, filed 3/21/80.]

WAC 173-510-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Puyallup River basin with instream flows and levels necessary to provide protection for wildlife, fish, scenic-aesthetic, environmental values, recreation, navigation, and to preserve high water quality standards.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-020, filed 3/21/80.]

WAC 173-510-030 Establishment of instream flows.

(1) Stream management units and associated control stations are established as follows:

STREAM MANAGEMENT UNIT INFORMATION

Control Station No. Stream Management Unit Name	Control Station by River Mile and Section, Township, and Range	Affected Stream Reach(es)
12-0965.00 Upper Puyallup River	12.2 25-20-4E	Confluence with Puyallup River to the headwaters including all tributaries

12-0957.00 Carbon River	0.1 13-19-4E	From the confluence with the White River to the headwaters including all tributaries, excluding the Carbon River.
12-1015.00 Lower Puyallup River	6.6 20-20N-R4E	From the influence of mean annual high tide at low base flow levels to the confluence with the White River including all tributaries and excluding the White River.

(2) Instream flows are established for the stream management units in WAC 173-510-030(1) as follows:

INSTREAM FLOWS IN THE PUYALLUP RIVER BASIN

(cubic feet per second)

Month	Day	12-0965.00 Puyallup River (At Alderton)	12-1015.00 Puyallup River	12-0957.00 Carbon River
Jan	1	700	1400	600
	15	700	1400	550
Feb	1	750	1400	550
	15	800	1500	550
Mar	1	800	1600	550
	15	850	1700	550
Apr	1	900	1800	600
	15	950	1900	700
May	1	950	2000	900
	15	1000	2000	900
Jun	1	1050	2000	600
	15	1050	2000	500
Jul	1	1050	2000	450
	15	1050	1750	400
Aug	1	900	1500	350
	15	800	1300	350
Sep	1	600	1150	350
	15	500	1000	350
Oct	1	500	1000	350
	15	500	1000	550
Nov	1	600	1000	550
	15	700	1100	600
Dec	1	700	1200	700
	15	700	1300	700

(3) Instream flow hydrographs, as represented in the document entitled "Puyallup River basin instream resource protection program," shall be used for definition of instream flows on those days not specifically identified in WAC 173-510-030(2).

(4) All consumptive water rights hereafter established shall be expressly, subject to instream flows established in WAC 173-510-030(1) through (3).

(5) At such time as the department of fisheries and/or department of wildlife and the department of ecology shall agree that additional stream management units should be identified other than those specified in WAC 173-510-030(1), the department of ecology shall identify additional control stations and management units on streams and tributaries within the basin and shall further protect instream flows where possible for those stations as provided in chapters 90.22 and 90.54 RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-510-030, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-030, filed 3/21/80.]

WAC 173-510-040 Surface water source limitations to further consumptive appropriations. (1) The department of ecology, having determined unlimited consumptive appropriations would harmfully impact instream values, adopts instream flows as follows confirming surface water source limitations previously established administratively under the authority of chapter 90.03 RCW and RCW 75.20.050.

LOW FLOW LIMITATIONS

Stream Number Stream Name Section, Township, Range of Stream Mouth or Lake Outlet	Limitation
10.0594 Unnamed stream, tributary to Puyallup River NE1/4SE1/4, Sec. 8, T.18N, R.5E	No diversion when flow falls to 0.10 cfs.
10.0415 Unnamed stream, (Taylor Creek) tributary of Carbon River NW1/4SW1/4, Sec. 33, T.19N., R.5E	No diversion when flow falls to 1.0 cfs.
10.0402 Unnamed stream, (Van Ogle Creek) tributary to Puyallup River NW1/4SE1/4, Sec. 30, T.20N, R.5E	No diversion when discharge into the Puyallup River drops to 1.0 cfs.
Unnamed stream, (Canyon Creek) tributary to Puyallup River SE1/4NE1/4, Sec. 24, T. 20N, R.3E	No diversion when flow falls to 1.0 cfs.

(2) The following stream and lake closures are adopted confirming surface water source limitations previously established administratively under the authority of chapter 90.03 RCW and RCW 75.20.050.

EXISTING SURFACE WATER CLOSURES

Stream Number Stream Name Section, Township, Range	Date of Closure	Period of Closure
10.0414 Voight Creek, tributary to Carbon River NW1/4SW1/4, Sec. 33, T.19N., R.5E	2/26/75	All year
10.0589 Unnamed stream (Lawrence Creek), tributary to Puyallup River NW1/4NE1/4, Sec. 25, T.19N, R.4E	2/26/75	All year
Unnamed springs, tributary to Puyallup River SE1/4,NE1/4, Sec. 35, T.20N, R.4E	12/14/64	All year
10.0006 Hylebos Creek Hylebos Creek, drains into Commencement Bay and Puget Sound NW1/4NE1/4, Sec. 27, T.21N, R.3E	4/26/76	All year
10.0406 Fennel Creek, tributary to Puyallup River SE1/4SE1/4, Sec. 6, T.19N, R.5E	2/26/75	All year
North Lake Sec. 15, T.21N, R.4E	8/19/47	All year

(3) The department, having determined that further consumptive appropriations would harmfully impact instream values, closes the following streams and lakes in WRIA 10 to further consumptive appropriations.

NEW SURFACE WATER CLOSURES

Stream Number Stream or Lake Name Section, Township, Range of Stream Mouth or Lake Outlet	Period of Closure
10.0429 South Prairie Creek and all tributaries, tributary to Carbon River SW1/4SE1/4, Sec. 27, T.19N, R.5E	All year
10.0027 Clarks Creek and all tributaries, tributary to Puyallup River NE1/4NE1/4, Sec. 19, T.20N, R.4E	All year
10.0600 Kapowsin Creek and all tributaries, tributary to Puyallup River SW1/4SW1/4, Sec. 20, T.18N, R.5E	All year
10.0031 -.0397 White River and all tributaries SW1/4SE1/4, Sec 23, T.20N, R.4E	All year
Kapowsin Lake SE1/4NE1/4, Sec. 5, T.17N., R.5E	All year
10.0603 -.0607 Ohop Creek and all tributaries source of Kapowsin Lake SE1/4NW1/4, Sec. 18, T.17N., R.3E	All year
10.0022 Clear Creek and all tributaries, tributary to Puyallup River NW1/4SW1/4, Sec. 11, T.20N., R.3E	All year
10.0410 Canyon Falls Creek and all tributaries, tributary to Puyallup River Sec. 7, T.19N., R.5E	All year
10.0596 Fiske Creek and all tributaries, tributary to Puyallup River SW1/4SW1/4, Sec. 17, T.18N., R.5E	All year
10.0006 Hylebos Creek and all tributaries, tributary to Commencement Bay NW1/4NE1/4, Sec. 27, T.21N., R.3E	All year
10.0620 Le Dout Creek and all tributaries, tributary to Puyallup River NW1/4NW1/4, Sec. 28, T.17N., R.6E	All year
10.0622 Niesson Creek and all tributaries, tributary to Puyallup River NE1/4SE1/4, Sec. 33, T.17N., R.6E	All year
10.0017 Wapato Creek and all tributaries, tributary to Commencement Bay NW1/4SW1/4, Sec. 27, T.21N., R.3E	All year
10.0035 Unnamed Stream (Strawberry Creek), (Salmon Creek) and all tributaries, tributary to White River NE1/4SE1/4, Sec. 13, T.20N., R.4E	All year
10.0621 Kellogg Creek and all tributaries, tributary to Puyallup River SE1/4SW1/4, Sec. 28, T.17N., R.6E	All year

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-040, filed 3/21/80.]

WAC 173-510-050 Ground water. In future permitting actions relating to ground water withdrawals, particularly from shallow aquifers, a determination shall be made as to whether the proposed withdrawal will have a direct, and measurable, impact on stream flows in streams for which closures and instream flows have been adopted (WAC 173-510-040). If the determination affirms such interrelationship, the provisions of WAC 173-510-040 shall apply.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-050, filed 3/21/80.]

WAC 173-510-060 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-060, filed 3/21/80.]

WAC 173-510-070 Exemptions. (1) Nothing in this chapter shall affect water rights, riparian, appropriative, or otherwise existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric, or water storage reservoir or related facilities.

(2) Domestic in-house use for a single residence and stock watering shall be exempt except that use related to feedlots.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-070, filed 3/21/80.]

WAC 173-510-080 Future rights. No rights to divert or store public surface waters of the Puyallup WRIA 10 shall hereafter be granted which shall conflict with the purpose of this chapter as stated in WAC 173-510-02 [WAC 173-510-020].

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-080, filed 3/21/80.]

WAC 173-510-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-510-090, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-090, filed 3/21/80.]

WAC 173-510-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-510-095, filed 6/9/88.]

WAC 173-510-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-510-100, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-04-047 (Order DE 79-31), § 173-510-100, filed 3/21/80.]

Chapter 173-511 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—NISQUALLY RIVER BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 11

WAC

- 173-511-010 General provision.
- 173-511-020 Purpose.
- 173-511-030 Establishment of instream flows.
- 173-511-040 Surface water source limitations to further consumptive appropriations.
- 173-511-050 Ground water.
- 173-511-060 Lakes.
- 173-511-070 Exemptions.
- 173-511-080 Future rights.
- 173-511-090 Enforcement.
- 173-511-095 Appeals.
- 173-511-100 Regulation review.

WAC 173-511-010 General provision. These rules apply to waters within the Nisqually River basin, WRIA 11, as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-010, filed 2/2/81.]

WAC 173-511-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Nisqually River basin with instream flows and levels necessary to provide protection for wildlife, fish, scenic, aesthetic, environmental values, recreation, navigation, and to preserve water quality.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-020, filed 2/2/81.]

WAC 173-511-030 Establishment of instream flows. (1) Stream management units and associated control stations are established as follows:

STREAM MANAGEMENT UNIT INFORMATION

Control Station No. Stream Management Unit Name	Control Station Location, River Mile and Section, Township and Range	Affected Stream Reach
New gage Nisqually River	4.3 9, 18N, 1E	From influence of mean annual high tide at low base flow levels to the outlet of the Centralia City Light Power Plant.

12-0895-00 Nisqually River	21.8 28, 17N, 2E	From outlet of the Centralia City Light Power Plant at river mile 12.6 to Centralia City Light Power canal diversion at river mile 26.2, including all tributaries.
12-0884-00 Nisqually River	32.6 21, 16N, 3E	From the Centralia City Light Power canal diversion at river mile 26.2 to gage 12-0865-00 near the La Grande Power Plant, including all tributaries except the Mashel River.
12-0825-00 Nisqually River	57.8 29, 15N, 6E	From gage 12-0865-00 near the La Grande Power Plant to the headwaters including all tributaries.
12-0870-00 Mashel River	3.25 11, 16N, 4E	From mouth upstream to the headwaters including all tributaries.

Month	Day	Upper Reach of the Nisqually River USGS Gage 12-0825-00 RM 57.8	Mashel River USGS Gage 12-0870-00 RM 3.25
January	1	450	100
	15	450	100
February	1	450	100
	15	450	100
March	1	450	100
	15	450	100
April	1	450	100
	15	450	100
May	1	450	100
	15	450	80
June	1	600	80(closed)
	15	650	70(closed)
July	1	550	50(closed)
	15	500	40(closed)
August	1	450	30(closed)
	15	400	30(closed)
September	1	350	20(closed)
	15	300	20(closed)
October	1	300	20(closed)
	15	300	20(closed)
November	1	350	40
	15	400	70
December	1	450	100
	15	450	100

(2) Instream flows established for the stream management unit described in WAC 173-511-030(1) are as follows:

INSTREAM FLOWS IN THE NISQUALLY RIVER BASIN
(in Cubic Feet per Second)

Month	Day	Lower Reach of the Nisqually River USGS Gage 12-* RM 4.3	Bypass Reach of the Nisqually River USGS Gage 12-0895-00 RM 21.8	Mid Reach of the Nisqually River USGS Gage 12-0884-00 RM 32.6-
January	1	900	600	900
	15	900	600	900
February	1	900	600	900
	15	900	600	900
March	1	900	600	900
	15	900	600	900
April	1	900	600	900
	15	900	600	900
May	1	900	600	900
	15	900	600	900
June	1	900	500(closed)	800(closed)
	15	850	450(closed)	800(closed)
July	1	800	400(closed)	800(closed)
	15	800	400(closed)	800(closed)
August	1	800	370(closed)	800(closed)
	15	800	370(closed)	650(closed)
September	1	600	370(closed)	600(closed)
	15	600	370(closed)	600(closed)
October	1	700	550(closed)	700(closed)
	15	700	550(closed)	700(closed)
November	1	700	600	700
	15	700	600	700
December	1	800	600	800
	15	900	600	900

*New gage to be established.

(3) Instream flow hydrographs, as represented in the document entitled "Nisqually River basin instream resource protection program," shall be used for identification of instream flows on those days not specifically identified in WAC 173-511-030(2).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-030, filed 2/2/81.]

WAC 173-511-040 Surface water source limitations to further consumptive appropriations. (1) The department has determined that (a) certain streams exhibit low summer flows or have a potential for going dry thereby inhibiting anadromous fish passage during critical life stages, and (b) historic flow regimes and current uses of certain other streams indicate that no water is available for additional appropriation. Based upon these determinations the following streams and lakes are closed to further appropriation for the periods indicated:

NEW SURFACE WATER CLOSURES

Stream or Lake Section, Township, and Range of Mouth or Outlet	Tributary to	Period of Closure
Mashel River NE1/4SW1/4 Sec. 29, T16N, R4E and all tributaries	Nisqually River	June 1 - Oct. 31
Red Salmon Creek (Mounts Creek) NE1/4NW1/4 Sec. 33, T19N, R1E and all tributaries	Nisqually River	April 1 - Oct. 31
Clear Creek NE1/4SE1/4 Sec. 21, T18N, R1E and all tributaries	Nisqually River	April 1 - Oct. 31

Tanwax Creek NW1/4NE1/4 Sec.20, T16N, R3E and all tributaries	Nisqually River	April 1 - Oct. 31	Unnamed Stream and all tributaries SW1/4NW1/4 Sec. 11, T15N, R4E	Alder Lake (Nisqually River)	Closure	4/28/64
McAllister Creek (except Medicine Creek) NW1/4N1/4 Sec. 6, T18N, R1E and all tributaries	Puget Sound	all year	Unnamed Stream and all tributaries SW1/4SE1/4 Sec. 17, T17N, R2E	Centralia Canal (Nisqually River)	Low Flow (0.75 cfs bypass)	11/19/51
Lake Saint Clair SE1/4NW1/4 Sec. 6, T17N, R1E		all year	Unnamed Stream and all tributaries SE1/4SE1/4 Sec. 27, T17N, R2E	Nisqually River	Low Flow (0.50 cfs bypass)	12/6/50
Toboton Creek (above Hopson Road) SW1/4SW1/4 Sec. 19, T16N, R3E and all tributaries	Nisqually River	April 1 - Nov. 30	Yelm Creek and all tributaries SW1/4SW1/4 Sec. 12, T.17N, R1E	Nisqually River	Closure	8/7/51
Lackamas Creek SE1/4SE1/4 Sec. 13, T16N, R2E and all tributaries	Nisqually River	April 1 - Nov. 30	[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-040, filed 2/2/81.]			
Murray Creek NW1/4NW1/4 Sec. 16, T17N, R2E	Nisqually River	April 1 - Nov. 30				
Bypass Reach, Nisqually River NE1/4SE1/4 Sec. 11, T17N, R1E	Puget Sound	June 1 - Oct. 31				
Mid Reach, Nisqually River SE1/4NW1/4 Sec. 1, T16N, R2E	Puget Sound	June 1 - Oct. 31				

(2) The following stream and lake low flows and closures are adopted confirming surface water source limitations previously established administratively under the authority of chapter 90.03 RCW and RCW 75.20.050.

EXISTING SURFACE WATER SOURCE LIMITATIONS
CURRENT ADMINISTRATIVE STATUS OF STREAMS AND LAKES
NISQUALLY BASIN, WRIA 11

Stream	Tributary to	Action	Dates
Eaton Creek SE1/4NW1/4 Sec. 6, T17N, R1E	Lake St. Clair	Closure	12/1/53
Harts Lake and outlet streams SW1/4SE1/4 Sec. 1, T16N, R2E	Nisqually River	Low Flow (0.5 cfs bypass)	10/7/44
Horn Creek SW1/4NE1/4 Sec. 1, T16N, R2E	Nisqually River	Closure	7/22/74
Muck Creek and all tributaries SW1/4SW1/4 Sec. 36, T18N, R1E	Nisqually River	Closure	5/26/48
Ohop Creek and all tributaries SW1/4NE1/4 Sec. 25, T16N, R3E	Nisqually River	Closure	2/15/52
Ohop Lake NE1/4SE1/4 Sec. 10, T16N, R1E	Ohop Creek	Lake Level (523 ft)	3/25/66
Thompson Creek and all tributaries SE1/4NE1/4 Sec. 11, T17N, R1E	Nisqually River	Low Flow (1.0 cfs bypass)	11/19/51

WAC 173-511-050 Ground water. Future ground water withdrawal proposals will not be affected by this chapter unless it is verified that such withdrawal would clearly have an adverse impact upon the surface water system contrary to the intent and objectives of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-050, filed 2/2/81.]

WAC 173-511-060 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-060, filed 2/2/81.]

WAC 173-511-070 Exemptions. (1) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric or water storage reservoir or related facilities.

(2) If, upon detailed analysis, appropriate and environmentally sound proposed storage facilities are found to be compatible with this chapter, such facilities may be approved.

(3) Domestic use for a single residence shall be exempt from the provisions of this chapter; provided that, if the cumulative effects of numerous single domestic diversions and/or withdrawals would seriously affect the quantity of water available for instream uses, then only domestic in-house use shall be exempt if no alternative source is available.

(4) Stock-watering use, except that related to feedlots, shall be exempt from the provisions established in this chapter.

(5) Future rights for nonconsumptive uses may be granted.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-070, filed 2/2/81.]

WAC 173-511-080 Future rights. No rights to divert or store public surface waters of the Nisqually River basin, WRIA 11, shall hereafter be granted, except as provided in WAC 173-511-070, which shall conflict with the purpose of this chapter as stated in WAC 173-511-020.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-080, filed 2/2/81.]

WAC 173-511-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-511-090, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-090, filed 2/2/81.]

WAC 173-511-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-511-095, filed 6/9/88.]

WAC 173-511-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-511-100, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-04-028 (Order DE 80-42), § 173-511-100, filed 2/2/81.]

Chapter 173-512 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—CHAMBERS-CLOVER CREEKS BASIN WATER RESOURCE INVENTORY AREA (WRIA) 12

WAC

- 173-512-010 Authority.
- 173-512-020 Purpose.
- 173-512-030 Surface water closures.
- 173-512-040 Ground water.
- 173-512-050 Future rights.
- 173-512-060 Exemptions.
- 173-512-070 Enforcement.
- 173-512-075 Appeals.
- 173-512-080 Regulation review.

WAC 173-512-010 Authority. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flow and levels), and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-010, filed 12/12/79.]

WAC 173-512-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Chambers-Clover creeks drainage basin with instream flows and levels necessary to provide for preservation and protection of wildlife, fish, scenic, aesthetic and other environmental values, recreational and navigational values, and to preserve water quality.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-020, filed 12/12/79.]

WAC 173-512-030 Surface water closures. The department of ecology, having determined that further consumptive appropriations would harmfully impact instream values closes the following streams and lakes in Water Resource Inventory Area 12 to further consumptive appropriations:

SURFACE WATER CLOSURES

Stream or Lake	Tributary to
Chambers Creek and all tributaries, including among others: Leach Creek Flett Creek Steilacoom Lake Ponce De Leon Creek	Puget Sound Chambers Creek Chambers Creek Chambers Creek Steilacoom Lake
Clover Creek and all tributaries, including among others: North Fork Clover Creek Spanaway Creek Morey Creek Spanaway Lake Tule Lake	Clover Creek Clover Creek Clover Creek Spanaway Creek Spanaway Creek
Unnamed Stream (Crystal Springs Creek) including tributaries Sequalitchew Creek and all tributaries, including among others: Sequalitchew Lake American Lake Murray Creek (and tributaries)	Puget Sound Puget Sound Sequalitchew Creek Sequalitchew Lake American Lake

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-030, filed 12/12/79.]

WAC 173-512-040 Ground water. In future permitting actions relating to ground water withdrawals, the natural interrelationship of surface and ground waters shall be fully considered in water allocation decisions to assure compliance with the intent of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-040, filed 12/12/79.]

WAC 173-512-050 Future rights. No water rights for consumptive uses of waters from the streams and lakes listed in WAC 173-512-030 shall hereafter be granted. Future rights for nonconsumptive uses may be granted subject to the provisions of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-050, filed 12/12/79.]

WAC 173-512-060 Exemptions. (1) Nothing in this chapter shall affect any existing water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter; nor shall it affect existing rights relating to the operation of any navigation, hydroelectric or water storage reservoir or related facilities.

(2) Stock watering use, except that related to feed lots, shall be exempt from the surface water closures established in this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-060, filed 12/12/79.]

WAC 173-512-070 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-512-070, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-070, filed 12/12/79.]

WAC 173-512-075 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-512-075, filed 6/9/88.]

WAC 173-512-080 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-512-080, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-01-012 (Order 79-23), § 173-512-080, filed 12/12/79.]

Chapter 173-513 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—DESCHUTES RIVER BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 13

WAC

173-513-010	General provision.
173-513-020	Purpose.
173-513-030	Establishment of instream flows.
173-513-040	Surface water source limitations to further consumptive appropriations.
173-513-050	Ground water.
173-513-060	Lakes.
173-513-070	Exemptions.
173-513-080	Future rights.
173-513-090	Enforcement.
173-513-095	Appeals.
173-513-100	Regulation review.

WAC 173-513-010 General provision. These rules apply to waters within the Deschutes River basin, WRIA 13, as defined in WAC 173-500-040. This chapter is promulgat-

ed pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-010, filed 6/24/80.]

WAC 173-513-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Deschutes River basin with instream flows and levels necessary to provide protection for wildlife, fish, scenic, aesthetic, environmental values, recreation, navigation, and water quality.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-020, filed 6/24/80.]

WAC 173-513-030 Establishment of instream flows. (1) Stream management units and associated control stations are established as follows:

Stream Management Unit Information

Control Station No. Stream Management Unit Name	Control Station Location, River Mile and Section, Township and Range	Affected Stream Reach
12.0800-00 Deschutes River	3.4 Sec. 35-18N-2W	From the confluence of the Deschutes River with Capitol Lake upstream to the Deschutes Falls at river mile 41.

(2) Instream flows established for the stream management unit described in WAC 173-513-030(1) are as follows:

INSTREAM FLOWS IN THE DESCHUTES RIVER BASIN
(in Cubic Feet per Second)

Month	Day	USGS Gage 212-0800-00 Deschutes River
Jan.	1	400
	15	400
Feb.	1	400
	15	400
Mar.	1	400
	15	400
Apr.	1	350
	15	(Closed)
May	1	(Closed)
	15	(Closed)
June	1	(Closed)
	15	(Closed)
July	1	(Closed)
	15	(Closed)
Aug.	1	(Closed)
	15	(Closed)
Sept.	1	(Closed)
	15	(Closed)
Oct.	1	(Closed)
	15	(Closed)
Nov.	1	150
	15	200
Dec.	1	300
	15	400

(3) Instream flow hydrograph, as represented in the document entitled "Deschutes River basin instream resource

protection program," shall be used for identification of instream flows on those days not specifically identified in WAC 173-513-030(2).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-030, filed 6/24/80.]

WAC 173-513-040 Surface water source limitations to further consumptive appropriations. (1) The department of ecology, having determined that further consumptive appropriations would harmfully impact instream values, closes the following streams and lakes to further consumptive appropriation for the periods indicated.

New Surface Water Closures

Stream or Lake Section, Township and Range of Mouth or Outlet	Tributary to	Period of Closure
Deschutes River below Deschutes Falls (river mile 41) NW1/4SW1/4 Sec. 26, T. 18N., R. 2W.	Puget Sound (Budd Inlet)	Apr. 15 to Nov. 1
Deschutes River above Deschutes Falls (river mile 41) and all tributaries of Deschutes River E1/2NE1/4 Sec. 10, T. 15N., R. 3E. (Deschutes Falls)		All year
McLane Creek and all tributaries SW1/4NW1/4 Sec. 33, T. 18N., R. 2W.	Puget Sound (Eld Inlet)	All year
Woodland Creek and all tributaries SW1/4NW1/4 Sec. 19, T. 19N., R. 1W.	Puget Sound (Henderson Inlet)	All year
Long Lake SE1/4NE1/4 Sec. 22, T. 18N., R. 1W.	Woodland Creek	All year
Patterson Lake SE1/4SW1/4 Sec. 35, T. 18N., R. 1W.	Woodland Creek	All year
Hicks Lake NE1/4SW1/4 Sec. 27, T. 18N., R. 1W.	Woodland Creek	All year

(2) The following stream and lake low flows and closures are adopted confirming surface water source limitations previously established administratively under the authority of chapter 90.03 RCW and RCW 75.20.050.

Existing Low Flow Limitations and Closures

Stream Section, Township and Range of Mouth	Tributary to	Action
Percival Creek SW1/4NE1/4 Sec. 22, T. 18N., R. 2W.	Capital Lake	Closure
Unnamed Stream NW1/4NW1/4 Sec. 33, T. 19N., R. 2W.	Puget Sound (Eld Inlet)	Low Flow (1.5 cfs)
Unnamed Stream NW1/4NW1/4 Sec. 25, T. 19N., R. 2W.	Gull Harbor	Low Flow (1.0 cfs)

(1992 Ed.)

Woodward Creek SW1/4NW1/4 Sec. 19, T. 19N., R. 1W. Woodward Bay Closure

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-040, filed 6/24/80.]

WAC 173-513-050 Ground water. Future ground water withdrawal proposals will not be affected by this chapter unless it is verified that such withdrawal would clearly have an adverse impact upon the surface water system contrary to the intent and objectives of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-050, filed 6/24/80.]

WAC 173-513-060 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-060, filed 6/24/80.]

WAC 173-513-070 Exemptions. (1) Nothing in this chapter shall affect water rights, riparian, appropriative, or otherwise existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric, or water storage reservoir or related facilities.

(2) Domestic use for a single residence and stock watering, except that use related to feedlots, shall be exempt from the provisions of this chapter if no alternative source is available. If the cumulative effects of numerous single domestic diversions would seriously affect the quantity of water available for instream uses, then only domestic in-house use shall be exempt.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-070, filed 6/24/80.]

WAC 173-513-080 Future rights. No rights to divert or store public surface waters of the Deschutes River basin, WRIA 13, shall hereafter be granted which shall conflict with the purpose of this chapter as stated in WAC 173-513-020.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-080, filed 6/24/80.]

WAC 173-513-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-513-090, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-090, filed 6/24/80.]

WAC 173-513-095 Appeals. All final written decisions of the department of ecology pertaining to permits,

regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-513-095, filed 6/9/88.]

WAC 173-513-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-513-100, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 80-08-019 (Order DE 80-11), § 173-513-100, filed 6/24/80.]

Chapter 173-514 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—KENNEDY-GOLDSBOROUGH WATER RESOURCE INVENTORY AREA (WRIA)

14

WAC

- 173-514-010 General provision.
- 173-514-020 Purpose.
- 173-514-030 Establishment of instream flows.
- 173-514-040 Surface water source limitations to further consumptive appropriation.
- 173-514-050 Lakes.
- 173-514-060 Exemptions.
- 173-514-070 Future rights.
- 173-514-080 Enforcement.
- 173-514-085 Appeals.
- 173-514-090 Regulation review.

WAC 173-514-010 General provision. These rules apply to waters within the Kennedy-Goldsborough water resource inventory area (WRIA 14), as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), chapter 75.20 RCW (State Fisheries Code) and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-010, filed 1/23/84.]

WAC 173-514-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Kennedy-Goldsborough water resource inventory area with instream flows and levels necessary to provide protection for wildlife, fish, scenic, aesthetic, and environmental values, recreation, navigation, and water quality.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-020, filed 1/23/84.]

WAC 173-514-030 Establishment of instream flows.

(1) Stream management units and associated control stations are established as follows:

Stream Management Unit Information

Control Station No. Stream Management Unit Name	Control Station By River Mile and Sec. Township, & Range	Stream Management Reach
12-0740-00 Shumocher Creek	.02 Sec.7, T.21N., R.2WWM	From Mason Lake to headwaters including all tributaries.
WDOE-0745-50 Sherwood Creek	0.14 Sec.20, T.22N., R.1WWM	From influence of mean annual high tide at low instream flow levels to Mason Lake, including Mason Lake and all tributaries.
12-0750-00 Deer Creek	0.8 Sec.20, T.21N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
12-0755-00 Cranberry Creek	0.5 Sec.36, T.21N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including Cranberry Lake, Lake Limerick and all tributaries.
12-0760-00 Johns Creek	2.5 Sec.3, T.20N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
WDOE-0770-50 Goldsborough Creek	0.23 Sec.20, T.20N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
WDOE-0775-50 Mill Creek	3.1 Sec.25, T.20N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including Lake Isabella and all tributaries.
12-0780-00 Skookum Creek	3.0 Sec.19, T.19N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.
WDOE-0785-50 Kennedy Creek	0.06 Sec.32, T.19N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including Summit Lake and all tributaries.
WDOE-0787-00 Perry Creek	1.06 Sec.13, T.18N., R.3WWM	From influence of mean annual high tide at low instream flow levels to headwaters, including all tributaries.

(2) Instream flows are established for the stream management units in WAC 173-514-030(1) as follows:

Instream Flows in the Kennedy-Goldsborough WRIA
(Instantaneous cubic feet per second)

Month	Day	12-0740-00 Shumochoer Creek	WDOE 0745-50 Sherwood Creek	12-0750-00 Deer Creek
Jan	1	20	60	55
	15	20	60	55
Feb	1	20	60	55
	15	20	60	55
Mar	1	20	60	55
	15	20	60	55
Apr	1	20	60	55
	15	20	60	46
May	1	17	48	39
	15	14	37	33
Jun	1	12	29	28
	15	10	23	23.5
Jul	1	8.6	17.5	20
	15	7.2	14	20
Aug	1	6	11	20
	15	6	11	20
Sep	1	6	11	20
	15	6	11	20
Oct	1	6	11*	20*
	15	6	19*	20*
Nov	1	11	34*	33*
	15	20	60*	55*
Dec	1	20	60	55
	15	20	60	55

*Denotes closure period to all consumptive uses

Instream Flows in the Kennedy-Goldsborough WRIA
(Cont'd)
(Instantaneous cubic feet per second)

Month	Day	12-0755-00 Cranberry Creek	12-0760-00 Johns Creek	WDOE-0770-50 Goldsborough Creek
Jan	1	50	45	50
	15	50	45	50
Feb	1	50	45	50
	15	50	45	85
Mar	1	50	45	85
	15	50	45	85
Apr	1	50	45	85
	15	40	45	85
May	1	31	34	85*
	15	23.5	26	85*
Jun	1	18	20	85*
	15	14	15.5	69*
Jul	1	10.5	12	55*
	15	8	9	52*
Aug	1	8	7	48*
	15	8	7	45*
Sept	1	8	7	45*
	15	8	7	45*
Oct	1	8*	7*	45*
	15	15*	7*	50*
Nov	1	28*	18*	50
	15	50*	45*	50
Dec	1	50	45	50
	15	50	45	50

*Denotes closure period to all consumptive uses

Instream Flows in the Kennedy-Goldsborough WRIA
(Cont'd)
(Instantaneous cubic feet per second)

Month	Day	WDOE 0775-50 Mill Creek	12-0765-00 Skookum Creek	WDOE-0785-50 Kennedy Creek	WDOE-0787-00 Perry Creek
Jan	1	65	40	60	30
	15	65	40	60	30
Feb	1	65	40	60	30
	15	65	40	60	30
Mar	1	65	40	60	30
	15	65	40	60	30
Apr	1	65	40	60	21
	15	65	40	46	14
May	1	55	26*	35*	10*
	15	46	16.5*	27*	6.8*
Jun	1	40	11*	20*	4.6*
	15	33	7*	16*	3.2*
Jul	1	28	4.6*	12*	2.2*
	15	24	3*	9*	1.5*
Aug	1	20	3*	7*	1*
	15	20	3*	7*	1*
Sep	1	20	3*	7*	1*
	15	20	3*	7*	1*
Oct	1	20	3*	7*	1*
	15	20	5.6*	14*	2.5*
Nov	1	35	15	29*	5.4
	15	65	40	60*	13
Dec	1	65	40	60	30
	15	65	40	60	30

*Denotes closure period to all consumptive uses

(3) Instream flow hydrographs, as represented in the document entitled "Kennedy-Goldsborough instream resources protection program, figs. 2-7, pgs. 26-28," shall be used for identification of instream flows on those days not specifically identified in WAC 173-514-030(2).

(4) Future consumptive water right permits issued hereafter for diversion of surface water in the Kennedy-Goldsborough WRIA and perennial tributaries shall be expressly subject to instream flows established in WAC 173-514-030 (1) through (3) as measured at the appropriate gage, preferably the nearest one downstream, except from those exempted uses described in WAC 173-514-060 (1) through (3).

(5) Projects that would reduce the flow in a portion of a stream's length (e.g.: Hydroelectric projects that bypass a portion of a stream) will be considered consumptive only with respect to the affected portion of the stream and will be subject to specific instream flow requirements as specified by the department for the bypassed reach notwithstanding WAC 173-514-030 (1) through (3) and 173-514-040 if detailed, project-specific instream flow studies for the bypassed reach, as may be required, demonstrate that a different flow requirement is appropriate. The department may require the project proponent to conduct such studies.

(6) If department investigations determine that withdrawal of ground water from the source aquifers would not interfere significantly with stream flow during the period of stream closure or with maintenance of minimum flows, then applications to appropriate public ground waters may be approved and permits or certificates issued.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-030, filed 1/23/84.]

WAC 173-514-040 Surface water source limitations to further consumptive appropriation. (1) The department, having determined further consumptive appropriation for all uses would harmfully impact instream values, closes the following streams including tributaries for the period indicated:

(a) Stream Name	Tributary to	Closure Period
Alderbrook Creek	Hood Canal	May 1 - October 31
Campbell Creek	Oakland Bay	May 1 - October 31
Elson Creek	Skookum Inlet	May 1 - October 31
Fawn Lake Outlet	Skookum Inlet	May 1 - October 31
Jones Creek	Pickering Passage	May 1 - October 31
Jarrell Creek	Jarrell Cove	May 1 - October 31
Little Creek	Skookum Creek	May 1 - October 31
Melaney Creek	Oakland Bay	May 1 - October 31
Shelton Creek	Oakland Bay	May 1 - October 31
Twahnoh Creek	Hood Canal	May 1 - October 31
Uncle John Creek	Oakland Bay	May 1 - October 31

The minimum flow during the closure period on the streams listed above is the natural flow. Because insufficient flow data is available to develop instream flows outside the closure period, minimum flows for any water right application for consumptive use will be considered on a case by case basis in consultation with the departments of fisheries and game (RCW 75.20.050).

(b) Stream Name	Closure Period
Kennedy Creek	May 1 - November 15
Cranberry Creek	September 16 - November 15
Deer Creek	September 16 - November 15
Johns Creek	September 16 - November 15
Sherwood Creek	September 16 - November 15
Perry Creek	May 1 - October 31

Because sufficient hydrologic data is available for the above streams, a minimum flow is established during the closed and nonclosed period in WAC 173-514-030(2).

(2) Except as noted in the footnotes, the following existing surface water source limitations, previously established administratively under the authority of chapter 90.03 RCW and RCW 75.20.050 are hereby confirmed and adopted for the period indicated:

Stream*/ Tributary to	Action	Period
Goldsborough Creek - Oakland Bay	Closure+	May 1 - October 31
Gosnell Creek - Isabella Lake	Low flow (10 cfs)	All year
Jarrell Creek - Jarrell Cove	Low flow@ (.30 cfs)	May 1 - October 31
Johns Creek - Oakland Bay	Low flow@ (4 cfs)	Sept. 16 - November 15
Kennedy Creek - Totten Inlet	Low flow@ (3 cfs)	May 1 - November 15
Schneider Creek - Totten Inlet	Closure#	May 1 - October 31
Skookum Creek - Skookum Inlet	Closure+	May 1 - October 31
Summit Lake - Kennedy Creek	Lake level	All year
Unnamed Stream - Mill Creek Sec.34, T.20N R.3 EWM	Low flow (2 cfs)	All year

*Closures and low flow limitations also apply to tributaries of these streams.

@Superseded by a new action in this section.

#The minimum flow during the closure period is the natural flow.

+Minimum flows are specified in WAC 173-514-030(2).

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-040, filed 1/23/84.]

WAC 173-514-050 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-050, filed 1/23/84.]

WAC 173-514-060 Exemptions. (1) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric, or water storage reservoir or related facilities.

(2) Single domestic and stockwatering use, except that related to feedlots, shall be exempt from the provisions established in this chapter. If the cumulative impacts of numerous single domestic diversions would significantly affect the quantity of water available for instream uses, then only single domestic in-house use shall be exempt if no alternative source is available.

(3) Nonconsumptive uses which are compatible with the intent of the chapter may be approved.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-060, filed 1/23/84.]

WAC 173-514-070 Future rights. No rights to divert or store public surface waters of the Kennedy-Goldsborough WRIA 14, shall hereafter be granted which shall conflict with the purpose of this chapter.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-070, filed 1/23/84.]

WAC 173-514-080 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-514-080, filed 6/9/88. Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-080, filed 1/23/84.]

WAC 173-514-085 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-514-085, filed 6/9/88.]

WAC 173-514-090 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-514-090, filed 6/9/88. Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 84-04-014 (Order DE 83-34), § 173-514-090, filed 1/23/84.]

Chapter 173-515 WAC
INSTREAM RESOURCES PROTECTION
PROGRAM—KITSAP WATER RESOURCE
INVENTORY AREA (WRIA) 15

WAC

- 173-515-010 General provision.
- 173-515-020 Purpose.
- 173-515-030 Establishment of instream flows.
- 173-515-040 Surface water closures.
- 173-515-050 Groundwater.
- 173-515-060 Lakes.
- 173-515-070 Exemptions.
- 173-515-080 Future rights.
- 173-515-090 Enforcement.
- 173-515-095 Appeals.
- 173-515-100 Regulation review.

WAC 173-515-010 General provision. These rules apply to waters within the Kitsap water resource inventory area (WRIA) 15 as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-010, filed 7/24/81.]

WAC 173-515-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Kitsap water resource inventory area (WRIA) 15 with instream flows and levels necessary to provide for preservation and protection of wildlife, fish, scenic, aesthetic and other environmental values, recreational and navigational values, and to preserve water quality.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-020, filed 7/24/81.]

WAC 173-515-030 Establishment of instream flows.
 (1) The following instream flows are established for each stream listed, from the point of influence of mean high tide at low flow to the stream's headwaters including tributaries except where indicated otherwise. Monitoring will take place at the control locations indicated.

INSTREAM FLOWS IN THE KITSAP WATER RESOURCE INVENTORY AREA (WRIA) 15

*WAC 173-515-040(2) closes certain streams to additional consumptive appropriations during specific time periods. These closures are indicated by asterisks in the following

table. Such closures supersede the indicated instream flow. The Union River closure extends upstream to McKenna Falls (RM 6.7).

**Stream numbers correlate with Plate I, instream resources protection program, Kitsap water resource inventory area (WRIA) 15.

Stream Number**	#7	#44	#60
Stream Name	Union River	Tahaya River	Rendsland Cr.
Gage Number	12-0635.00	12-0680.00	
River Mile	2	2.5	near mouth
Sec., Twp., Rge.	20,23N.,1W.	12,22N.,3W.	19,22N.,3W.

Month	Day	cfs	cfs	cfs
Jan.	1	65*	90	18
	15	65*	90	18
Feb.	1	65*	90	18
	15	65*	90	18
Mar.	1	59*	90	18
	15	53*	90	18
Apr.	1	48*	72	18
	15	44*	58	16
May	1	40*	47	13.5
	15	36*	38	12
June	1	33*	31	10*
	15	29*	25*	9*
July	1	27*	18*	8*
	15	24*	12*	7*
Aug.	1	22*	8.5*	6*
	15	20*	5.5*	5*
Sept.	1	20*	5.5*	5*
	15	20*	5.5*	5*
Oct.	1	20*	7*	5*
	15	20*	13*	7*
Nov.	1	27*	25	9.5
	15	35*	48	13
Dec.	1	47*	90	18
	15	65*	90	18

Stream Number**	#70	#96	#113
Stream Name	Dewatto River	Anderson Cr.	Stavis Cr.
Gage Number	12-0685.00		12-0695.00
River Mile	1.5	0.1	0.75
Sec., Twp., Rge.	23,23N.,3W.	17,24N.,2W.	25,25N.,2W.

Month	Day	cfs	cfs	cfs
Jan.	1	75	10.5	15
	15	75	10.5	15
Feb.	1	75	10.5	15
	15	75	10.5	15
Mar.	1	75	10.5	15
	15	75	10.5	15
Apr.	1	60	10.5	14
	15	49	10	13
May	1	39	9	12
	15	32	8.5	11
June	1	25	8	10
	15	22*	7.5	9.5
July	1	20*	7	9
	15	17.5*	6.5	8
Aug.	1	15.5*	6	7.5
	15	13.5*	6	7
Sept.	1	13.5*	6	7
	15	13.5*	6	7
Oct.	1	13.5*	6.5	7
	15	17*	7	8.5
Nov.	1	21	8	10.5
	15	39	8.5	12.5
Dec.	1	75	9.5	15
	15	75	10.5	15

Title 173 WAC: Ecology, Department of

Stream Number**	#121	#124	#192
Stream Name	Big Beef Cr.	Anderson Cr.	Groyer's Cr.
Gage Number	12-0695.50		
River Mile	0.25	near mouth	near mouth
Sec., Twp., Rge.	22,25N.,1W.	13,25N.,1W.	4,26N.,2E.
Month Day	cfs	cfs	cfs
Jan. 1	40	8	5.5
Jan. 15	40	8	5.5
Feb. 1	40	8	5.5
Feb. 15	40	8	5.5
Mar. 1	40	8	5.5
Mar. 15	40	8	5.5
Apr. 1	31	8	5.5
Apr. 15	24	6	4.5
May 1	18	4.5	4
May 15	14*	3.5	3.5
June 1	11*	3*	3*
June 15	8.5*	2*	2.5*
July 1	6.5*	1.5*	2.5*
July 15	5*	1.5*	2*
Aug. 1	4*	1*	2*
Aug. 15	4*	1*	2*
Sept. 1	4*	1*	2*
Sept. 15	4.5*	1*	2.5*
Oct. 1	5.5*	1.5*	3*
Oct. 15	6*	1.5*	3.5*
Nov. 1	7*	2.5*	4
Nov. 15	12	4.5	4.5
Dec. 1	22	8	5.5
Dec. 15	40	8	5.5

Stream Number**	#259	#268	#294
Stream Name	Chico Cr.	Gorst Cr.	Curley Cr.
Gage Number			
River Mile	near mouth	0.1	0.1
Sec., Twp., Rge.	5,24N.,1E.	32,24N.,1E.	4,23N.,2E.
Month Day	cfs	cfs	cfs
Jan. 1	15*	25	40
Jan. 15	15*	25	40
Feb. 1	15*	25	40
Feb. 15	15*	25	40
Mar. 1	15*	25	40
Mar. 15	15*	21	40
Apr. 1	15*	18	31
Apr. 15	13.5*	15	25
May 1	12*	13	20
May 15	11*	11	16
June 1	10*	10.5	12.5
June 15	9*	10	10*
July 1	8.5*	9	8*
July 15	8*	8.5	6.5*
Aug. 1	7.5*	8	5*
Aug. 15	7*	7.5	5*
Sept. 1	7*	7.5	5*
Sept. 15	7*	7.5	5*
Oct. 1	7*	8	5*
Oct. 15	8*	8.5	8*
Nov. 1	9*	9	14
Nov. 15	11.5*	15	23
Dec. 1	15*	25	40
Dec. 15	15*	25	40

Stream Number**	#223	#248	#259
Stream Name	Steel Creek	Strawberry/ Kochs/Cooks	Dickerson Cr.
Gage Number			
River Mile	near mouth	near mouth	Confluence with Chico Cr.
Sec., Twp., Rge.	14,25N.,1E.	20,25N.,1E.	8,24N.,1E.
Month Day	cfs	cfs	cfs
Jan. 1	6	7	3*
Jan. 15	6	7	3*
Feb. 1	6	7	3*
Feb. 15	6	7	3*
Mar. 1	6	7	3*
Mar. 15	6	7	3*
Apr. 1	6	7	2.5*
Apr. 15	5	5.5	2.5*
May 1	4.5	4.5	2*
May 15	4	3.5	2*
June 1	3.5*	2.5*	1.5*
June 15	3*	2*	1.5*
July 1	3*	1.5*	1.5*
July 15	2.5*	1.5*	1.5*
Aug. 1	2.5*	1*	1*
Aug. 15	2.5*	1*	1*
Sept. 1	2.5*	1*	1*
Sept. 15	3*	1*	1*
Oct. 1	3.5*	1*	1*
Oct. 15	4*	1.5*	1.5*
Nov. 1	4.5	2.5	1.5*
Nov. 15	5	4	1.5*
Dec. 1	6	7	3*
Dec. 15	6	7	3*

Stream Number**	#313	#321	#354
Stream Name	Olalla Cr.	Crescent Cr.	Purdy Cr.
Gage Number			12-0728.00
River Mile	near mouth	near mouth	0.1
Sec., Twp., Rge.	4,22N.,2E	32,22N.,2E.	24,22N.,1E.
Month Day	cfs	cfs	cfs
Jan. 1	13	9	7
Jan. 15	13	9	7
Feb. 1	13	9	7
Feb. 15	13	9	7
Mar. 1	13	9	7
Mar. 15	13	9	6
Apr. 1	13	9	5.5
Apr. 15	11	7.5	5
May 1	9.5	7	4.5
May 15	8.5	6	4
June 1	7.5*	5*	3.5*
June 15	6.5*	4.5*	3*
July 1	5.5*	4*	3*
July 15	5*	3.5*	2.5*
Aug. 1	5*	3.5*	2.5*
Aug. 15	5*	3.5*	2.5*
Sept. 1	5*	3.5*	2.5*
Sept. 15	6*	4*	3*
Oct. 1	7*	5*	3*
Oct. 15	8*	5.5*	3.5*
Nov. 1	9	6.5	4.5
Nov. 15	11	7.5	5.5
Dec. 1	13	9	7
Dec. 15	13	9	7

Stream Number**	#369	#415	#425
Stream Name	Lackey Cr.	Rocky Cr.	Coulter Cr. ^{a/}
Gage Number			
River Mile	near mouth	0.1	0.1
Sec., Twp., Rge.	31,21N.,1E.	27,22N.,1W	9,22N.,1W.
Month Day	cfs	cfs	cfs
Jan. 1	5	18	18
15	5	18	18
Feb. 1	5	18	18
15	5	18	18
Mar. 1	5	18	18
15	4.5	18	18
Apr. 1	4	14.5	18
15	3.5	11.5	17
May 1	3	9	16.5
15	2.5	7.5	15.5
June 1	2.5*	6*	15
15	2*	5.5*	14.5
July 1	2*	5*	13.5
15	2*	4.5*	13
Aug. 1	1.5*	4.5*	13
15	1.5*	4*	13
Sept. 1	1.5*	4*	13
15	1.5*	4*	13
Oct. 1	2*	4*	13
15	2*	5*	14
Nov. 1	2*	6	15
15	2.5*	7	16.5
Dec. 1	3	18	18
15	4	18	18

a/ Relating to the waters of Coulter Creek, the department is cognizant of a settlement agreement resulting from Cause No. 14262, in the superior court of the state of Washington for Mason County, "*Peter E. Overton, et al., v. Washington Department of Fisheries, et al.*" Although the department of ecology was not a party in this litigation, the department will, to the extent possible, give full consideration to the intent of the settlement agreement in any future water right actions involving said parties: *Provided*, That, said actions must be consistent with the requirements of chapters 90.03 and 90.44 RCW, and satisfy the general intent of chapter 173-515 WAC.

(2) Instream flow hydrographs, as represented in the document entitled "instream resources protection program," shall be used for definition of instream flows on those days not specifically identified in WAC 173-515-030(1).

(3) All consumptive water rights hereafter established shall be expressly subject to instream flows and closures established in WAC 173-515-030(1) and 173-515-040 (1) through (3). Closures override the instream flows where both are shown except as provided in WAC 173-515-070.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-030, filed 7/24/81.]

WAC 173-515-040 Surface water closures. (1) The department, having determined there are no waters available for further appropriation, closes the following streams to further consumptive appropriation. These closures confirm surface water source limitations previously established administratively under authority of chapter 90.03 RCW and RCW 75.20.050.

Surface Water Closures

**Stream numbers correlate with Plate I, instream resources protection program, Kitsap water resource inventory area (WRIA) 15.

Stream Number**	Tributary to	Date of Original Closure
Stream or Lake Name		
Sec., Twp., Rge. at Mouth		
Stansberry Lake and tributaries Sec. 19, T.22N., R.1E.	Carr Inlet	5-17-66
Mission Lake and tributaries Outlet: NE1/4NW1/4 Sec. 32, T.24N.,R.1W.	Mission Creek	7-19-78
#12 Mission Creek and tributaries NW1/4NE1/4 Sec. 1, T.22N., R.2W.	Hood Canal	12-5-51
#57 Unnamed Stream and tributaries Sec. 20, T.21N., R.4W.	Hood Canal	11-3-48
#117 Seabeck Creek and tributaries SE1/4SW1/4 Sec. 20, T.25N., R.1W.	Seabeck Bay	8-27-54
#158 Unnamed Stream (Gamble Creek, Christianson Creek) and tributaries SW1/4SW1/4 Sec. 20, T.27N., R.2E.	Port Gamble	8-15-75
#207 Unnamed Stream (Dogfish Creek, Harding Creek) and tributaries NE1/4NE1/4 Sec. 15, T.26N., R.1E.	Liberty Bay	8-21-75
#245 Barker Creek and tributaries SW1/4SW1/4 Sec. 22, T.25N., R.1E.	Dyes Inlet	2-21-61
#246 Clear Creek and tributaries SE1/4SW1/4 Sec. 16, T.25N., R.1E.	Dyes Inlet	7-27-53
#259 Chico Creek and tributaries above confluence of Dickerson Creek, (excluding Wildcat Lake). Sec. 5, T.24N., R.1E.	Chico Bay	11-3-52
#259 Kitsap Creek and tributaries Sec. 5, T.24N., R.1E.	Chico Creek	7-2-42
#259 Unnamed Stream and tributaries SE1/4SW1/4 Sec. 17, T.24N., R.1E.	Kitsap Lake	12-8-52
#279 Blackjack Creek and tributaries NE1/4SE1/4 Sec. 25, T.24N., R.1E.	Sinclair Inlet	4-5-60
#285 Unnamed Stream (Sullivan Creek) and tributaries NE1/4SW1/4 Sec. 19, T.24N., R.2E.	Sinclair Inlet	5-9-75
#294 Salmonberry Creek and tributaries NW1/4SE1/4 Sec. 18, T.23N., R.2E.	Long Lake	1-7-48
#356 Burley Creek and tributaries, SW1/4NW1/4 Sec. 12, T.22N., R.1E.	Burley Lagoon	5-10-51
#367 Minter Creek and tributaries SW1/4NE1/4 Sec. 29, T.22N., R.1E.	Henderson Bay	12-28-73
#402 Unnamed Stream (Dutcher Creek) and tributaries	Dutcher Cove	3-10-54

NE1/4NE1/4 Sec. 15, T.21N., R.1W.

#510
Judd Creek and tributaries Quartermaster 5-10-51
NE1/4NE1/4 Sec. 18, T.22N., R.3E. Harbor

(2) The department has determined that (a) certain streams exhibit low summer flows and have a potential for drying up or inhibiting anadromous fish passage during critical life stages, and (b) historic flow regimes and current uses of certain other streams indicate that no water is available for additional appropriation. Based upon these determinations and in accordance with the general intent of RCW 75.20.050, the following streams are closed to further appropriation for the periods indicated:

New Surface Water Closures

**Stream numbers correlate with Plate I, instream resources protection program, Kitsap water resource inventory area (WRIA) 15.

Stream Number** Stream Name Sec., Twp., Rge. at Mouth	Tributary to	Period of Closure
#7 Union River and tributaries from the mouth to McKenna Falls (R.M. 6.7) SE1/4SW1/4 Sec. 29, T.23N., R.1W.	Hood Canal	All year
#44 Tahuya River and tributaries SE1/4SE1/4 Sec. 22, T.22N., R.3W.	Hood Canal	June 15-Oct. 15
#60 Rendsland Creek and tributaries NW1/4NW1/4 Sec. 19, T.22N., R.3W.	Hood Canal	June 1-Oct. 31
#70 Dewatto River and tributaries NW1/4SE1/4 Sec. 27, T.22N., R.3W.	Hood Canal	June 15-Oct. 31
#121 Big Beef Creek and tributaries SW1/4SE1/4 Sec. 15, T.25N., R.1W.	Hood Canal	May 15-Oct. 31
#124 Anderson Creek and tributaries NW1/4NW1/4 Sec. 13, T.26N., R.1W.	Hood Canal	June 1-Oct. 31
#192 Grover's Creek and tributaries NW1/4SW1/4 Sec. 4, T.26N., R.2E.	Puget Sound	June 1-Oct. 15
#223 Unnamed Stream (Steel Creek) and tributaries SE1/4SE1/4 Sec. 14, T.25N., R.1E.	Port Orchard	June 1-Oct. 15
#248 Unnamed Stream and tributaries (Strawberry/Cook's/Koch's Creek) SE1/4NE1/4 Sec. 20, T.25N., R.1E.	Dyes Inlet	June 1-Oct. 31
#259 Dickerson Creek and tributaries SW1/4NW1/4 Sec. 7, T.24N., R.1E.	Chico Creek	All year
#259 Chico Creek and tributaries below confluence of Dickerson Creek SW1/4SW1/4 Sec. 5, T.25N., R.1E.	Chico Bay	All year
#294 Curley Creek and tributaries NE1/4NE1/4 Sec. 18, T.23N., R.2E.	Yukon Harbor	June 15-Oct. 15
#313		

Olalla Creek and tributaries Colvos Passage June 1-Oct. 15
SE1/4NE1/4 Sec. 4, T.22N., R.2E.

#321
Crescent Creek and tributaries Gig Harbor June 1-Oct. 15
SE1/4SW1/4 Sec. 32, T. 22N., R.2E.

#354
Purdy Creek and tributaries Henderson Bay June 1-Oct. 31
NE1/4NW1/4 Sec. 12, T.22N., R.1E.

#369
Lackey Creek and tributaries Carr Inlet June 1-Nov. 15
SE1/4SW1/4 Sec. 31, T.21N., R.1E.

#415
Rocky Creek and tributaries Case Inlet June 1-Oct. 31
SE1/4SE1/4 Sec. 27, T.22N., R.1E.

(3) In the Kitsap basin numerous small streams with estimated mean annual flow of 5 cfs or less have been identified as having high instream values for anadromous fish, aesthetics, water quality, and/or recreation. In accordance with the general intent of RCW 75.20.050 the department has determined that the total natural flow of these streams is required for protection and preservation of instream resources, and that no water is available for additional consumptive appropriation. The natural flow, in effect, constitutes the minimum flow for protection of the instream resources. The following streams possess such characteristics and are therefore closed year-round to further consumptive appropriation.

New Surface Water Closures

**Stream numbers correlate with Plate I, instream resources protection program, Kitsap water resource inventory area (WRIA) 15.

Stream Number** Stream Name Sec., Twp., Rge. at Mouth	Tributary to
#13 Little Mission Creek and tributaries SE1/4NW1/4 Sec. 1, T.22N., R.2W.	Hood Canal
#18 Stimson Creek and tributaries NW1/4NW1/4 Sec. 11, T.22N., R.2W.	Hood Canal
#31 Unnamed Stream (Little Shoefly Creek) and tributaries SW1/4NW1/4 Sec. 17, T.22N., R.2W.	Hood Canal
#34 Shoefly Creek and tributaries SE1/4SW1/4 Sec. 18, T.22N., R.2W.	Hood Canal
#46 Caldervin Creek and tributaries NE1/4NE1/4 Sec. 28, T.21N., R.3W.	Hood Canal
#50 Hall Creek and tributaries Sec. 20, T.21N., R.3W.	Hood Canal
#52 Hoddy Creek and tributaries Sec. 20, T.21N., R.3W.	Hood Canal
#54 Fay Creek and tributaries Sec. 21, T.20N., R.3W.	Hood Canal
#55 Brown Creek and tributaries	Hood Canal

Sec. 21, T.20N., R.3W.	
#56 Unnamed Stream (West Creek) and tributaries Sec. 20, T.22N., R.3W.	Hood Canal
#101 Harding Creek and tributaries NW1/4SW1/4 Sec. 9, T.24N., R.2W.	Hood Canal
#164 Unnamed Stream (Little Boston Creek) and tributaries SW1/4SW1/4 Sec. 5, T.27N., R.2E.	Port Gamble
#181 Unnamed Stream and tributaries SE1/4SW1/4 Sec. 26, T.27N., R.2E.	Apple Tree Cove
#184 Unnamed Stream and tributaries NE1/4SW1/4 Sec. 36, T.27N., R.2E.	Apple Tree Cove
#190 Unnamed Stream and tributaries Sec. 9, T.26N., R.2E.	Puget Sound
#196 Cowling Creek and tributaries NW1/4NW1/4 Sec. 16, T.26N., R.2E.	Miller Bay
#198 Thompson Creek and tributaries SW1/4SE1/4 Sec. 29, T.26N., R.2E.	Port Orchard
#208 Johnson Creek and tributaries SE1/4NW1/4 Sec. 22, T.26N., R.1E.	Liberty Bay
#213 Scandia Creek and tributaries SW1/4NE1/4 Sec. 27, T.26N., R.1E.	Liberty Bay
#241 Mosher Creek and tributaries SW1/4NE1/4 Sec. 34, T.25N., R.1E.	Dyes Inlet
#272 Anderson Creek and tributaries SE1/4NE1/4 Sec. 33, T.24N., R.1E.	Sinclair Inlet
#275 Ross Creek and tributaries SE1/4SE1/4 Sec. 27, T.24N., R.1E.	Sinclair Inlet
#289 Beaver Creek and tributaries NW1/4SE1/4 Sec. 16, T.24N., R.2E.	Rich Passage
#322 North Creek and tributaries NE1/4SE1/4 Sec. 6, T.21N., R.2E.	Gig Harbor
#342 Unnamed Stream and tributaries NW1/4SE1/4 Sec. 10, T.21N., R.1E.	Henderson Bay
#343 Unnamed Stream (Meyer Creek) and tributaries SW1/4SW1/4 Sec. 2, T.21N., R.1E.	Hood Canal
#407 Unnamed Stream and tributaries SE1/4NW1/4 Sec. 2, T.21N., R.1W.	Vaughn Bay
#434 Unnamed stream and tributaries SE1/4SE1/4 Sec. 15, T.25N., R.2E.	Murden Cove
#461 Unnamed Stream and tributaries SE1/4NE1/4 Sec. 20, T.25N., R.2E.	Fletcher Bay
#514	

Unnamed Stream (Fisher Creek) and tributaries
SW1/4NW1/4 Sec. 19, T.22N., R.3E. Quartermaster Harbor

#530
Jod Creek and tributaries
NW1/4NW1/4 Sec. 14, T.22N., R.2E. Colvos Passage

#540
Needle Creek and tributaries
NE1/4SE1/4 Sec. 13, T.23N., R.3E. Colvos Passage

(4) Closures listed in WAC 173-515-040 (2) and (3) will supersede low flow surface water source limitations previously imposed by administrative authority pursuant to chapter 75.20 RCW.

(5) Lakes perennially tributary to closed streams are closed to further consumptive appropriation.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-040, filed 7/24/81.]

WAC 173-515-050 Groundwater. Future groundwater withdrawal proposals will not be affected by this chapter unless it is determined that such withdrawal would clearly have an adverse impact upon the surface water system contrary to the intent and objectives of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-050, filed 7/24/81.]

WAC 173-515-060 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-060, filed 7/24/81.]

WAC 173-515-070 Exemptions. (1) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric or water storage reservoir or related facilities.

(2) If, upon detailed analysis, appropriate and environmentally sound proposed storage facilities are found to be compatible with this chapter, such facilities may be approved but will be subject to the establishment of appropriate protection flows for drought or low runoff periods.

(3) Domestic use for a single residence shall be exempt from the provisions of this chapter. If the cumulative effects of numerous single domestic diversions would seriously affect the quantity of water available for instream uses, then domestic in-house use shall be exempt if no alternative source is available.

(4) Stockwatering use, except that related to feedlots, shall be exempt from the provisions established in this chapter.

(5) Future rights for nonconsumptive uses may be granted.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-070, filed 7/24/81.]

WAC 173-515-080 Future rights. No right to divert or store public surface waters of the Kitsap water resource inventory area (WRIA) 15 shall hereafter be granted which shall conflict with the purpose of this chapter.

[Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-080, filed 7/24/81.]

WAC 173-515-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-515-090, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-090, filed 7/24/81.]

WAC 173-515-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-515-095, filed 6/9/88.]

WAC 173-515-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-515-100, filed 6/9/88. Statutory Authority: Chapters 90.22 and 90.54 RCW. 81-16-003 (Order DE 80-45), § 173-515-100, filed 7/24/81.]

Chapter 173-522 WAC

WATER RESOURCES PROGRAM IN THE CHEHALIS RIVER BASIN, WRIA-22 AND 23

WAC

- 173-522-010 General provision.
- 173-522-020 Establishment of base flows.
- 173-522-030 Future allocation of surface water for beneficial uses.
- 173-522-040 Priority of future rights during times of water shortage.
- 173-522-050 Streams closed to further consumptive appropriations.
- 173-522-060 Effect on prior rights.
- 173-522-070 Enforcement.
- 173-522-080 Appeals.
- 173-522-090 Regulation review.

WAC 173-522-010 General provision. These rules, including any subsequent additions and amendments, apply to waters within and contributing to the Chehalis River basin, WRIA-22 and 23 (see WAC 173-500-040). Chapter 173-500 WAC, the general rules of the department of ecology for the implementation of the comprehensive water resources program, applies to this chapter 173-522 WAC.

[Order 75-31, § 173-522-010, filed 3/10/76.]

WAC 173-522-020 Establishment of base flows. (1) Base flows are established for stream management units with monitoring to take place at certain control stations as follows:

STREAM MANAGEMENT UNIT INFORMATION

Control Station No. Stream Management Unit Name	Control Station by River Mile and Section, Township and Range	Affected Stream Reach Including Tributaries
12.0200.00 Chehalis River Conf. w/Elk Creek	101.8 14-13-5W	From confluence with Elk Creek to headwaters except Elk Cr.
12.0205.00 Elk Creek	2.5 18-13-5W	From confluence with Chehalis River to headwaters.
12.0216.30 So. Fork Chehalis R.	0.3 24-13-4W	From mouth to headwaters.
12.0235.00 Chehalis River	77.6 2-13-3W	From confluence with Newaukum River to confluence with Elk Cr., excluding Elk Creek, and Newaukum Rivers.
12.0240.00 S. Fork Newaukum R.	22.8 28-13-1E	From confluence with Lost Creek to headwaters, excluding Lost Creek.
12.0245.00 N. Fork Newaukum River	6.6 35-14-1W	From mouth to headwaters.
12.0250.00 Newaukum River	4.1 9-13-2W	From mouth to confluence with Lost Cr. on S. Fork Newaukum River, excluding N. Fork Newaukum River.
12.0253.00 Salzer Creek	3.8 22-14-2W	From mouth to headwaters.
12.0264.00 Skookumchuck River	6.4 12-15-2W	From mouth to headwaters.
12.0275.00 Chehalis River at Grand Mound	59.9 22-15-3W	From confluence with Newaukum River to confluence with Prairie Creek.
12.0292.00 Black River	4.1 33-16-4W	From mouth to headwaters.
12.0305.00 Cedar Creek	1.1 14-16-5W	From mouth to headwaters.
12.0309.00 Porter Creek	1.3 22-17-5W	From mouth to headwaters.
12.0310.00 Chehalis River at Porter	33.3 28-17-5W	From confluence with Prairie Creek near Grand Mound to confluence with Porter Creek including Prairie Creek.
12.0325.00 Cloquallum Creek	1.9 36-18-6W	From mouth to headwaters.
12.0342.00 East Fk. Satsop R.	15.9 15-19-6W	From confluence with Dry Run Cr. to headwaters excluding Dry Run Cr.

Chehalis River Basin—WRIA's 22 and 23

173-522-020

Station ID	Flow Rate	Description	Month	Day	12.0240.00 Newaukum R. S. Fork	12.0245.00 Newaukum R. N. Fork	12.0250.00 Newaukum R.	12.0253.00 Salzer Cr.
12.0343.00 Decker Creek	0.3 31-19-6W	From mouth to headwaters.	May	15	260	100	200	700
				1	195	76	145	525
				15	146	57	105	400
12.0345.00 Middle Fk. Satsop R.	0.4 36-19-7W	From mouth to headwaters.	June	1	108	43	75	300
				15	82	32	55	230
				1	62	25	40	175
12.0350.00 Satsop River	2.3 36-18-7W	From mouth to confl. with Dry Run Cr. on East Fk. Satsop R.	July	15	46	19	29	130
				1	37	16	21	98
				15	31	14	15	75
12.0350.02 Chehalis R. below confl. w/Satsop R.	20.0 7-17-6W	From confluence with Porter Ck. to just below confl. with Satsop River.	Sep.	1	31	14	15	75
				15	31	14	15	75
				1	39	15	21	92
				15	49	17	28	115
12.0374.00 Wynoochee River	5.9 27-18-8W	From mouth to headwaters.	Nov.	1	88	31	56	215
				15	150	56	105	390
				1	260	100	200	700
				15	260	100	200	700
12.0380.00 Wishkah River	16.2 22-19-9W	From influence of mean annual high tide at low base flow levels to headwaters. Excluding E. Fk. Wishkah River.	Month	Day	12.0240.00 Newaukum R. S. Fork	12.0245.00 Newaukum R. N. Fork	12.0250.00 Newaukum R.	12.0253.00 Salzer Cr.
			Jan.	1	125	62	250	11
				15	125	62	250	11
			Feb.	1	125	62	250	11
				15	125	62	250	11
			Mar.	1	125	62	250	11
				15	125	62	250	11
			Apr.	1	125	62	250	11
				15	125	62	250	11
			May	1	110	47	210	5.8
				15	88	36	160	2.8
			June	1	70	27	118	1.4
				15	56	21	90	.73
			July	1	45	16	68	.38
				15	36	12	52	.20
			Aug.	1	29	9	38	.10
				15	27	7	35	.05
			Sep.	1	27	7	35	.05
				15	27	7	35	.05
			Oct.	1	33	8.4	43	.14
				15	40	10	54	.40
			Nov.	1	58	19	91	1.35
				15	85	34	150	3.9
			Dec.	1	125	62	250	11
				15	125	62	250	11
12.0174.00 Elk River	3.0 3-16-11W	From influence of mean annual high tide at low base flow levels to headwaters.	Month	Day	12.0264.00 Skookumchuck River	12.0275.00 Chehalis R. at Grand M.	12.0292.00 Black R.	12.0305.00 Cedar Cr.
			Jan.	1	160	1300	200	90
				15	160	1300	200	90
			Feb.	1	160	1300	200	90
				15	160	1300	200	90
			Mar.	1	160	1300	200	90
				15	160	1300	200	90
			Apr.	1	160	1300	200	90
				15	160	1300	200	90
			May	1	160	1000	170	70
				15	130	780	145	54
			June	1	103	600	120	40
				15	83	460	104	31
			July	1	67	355	88	24
				15	54	275	75	19
			Aug.	1	43	210	70	14
				15	35	165	66	11
			Sep.	1	35	165	66	11
				15	35	165	66	11
			Oct.	1	35	200	68	13.8
				15	35	250	70	17
			Nov.	1	59	440	100	30
				15	96	760	140	52

(2) Base flows established for the stream management units in WAC 173-522-020(1) are as follows:

BASE FLOWS IN THE CHEHALIS RIVER BASIN
(In Cubic Feet per Second)

Month	Day	12.0200.00 Chehalis R. nr. Elk Cr.	12.0205.00 Elk Cr.	12.0216.30 So. Fk. Chehalis R.	12.0235.00 Chehalis R.
Jan.	1	260	100	200	700
	15	260	100	200	700
Feb.	1	260	100	200	700
	15	260	100	200	700
Mar.	1	260	100	200	700
	15	260	100	200	700
Apr.	1	260	100	200	700

Dec.	1	160	1300	200	90
	15	160	1300	200	90

May	1	560	135	33	32
	15	560	113	27	26

Month	Day	12.0309.00 Porter Cr.	12.0310.00 Chehalis R. at Porter	12.0325.00 Cloquallum Creek	12.0342.00 Satsop R. E. Fork
-------	-----	--------------------------	--	-----------------------------------	------------------------------------

Month	Day	12-0385.80 Hoquiam R. M. Fk.	12-0386.60 Hoquiam R. E. Fk.	12-0390.00 Humptulips River	12-0174.00 Elk River
-------	-----	------------------------------------	------------------------------------	-----------------------------------	-------------------------

Jan.	1	90	2500	150	280
	15	90	2500	150	280
Feb.	1	90	2500	150	280
	15	90	2500	150	280
Mar.	1	90	2500	150	280
	15	90	2500	150	280
Apr.	1	90	2500	150	280
	15	90	2500	150	280
May	1	56	1900	118	240
	15	35	1420	92	210
June	1	29	1060	70	175
	15	24	800	55	152
July	1	21	610	43	130
	15	17	460	34	112
Aug.	1	14.2	340	29	104
	15	12	260	24	95
Sep.	1	12	260	24	86
	15	12	260	24	80
Oct.	1	13.3	320	27	80
	15	15	400	30	80
Nov.	1	28	760	52	125
	15	50	1380	88	185
Dec.	1	90	2500	150	280
	15	90	2500	150	280

Jan.	1	27	44	600	50
	15	27	44	600	50
Feb.	1	27	44	600	50
	15	27	44	600	50
Mar.	1	27	44	600	50
	15	27	44	600	50
Apr.	1	27	44	600	50
	15	27	44	600	50
May	1	27	44	600	43
	15	21	38	500	37
June	1	16	33	400	31
	15	12.2	29	325	26
July	1	9.5	25	265	22
	15	7.4	22	215	19
Aug.	1	5.6	19	170	16
	15	5.6	19	170	16
Sep.	1	5.6	19	170	16
	15	5.6	19	170	16
Oct.	1	6.7	19	205	20
	15	8.0	25	250	25
Nov.	1	15	34	390	32
	15	27	44	600	40
Dec.	1	27	44	600	50
	15	27	44	600	50

Month	Day	12.0343.00 Decker Cr.	12.0345.00 Satsop R. M. Fork	12.0350.00 Satsop R. nr.	12.0350.02 Chehalis R. Satsop
-------	-----	--------------------------	------------------------------------	--------------------------------	-------------------------------------

Month	Day	12-0175.00 Johns River	12-0180.00 Newskah Creek	12-0185.00 Charley Creek
-------	-----	---------------------------	--------------------------------	--------------------------------

Jan.	1	130	260	1100	3800
	15	130	260	1100	3800
Feb.	1	130	260	1100	3800
	15	130	260	1100	3800
Mar.	1	130	260	1100	3800
	15	130	260	1100	3800
Apr.	1	130	260	1100	3800
	15	130	260	1100	3800
May	1	115	203	910	2910
	15	103	160	750	2300
June	1	91	125	600	1750
	15	81	98	500	1360
July	1	72	78	425	1085
	15	64	61	360	860
Aug.	1	56	48	300	680
	15	50	38	260	550
Sep.	1	50	38	260	550
	15	50	38	260	550
Oct.	1	54	41	280	640
	15	58	45	300	750
Nov.	1	77	83	475	1305
	15	100	145	720	2220
Dec.	1	130	260	1100	3800
	15	130	260	1100	3800

Jan.	1	70	17	14
	15	70	17	14
Feb.	1	70	17	14
	15	70	17	14
Mar.	1	70	17	14
	15	70	17	14
Apr.	1	70	17	14
	15	70	17	14
May	1	50	13.4	11
	15	42	10.7	8.6
June	1	35	8.3	6.7
	15	29	6.5	5.4
July	1	24	5.2	4.2
	15	21	4.1	3.3
Aug.	1	17	3.2	2.5
	15	17	2.5	2
Sep.	1	17	2.5	2
	15	17	2.5	2
Oct.	1	17	3.2	2.6
	15	24	4	3.5
Nov.	1	35	8.4	7.1
	15	49	17	14
Dec.	1	70	17	14
	15	70	17	14

Month	Day	12-0374.00 Wynoochee River	12-0380.00 Wishkah R.	12-0382.90 Wishkah R. E. Fk.	12-0385.00 Hoquiam R. W. Fk.
-------	-----	----------------------------------	--------------------------	------------------------------------	------------------------------------

Jan.	1	560	135	33	32
	15	560	135	33	32
Feb.	1	560	135	33	32
	15	560	135	33	32
Mar.	1	560	135	33	32
	15	560	135	33	32
Apr.	1	560	135	33	32
	15	560	135	33	32

(3) Base flow hydrographs, Appendix 1, pages 19-23 in the document entitled "water resources management program in the Chehalis River basin" dated November, 1975 shall be used for definition of base flows on those days not specifically identified in WAC 173-522-020(2).

(4) All rights hereafter established shall be expressly subject to the base flows established in WAC 173-522-020 (1) through (3).

(5) At such time as the departments of fisheries and/or wildlife provide specific information substantiating the need for flows higher than the flows set forth in WAC 173-522-020(2), the department of ecology agrees to proceed with setting minimum flows as provided under chapter 90.22 RCW within one year from the time of said request, unless agreement to another time frame is reached between parties.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-522-020, filed 6/9/88; Order 75-31, § 173-522-020, filed 3/10/76.]

WAC 173-522-030 Future allocation of surface water for beneficial uses. The department has determined that there are public waters available, subject to base flow, for allocation to beneficial uses from all streams within the Chehalis basin; except for those streams and times declared closed in WAC 173-522-050. The department shall maintain a current tabulation of the amount of water that is available for appropriation at each stream management unit specified under WAC 173-522-020(1).

[Order 75-31, § 173-522-030, filed 3/10/76.]

WAC 173-522-040 Priority of future rights during times of water shortage. (1) Rights established in the future pertaining to waters available for allocation in WAC 173-522-030 shall be subject to a priority of use. Rights for domestic use, including irrigation of lawn and noncommercial garden not to exceed one-half acre, and livestock use excluding feedlot operation, shall be superior to all other consumptive and nonconsumptive uses.

(2) As between rights established in the future within a priority of use, the date of priority shall control with an earlier-dated right being superior to those rights with later dates.

(3) Additional water use priorities may be promulgated, when required, in the future.

[Order 75-31, § 173-522-040, filed 3/10/76.]

WAC 173-522-050 Streams closed to further consumptive appropriations. The department, having determined there are no waters available for further appropriation through the establishment of rights to use water consumptively, closes the following streams to further consumptive appropriation. An exception is made for domestic and normal stockwatering where there is no alternative source of water supply.

Surface Water Closures

STREAM	DATE OF CLOSURE	PERIOD OF CLOSURE
Beaver Creek, tributary to S. Fk., Newaukum River	12-5-52	1 May-31 Oct.

Beaver Creek, tributary to Black River	10-28-52	" "
Bunker Creek	1-17-50	" "
Dempsey Creek	11-15-74	" "
Dillenbaugh Creek	8-21-72	" "
Hanaford Creek	5-7-52	" "
Hope Creek & Garrard Creek	8-28-73	" "
Kearney Creek	10-27-52	" "
Lincoln Creek	11-5-48	" "
Middle Fork, Newaukum R.	4-7-50	" "
Mill Creek	3-21-52	" "
Mox Chehalis	4-25-57	" "
Salmon Creek	12-18-56	" "
Rock Creek	4-11-73	" "
Scatter Creek	7-20-50	" "
Stearns Creek	4-28-53	" "
Wildcat Creek	10-28-52	" "
Williams Creek	5-6-52	" "
Wynoochee River	3-9-62	" "
Black River	Date of Adoption	1 July-30 Sept.
Skookumchuck River	" "	" "
S. Fk. Chehalis River	" "	" "
Salzer Creek	" "	1 June-30 Sept.

Note: Affected reach is from mouth to headwaters and includes all tributaries in the contributing drainage area unless specifically excluded.

[Order 75-31, § 173-522-050, filed 3/10/76.]

WAC 173-522-060 Effect on prior rights. Nothing in this chapter shall be construed to lessen, enlarge, or modify the existing rights acquired by appropriation or otherwise.

[Order 75-31, § 173-522-060, filed 3/10/76.]

WAC 173-522-070 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as are appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-522-070, filed 6/9/88.]

WAC 173-522-080 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-522-080, filed 6/9/88.]

WAC 173-522-090 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-522-090, filed 6/9/88.]

Chapter 173-531A WAC

**WATER RESOURCE PROGRAM FOR THE JOHN
DAY-MCNARY POOLS REACH OF THE
COLUMBIA RIVER, WRIA 31 AND PARTS OF
WRIA'S 32, 33, 36, AND 37**

WAC

173-531A-010	Purpose.
173-531A-020	Definitions.
173-531A-030	Existing water rights protected.
173-531A-040	Reservation for future irrigation use.
173-531A-050	Reservation for municipal use.
173-531A-060	Permit conditions.
173-531A-070	Department to review regulation.
173-531A-080	Enforcement.
173-531A-090	Appeals.

WAC 173-531A-010 Purpose. This chapter is adopted in accordance with the water resources management regulation, chapter 173-500 WAC, which was promulgated under the authority of the Water Resources Act of 1971, chapter 90.54 RCW. This chapter applies to the surface waters of the John Day and McNary Pools of the Columbia River and the Lower Snake River.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-010, filed 6/24/80. Formerly WAC 173-531-010.]

WAC 173-531A-020 Definitions. For the purposes of this chapter, the following definitions shall be used.

(1) "Department" means the Washington state department of ecology.

(2) "Reservation" means the designation of specific amounts of the water resources for specific future beneficial uses.

(3) "John Day/McNary Pools Reach," means that part of the Columbia River from John Day Dam upstream to the upper limits of McNary Pool including the upper limits of the pool in the Snake River, the Yakima River, and the Walla Walla River. This reach extends from river mile 216 to river mile 352 of the Columbia River, and includes the lower 10 miles of the Snake River, the lower 6 miles of the Yakima River, and the lower 9 miles of the Walla Walla River.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-020, filed 6/24/80. Formerly WAC 173-531-020.]

WAC 173-531A-030 Existing water rights protected. Nothing in the chapter shall be construed to lessen, enlarge, or modify existing rights acquired by appropriation or by other means, including federal reserved rights.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-030, filed 6/24/80. Formerly WAC 173-531-030.]

WAC 173-531A-040 Reservation for future irrigation use. (1) One million three hundred twenty thousand acre-feet per year are hereby reserved from the John Day/McNary Pools reach to provide a water supply for the 330,000 acres of irrigation projected to be developed by the year 2020. The 330,000 acres includes lands under existing water right permits, pending applications and land for which appropriation applications have not yet been filed.

(2) The priority dates of existing permits and applications already on file covered by the reservation are the dates of filing with the department. The priority dates of permits issued under applications filed in the future under the reservation shall be the effective date of this regulation (see RCW 90.03.345).

(3) Waters represented by canceled or relinquished applications and permits will still be considered reserved and may be subsequently filed on by interested appropriators.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-040, filed 6/24/80. Formerly WAC 173-531-040.]

WAC 173-531A-050 Reservation for municipal use.

(1) Twenty-six thousand acre-feet of water per year is reserved from the John Day/McNary Pools reach to provide for future municipal supply to the year 2020.

(2) The reservation for municipal use does not guarantee any existing or future supply entity a specific quantity of water. Municipal water supply utilities must petition the department for reservation of water, for their particular needs, according to procedures of chapter 173-590 WAC.

(3) The priority dates of water right filings under the municipal reservation shall be the effective date of this regulation.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-050, filed 6/24/80. Formerly WAC 173-531-050.]

WAC 173-531A-060 Permit conditions. All permits issued for waters reserved under WAC 173-531A-040 or 173-531A-050 after the effective date of this chapter shall be subject to the provisions of chapter 173-563 WAC - instream resources protection program for the main stem of the Columbia River.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-060, filed 6/24/80. Formerly WAC 173-531-060.]

WAC 173-531A-070 Department to review regulation. (1) The department, in accordance with applicable statutory provisions, shall review the reservations for future irrigation use and future municipal use at least every five years after adoption of this management regulation.

(2) In reviewing the reservations, the department will evaluate the account of water rights established under the reservations as provided in WAC 173-531A-040(3) and 173-531A-050(2). The department will also evaluate and update the accounts of ground water development and use on lands relating to the reserved waters and reduce the reserved amounts of surface water.

[Statutory Authority: Chapter 90.54 RCW. 80-08-022 (Order DE 80-19), § 173-531A-070, filed 6/24/80.]

WAC 173-531A-080 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as are appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-531A-080, filed 6/9/88.]

WAC 173-531A-090 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-531A-090, filed 6/9/88.]

Chapter 173-532 WAC

WATER RESOURCES PROGRAM FOR THE WALLA WALLA RIVER BASIN, WRIA 32

WAC

- 173-532-010 Purpose.
- 173-532-020 Definitions.
- 173-532-030 Base flows.
- 173-532-040 Streams closed to further consumptive appropriations.
- 173-532-050 Protection of surface water rights from new appropriators of ground water.
- 173-532-060 Designation of ground water areas for specific uses.
- 173-532-070 Closure of ground water aquifer to further appropriation.
- 173-532-080 Evaluation of ground water applications.
- 173-532-090 Enforcement.
- 173-532-100 Appeals.
- 173-532-110 Regulation review.

WAC 173-532-010 Purpose. This regulation is adopted in accordance with the water resources management regulation, chapter 173-500 WAC, which was promulgated under the authority of the Water Resources Act of 1971, chapter 90.54 RCW. This chapter, including any amendments, applies to all waters that lie within or contribute to the Walla Walla River drainage basin. This chapter sets forth the department's policies to manage the basin's water resources.

[Order DE 77-30, § 173-532-010, filed 12/14/77.]

WAC 173-532-020 Definitions. For purposes of this chapter, the following definitions shall be used.

(1) "Allocation" means the designating of specific amounts of the water resource for specific beneficial uses.

(2) "Base flow" means a level of stream flow established in accordance with provisions of chapter 90.54 RCW required in perennial streams to preserve wildlife, fish, scenic, aesthetic, and other environmental and navigational values.

(3) "Consumptive use" means use of water whereby there is discernible diminishment of the water source.

(4) "Department" means the Washington state department of ecology.

(5) "Director" means the director of the department of ecology.

(6) "Domestic use" means use of water associated with human health and welfare requirements, including water used for drinking, bathing, sanitary purposes, cooking, laundering, irrigation of not over one-half acre of lawn and garden per dwelling, and other incidental household uses.

(7) "In-house domestic use" means use of water for drinking, cleaning, sanitation, and other uses in a residence, excluding irrigation of lawn and garden.

(8) "Municipal water supply system" means a set of facilities including source, treatment, storage, transmission and distribution facilities whereby water is furnished for commercial and/or industrial uses, and public water supplies with 10 or more connections.

(9) "Nonconsumptive use" means a type of water use where either there is no diversion from a source body, or where there is no discernible diminishment of the source.

(10) "Perennial stream" means a stream with a natural flow which is normally continuous at any given location.

(11) "Public water supply" means any water supply intended or used for human consumption and community uses.

(12) "Water right" means a right to make beneficial use of public waters of the state.

(13) "Zone of direct hydraulic continuity" means that zone of inter action between the surface water stream and the adjacent ground water whereby a pumping well can effectively reduce the flow in the stream to the detriment of surface water users, as determined by the department.

[Order DE 77-30, § 173-532-020, filed 12/14/77.]

WAC 173-532-030 Base flows. The establishment of base flows for surface streams will be deferred until such time as storage project or projects become a reality. At present, all surface streams are totally appropriated during the irrigation season and water is not available for protection of instream values. With the advent of future storage projects, the department may establish base flows which can be included as project benefits and maintained by storage releases.

[Order DE 77-30, § 173-532-030, filed 12/14/77.]

WAC 173-532-040 Streams closed to further consumptive appropriations. The department has determined that no waters are available for consumptive appropriation through the establishment of water rights for the following streams for the periods indicated:

TABLE II-1
SURFACE WATER CLOSURES*

STREAM NAME	AFFECTED REACH	EFFECTIVE DATE OF CLOSURE	PERIOD OF CLOSURE
Blue Creek	Mouth to Headwaters	Date of Adoption	June 1 - Oct. 31
Mill Creek	Mouth to State Line	2-6-1957	May 1 - Oct. 1
Walla Walla River	Mouth to State Line	Date of Adoption	May 1 - Nov. 30
Dry Creek	Mouth to Headwaters	Date of Adoption	April 15 - Nov. 15 or whenever Walla Walla at USGS Gage 14,0185 drops below 91.0 cfs.
Touchet River	Mouth to Headwaters	Date of Adoption	June 1 - Oct. 31
Coppei Creek	Mouth to Headwaters	Date of Adoption	April 1 - Nov. 10

Doan Creek	Mouth to Headwaters	Date of Adoption	June 1 - Oct. 1
Mud Creek	Mouth to Headwaters	Date of Adoption	May 1 - Oct. 31 or whenever Walla Walla below confluence with Mud Creek falls below 50 cfs.
Pine Creek	Mouth to Headwaters	Date of Adoption	May 1 - Oct. 31 or whenever Walla Walla River at confluence with Pine Creek or below Touchet River drops below 50 cfs.
Stone Creek	Mouth to Headwaters	Date of Adoption	May 1 - Oct. 31

*Exception for single-domestic and stock water where no other practical source is available.

[Order DE 77-30, § 173-532-040, filed 12/14/77.]

WAC 173-532-050 Protection of surface water rights from new appropriators of ground water. New appropriators of ground water will be required to locate wells outside of the zone of direct hydraulic continuity between the surface water stream and the ground water aquifer. The actual limits of the zone of direct hydraulic continuity at a specific location will be determined by the department after an individual ground water application is received. The department will use accepted engineering methods for its determination.

[Order DE 77-30, § 173-532-050, filed 12/14/77.]

WAC 173-532-060 Designation of ground water areas for specific uses. A portion of the ground water resource in the Walla Walla-College Place vicinity is designated for the anticipated growth of the community. Within the following area, ground water in the basalt aquifer is limited to appropriation for municipal water supply systems only, and ground water in the shallow gravel aquifer is limited to uses other than municipal water supply systems:

All the area contained within the following listed sections: Sections 35 and 36, T8N, R35E; sections 1, 2, 11, 12, 13, 14, 15, 23, 24, 25, 26, 27, 28, 34, 35, and 36, T7N, R35E; sections 1, 2, 3, 10, 11, 12, and all of 13, 14, and 15 lying within Washington state, T6N, R35E; sections 31, 32, 33, 34, 35, and 36, T8N, R36E; all the area within T7N, R36E; all the area within T6N, R36E lying within the state of Washington; section 31, T8N, R37E; sections 6, 7, 18, 19, 30, and 31, T7N, R37E; and sections 6, 7, and all of section 18 lying within Washington state, T6N, R37E.

The provisional designation of water in the basalt aquifer for municipal water supply systems shall be effective for a period from February 1, 1978 to October 1, 1984. After October 1, 1984, all designated waters not appropriated or reserved under chapter 173-590 WAC reservation of water

for future public water supply, shall be open for appropriations by other users as determined by the department.

The designation of water in the gravel aquifer for users other than municipal water supply systems shall remain indefinitely until changed by the department.

[Statutory Authority: RCW 90.54.050. 83-02-039 (Order DE 82-46), § 173-532-060, filed 12/30/82; Order DE 77-30, § 173-532-060, filed 12/14/77.]

WAC 173-532-070 Closure of ground water aquifer to further appropriation. When the department determines that annual ground water withdrawals from the basalt aquifer have reached 125,000 acre-feet, which is approximately 95 percent of the average annual recharge to that aquifer, the aquifer will be closed to further appropriation.

[Order DE 77-30, § 173-532-070, filed 12/14/77.]

WAC 173-532-080 Evaluation of ground water applications. Each new application for ground water appropriation will be evaluated to minimize interference with existing wells and with adjacent surface water streams. The department will issue permits for ground water withdrawal in those cases where senior surface water and ground water rights will not be adversely affected as determined by the department.

[Order DE 77-30, § 173-532-080, filed 12/14/77.]

WAC 173-532-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as are appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-532-090, filed 6/9/88.]

WAC 173-532-100 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-532-100, filed 6/9/88.]

WAC 173-532-110 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-532-110, filed 6/9/88.]

Chapter 173-545 WAC

INSTREAM RESOURCES PROTECTION PROGRAM—WENATCHEE RIVER BASIN, WATER RESOURCE INVENTORY AREA (WRIA) 45

WAC

173-545-010 General provision.

173-545-020	Purpose.
173-545-030	Establishment of instream flows.
173-545-040	Stream closure.
173-545-050	Policy statement for future permitting actions.
173-545-060	Lakes.
173-545-070	Exemptions.
173-545-080	Future rights.
173-545-090	Enforcement.
173-545-095	Appeals.
173-545-100	Regulation review.

WAC 173-545-010 General provision. These rules apply to waters within the Wenatchee River basin, WRIA 45, as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW (Water Resources Act of 1971), chapter 90.22 RCW (minimum water flows and levels), chapter 75.20 RCW (state fisheries code) and in accordance with chapter 173-500 WAC (water resources management program).

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-010, filed 6/3/83.]

WAC 173-545-020 Purpose. The purpose of this chapter is to retain perennial rivers, streams, and lakes in the Wenatchee River basin with instream flows and levels necessary to provide protection for wildlife, fish, scenic, aesthetic, and environmental values, recreation, navigation, and water quality.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-020, filed 6/3/83.]

WAC 173-545-030 Establishment of instream flows.
 (1) Stream management units and associated control stations are established as follows:

Stream Management Unit Information

Control Station No. Stream Management Unit Name	Control Station by River Mile and Section, Township, and Range	Affected Stream Reach(es) including Tributaries
12-4570.00 Wenatchee River at Plain	46.2 Sec. 12, T. 26N., R. 17E. W.M	From Plain Road Bridge, R.M. 46.2, to headwaters
12-4585.00 Icicle Cr. near Leavenworth	1.5 Sec. 24, T. 24N., R. 17E. W.M	Headwaters of Icicle Creek to its mouth
12-4590.00 Wenatchee River at Peshastin	21.5 Sec. 8, T. 24N., R. 18E. W.M	From confluence of Derby Creek to Plain Road Bridge, R.M. 46.2 excluding Derby Creek and Icicle Creek
12-4625.00 Wenatchee River at Monitor	7.0 Sec. 11, T. 23N., R. 19E. W.M	From mouth to confluence of Derby Creek, including Derby Creek and excluding Mission Creek
12-4620.00 Mission Creek near Cashmere	1.5 Sec. 8, T. 23N., R. 19E. W.M	From mouth to headwaters

(2) Instream flows are established for the stream management units in WAC-173-545-030(1) as follows:

Instream Flows in the Wenatchee River basin
 (instantaneous cubic feet per second)

Month	Day	12-4570.00	12-4580.00	12-4590.00
		Wenatchee R. at Plain	Icicle Cr. near Leavenworth	Wenatchee R. at Peshastin
Jan	1	550	120	700
	15	550	120	700
Feb	1	550	120	700
	15	550	120	700
Mar	1	550	150	750
	15	700	170	940
Apr	1	910	200	1300
	15	1150	300	1750
May	1	1500	450	2200
	15	2000	660	2800
Jun	1	2500	1000	3500
	15	2000	660	2600
Jul	1	1500	450	1900
	15	1200	300	1400
Aug	1	880	200	1000
	15	700	170	840
Sep	1	660	130	820
	15	620	130	780
Oct	1	580	130	750
	15	520	130	700
Nov	1	550	150	750
	15	550	150	750
Dec	1	550	150	750
	15	550	150	750

Instream Flows in the Wenatchee River basin
 (cont'd)
 (instantaneous cubic feet per second)

Month	Day	12-4620.00	12-4625.00
		Mission Cr. near Cashmere	Wenatchee R. at Monitor
Jan	1	6	820
	15	6	820
Feb	1	6	820
	15	6	800
Mar	1	6	800
	15	11	1040
Apr	1	22	1350
	15	40	1750
May	1	40	2200
	15	40	2800
Jun	1	28	3500
	15	20	2400
Jul	1	14	1700
	15	10	1200
Aug	1	7	800
	15	5	700
Sep	1	4	700
	15	4	700
Oct	1	4	700
	15	5	700
Nov	1	6	800
	15	6	800
Dec	1	6	800
	15	6	800

(3) Instream flow hydrographs, as represented in the document entitled "Wenatchee River basin instream resources protection program, figs. 7, 8, 9, pgs. 30 and 31," shall be used for identification of instream flows on those days not specifically identified in WAC 173-545-030(2).

(4) Future consumptive water right permits issued hereafter for diversion of surface water from the main stem

Wenatchee River and perennial tributaries shall be expressly subject to instream flows established in WAC 173-545-030(1) through (3) as measured at the appropriate gage, preferably the nearest one downstream, except for those exemptions described in WAC 173-545-070 (1) through (3).

(5) Projects that would reduce the flow in a portion of a stream's length (e.g.: hydroelectric diversion projects) will be considered consumptive with respect to the bypassed portion of the stream and will be subject to specific instream flow requirements as specified by the department for the bypassed reach notwithstanding WAC 173-545-030(1) through (3). The department may require detailed, project-specific instream flow studies to determine a specific instream flow for the bypassed reach.

(6) If department investigations determine that withdrawal of ground water from the source aquifers would not interfere significantly with stream flow during the period of stream closure or with maintenance of minimum flows, then applications to appropriate public ground waters may be approved and permits or certificates issued.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-030, filed 6/3/83.]

WAC 173-545-040 Stream closure. The department has determined that additional diversions of water from Peshastin Creek during the period June 15 to October 15 would deplete instream flows required to protect instream values. Peshastin Creek is, therefore, closed to further consumptive appropriation from June 15 to October 15 each year. During the nonclosed period, minimum instream flows will be controlled and measured from the control station on the Wenatchee River at Monitor.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-040, filed 6/3/83.]

WAC 173-545-050 Policy statement for future permitting actions. Consistent with the provisions of chapter 90.54 RCW, it is the policy of the department to preserve an appropriate base flow in all streams and rivers as well as the water levels in all lakes in the Wenatchee River basin by encouraging the use of alternate sources of water which include (1) ground water, (2) storage water, or (3) purchase of other valid water rights.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-050, filed 6/3/83.]

WAC 173-545-060 Lakes. In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. Withdrawals of water which would conflict therewith shall be authorized only in those situations where it is clear that overriding considerations of the public interest will be served.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-060, filed 6/3/83.]

WAC 173-545-070 Exemptions. (1) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise existing on the effective date of this chapter, nor shall it affect existing rights relating to the

operation of any navigation, hydroelectric, or water storage reservoir or related facilities.

(2) Future requests for group domestic uses, including municipal supply, may be exempted from the minimum instream flow provisions of this chapter when it is determined by the department, in consultation with the departments of fisheries and game, that overriding considerations of the public interest will be served.

(3) Single domestic and stockwatering use, except that related to feedlots, shall be exempt from the provisions established in this chapter. If the cumulative impacts of numerous single domestic diversions would significantly affect the quantity of water available for instream uses, then only single domestic in-house use shall be exempt if no alternative source is available.

(4) Nonconsumptive uses which are compatible with the intent of the chapter may be approved.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-070, filed 6/3/83.]

WAC 173-545-080 Future rights. No rights to divert or store public surface waters of the Wenatchee River basin, WRIA 45, shall hereafter be granted which shall conflict with the purpose of this chapter.

[Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-080, filed 6/3/83.]

WAC 173-545-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-545-090, filed 6/9/88. Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-090, filed 6/3/83.]

WAC 173-545-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-545-095, filed 6/9/88.]

WAC 173-545-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-545-100, filed 6/9/88. Statutory Authority: Chapters 90.54, 90.22 and 75.20 RCW. 83-13-016 (Order DE 83-8), § 173-545-100, filed 6/3/83.]

Chapter 173-548 WAC
WATER RESOURCES PROGRAM IN THE
METHOW RIVER BASIN, WRIA 48

WAC

173-548-010	General provision.
173-548-020	Establishment of base flows.
173-548-030	Future allocations—Reservation of surface water for beneficial uses.
173-548-040	Priority of future water rights during times of water shortage.
173-548-050	Streams and lakes closed to further consumptive appropriations.
173-548-060	Ground water.
173-548-070	Effect on prior rights.
173-548-080	Enforcement.
173-548-090	Appeals.
173-548-100	Regulation review.

WAC 173-548-010 General provision. These rules, including any subsequent additions and amendments, apply to waters within and contributing to the Methow River basin, WRIA 48 (see WAC 173-500-040). Chapter 173-500 WAC, the general rules of the department of ecology for the implementation of the comprehensive water resources program, applies to this chapter 173-548 WAC.

[Order DE 76-37, § 173-548-010, filed 12/28/76.]

WAC 173-548-020 Establishment of base flows. (1) Base flows are established for stream management units with monitoring to take place at certain control points as follows:

STREAM MANAGEMENT UNIT INFORMATION

Stream Management Unit Name, Control Station Name and Number	Control Station Location by River Mile, Section, Township, Range	Affected Stream Reach (includes tributaries)
<u>Lower Methow</u>		
Methow R. nr. Pateros (12.4499.50)	6.7 20-30-23E	Methow River confluence with Wells Pool to confluence with Twisp River.
<u>Middle Methow</u>		
Methow R. nr. Twisp (12.4495.00)	40.0 17-33-22E	Methow River from confluence with Twisp River to confluence with Chewack River.
<u>Upper Methow</u>		
Methow R. nr. Winthrop (12.4473.89)	50.2 2-34-21E	Methow River from confluence with Chewack River to confluence with Little Boulder Creek and including Little Boulder Creek.
<u>Methow Headwaters</u>		
Methow R. at Little Boulder Cr. (12.4473.83)	65.3 25-36-19E	Methow River from confluence with Little Boulder Creek to headwaters.

Early Winters Creek

Early Winters Cr. near Mazama	27-36-19E
-------------------------------	-----------

Early Winters Creek from confluence with Methow River to headwaters.

Chewack River

Chewack R. nr. Boulder Creek (12.4475.00)	8.7 35-36-21E
---	------------------

Chewack River confluence with Methow River to headwaters.

Twisp River

Twisp R. nr. Twisp (12.4489.98)	0.3 7-33-22E
---------------------------------	-----------------

Twisp River from confluence with Methow River to headwaters.

(2) Base flows established for the stream management units in WAC 173-548-020(1) are as follows:

Base Flows in the Methow River
 (All Figures in Cubic Feet Per Second)

[CODIFICATION NOTE: The graphic presentation of this table has been varied slightly in order that it would fall within the printing specification for the Washington Administrative Code. The following table was too wide to be accommodated in the width of the WAC column. The table as codified has been divided into two tables with Part 1 covering the Lower Methow, Middle Methow and Upper Methow and with Part 2 covering the Methow Headwaters, Early Winters Creek, Chewack River and Twisp River.]

PART 1

Month	Day	Lower Methow (12.4499.50)	Middle Methow (12.4495.00)	Upper Methow (12.4473.89)
Jan.	1	350	260	120
	15	350	260	120
Feb.	1	350	260	120
	15	350	260	120
Mar.	1	350	260	120
	15	350	260	120
Apr.	1	590	430	199
	15	860	650	300
May	1	1,300	1,000	480
	15	1,940	1,500	690
Jun.	1	2,220	1,500	790
	15	2,220	1,500	790
Jul.	1	2,150	1,500	694
	15	800	500	240
Aug.	1	480	325	153
	15	300	220	100
Sep.	1	300	220	100
	15	300	220	100
Oct.	1	360	260	122
	15	425	320	150
Nov.	1	425	320	150
	15	425	320	150
Dec.	1	390	290	135
	15	350	260	120

PART 2

Month	Day	Methow Headwaters (12.4473.83)	Early Winters Creek	Chewack River (12.4475.00)	Twisp River (12.4489.98)
Jan.	1	42	10	56	34
	15	42	10	56	34
Feb.	1	42	10	56	34
	15	42	10	56	34
Mar.	1	42	10	56	34
	15	42	10	56	34
Apr.	1	64	14	90	60
	15	90	23	140	100
May	1	130	32	215	170
	15	430	108	290	300
Jun.	1	1,160	290	320	440
	15	1,160	290	320	440
Jul.	1	500	125	292	390
	15	180	45	110	130
Aug.	1	75	20	70	58
	15	32	8	47	27
Sep.	1	32	8	47	27
	15	32	8	47	27
Oct.	1	45	11	56	35
	15	60	15	68	45
Nov.	1	60	15	68	45
	15	60	15	68	45
Dec.	1	51	12	62	39
	15	42	10	56	34

(3) Base flow hydrographs, as represented in Figure 1 in the document entitled "water resources management program, Methow River basin" dated 1976, shall be used for definition of base flows on those days not specifically identified in WAC 173-548-020(2) and 173-548-030.

(4) All rights hereafter established shall be subject to the base flows established in WAC 173-548-020(1) through (3), except as provided under WAC 173-548-030 herein.

(5) Future appropriations of water which would conflict with base flows shall be authorized, by the director, only in those situations when it is clear that overriding considerations of the public interest will be served.

[Order DE 76-37, § 173-548-020, filed 12/28/76.]

WAC 173-548-030 Future allocations—Reservation of surface water for beneficial uses. (1) The department determines that there are surface waters available for appropriation from the stream management units specified in the amount specified in cubic feet per second (cfs) during the time specified as follows:

(a) Maximum surface water available for future allocation from the indicated reach is as follows:

Month	Lower Methow	Middle Methow	Upper Methow	Methow Headwaters	Early Winters Creek	Chewack River	Twisp River
Oct.	95	50	44	15	29	09	14
Nov.	116	101	46	06	21	10	15
Dec.	112	99	44	17	26	10	15
Jan.	50	36	26	08	19	03	09
Feb.	51	37	29	09	19	04	10
Mar.	147	139	80	38	19	24	18
Apr.	565	590	273	336	35	118	148
May	2,922	2,927	784	412	403	809	703

Jun.	3,116	2,853	1,017	1,249	294	1,292	890
Jul.	965	877	583	608	189	308	298
Aug.	214	192	203	109	94	70	70
Sep.	62	55	76	33	47	23	26

All figures in cubic feet per second.

(b) The control station for each reach is defined in WAC 173-548-020.

(c) The appropriation limit is set forth to be an amount equal to the one in two year natural reach discharge on a monthly basis for all management reaches except Early Winters Creek. The appropriation limit for Early Winters Creek is set forth to be an amount equal to the estimated natural mean monthly streamflow for that stream.

(2) The amounts of water referred to in WAC 173-548-030(1) above are allocated for beneficial uses in the future as follows:

(a) Allocation of surface waters by use category (April through September):

Use Description	Apr.	May	Jun.	Jul.	Aug.	Sep.
<u>Lower Methow</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	860	1,940	2,220	800	300	300
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Middle Methow</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	650	1,500	1,500	500	220	220
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Upper Methow</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	300	690	790	240	100	100
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Methow Headwaters</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	90	430	1,160	180	32	32
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Early Winters Creek</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	23	108	290	45	8.0	11.0
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Chewack River</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0

Base Flow	140	290	320	110	47	47
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Twisp River</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	100	300	440	130	27	27
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					

Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Twisp River</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	45	45	34	34	34	34
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					

All figures in cubic feet per second.

(b) Allocation of surface waters by use category (October through March):

Use Description	Oct.	Nov.	Dec.	Jan.	Feb.	Mar.
<u>Lower Methow</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	425	425	350	350	350	350
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Middle Methow</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	320	320	260	260	260	260
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Upper Methow</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	150	150	120	120	120	120
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Methow Headwaters</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	60	60	42	42	42	42
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Early Winters Creek</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	15	15	10	10	10	10
Public Water Supply, Irrigation, and Other Uses	Remaining waters up to the appropriation limit set forth in WAC 173-548-030 (1)(c)					
<u>Chewack River</u>						
Single Domestic and Stock Use	2.0	2.0	2.0	2.0	2.0	2.0
Base Flow	68	68	56	56	56	56

(c) Allocations presented in this section do not limit the utilization of waters stored for later release, provided such storage does not infringe upon existing rights or base flow and is duly permitted under RCW 90.03.290 and 90.03.350.

(d) As the amount of water allocated for each category of use approaches the amount available for future allocation set forth in WAC 173-548-030(1), the department shall review the program to determine whether there is a need for program revision.

[Order DE 76-37, § 173-548-030, filed 12/28/76.]

WAC 173-548-040 Priority of future water rights during times of water shortage. (1) As between rights established in the future pertaining to waters allocated in WAC 173-548-030 (2)(a) and (b), all rights subject to this program shall be regulated in descending order of use category priority regardless of the date of the priority of right.

(2) As between rights established in the future within a single use category allocation of WAC 173-548-030, the date of priority shall control with an earlier dated right being superior to those rights with later dates.

[Order DE 76-37, § 173-548-040, filed 12/28/76.]

WAC 173-548-050 Streams and lakes closed to further consumptive appropriations. The department, having determined based on existing information that there are no waters available for further appropriation through the establishment of rights to use water consumptively, closes the streams and lakes listed in (a) and (b), and ground water hydraulically connected with these surface waters to further consumptive appropriation[.]. This includes rights to use water consumptively established through permit procedures and ground water withdrawals otherwise exempted from permit under RCW 90.44.050. Specific situations in which well construction may be approved are identified.

No wells shall be constructed for any purposes, including those exempt from permitting under RCW 90.44.050, unless one or more of the following conditions have been met and construction of the well has been approved in writing by the department prior to the beginning of well construction:

(1) The proponent has a valid water right permit recognized by the department. For an existing community domestic use, a water right permit must be held by a purveyor of an approved system. (For the purposes of this chapter, an approved water system is one in compliance with the state drinking water regulations, chapter 246-290 WAC

and the state surface and ground water codes, chapters 90.03 and 90.44 RCW); or

(2) The proponent has obtained a valid state surface or ground water right through a transfer approved by the department under the statutory authority of chapter 90.03 or 90.44 RCW; or

(3) The proponent is replacing or modifying an existing well developed under the exemption from permit clause of RCW 90.44.050 and this has been approved in writing by the department; or,

(4) If the ground water being sought for withdrawal has been determined by the department not to be hydraulically connected with surface waters listed as closed, the department may approve a withdrawal. When insufficient evidence is available to the department to make a determination that ground and surface waters are not hydraulically connected, the department shall not approve the withdrawal of ground water unless the person proposing to withdraw the ground water provides additional information sufficient for the department to determine that hydraulic continuity does not exist and that water is available.

(a) STREAM CLOSURES

The following streams are closed all year, including all ground waters hydraulically connected to these streams.

Stream Name (Includes Tributaries)
Wolf Creek
Bear Creek (Davis Lake)
Thompson Creek
Beaver Creek
Alder Creek
Benson Creek
Texas Creek
Libby Creek
Cow Creek
Gold Creek
McFarland Creek
Squaw Creek
Black Canyon Creek
French Creek

(b) LAKE CLOSURES

The following lakes are closed all year, including all ground waters hydraulically connected to these lakes:

Name	Location
Alta Lake	3 mi. SW of Pateros
Black Lake	25 mi. N of Winthrop
Black Pine Lake	9 mi. SW of Twisp
Crater Lake	10 mi. W of Carlton
Davis Lake	Bear Creek Drainage
Eagle Lake	11 mi. SW of Carlton
French Creek	Sec.28, T.31N., R.23E.
Libby Lake	10 mi. W of Carlton
Louis Lake	20 mi. W of Winthrop
Middle Oval Lake	16 mi. W of Carlton
North Lake	20 mi. W of Winthrop
Patterson Lake	Sec.8, T.34N., R.21E.

Pearrygin Lake	Sec.36, T.35N., R.21E.
Slate Lake	14 mi. W of Winthrop
Sunrise Lake	16 mi. W of Methow
Upper Eagle Lake	12 mi. W of Carlton
West Oval Lake	16 mi. W of Carlton

[Statutory Authority: Chapters 34.05, 90.54, 18.104, 90.03 and 90.44 RCW, 91-23-093 (Order 91-27), § 173-548-050, filed 11/19/91, effective 12/20/91; Order DE 76-37, § 173-548-050, filed 12/28/76.]

WAC 173-548-060 Ground water. If it is determined that a future development of ground water measurably affects surface waters subject to the provisions of chapter 173-548 WAC, then rights to said ground water shall be subject to the same conditions as affected surface waters.

[Order DE 76-37, § 173-548-060, filed 12/28/76.]

WAC 173-548-070 Effect on prior rights. Nothing in this chapter shall be construed to lessen, enlarge, or modify existing rights acquired by appropriation or otherwise, and legally vested prior to the effective date of this chapter.

[Order DE 76-37, § 173-548-070, filed 12/28/76.]

WAC 173-548-080 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as are appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-548-080, filed 6/9/88.]

WAC 173-548-090 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B-RCW.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-548-090, filed 6/9/88.]

WAC 173-548-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-548-100, filed 6/9/88.]

**Chapter 173-549 WAC
WATER RESOURCES PROGRAM IN THE
OKANOGAN RIVER BASIN, WRIA 49**

WAC	
173-549-010	General provision.
173-549-015	Purpose.
173-549-016	Definition.
173-549-020	Establishment of minimum instream flows.
173-549-025	Stream closures.
173-549-027	Policy statement for future permitting actions.
173-549-035	Lakes.

- 173-549-060 Ground water.
- 173-549-070 Effect on prior rights and exemptions.
- 173-549-080 Future rights.
- 173-549-090 Enforcement.
- 173-549-095 Appeals.
- 173-549-100 Regulation review.
- 173-549-900 Minimum instream flow hydrographs.

DISPOSITION OF SECTIONS FORMERLY CODIFIED IN THIS CHAPTER

- 173-549-030 Future allocations—Reservation of surface water for beneficial uses. [Order DE 76-25, § 173-549-030, filed 7/14/76.] Repealed by 84-13-076 (Order DE 84-15), filed 6/20/84. Statutory Authority: Chapters 90.54 and 90.22 RCW.
- 173-549-040 Priority of future water rights during times of water shortage. [Order DE 76-25, § 173-549-040, filed 7/14/76.] Repealed by 84-13-076 (Order DE 84-15), filed 6/20/84. Statutory Authority: Chapters 90.54 and 90.22 RCW.
- 173-549-050 Streams and lakes closed to further consumptive appropriations. [Order DE 76-25, § 173-549-050, filed 7/14/76.] Repealed by 84-13-076 (Order DE 84-15), filed 6/20/84. Statutory Authority: Chapters 90.54 and 90.22 RCW.

WAC 173-549-010 General provision. These rules apply to waters within the Okanogan River Basin (WRIA 49) as defined in WAC 173-500-040. This chapter is promulgated pursuant to chapter 90.54 RCW (the Water Resources Act of 1971) and chapter 90.22 RCW (Minimum water flows and levels) and in accordance with chapter 173-500 WAC (Water resources management program).

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-010, filed 6/20/84; Order DE 76-25, § 173-549-010, filed 7/14/76.]

WAC 173-549-015 Purpose. Chapter 90.54 RCW (the Water Resources Act of 1971) requires that utilization and management of the waters of the state shall be guided by a number of fundamentals, including the following:

"(1) Uses of water for domestic, stock watering, industrial, commercial, agricultural, irrigation, hydroelectric power production, mining, fish and wildlife maintenance and enhancement, recreational, and thermal power production purposes, and preservation of environmental and aesthetic values, and all other uses compatible with the enjoyment of the public waters of the state, are declared to be beneficial." (RCW 90.54.020(1).)

The act further specifies that "Perennial rivers and streams of the state shall be retained with base flows necessary to provide for preservation of wildlife, fish, scenic, aesthetic and other environmental values, and navigational values." (RCW 90.54.020 (3)(a).)

The purpose of this chapter is to satisfy the requirements of RCW 90.54.020 (3)(a) while, at the same time, allowing the continued use of water for other beneficial uses such as agriculture, which is acknowledged as a vital activity greatly benefiting the citizens of the Okanogan Basin and the state of Washington.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-015, filed 6/20/84.]

WAC 173-549-016 Definition. For the purposes of this chapter, the term minimum instream flow shall be synonymous with the term base flow as defined in chapter 90.54 RCW and the term minimum flow as defined in chapter 90.22 RCW.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-016, filed 6/20/84.]

WAC 173-549-020 Establishment of minimum instream flows. (1) Minimum instream flows are established for stream management units with monitoring to take place at certain control points as follows:

Stream Management Unit Information

Stream Management Unit Name, Control Station Name and Number	Control Station Location by River Mile, Section, Township, Range	Affected Stream Reach
Lower Okanogan		
Okanogan R. at Malott (12447200)	17.0, 9-32-25E	Okanogan River confluence with Wells Pool to confluence of Chewiliken Cr.
Middle Okanogan		
Okanogan R. nr. Tonasket (12445000)	50.8, 8-36-27E	Okanogan River confluence of Chewiliken Creek to confluence Similkameen River
Upper Okanogan		
Okanogan R. at Oroville (12439500)	77.3, 27-40-27E	Okanogan River confluence of Similkameen River to Osyoos Lake
Similkameen		
Similkameen R. at Nighthawk (12442500)	15.8, 7-40-26E	Similkameen River confluence with Okanogan River to Canadian Border

(2) Minimum instream flows established for the stream management units in WAC 173-549-020(1) are as follows:

Minimum Instream Flows in the Okanogan River (All Figures in Cubic Feet Per Second)

Month	Day	Lower Okanogan 12447200	Middle Okanogan 1244500	Upper Okanogan 124426000	Similkameen 12439500
Jan.	1	860	800	320	400
	15	830	800	320	400
Feb.	1	820	800	320	400
	15	850	800	320	400
Mar.	1	880	800	320	425
	15	900	800	320	450
Apr.	1	925	910	330	510
	15	1,100	1,070	340	640
May	1	1,750	1,200	350	1,100
	15	3,800	3,800	500	3,400
Jun.	1	3,800	3,800	500	3,400
	15	3,800	3,800	500	3,400
Jul.	1	2,100	2,150	420	1,900
	15	1,200	1,200	350	1,070

Aug.	1	800	840	320	690
	15	600	600	300	440
Sept.	1	620	600	300	400
	15	700	600	300	400
Oct.	1	750	730	330	450
	15	960	900	370	500
Nov.	1	950	900	370	500
	15	950	900	320	500
Dec.	1	930	900	320	500
	15	900	850	320	450

(3) Minimum instream flow hydrographs, as represented in WAC 173-549-900, shall be used for definition of minimum instream flows on those days not specifically identified in WAC 173-549-020(2).

(4) Future consumptive water right permits hereafter issued for diversion of surface water from the mainstem Okanogan River and the Similkameen River shall be expressly subject to minimum instream flows established in WAC 173-549-020 (1) through (3) except those described in WAC 173-549-070.

(5) Projects that would reduce the flow in a portion of a stream's length (e.g. hydroelectric projects that bypass a portion of a stream) will be considered consumptive only with respect to the affected portion of the stream. Such projects will be subject to instream flows as specified by the department. These flows may be those established in WAC 173-549-020 or, when appropriate, may be flows specifically tailored to that particular project and stream reach. When studies are required to determine such reach- and project-specific flow requirements, the department may require the project proponent to conduct such studies.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-020, filed 6/20/84; Order DE 76-25, § 173-549-020, filed 7/14/76.]

WAC 173-549-025 Stream closures. (1) Consistent with the provisions of chapter 90.54 RCW, it is the policy of the department to preserve an appropriate minimum instream flow in all perennial streams and rivers of the Okanogan River Basin for protection of instream values.

(2) In keeping with this policy, a partial year closure from May 1 to October 1 will be established on all perennial streams in the basin except those with established minimum instream flows as described in WAC 173-549-020.

(3) The upper Okanogan stream management unit as established in WAC 173-549-020(1) is closed to further consumptive appropriation from June 15 through August 31 with the exception of single-domestic use and stockwatering use, provided that no alternative source of supply is available.

(4) When a project (as described in WAC 173-549-020(5)) is proposed on a stream that is closed to further appropriations, the department shall deny the water right application unless the project proponent can adequately demonstrate that the project does not conflict with the intent of the closure.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-025, filed 6/20/84.]

WAC 173-549-027 Policy statement for future permitting actions. (1) Consistent with the provisions of chapter 90.54 RCW, it is the policy of the department to

[Title 173 WAC—p 952]

preserve an appropriate minimum instream flow in all perennial streams and rivers as well as the water levels in all lakes in the Okanogan River Basin by encouraging the use of alternate sources of water which include (a) ground water, (b) storage water, or (c) acquisition of existing water rights.

(2) All future permits to appropriate water from the Okanogan River, the Similkameen River and perennial tributaries shall be subject to the required flows at all downstream control stations as established in WAC 173-549-020.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-027, filed 6/20/84.]

WAC 173-549-035 Lakes. (1) In future permitting actions relating to withdrawal of lake waters, lakes and ponds shall be retained substantially in their natural condition. In considering future water right applications, the department shall deny any application for surface or ground water which will result in a significant decrease in lake level or in the stream flow of any stream draining the lake, except that no decrease in stream flow shall be allowed during the May 1 - October 1 stream closure period.

(2) Notwithstanding the above, nothing in this chapter shall limit the utilization of waters stored for later release, provided such storage does not infringe upon existing rights or instream flow and is duly permitted under RCW 90.03.290 and 90.03.350.

(3) Any future water rights for waters from Osoyoos Lake or from ground waters determined to be in significant hydraulic continuity with Osoyoos Lake, issued after the effective date of this chapter and upon completion of the new Osoyoos Lake outlet control structure, shall be subject to the maintenance of a water surface level of 910.5 feet USCGS in Osoyoos Lake and said diversions shall be curtailed when the lake elevation drops below elevation 910.5 feet USCGS.

(4) Notwithstanding the provisions of this chapter, the construction and operation of the proposed new outlet control structure for Osoyoos Lake shall be consistent with the terms and conditions of the International Joint Commission Order of Approval signed on December 9, 1982, pursuant to the 1909 Boundary Waters Treaty.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-035, filed 6/20/84.]

WAC 173-549-060 Ground water. If department investigations determine that there is significant hydraulic continuity between surface water and the proposed ground water source, any water right permit or certificate issued shall be subject to the same conditions as affected surface waters. If department investigations determine that withdrawal of ground water from the source aquifers would not interfere with stream flow during the period of stream closure or with maintenance of minimum instream flows, then applications to appropriate public ground waters may be approved.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-060, filed 6/20/84; Order DE 76-25, § 173-549-060, filed 7/14/76.]

WAC 173-549-070 Effect on prior rights and exemptions. (1) Nothing in this chapter shall affect any existing water rights including, among others, riparian, appropriative, and federal Indian and non-Indian reserved rights, existing on the effective date of this chapter, nor shall it affect existing rights relating to the operation of any navigation, hydroelectric, or water storage reservoir or related facilities.

(2) Single domestic use and stockwatering use shall be exempt from the provisions established in this chapter except that, when the cumulative impacts of numerous domestic diversions begins to significantly affect the quantity of water available for instream uses or the maintenance of lake levels, then any water rights issued after that time shall be issued only for in-house use if no alternative supply is available.

(3) Nonconsumptive uses which are compatible with the intent of the chapter may be approved.

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-070, filed 6/20/84; Order DE 76-25, § 173-549-070, filed 7/14/76.]

WAC 173-549-080 Future rights. No rights to divert or store public surface or ground waters of the Okanogan River Basin, WRIA 49, shall hereafter be granted which shall conflict with the purpose of this chapter except as provided in RCW 90.54.020 (3)(a).

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-080, filed 6/20/84.]

WAC 173-549-090 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-549-090, filed 6/9/88. Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-090, filed 6/20/84.]


WAC 173-549-095 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-549-095, filed 6/9/88.]

WAC 173-549-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-549-100, filed 6/9/88. Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-100, filed 6/20/84.]

WAC 173-549-900 Minimum instream flow hydrographs.

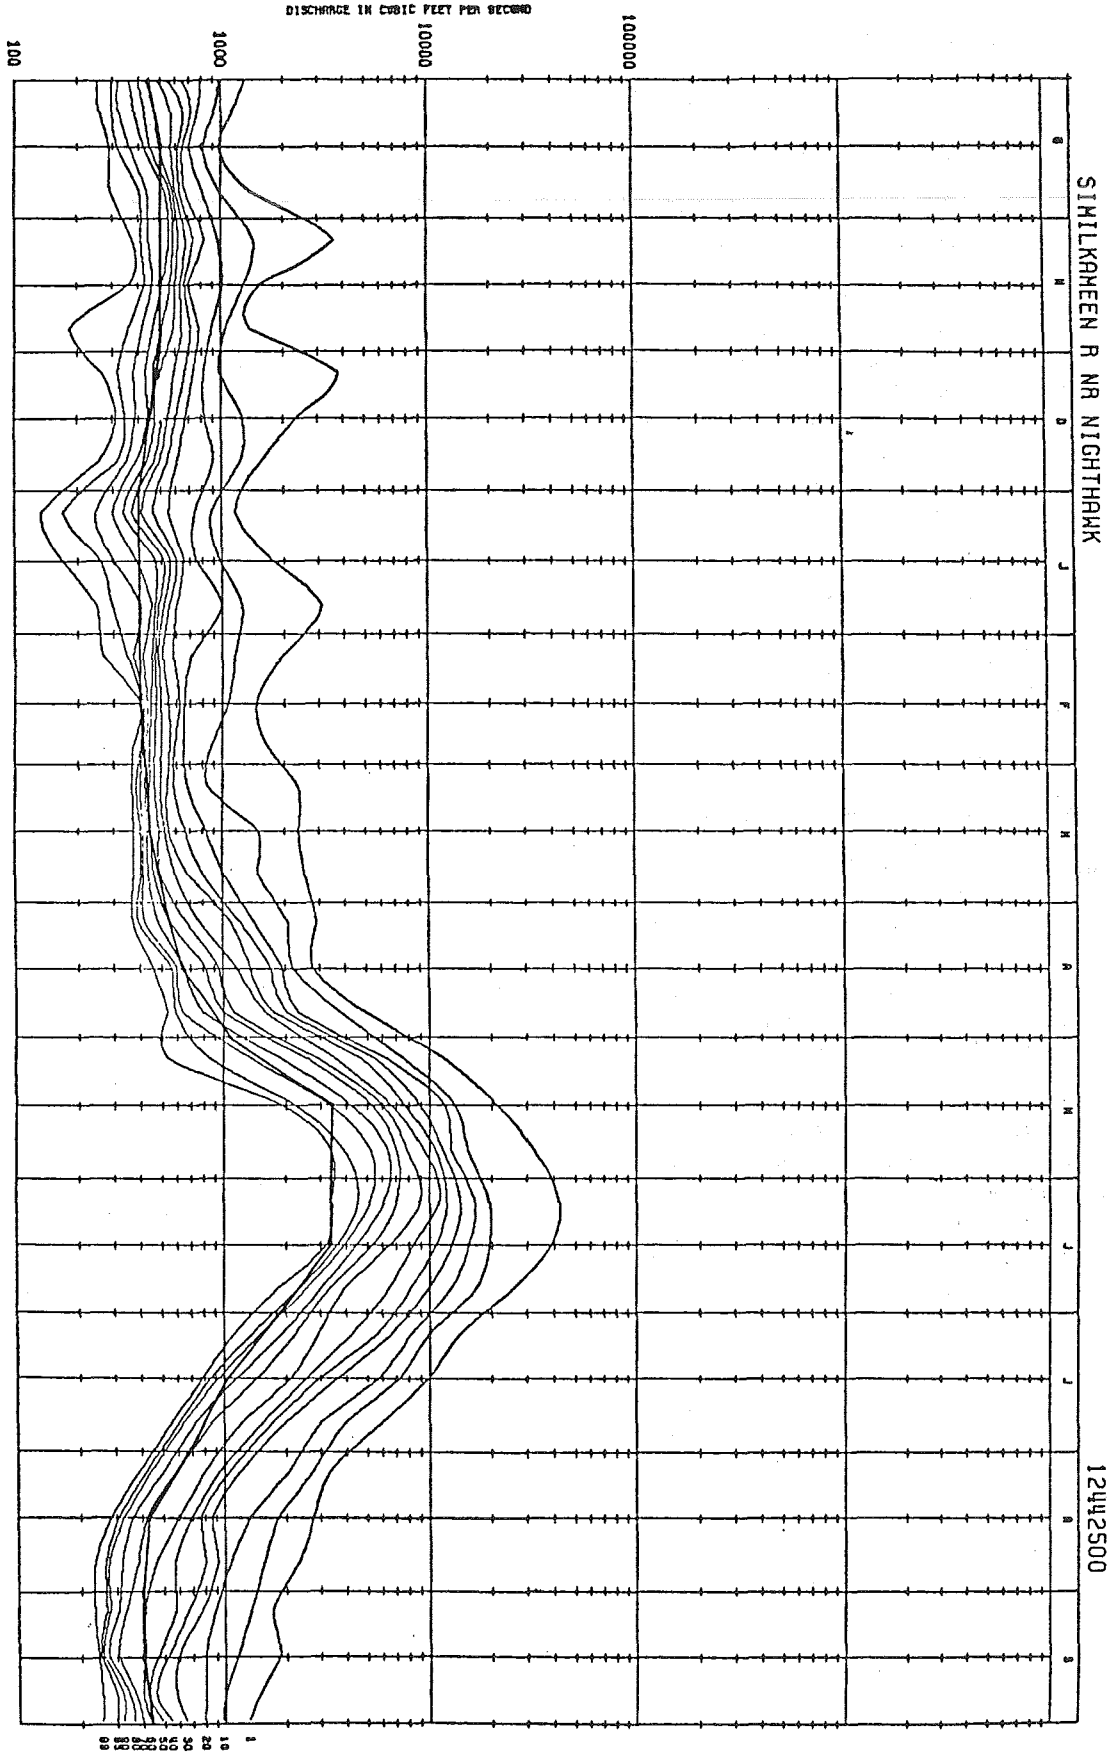

STATE OF WASHINGTON
DISCHARGE - DURATION HYDROGRAPH

12442500


PERIODS FROM - TO
JUN 1958 - SEP 1970
OCT 1971 - SEP 1978

STATE OF WASHINGTON
DISCHARGE - DURATION HYDROGRAPH

PERIOD(S) FROM - TO
JAN 1968 - SEP 1970
OCT 1971 - SEP 1970

OKANOGAN R AT OROVILLE

12439500

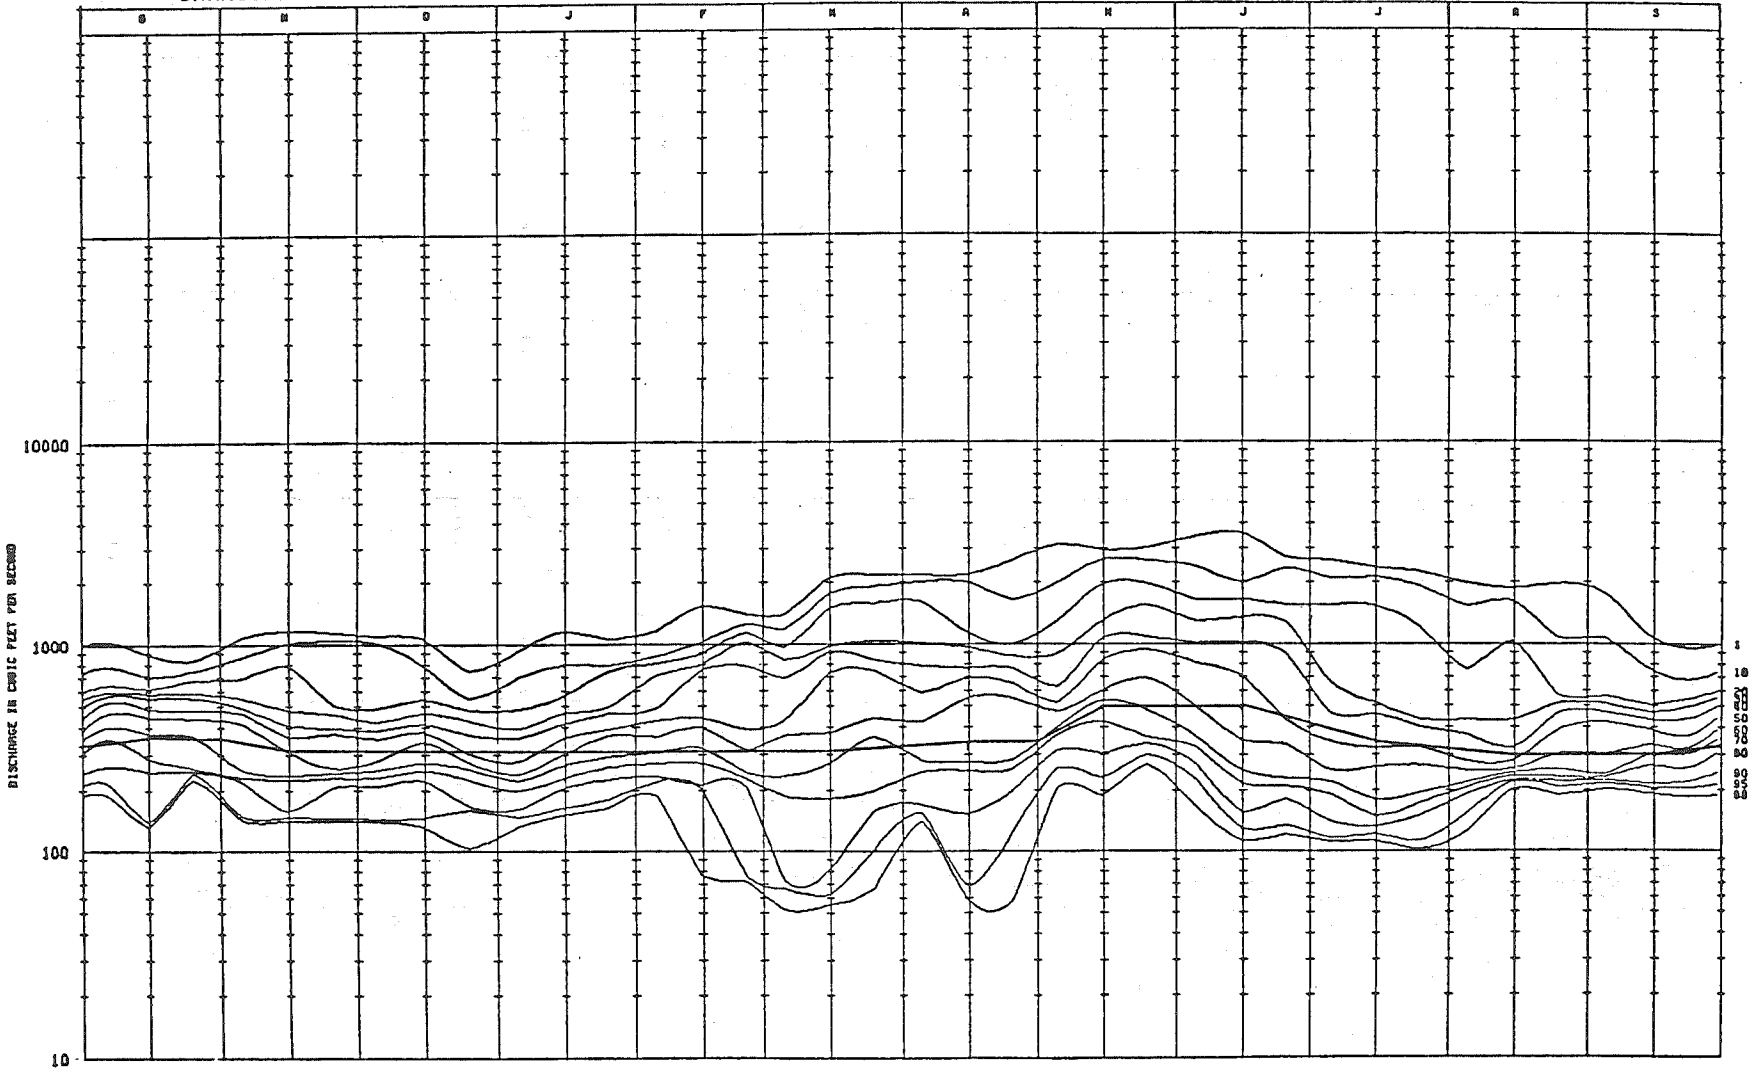



STATE OF WASHINGTON
DISCHARGE - DURATION HYDROGRAPH

PERIOD(S) FROM - TO
JAN 1968 - SEP 1970
OCT 1971 - SEP 1970

OKANOGAN R NR TONASKET

12445000

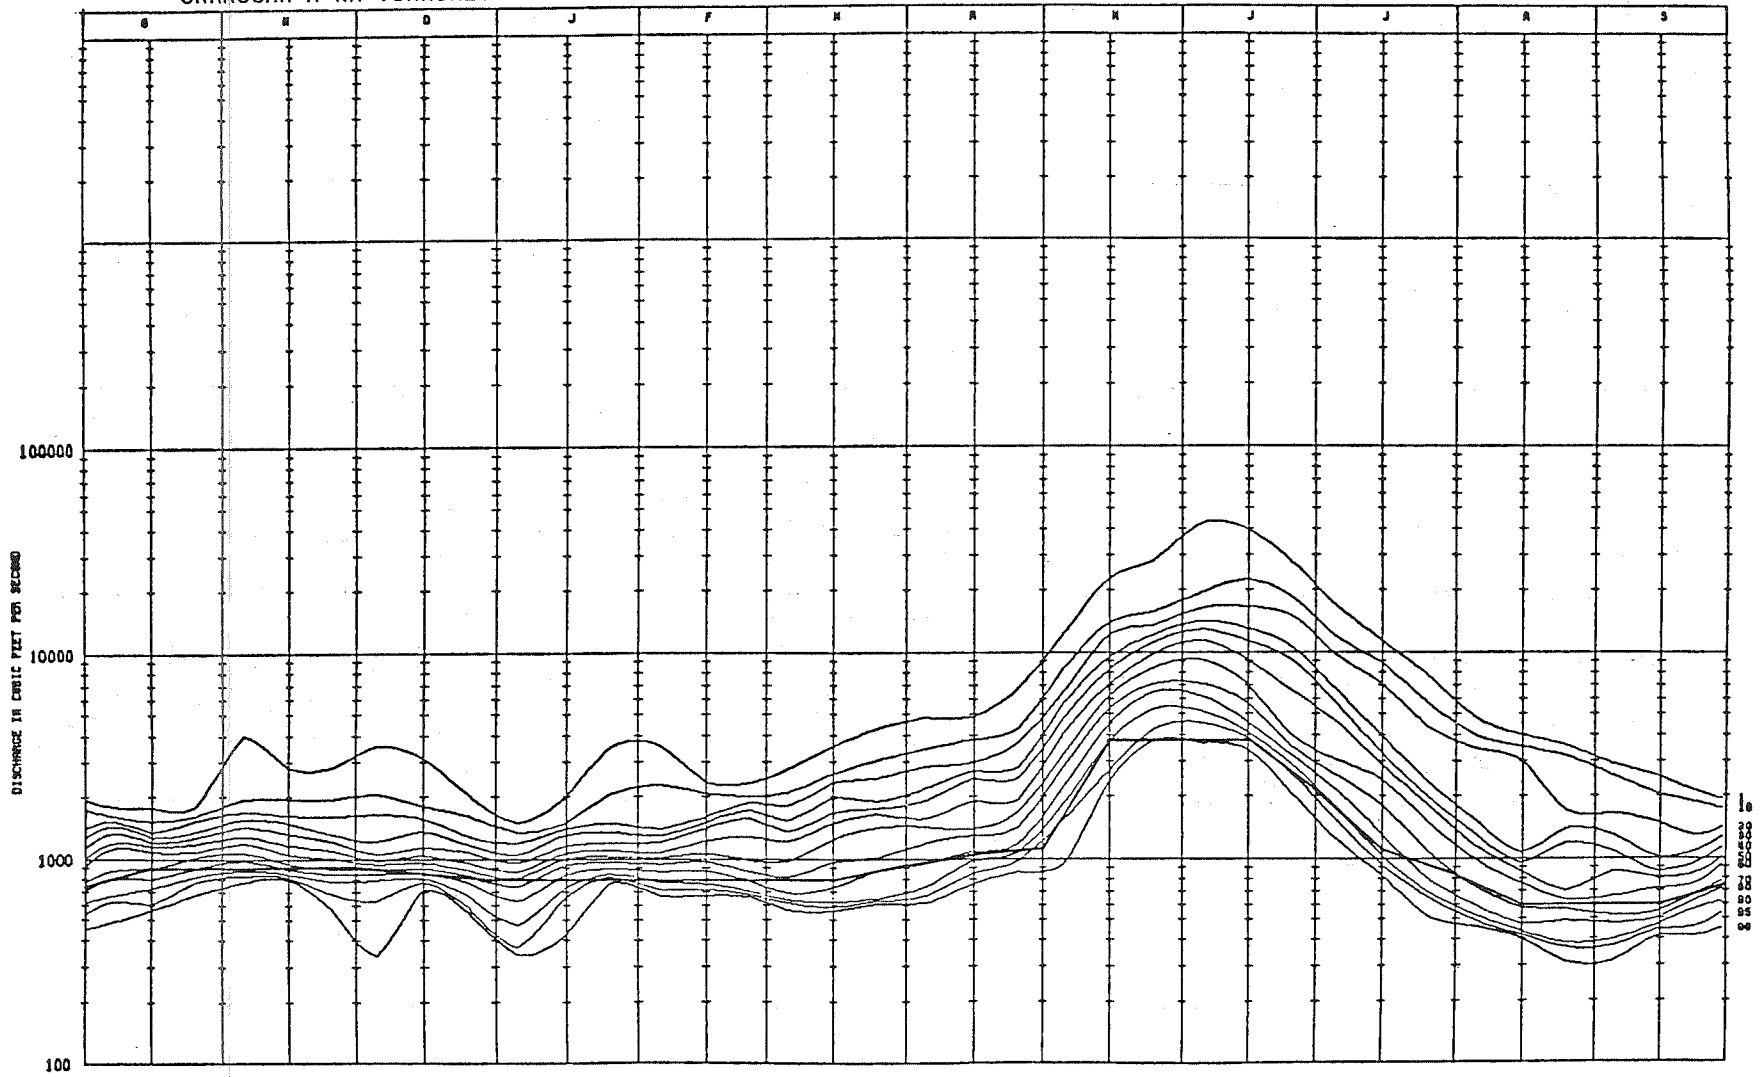

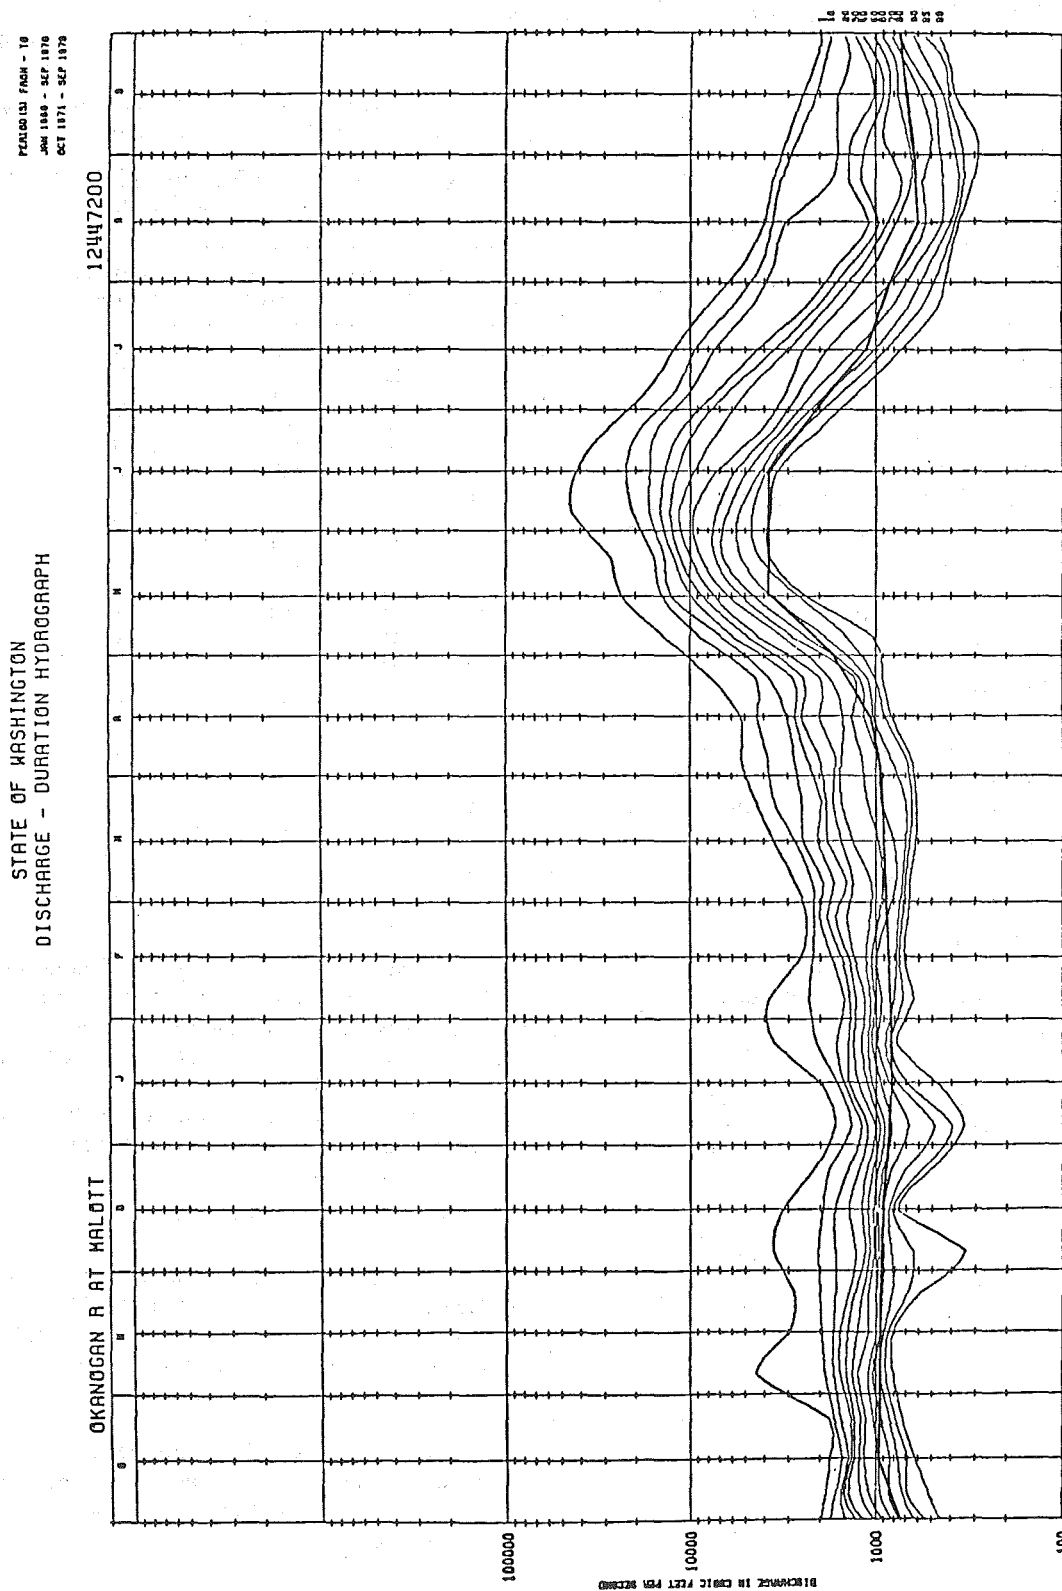

[Statutory Authority: Chapters 90.54 and 90.22 RCW. 84-13-076 (Order DE 84-15), § 173-549-900, filed 6/20/84.]

Chapter 173-555 WAC

WATER RESOURCES PROGRAM IN THE LITTLE SPOKANE RIVER BASIN, WRIA 55

WAC

- 173-555-010 General provision.
- 173-555-020 Definition.
- 173-555-030 Establishment of base flows.
- 173-555-040 Future allocations—Reservation of surface water for beneficial uses.
- 173-555-050 Priority of future water rights during times of water shortage.
- 173-555-060 Streams and lakes closed to further consumptive appropriations.
- 173-555-070 Effect on prior rights.
- 173-555-080 Enforcement.
- 173-555-090 Appeals.
- 173-555-100 Regulation review.

WAC 173-555-010 General provision. These rules, including any subsequent additions and amendments, apply to waters within and contributing to the Little Spokane River basin, WRIA-55 (see WAC 173-500-040). Chapter 173-500 WAC, the general rules of the department of ecology for the implementation of the comprehensive water resources program, applies to this chapter 173-555 WAC.

[Order DE 75-24, § 173-555-010, filed 1/6/76.]

WAC 173-555-020 Definition. "NONCOMMERCIAL AGRICULTURAL IRRIGATION" means beneficial use of water upon not more than three acres for the purpose of crops and livestock for domestic use.

[Order DE 75-24, § 173-555-020, filed 1/6/76.]

WAC 173-555-030 Establishment of base flows. (1) Base flows are established for stream management units with monitoring to take place at certain control points as follows:

Stream Management Unit Information

Control Station Number, Stream Management Unit Name	Control Station Location by River Mile and Section, Township Range	Affected Stream Reach
No. 12-4270.00 Little Spokane River Elk	34.6 Sec. 8, T.29N., R.43 E.W.M.	From confluence with Dry Creek to the headwaters including tributaries except Dry Creek.
No. 12-4295.00 Little Spokane River Chattaroy	23.05 Sec. 34, T.28N., R.43 E.W.M.	From confluence with Deer Creek to confluence with Dry Creek including tributaries except Deer Creek.
No. 12-4310.00 Little Spokane River Dartford	10.8 Sec. 6, T.26N., R.43 E.W.M.	From confluence with Little Creek to confluence with Deer Creek including tributaries except Little Creek.

No. 12-4315.00
Little Spokane River
Confluence

3.9
Sec. 3, T.26N.,
R.42 E.W.M.

From mouth to confluence with Little Creek including tributaries.

(2) Base flows established for the stream management units in WAC 173-555-030(1) are as follows:

Base Flows in the Little Spokane River Basin
(in Cubic Feet Per Second)

Month	Day	12-4270.00 Elk	12-4295.00 Chattaroy	12-4310.00 Dartford	12-4315.00 Confluence
Jan.	1	40	86	150	400
	15	40	86	150	400
Feb.	1	40	86	150	400
	15	43	104	170	420
Mar.	1	46	122	190	435
	15	50	143	218	460
Apr.	1	54	165	250	490
	15	52	143	218	460
May	1	49	124	192	440
	15	47	104	170	420
Jun.	1	45	83	148	395
	15	43	69	130	385
Jul.	1	41.5	57	115	375
	15	39.5	57	115	375
Aug.	1	38	57	115	375
	15	38	57	115	375
Sept.	1	38	57	115	375
	15	38	63	123	380
Oct.	1	38	70	130	385
	15	39	77	140	390
Nov.	1	40	86	150	400
	15	40	86	150	400
Dec.	1	40	86	150	400
	15	40	86	150	400

(3) Base Flow hydrographs, Figure II-1 in the document entitled "water resources management program in the Little Spokane River Basin" dated August, 1975 shall be used for definition of base flows on those days not specifically identified in WAC 173-555-030(2).

(4) All rights hereafter established shall be expressly subject to the base flows established in sections WAC 173-555-030 (1) through (3).

[Order DE 75-24, § 173-555-030, filed 1/6/76.]

WAC 173-555-040 Future allocations—Reservation of surface water for beneficial uses. (1) The department determines that these are surface waters available for appropriation from the stream management units specified in the amount specified in cubic feet per second (cfs) during the time specified as follows:

(a) Surface water available from the east branch of the Little Spokane River, confluence with Dry Creek to headwaters, based on measurement at control station number 12-4270.00 at Elk are:

Month	May	June	July	Aug.	Sept.	Oct.
Date	1 15	1 15	1 15	1 15	1 15	1 15
Amount	26 22	17 14	11 9	5 5	5 5	7 7

(b) Surface water available from the Little Spokane River from confluence with Little Creek at Dartford to Eloika Lake outlet, and to confluence with Dry Creek based on measurement at control station number 12-4310 at Dartford are:

Month	May	June	July	Aug.	Sept.	Oct.
Date	1 15	1 15	1 15	1 15	1 15	1 15
Amount	340 236	152 103	62 34	11 11	11 11	20 20

(c) Available surface waters for those days not specified in (a) and (b) shall be defined from Figures II-3 and II-4 in the document entitled "water resources management program in the Little Spokane River basin" dated August, 1975.

(2) The amounts of waters referred to in WAC 173-555-040(1) above are allocated for beneficial uses in the future as follows:

(a) Three cubic feet per second from the amount available in the east branch of the Little Spokane River referred to in WAC 173-555-040 (1)(a) above and five cubic feet per second from the amount available in the Little Spokane River, besides east branch, referred to in WAC 173-555-040 (1)(b) are allocated to future domestic, stockwatering and noncommercial agricultural irrigation purposes within the stream reaches specified therein throughout the year.

(b) The remainder of the amount referred to in WAC 173-555-040 (1)(a) and (b) besides the amount specified in WAC 173-555-040 (2)(a) are allocated to consumptive and nonconsumptive uses not specified in WAC 173-555-040 (2)(a). These are further described in the figures appended hereto.

[Order DE 75-24, § 173-555-040, filed 1/6/76.]

WAC 173-555-050 Priority of future water rights during times of water shortage. (1) As between rights established in the future pertaining to waters allocated in WAC 173-555-040 (2)(a) and (b), all rights established in (a) shall be superior to those pertaining to (b) regardless of the date of the priority of right.

(2) As between rights established in the future within a single use category allocation of WAC 173-555-040, the date of priority shall control with an earlier dated right being superior to those rights with later dates.

[Order DE 75-24, § 173-555-050, filed 1/6/76.]

WAC 173-555-060 Streams and lakes closed to further consumptive appropriations. The department, having determined there are no waters available for further appropriation through the establishment of rights to use water consumptively, closes the following streams to further

consumptive appropriation except for domestic and normal stockwatering purposes excluding feedlot operation:

SURFACE WATER CLOSURES			
Stream* Name	Affected Reach	Date of Closure	Period of Closure
Dry Creek	Mouth to headwaters	5-26-1952	1 June-31 Oct.
Otter Creek	Mouth to headwaters	2-23-1971	"
Bear Creek	Mouth to headwaters	4-13-1953	"
Deer Creek	Mouth to headwaters	2-29-1968	"
Dragoon Creek	Mouth to headwaters	7-02-1951	"
Deep Creek	Mouth to headwaters	6-14-1961	"
Deadman Creek ^{1/}	Mouth to headwaters	11-28-1961	"
Little Creek	Mouth to headwaters	4-13-1953	"
W. Branch Little Spokane River	Outlet of Eloika Lake to headwaters	Date of adoption	"
All natural lakes in the basin		"	"

* Includes all tributaries in the contributing drainage area unless specifically excluded.

^{1/} An unnamed tributary flowing through Sec. 20, T26N., R.44E. is exempted from closure.

[Order DE 75-24, § 173-555-060, filed 1/6/76.]

WAC 173-555-070 Effect on prior rights. Nothing in this chapter shall be construed to lessen, enlarge or modify the existing rights acquired by appropriation or otherwise.

[Order DE 75-24, § 173-555-070, filed 1/6/76.]

WAC 173-555-080 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as are appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-555-080, filed 6/9/88.]

WAC 173-555-090 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-555-090, filed 6/9/88.]

WAC 173-555-100 Regulation review. The department of ecology shall initiate a review of the rules estab-

lished in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-555-100, filed 6/9/88.]

Chapter 173-559 WAC

WATER RESOURCES PROGRAM FOR THE COLVILLE RIVER BASIN, WRIA-59

WAC

- 173-559-010 Purpose.
- 173-559-020 Definitions.
- 173-559-030 Establishment of base flows.
- 173-559-040 Allocation for future surface water appropriations.
- 173-559-050 Certain streams and lakes are closed to further consumptive appropriations.
- 173-559-060 Ground water.
- 173-559-070 Effects on prior rights.
- 173-559-080 Enforcement.
- 173-559-090 Appeals.
- 173-559-100 Regulation review.

WAC 173-559-010 Purpose. This regulation is adopted in accordance with the water resources management regulation, chapter 173-500 WAC, which was promulgated under the authority of the Water Resources Act of 1971, chapter 90.54 RCW. This chapter, including any amendments, applies to all waters that lie within or contribute to the Colville River drainage basin. This chapter sets forth the department's policies to manage the basin's water resources.

[Order DE 77-6, § 173-559-010, filed 7/22/77.]

WAC 173-559-020 Definitions. For purposes of this chapter, the following definitions shall be used.

- (1) "Allocation" means the designating of specific amounts of the water resource for specific beneficial uses.
- (2) "Base flow" means a level of stream flow established in accordance with provisions of chapter 90.54 RCW required in perennial streams to preserve wildlife, fish, scenic, aesthetic, and other environmental and navigational values.
- (3) "Consumptive use" means use of water, whereby there is diminishment of the water resources.
- (4) "Department" means the Washington state department of ecology.
- (5) "Director" means the director of the department of ecology.
- (6) "Domestic use" means use of water associated with human health and welfare requirements, including water used for drinking, bathing, sanitary purposes, cooking, laundering, irrigation of not over one-half acre of lawn and garden per dwelling, and other incidental household uses.
- (7) "Hydrograph" is a graph showing the variation of streamflow (or stream discharge) with respect to time during a year as determined at a specific cross-sectional location on the stream.
- (8) "In-house domestic use" means use of water for drinking, cleaning, sanitation, and other uses in a residence, excluding irrigation of lawn and garden.

(9) "Nonconsumptive use" means a type of water use where either there is no diversion from a source body, or where there is no diminishment of the source.

(10) "Perennial stream" means a stream with a natural flow which is normally continuous at any given location.

(11) "Reservoir permit" means a water right permit which authorizes construction of an impoundment structure, storage of water and generally the use of water in the amount of one filling annually.

(12) "Secondary permit" means a water right permit which allows diversion of water for beneficial use from a storage reservoir. A secondary permit is necessary only for use in excess of one filling annually, or for diversion and use by a party other than the reservoir owner.

(13) "Stream management unit" means a stream segment, reach, or tributary, containing a control station, that is identified on a stream reach map in an adopted water resource management program document as a unit for defining base flow levels.

(14) "Water right" means a right to make beneficial use of public waters of the state.

[Order DE 77-6, § 173-559-020, filed 7/22/77.]

WAC 173-559-030 Establishment of base flows. RCW 90.54.020 requires that perennial rivers and streams shall be retained with base flows necessary to provide for preservation of wildlife, fish, scenic, aesthetic, and other environmental values and navigational values. Under this provision, base flows for stream management units of a basin are established which describe discharge rates at stream measurement stations in each unit. The following subsections, WAC 173-559-030(1) through (4), establish these requirements for WRIA 59:

(1) In the Colville River basin, monitoring of base flows will take place at the following control points:

**Table 1
Stream Management Units**

Stream Management Unit and Control Station Number	Control Station Location by River-Mile, and Section Township and Range	Stream Management Reach
Upper Colville River No. 12.4080.00	32.1 Sec. 31, T. 33 N., R. 40 E.W.M.	Colville River from confluence with Stensgar Creek to confluence of Sheep Creek and Deer Creek.
Lower Colville River No. 12.4090.00	5.0 Sec. 29, T. 36 N., R. 38 E.W.M.	Colville River from confluence with Lake Roosevelt to confluence with Stensgar Creek.

(2) In the Colville River basin, base flows for the stream management units in WAC 173-559-030(1) are set in Table 2 as follows:


Table 2
Base Flows in the Colville River basin
 (in Cubic Feet Per Second)

Month	Day	Upper Colville (12.4080.00)	Lower Colville (12.4090.00)
Jan.	1	30	80
	15	30	80
Feb.	1	30	80
	15	38	100
Mar.	1	47	124
	15	59	157
Apr.	1	76	200
	15	76	200
May	1	49	200
	15	32	135
Jun.	1	20	90
	15	17	70
Jul.	1	15	55
	15	13	43
Aug.	1	11	33
	15	11	33
Sep.	1	14	40
	15	18	49
Oct.	1	22	60
	15	27	70
Nov.	1	35	84
	15	43	100
Dec.	1	43	100
	15	36	90

(3) Figure 1, base flow hydrographs for selected stations, shall be used to define base flows on those days not identified in WAC 173-559-030(2).

(4) All surface water rights, established by appropriation in the Upper Colville and Lower Colville stream management units after adoption of this regulation, shall be subject to the base flows set in WAC 173-559-030 (1) through (3). However, these base flows will not apply to in-house domestic use and stock watering use, if an alternate source is not available to satisfy these uses. If the cumulative impact of numerous single in-house domestic use diversions is determined to substantially affect a stream's base flow or existing rights, then new permits for this use may be denied.

Figure 1
BASE FLOW HYDROGRAPH FOR SELECTED STATIONS

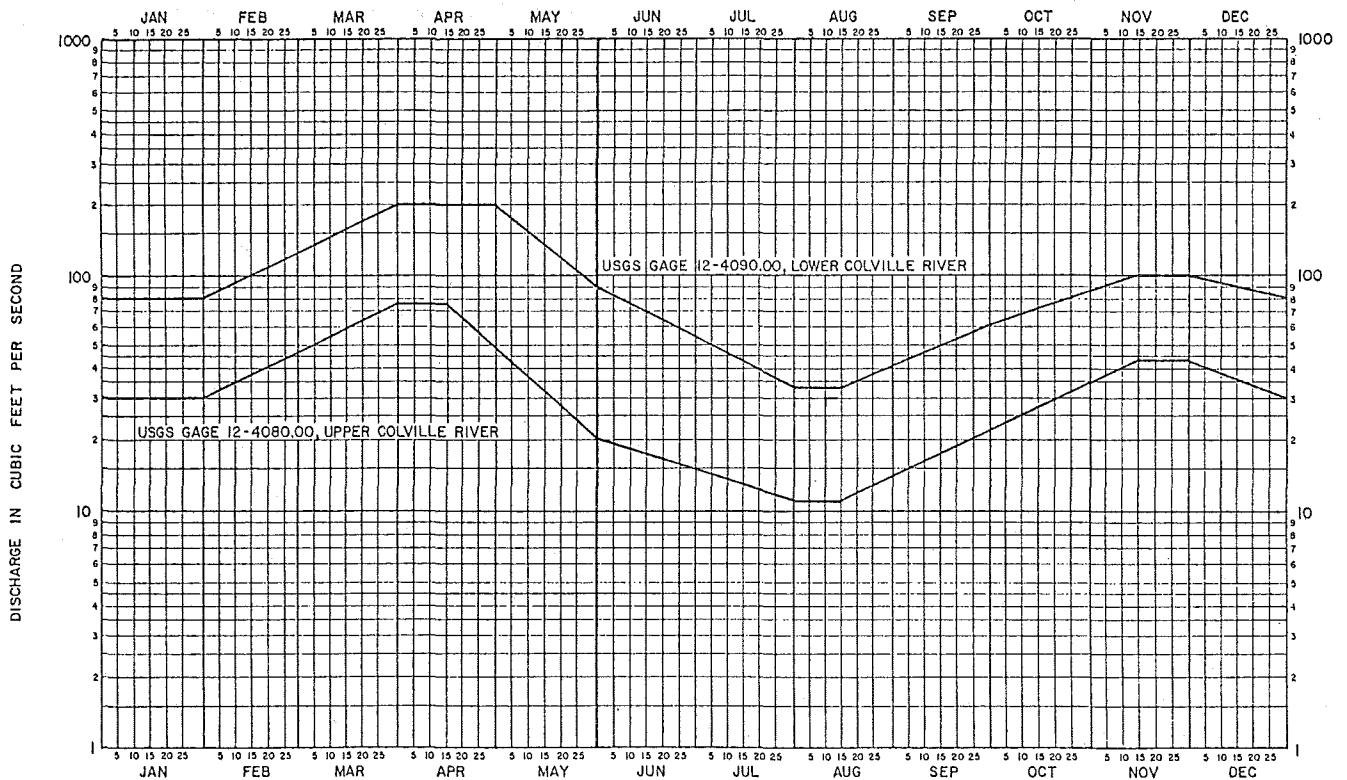

[Order DE 77-6, § 173-559-030, filed 7/22/77.]

WAC 173-559-040 Allocation for future surface water appropriations. (1) The department determines that surface water is available for appropriation from the Upper Colville River stream management unit and the Lower Colville River stream management unit except as provided in WAC 173-559-050(2). Tables 3 and 4 show the available amounts in cubic feet per second during specified periods, as follows:

Table 3
Allocation of Public Surface Water from the Upper Colville River Stream Management Unit
(Units in Cubic Feet Per Second)

Month	Base Flow	Future Consumptive Uses
Jan.	30	47
Feb.	41	68
Mar.	61	129
April	44	256
May	20	192
June	13	93
July		
1-15	12	18
16-31	12	0
Aug.	11	0
Sept.	17	0
Oct.	27	16
Nov.	43	21
Dec.	36	37

Table 4
Allocation of Public Surface Water from the Lower Colville River Management Unit
(Units in Cubic Feet Per Second)

Month	Base Flow	Future Consumptive Uses
Jan.	80	47
Feb.	100	68
Mar.	157	129
April	200	256
May	135	256
June	70	94
July		
1-15	43	18
16-31	43	0
Aug.	33	0
Sept.	49	0
Oct.	70	17
Nov.	100	21
Dec.	90	37

(2) Total appropriations for nonconsumptive uses may exceed the allocation limits specified in Tables 3 and 4.

(3) Monthly allocations in Tables 3 and 4 do not apply to the use of stored water. Specific provision will be included in all reservoir permits regarding period of filling, use and release of water.

[Order DE 77-6, § 173-559-040, filed 7/22/77.]

WAC 173-559-050 Certain streams and lakes are closed to further consumptive appropriations. (1) The department has determined that no water is available for further consumptive appropriation in streams tributary to the Colville River. Therefore, these tributary streams are closed to further consumptive appropriation except for reservoir storage from November 1 through May 31. Applications for single in-house domestic use, or stockwatering may be approved if no alternate source of water supply is available and the proposed use will not impair existing water rights.

(2) The Upper Colville River and Lower Colville River will be closed to further consumptive appropriation from July 16 through September 30, except for in-house domestic use and normal stockwatering if no alternate source of water supply is available.

(3) If the cumulative impact of numerous single in-house domestic use diversions is determined to substantially affect a closed stream's base flow, then new permits for this use may be denied. Base flow levels for closed streams are specified in the department's publication, "water resources management program, Colville River basin."

(4) Appropriation of water from streams tributary to the Colville River for out of stream storage and on-stream storage shall be subject to the base flows recommended in the department's publication, "water resources management program, Colville River basin."

(5)(a) Lakes included in table 5 are closed to further consumptive appropriation for specified periods of the year, except for in-house domestic and stockwatering uses. The department may deny applications for domestic use if the cumulative effect of such diversions would be detrimental to retaining a lake substantially in its natural condition.

Table 5 Lake Closures

Lake	Tributary to	Location	Period of Closure
Deer Lake	Sheep Creek	T. 30 N., R. 41 E. Secs. 1, 11,12,14	June 1-Oct. 31
Loon Lake	Sheep Creek	T. 30 N., R. 41, E. Secs. 33, 34., T.29 N., R. 41 E. Secs. 2, 3,4,10,11	June 1-Oct. 31
Waitts Lake	Waitts Creek	T. 31 N., R. 40 E. Secs. 17-20	June 1-Oct. 31
Jumpoff Joe Lake	Colville River	T. 31 N., R. 40 E. Sec. 19	June 1-Oct. 31
White Mud Lake		T. 35 N., R. 40 E. Sec. 19.	June 1-Oct. 31
Heritage and Thomas Lakes	Little Pend Oreille River	T. 36 N., R. 42 E. Secs. 8,9, 17,18	June 1-Oct. 31

(b) Appropriation of water from lakes not specified in table 5 will be permitted if prior water rights will not be adversely affected and if the appropriation will not conflict with the intent of RCW 90.54.020 (3)(a) which stipulates, in part, that "lakes and ponds shall be retained substantially in their natural condition."

[Order DE 77-6, § 173-559-050, filed 7/22/77.]

WAC 173-559-060 Ground water. If it is determined that a future development of ground water affects surface waters subject to the provisions of WAC 173-559-030 through 173-559-050, then rights to said ground water shall be subject to the same conditions as affects the surface water.

[Order DE 77-6, § 173-559-060, filed 7/22/77.]

WAC 173-559-070 Effects on prior rights. Nothing in this chapter shall be construed to lessen, enlarge, or modify existing rights acquired by appropriation or by other means.

[Order DE 77-6, § 173-559-070, filed 7/22/77.]

WAC 173-559-080 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as are appropriate under authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-559-080, filed 6/9/88.]

WAC 173-559-090 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-559-090, filed 6/9/88.]

WAC 173-559-100 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-559-100, filed 6/9/88.]

Chapter 173-563 WAC
INSTREAM RESOURCES PROTECTION
PROGRAM FOR THE MAIN STEM COLUMBIA
RIVER IN WASHINGTON STATE

WAC

173-563-010	Background and purpose.
173-563-015	Withdrawal of unappropriated waters.
173-563-020	Applicability.
173-563-030	Authority.
173-563-040	Establishment of instream flows for instream uses.
173-563-050	Critical flow adjustment to, and waivers of, minimum instantaneous and average weekly flows.

173-563-052	Establishment of instream flows for out-of-stream uses.
173-563-056	Application of minimum average weekly flows to out-of-stream uses.
173-563-060	Establishment of conservation and efficiency fundamentals.
173-563-070	Enforcement.
173-563-075	Regulation review.
173-563-080	Overriding considerations.
173-563-090	Regulation review.
173-563-100	Implementation.
173-563-900	Critical flow adjustment—Minimum instantaneous and weekly average flows—Columbia River.

WAC 173-563-010 Background and purpose. The Columbia River is an international as well as an interstate river with its waters subject to laws of seven western states, the Province of British Columbia, Canada and the federal governments of the United States and Canada. The flows and levels of the river are in a state of continuous change through the operation of numerous federally owned or federally licensed dams located within the river. The waters of the Columbia River are operated to support extensive irrigation development, inland navigation, municipal and industrial uses, and hydroelectric power development. Among all these uses, the anadromous fisheries of the Columbia River, which are dependent on clean flowing water, require for their survival the establishment of minimum flows of water and special actions by all agencies sharing in the management of the Columbia River.

The provisions of this chapter apply, as a matter of state law, to water right permits issued pursuant to the state's water rights code. The provisions hereof shall provide the department of ecology the basic state policy relating to minimum flows and levels for the Columbia River, for submission to various federal, interstate and state agencies having jurisdiction over the river. Further, the department of ecology of the state of Washington recognizes that, under our federal constitutional system, regulatory powers over the river are shared powers between the United States and the state of Washington and that by various federal actions the state's powers may, and in some cases have been superseded through the mandates of the Supremacy Clause of the United States Constitution.

This chapter is adopted under state legislation, to promote the proper utilization of the water resources of the Columbia River and to protect and insure the viability of the instream resource values associated with the main stem of the Columbia River in the future through (1) the establishment of minimum flows on the main stem Columbia River in Washington state, and (2) the establishment of conservation and efficiency fundamentals relating to out-of-stream and instream uses and values.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 80-08-021 (Order DE 80-2), § 173-563-010, filed 6/24/80.]

WAC 173-563-015 Withdrawal of unappropriated waters. (1) New information and changing conditions place into question whether sufficient information and data is available for making sound decisions on water availability and the public interest for additional appropriations from the main stem of the Columbia River. These changing conditions include the listing on December 20, 1991, of Snake River sockeye salmon as endangered and the May 17, 1992,

listing of Snake River spring/summer and fall chinook salmon as threatened under the Federal Endangered Species Act and related federal, regional, and state activities to assure the protection of Columbia basin salmon runs.

(2) Pursuant to subsection (1) of this section, the waters of the main stem of the Columbia River that are unappropriated by water rights for which applications were accepted for filing by the department prior to December 20, 1991, are withdrawn from further appropriation, except that the department may issue a permit to withdraw water for:

(a) Applications filed by the United States for uses of water withdrawn with a priority date of 1938 under chapter 90.40 RCW;

(b) Nonrecurring temporary projects for up to four months duration, with a possible extension of no more than four additional months (applications for extensions must include adequate justification for the extension and must demonstrate that reasonable efforts are being made to use the water for the project as efficiently as possible); and

(c) Nonconsumptive uses which, for the purposes of this section, are defined as uses where:

(i) There is no diversion from the water source; or

(ii) The water is diverted and returned immediately to the source at the point of diversion following its use, in the same quantity as diverted and meeting water quality standards for the source.

(3) All water right applications which the department accepted for filing prior to December 20, 1991, for diversion or pumping of surface water from the main stem of the Columbia River, or for withdrawal of ground water which is part of or tributary to the main stem of the Columbia River, shall be processed in accordance with existing policies and procedures and are not subject to this withdrawal of waters.

(4) With the exceptions specified in subsection (2) of this section, all water right applications which the department accepted for filing on or after December 20, 1991, for diversion or pumping of surface water from the main stem of the Columbia River, or for withdrawal of ground water which is part of or tributary to the main stem of the Columbia River where such withdrawal requires a permit under RCW 90.44.050, are subject to this withdrawal of waters and will be acted upon, without loss of priority date, after the expiration of the withdrawal of waters.

(5) The department shall inform applicants of the status of their applications under this section.

(6) This section will expire on June 30, 1994, or upon further amendment of the chapter, whichever occurs first.

[Statutory Authority: RCW 34.05, 43.21A, 43.27A, 90.03, 90.44 and 90.54 RCW and chapter 173-500 WAC and WAC 173-563-075. 93-01-009 (Order 92-20), § 173-563-015, filed 12/3/92, effective 1/3/93.]

WAC 173-563-020 Applicability. (1) This chapter applies to public surface waters of the main stem Columbia River in Washington state and to any ground water the withdrawal of which is determined by the department of ecology to have a significant and direct impact on the surface waters of the main stem Columbia River.

The extent of the "main stem" Columbia River shall be the Columbia River from the upstream extent of tidal influence (Bonneville Dam-River Mile 146.1) upstream to the United States-Canada border (River Mile 745) and

including those areas inundated by impounded waters at full pool elevations.

(2) Chapter 173-500 WAC, the general rules of the department of ecology for the implementation of the comprehensive water resources program mandated by RCW 90.54.040, applies to this chapter.

(3) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter, including existing rights relating to the operation of any navigation, hydroelectric, or water storage reservoir, or related facilities. This exemption includes rights embodied in all water right permits and certificates existing on the effective date of this chapter.

(4) Water right permits and certificates for domestic/municipal water supplies issued subsequent to the effective date of this rule shall not be subject to the provisions of this chapter.

(5) Waters withdrawn by the United States pursuant to RCW 90.40.030 prior to the effective date of this rule relating to the second half of the Columbia basin project, and water right permits and certificates hereafter issued by the department of ecology pertaining to such withdrawn waters, are not subject to the provisions of this chapter.

(6) For the purposes of this chapter, average weekly flows shall be the average of the daily average flows reported in the Columbia River operational hydromet and management system (CROHMS) for a seven-day period beginning at 12:01 a.m. Monday and ending at midnight on Sunday. When the beginning of the seven-day period defined in this section does not correspond to the dates on which flows are established in WAC 173-563-040, the flow requirements for that week shall be the arithmetic average of the required flows listed in WAC 173-563-040 for each of the seven days, rounded to the nearest 1,000 cfs.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-020, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-020, filed 6/24/80.]

WAC 173-563-030 Authority. These rules are adopted under the authority of chapters 90.54, 90.22, and 90.03 RCW, and in relation to chapter 173-500 WAC.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 80-08-021 (Order DE 80-2), § 173-563-030, filed 6/24/80.]

WAC 173-563-040 Establishment of instream flows for instream uses. (1) In order to protect the quality of the natural environment and provide for preservation of wildlife, fish, scenic, aesthetic and other environmental values, and navigational values, minimum instantaneous flows and minimum average weekly flows are established for instream uses at the following project locations on the main stem Columbia River in Washington state:

CONTROL STATION	RIVER MILE	MANAGEMENT UNIT
The Dalles Dam	191.5	John Day Dam to Bonneville Dam (Lake Bonneville and Celilo Lake) (River Mile 146.1-215.6)
John Day Dam	215.6	John Day Dam to McNary Dam (Umatilla Lake) (River Mile 215.6-292.0)

Columbia River—Main Stem

173-563-040

McNary Dam	292.0	McNary Dam to Priest Rapids Dam (Lake Wallula and the Hanford Reach) (River Mile 292.0-397.1)
Priest Rapids Dam and upstream (Wanapum, Rock Island, Rocky Reach, Wells, Chief Joseph, and Grand Coulee Dam)	397.1+	Priest Rapids Dam upstream to Canadian Border (River Mile 397.1-745.0)

Jul	1-15	60	80	80	80	120	120	120
	16-31	90	100	110	110	140	140	140
Aug		85	90	95	95	120	120	120
Sep		40	40	40	40	60	85	90
Oct	1-15	30	35	40	40	60	85	90
	16-31	30	35	40	70	60	85	90
Nov		30	30	30	70	60	60	60
Dec		30	30	30	70	60	60	60

(2) Minimum instantaneous flows at the locations listed in WAC 173-563-040(1) are established for instream uses as follows:

MINIMUM INSTANTANEOUS FLOWS - COLUMBIA RIVER PROJECTS
(1,000 cubic feet/second)

	Chief* Joseph	Wells & Rocky Reach Rock Island & Wanapum*	Priest Rapids	McNary & John Day	The Dalles
Jan	10	10	50	20	20
Feb	10	10	50	20	20
Mar	10	10	50	50	50
Apr	1-15	20	50	50	70
	16-25	20	50	70	70
	26-30	20	50	70	70
May	20	50	50	70	70
June	1-15	20	50	70	70
	16-30	10	50	50	50
Jul	1-15	10	50	50	50
	16-31	10	50	50	50
Aug	10	50	50	50	50
Sep	10	20	36	50	50
Oct	1-15	10	36	50	50
	16-31	10	50	50	50
Nov	10	10	50	50	50
Dec	10	10	50	20	20

* As provided in WAC 173-563-050(1), the minimum instantaneous flows set forth in this subsection are subject to a reduction of up to twenty-five percent during low flow years, except that in no case shall the outflow from Priest Rapids Dam be less than 36,000 cfs. For the reach from Grand Coulee through Wanapum, minimum instantaneous flows shall be as shown above, or as necessary to maintain minimum flows (subject to low runoff adjustment) at Priest Rapids, whichever is higher.

(3) Minimum average weekly flows for instream uses are established at the locations listed in WAC 173-563-040(1) as follows:

MINIMUM AVERAGE WEEKLY FLOWS - COLUMBIA RIVER PROJECTS
(1,000 cubic feet/second)

	Chief Joseph*	Wells & Rocky Reach*	Rock Island & Wanapum*	Priest Rapids	John McNary	John Day	The Dalles
Jan	30	30	30	70	60	60	60
Feb	30	30	30	70	60	60	60
Mar	30	30	30	70	60	60	60
Apr	1-15	50	50	70	100	100	120
	16-25	60	60	70	150	150	160
	26-30	90	100	110	200	200	200
May	100	115	130	130	220	220	220
Jun	1-15	80	110	110	200	200	200
	16-30	60	80	80	120	120	120

* For the reach from Grand Coulee through Wanapum, minimum average weekly flows shall be as shown above, or as necessary to maintain minimum flows (subject to low runoff adjustment) at Priest Rapids, whichever is higher. As provided in WAC 173-563-050(1), the minimum average weekly flows set forth in this subsection are subject to a reduction of up to twenty-five percent during low flow years, except that in no case shall the outflow from Priest Rapids Dam be less than 36,000 cfs.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-040, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-040, filed 6/24/80.]

WAC 173-563-050 Critical flow adjustment to, and waivers of, minimum instantaneous and average weekly flows. (1) The director of the department of ecology, when he deems it to be an overriding public interest requirement, may reduce the minimum instantaneous and/or average weekly flows for the Columbia River established in this chapter up to twenty-five percent during low flow years, except that in no case shall the outflow from Priest Rapids be less than 36,000 cfs. The amount of the reduction (from zero to twenty-five percent) shall be: (a) Based on the March 1 forecast for April through September runoff at The Dalles, Oregon, as published by the National Weather Service in Water Supply Outlook for the Western United States, and (b) determined from Figure 1 in WAC 173-563-900.

(2) Prior to implementing the critical flow adjustment to minimum flows in a low water year, the department of ecology shall conduct a public hearing to announce its intentions and to solicit public and agency comment on the proposed action.

(3) The department has determined that some damage to instream values may be incurred at flow values equivalent to eighty-eight million acre-feet or less. Therefore, the reduced flows shall be referred to as critical flows and shall be authorized by the director of the department of ecology under the critical flow adjustment only when the March 1 forecast of April through September flow at The Dalles is below eighty-eight million acre-feet (MAF). The critical flows shall, in no case, provide less than 39.4 MAF (seventy-five percent of 52.5 MAF for the April through September period).

(4) The director of the department of ecology may waive the state's minimum flow requirements delineated in this chapter for a defined period of time for the purpose of studying the impacts of various flow levels on the river system and its operation when such studies are to be conducted in consultation with the Washington departments of fisheries and/or wildlife and when said exemption is requested by the departments of fisheries and/or wildlife. Such a request shall be made by letter to the director of the department of ecology. This waiver may include the Federal Energy Regulatory Commission studies to be conducted

under Docket No. E-9569 and any operational change which does not allow the flows under this chapter to be met, but which, in the opinion of the director, still provides a commensurate level of protection for instream resources.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-563-050, filed 6/9/88. Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-050, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-050, filed 6/24/80.]

WAC 173-563-052 Establishment of instream flows for out-of-stream uses. In order to protect the quality of the natural environment and provide for preservation of wildlife, fish, scenic, aesthetic and other environmental values, and navigational values, the minimum average weekly flows listed in WAC 173-563-040(3) are established for out-of-stream uses.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-052, filed 10/7/82 and 10/8/82.]

WAC 173-563-056 Application of minimum average weekly flows to out-of-stream uses. (1) For the first 4,500 cfs of water rights issued subject to this program, the following conditions shall apply:

(a) When the March 1 forecast of April-September runoff at The Dalles, Oregon (as published by the National Weather Service in Water Supply Outlook for the Western United States) is equal to or greater than 88 million acre-feet (MAF), no regulation of out-of-stream diverters shall occur, regardless of the gaged flow of the Columbia River.

(b) When the flow forecast is less than 88 MAF but greater than 60 MAF, the department shall encourage voluntary water conservation through appropriate notification of water users in an attempt to foster efficient resource use.

(c) When the flow forecast is 60 MAF or less, the department shall regulate out-of-stream diverters on the basis of first-in-time is first-in-right whenever it is predicted that gaged flows will fall below the minimum average weekly flows as established by this chapter.

(2) For any water allocations issued in excess of the first 4,500 cfs defined in WAC 173-563-056(1), the following conditions shall apply:

(a) When the March 1 forecast of April-September runoff at The Dalles, Oregon (as published by the National Weather Service in Water Supply Outlook for the Western United States) is equal to or greater than 88 million acre-feet (MAF), no regulation of out-of-stream diverters shall occur, regardless of the gaged flow of the Columbia River.

(b) When the flow forecast is less than 88 MAF, the department shall regulate out-of-stream diverters on the basis of first-in-time is first-in-right whenever it is predicted that gaged flows will fall below the CRIRPP minimum average weekly flows as established by this chapter.

(3) The department shall utilize the Bonneville Power Administration (BPA) 30-day power operation plan in predicting specific periods of anticipated flow conditions.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-056, filed 10/7/82 and 10/8/82.]

WAC 173-563-060 Establishment of conservation and efficiency fundamentals. (1) The department, having determined that public water is available from the main stem of the Columbia River in Washington and that continued issuance of water right permits and certificates therefrom is in the public interest, does acknowledge and is concerned that, cumulatively, the projected future diversions from the main stem Columbia River in Washington state may, under certain flow conditions, have a detrimental effect on instream values.

(2) Also, it is in the public interest that the state's water resources be conserved and that the burden of water shortages in low water years should be shared by the various users to the greatest extent practicable.

(3) Notwithstanding the constraints on prorata water-sharing under existing state water laws, the department shall, in projected low water years, utilize all reasonable measures of influence to achieve the goal of this section.

(4) During proof of appropriation of water under RCW 90.03.330 and before issuing a certificate of water right, the department shall assure that the quantities of water shown on the certificate accurately reflect the perfected usage consistent with up-to-date water conservation practices and water delivery system efficiencies.

(5) The department shall continue to seek effective methods to better achieve the goal of this section.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-060, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-060, filed 6/24/80.]

WAC 173-563-070 Enforcement. In enforcement of this chapter, the department of ecology may impose such sanctions as appropriate under the authorities vested in it, including but not limited to the issuance of regulatory orders under RCW 43.27A.190 and civil penalties under RCW 90.03.600.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-563-070, filed 6/9/88. Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 80-08-021 (Order DE 80-2), § 173-563-070, filed 6/24/80.]

WAC 173-563-075 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-563-075, filed 6/9/88.]

WAC 173-563-080 Overriding considerations. Future authorizations for the use of water which would conflict with the provisions of this chapter shall be authorized by the director only in those situations when it is clear that overriding considerations of the public interest will be served. Such decisions shall be made in consultation with the directors of the Washington state department of fisheries, the Washington state department of wildlife, the Washington state department of agriculture, and the Washington state commissioner of public lands.

Consideration of the public interest by the director of the department of ecology shall include an evaluation of all uses of the river and its impact on the state of Washington. The uses to be considered include, but are not limited to, uses of water for domestic, stockwatering, industrial, commercial, agricultural, irrigation, hydroelectric power production, mining, fish and wildlife maintenance and enhancement, recreational, thermal power production, and preservation of environmental and aesthetic values and all other uses compatible with the enjoyment of the public waters of the state.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-563-080, filed 6/9/88. Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-080, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-080, filed 6/24/80.]

WAC 173-563-090 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-563-090, filed 6/9/88. Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 80-08-021 (Order DE 80-2), § 173-563-090, filed 6/24/80.]

WAC 173-563-100 Implementation. (1) All water right permits and certificates subject to this chapter or issued subject to chapter 173-531A WAC shall be issued subject to the department's minimum flow requirements. (The minimum average weekly flows established in WAC 173-563-040 and 173-563-052 are equivalent to a flow of 52.5 MAF at The Dalles for the April through September period.)

(2) All water rights for instream uses subject to the minimum flows established in this chapter shall contain the following provision:

This permit/certificate is subject to the minimum flow provisions contained in chapter 173-563 WAC and is subject to regulation by the department of ecology to insure protection of instream resources.

(3) All water rights for out-of-stream uses subject to the flows established in this chapter shall contain the following provisions:


(a) This permit/certificate is subject to the minimum flow provisions contained in chapter 173-563 WAC and is subject to regulation by the department of ecology to insure protection of instream resources.

(b) Use of water under this authorization shall be contingent upon the water right holder's utilization of up to date water conservation practices and maintenance of efficient water delivery systems consistent with established regulation requirements and facility capabilities.

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-100, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-100, filed 6/24/80.]

WAC 173-563-900 Critical flow adjustment—Minimum instantaneous and weekly average flows—Columbia River.

FIGURE 1
CRITICAL FLOW ADJUSTMENT
MINIMUM INSTANTANEOUS AND
WEEKLY AVERAGE FLOWS
COLUMBIA RIVER

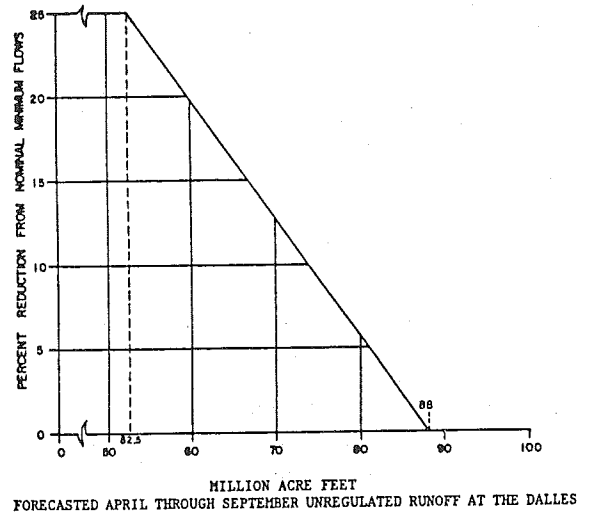

[Statutory Authority: RCW 90.54.040, 90.54.050, chapters 90.03 and 90.22 RCW. 82-21-001 and 82-21-007 (Orders DE 82-35 and DE 82-35A), § 173-563-900, filed 10/7/82 and 10/8/82; 80-08-021 (Order DE 80-2), § 173-563-900, filed 6/24/80.]

**Chapter 173-564 WAC
WATER RESOURCES MANAGEMENT PROGRAM
FOR THE MAIN STEM OF THE SNAKE RIVER IN
WASHINGTON STATE**

WAC

173-564-010	Background and purpose.
173-564-020	Authority.
173-564-030	Applicability.
173-564-040	Withdrawal of unappropriated waters.

WAC 173-564-010 Background and purpose. The Snake River is an interstate river with waters subject to laws of five states and the federal government. The flows and levels of the river in Washington state are heavily influenced by the operation of federally owned and federally licensed dams located upstream from Washington and within Washington, as well as by water diversions in the various states. The waters of the river support extensive irrigation, navigation, municipal, industrial, and power generation uses as well as nationally significant anadromous fish runs. These fish runs require for their survival clean, flowing water assured by minimum flows and special actions by all agencies sharing in the management of the river.

The department of ecology of the state of Washington recognizes that, under our federal constitutional system, regulatory power over the Snake River is shared between the United States and the states and that by various federal actions the state's powers may in some cases be superseded

through the mandates of the Supremacy Clause of the United States Constitution.

This chapter is adopted to promote the proper utilization of the water resources of the Snake River and to protect and insure the viability of the instream resource values associated with the main stem of the river in the future.

[Statutory Authority: Chapters 34.05, 43.21A, 43.27A, 90.03, 90.44 and 90.54 RCW and Chapter 173-500 WAC. 93-01-010 (Order 92-21), § 173-564-010, filed 12/3/92, effective 1/3/93.]

WAC 173-564-020 Authority. These rules are adopted under the authority of chapters 34.05, 43.21A, 43.27A, 90.03, 90.44, and 90.54 RCW, and in relation to chapter 173-500 WAC.

[Statutory Authority: Chapters 34.05, 43.21A, 43.27A, 90.03, 90.44 and 90.54 RCW and Chapter 173-500 WAC. 93-01-010 (Order 92-21), § 173-564-020, filed 12/3/92, effective 1/3/93.]

WAC 173-564-030 Applicability. (1) This chapter applies to public surface waters of the main stem of the Snake River in Washington and to any ground water where the ground water is determined by the department of ecology to be part of or tributary to the surface waters of the main stem of the Snake River. For purposes of this chapter, the main stem of the Snake River extends from the Idaho, Oregon and Washington border, in the extreme southeastern corner of the state of Washington, at river mile 175, to the confluence with the Columbia River near Pasco, Washington at river mile 0.

(2) Nothing in this chapter shall affect existing water rights, riparian, appropriative, or otherwise, existing on the effective date of this chapter, including existing water right permits and certificates.

[Statutory Authority: Chapters 34.05, 43.21A, 43.27A, 90.03, 90.44 and 90.54 RCW and Chapter 173-500 WAC. 93-01-010 (Order 92-21), § 173-564-030, filed 12/3/92, effective 1/3/93.]

WAC 173-564-040 Withdrawal of unappropriated waters. (1) New information and changing conditions place into question whether sufficient information and data is available for making sound decisions on water availability and the public interest for additional appropriations from the main stem of the Snake River. These changing conditions include the listing on December 20, 1991 of Snake River sockeye salmon as endangered and the May 17, 1992, listing of Snake River spring/summer and fall chinook salmon as threatened under the Federal Endangered Species Act and related federal, regional, and state activities to assure the protection of Columbia basin salmon runs.

(2) Pursuant to subsection (1) of this section, the waters of the main stem of the Snake River that are unappropriated by water rights for which applications were accepted for filing by the department prior to December 20, 1991, are withdrawn from further appropriation, except that the department may issue a permit to withdraw water for:

(a) Nonrecurring temporary projects for up to four months duration, with a possible extension of no more than four additional months (applications for extensions must include adequate justification for the extension and must demonstrate that reasonable efforts are being made to use the water for the project as efficiently as possible); and

(b) Nonconsumptive uses which, for the purposes of this section, are defined as uses where:

(i) There is no diversion from the water source; or

(ii) The water is diverted and returned immediately to the source at the point of diversion following its use, in the same quantity as diverted and meeting water quality standards for the source.

(3) All water right applications which the department accepted for filing prior to December 20, 1991, for diversion or pumping of surface water from the main stem of the Snake River, or for withdrawal of ground water which is part of or tributary to the main stem of the Snake River, shall be processed in accordance with existing policies and procedures and are not subject to this withdrawal of waters.

(4) With the exceptions specified in subsection (2) of this section, all water right applications which the department accepted for filing on or after December 20, 1991, for diversion or pumping of surface water from the main stem of the Snake River, or for withdrawal of ground water which is part of or tributary to the main stem of the Snake River where such withdrawal requires a permit under RCW 90.44.050, are subject to this withdrawal of waters and will be acted upon, without loss of priority date, after the expiration of the withdrawal of waters.

(5) The department shall inform applicants of the status of their applications under this section.

(6) This section will expire on June 30, 1994, or upon further amendment of the chapter, whichever occurs first.

[Statutory Authority: Chapters 34.05, 43.21A, 43.27A, 90.03, 90.44 and 90.54 RCW and Chapter 173-500 WAC. 93-01-010 (Order 92-21), § 173-564-040, filed 12/3/92, effective 1/3/93.]

Chapter 173-590 WAC

PROCEDURES RELATING TO THE RESERVATION OF WATER FOR FUTURE PUBLIC WATER SUPPLY

WAC

173-590-010	Background.
173-590-020	Purpose.
173-590-030	Authority.
173-590-040	General.
173-590-050	Definitions.
173-590-060	Reservation procedure—Petition for reservation.
173-590-070	Contents of petition.
173-590-080	Record of petition.
173-590-090	Notice.
173-590-100	Investigation.
173-590-110	Reservation.
173-590-120	Compatibility with existing water resources program.
173-590-130	Separate reservation by use.
173-590-140	Reservation subject to review and change.
173-590-150	Effective date of reservation.
173-590-160	Application for water rights.
173-590-170	Reservation without petition—Hearings.
173-590-180	Appeal.
173-590-190	Regulation review.

WAC 173-590-010 Background. (1) The Water Resources Act of 1971 (chapter 90.54 RCW) sets forth fundamentals of water resource policy to insure that the waters of the state will be protected and fully utilized for the greatest benefit to the people of the state of Washington, and in relation thereto, the act provides direction to the depart-

ment of ecology and other state agencies and officials in carrying out water and related resource programs.

(2) The act directs the department to develop and implement a water resources program which will provide a process for making decisions on future water resource allocation and use.

(3) The program may be developed in regional segments so that immediate attention may be given to waters of a given physioeconomic region of the state or to specific critical problems of water allocation and use.

(4) Preservation and protection of water in a potable condition for adequate and safe supplies to satisfy human domestic needs is one of the fundamentals of state water resource policy set forth in said act.

(5) The act further directs the department of ecology to modify existing regulations and adopt new regulations to insure that existing regulatory programs are in accord with the water resource policies of the act.

(6) Allocation of waters among potential uses and users shall be based generally on the securing of the maximum net benefits for the people of the state. Maximum net benefits shall constitute total benefits less cost including opportunity lost.

[Order DE 75-32, § 173-590-010, filed 3/11/76 and 3/10/76.]

WAC 173-590-020 Purpose. The purpose of this chapter is to establish and set forth a procedure whereby any person within the state of Washington may petition the department to reserve water for future public water supply.

[Order DE 75-32, § 173-590-020, filed 3/10/76.]

WAC 173-590-030 Authority. This regulation is adopted pursuant to the Water Resources Act of 1971, chapter 90.54 RCW.

[Order DE 75-32, § 173-590-030, filed 3/10/76.]

WAC 173-590-040 General. (1) These rules shall apply to both surface and ground waters of the state.

(2) Because of changing future conditions, including institutional arrangements, reservations under this chapter will be for specific geographic areas rather than for particular water suppliers.

(3) Appropriation of reserved water shall be in accordance with the intent and procedures set forth in chapters 90.03 and 90.44 RCW and adopted water resources programs under chapters 173-500 through 173-562 WAC applicable to the geographic area specified in a water right application.

(4) Regulations reserving waters for public water supply shall, where appropriate, provide guidelines for an interim use of the reserved waters for other beneficial uses.

[Order DE 75-32, § 173-590-040, filed 3/10/76.]

WAC 173-590-050 Definitions. For the purpose of this chapter and subsequent regulations, the following definitions shall be used:

(1) "Community water use" means use of water associated with needs of a community including street cleaning, parks, public buildings, public swimming pools, fire fighting, and attendant commercial, industrial and irrigational uses.

(2) "Director" means the director of the state of Washington department of ecology or his authorized representative.

(3) "Department" means the department of ecology unless specified otherwise.

(4) "Domestic water use" means use of water associated with human health and welfare requirements, including water used for drinking, bathing, sanitary purposes, cooking, laundering, irrigation of not over one-half acre of lawn or garden per dwelling, and other incidental household uses.

(5) "Commercial and/or industrial use" means use of water associated with commercial and/or industrial requirements such as service, processing, cooling and conveying.

(6) "Public water supply" means any water supply intended or used for human consumption and community uses for more than one single-family residence.

(7) "Public water supply system" means a set of facilities including source, treatment, storage, transmission and distribution facilities whereby water is furnished to any municipality, community, collection, or number of individuals for human consumption and community uses.

(8) "Coordinated water system plan" means a plan adopted by utilities covering one or more public water supply system(s), which identifies present and future needs of participating water systems and sets forth means for meeting those needs in the most efficient manner possible. In areas where more than one water system lie in close proximity, a coordinated water system plan may consist of either of the following:

(a) A compilation of current and compatible water system plans developed by each utility containing the elements of comprehensive plan as set forth in WAC 248-54-280, with the addition of future service area designations, assessment of the feasibility of shared source, transmission, and storage facilities, and other mutual or regional concerns.

(b) An area wide water system plan developed jointly or by a lead agency which adequately addresses all the items mentioned in (a) above.

(9) "Reservation" means an allocation of water for a future beneficial use with the priority established as of the date when the reservation becomes effective.

(10) "Appropriation" means the process of legally acquiring the right to specific amounts of the public water resource for application to beneficial uses pursuant to RCW 90.03.250 through 90.03.340 and 90.44.060.

(11) "Person" means any individual, municipal, public, or private corporation, or other entity however dominated, including a state agency or county who operates a public water supply system or who contemplates such an operation.

[Order DE 75-32, § 173-590-050, filed 3/10/76.]

WAC 173-590-060 Reservation procedure—Petition for reservation. Any person, hereafter desiring the department to reserve water for future public water supply may file a petition with the director requesting future establishment of a reservation, provided that the applicant shall have a coordinated water system plan approved by the secretary, department of social and health services unless exempted from this requirement by both the secretary and the director.

[Order DE 75-32, § 173-590-060, filed 3/10/76.]

WAC 173-590-070 Contents of petition. Each petition to the director for the reservation of water shall include, but not be limited to, the following:

- (1) Name and post office address of the applicant.
- (2) Source of water supply.
- (3) Map showing the proposed general service area, source of supply, pipelines, distribution systems, wells and other appurtenant works.
- (4) Present and projected population in 10, 25, and 50 years.
- (5) The amount of the present and proposed use in the following categories, and the time during which water will be required each year if the requirements differ seasonally:
 - (a) Domestic water use;
 - (b) Community water uses including specific amounts for attendant commercial, industrial and irrigational uses;
 - (c) Other(s) as specified.
- (6) Copy of a coordinated water system plan, or comprehensive plan under WAC 248-54-280 if water systems are sufficiently separated so that no advantages will be realized by coordination. All review comments from the local A-95 clearinghouse on said plan shall be provided.
- (7) Information to justify the requested reservation quantity in the form of official state population estimates, regional plan or engineering reports.
- (8) A summary of ongoing and planned conservation programs. When applicable, this must summarize water usage for the previous five years including total water diverted or withdrawn, total water sold, and the quantities used by residential, wholesale and large industrial users. Status of metering of all services must be described. Rate structures should not encourage waste of the water resources and should be described.
- (9) Other data as may be required by the director.

[Order DE 75-32, § 173-590-070, filed 3/10/76.]

WAC 173-590-080 Record of petition. The department shall maintain a file of all petitions for reservation of water under the provisions of this chapter. If a petition is returned to the petitioner for completion or correction, the date and the reasons for the return thereof shall be endorsed and shall be recorded in the reservation file.

[Order DE 75-32, § 173-590-080, filed 3/10/76.]

WAC 173-590-090 Notice. Upon receipt of a proper petition, the director shall publish notice thereof in a newspaper or newspapers of general circulation in the county or counties in which the storage, diversion, and use is to be made, once a week for two consecutive weeks.

The director shall send notice thereof to the secretary, department of social and health services, and to the directors of the departments of fisheries and wildlife for the purpose of soliciting their comments.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-590-090, filed 6/9/88; Order DE 75-32, § 173-590-090, filed 3/10/76.]

WAC 173-590-100 Investigation. When a petition is received, the director shall conduct an investigation of the surrounding impacts of the proposed reservation.

[Title 173 WAC—p 970]

[Order DE 75-32, § 173-590-100, filed 3/10/76.]

WAC 173-590-110 Reservation. Upon review of a petition for reservation, related data and the results from the departmental investigation, the director shall notify the petitioner of action pertaining to the petition, to withdraw affected waters under RCW 90.54.050(2), or to reserve water(s). If reservation is deemed appropriate, the director shall take action to adopt a regulation or amend an existing regulation established pursuant to chapter 173-500 WAC to reserve water for a future public water supply for the general geographic area described in the petition or for a general area the director determines appropriate. (RCW 90.54.050 mandates the department to conduct a public hearing, prior to adoption of a rule to withdraw or to reserve in each county in which waters relating to the rule are located.)

The amount of the reservation shall be determined by the director and may be more or less than the amount requested in the petition. The total reservation amount may be prorated to specific subareas of service in the proposed development area. Appropriate map may be appended to regulation.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-590-110, filed 6/9/88; Order DE 75-32, § 173-590-110, filed 3/10/76.]

WAC 173-590-120 Compatibility with existing water resources program. Reservation of waters pursuant to this chapter and other elements of a comprehensive water resources program developed pursuant to chapters 173-500 through 173-562 WAC and amendments thereof shall be compatible.

[Order DE 75-32, § 173-590-120, filed 3/10/76.]

WAC 173-590-130 Separate reservation by use. In situations where a given area will require significant quantities of water for other than community and domestic water uses, the reservation may identify separate quantities for each use.

[Order DE 75-32, § 173-590-130, filed 3/10/76.]

WAC 173-590-140 Reservation subject to review and change. From time to time, any reservation established under this chapter shall be reviewed and, when it appears appropriate to the department in implementing RCW 90.54.050, modified. No change shall be made without consultation of interested parties. The water resource program and the coordinated water system plan shall be reviewed whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-590-140, filed 6/9/88; Order DE 75-32, § 173-590-140, filed 3/10/76.]

WAC 173-590-150 Effective date of reservation. The effective date of a reservation established under the provisions of this chapter shall be the date when a regulation pertaining to a specific reservation has been adopted: *Provided*, That the effective date for any additional amount

of reservation pursuant to the provisions of WAC 173-590-140 shall be the date when such subsequent amendments become effective.

[Order DE 75-32, § 173-590-150, filed 3/10/76.]

WAC 173-590-160 Application for water rights. With regard to any permit issued pursuant to RCW 90.03.290 and 90.44.060 which authorizes withdrawal and use of waters subject of a regulation provided for in WAC 173-590-110 hereof, the priority date of said permit shall be the effective date of said regulation.

[Order DE 75-32, § 173-590-160, filed 3/10/76.]

WAC 173-590-170 Reservation without petition—Hearings. Whenever it appears necessary, the director may reserve and set aside waters for beneficial utilization in the future on his own motion as provided under RCW 90.54.050(1). In so doing, prior to the adoption of such rule, the director shall conduct a public hearing in each county in which waters relating to such rule are located.

[Order DE 75-32, § 173-590-170, filed 3/10/76.]

WAC 173-590-180 Appeal. The procedures hereof relate solely to rule-making activity of the department and are designed to obtain information to assist the department in determining when waters should be reserved as provided in RCW 90.54.050. Actions conducted under this chapter do not relate to contested cases within the meaning of the Administrative Procedure Act, chapter 34.04 RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-590-180, filed 6/9/88; Order DE 75-32, § 173-590-180, filed 3/10/76.]

WAC 173-590-190 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-590-190, filed 6/9/88.]

Chapter 173-591 WAC

RESERVATION OF FUTURE PUBLIC WATER SUPPLY FOR THURSTON COUNTY

WAC

173-591-010	Purpose.
173-591-020	Authority.
173-591-030	General.
173-591-040	Reservation area defined.
173-591-050	Definitions.
173-591-060	Petition received—Notice.
173-591-070	Reservation.
173-591-080	Future nonpublic water supply—Policy uses.
173-591-090	Monitoring program.
173-591-100	Water quality.
173-591-110	Exemptions.
173-591-115	Appeals.
173-591-120	Regulation review.
173-591-130	Reservation boundary maps.

WAC 173-591-010 Purpose. The purpose of this chapter is to reserve ground waters within Thurston County for future public water supply.

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-010, filed 7/14/86.]

WAC 173-591-020 Authority. This regulation is adopted pursuant to the Water Resources Act of 1971, chapter 90.54 RCW and chapter 173-590 WAC.

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-020, filed 7/14/86.]

WAC 173-591-030 General. (1) These rules shall apply to ground waters in Thurston County, as defined in WAC 173-591-040 and 173-591-070(4), as specified in Figure II-2 of the coordinated water system plan for Thurston County, dated May 1982, as approved by the department of social and health services for the purposes of reserving ground waters for future public supply, and as shown as the reservation source of supply subareas on the Thurston County reservation source of supply subarea boundary map in WAC 173-591-130, Illus. 2.

(2) The reservation adopted under this chapter will be for the specific geographical area so named the "reservation boundaries" as shown in Figure II-1 of the coordinated water supply plan for Thurston County, dated May 1982, as approved by the department of social and health services for the purposes of reserving ground waters for future public water supply, and shown on the Thurston County reservation area boundary map in WAC 173-591-130, Illus. 1.

(3) Appropriation of reserved waters under this chapter shall be in accordance with the intent and procedures set forth in chapters 90.03 and 90.44 RCW and chapter 173-513 WAC Instream resources protection program—Deschutes River Basin, Water Resource Inventory Area (WRIA) 13 (adopted 6/24/80) and chapter 173-511 WAC Instream resources protection program—Nisqually River Basin, Water Resource Inventory Area (WRIA) 11 (adopted 2/2/81) and chapter 173-514 WAC Instream resources protection program—Kennedy-Goldsborough Water Resource Inventory Area (WRIA 14) (adopted 1/23/84).

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-030, filed 7/14/86.]

WAC 173-591-040 Reservation area defined. "Thurston County reservation area" and "Thurston County reservation source of supply area" shall mean those lands lying within Thurston County described as follows:

Location	Township	Range	Sections
Reservation Area	16N	3W	1-3, 10-12
	16N	2W	1-12
	16N	1W	4-9
	17N	3W	1, 2, 3 (portion), 10-15, 22-27, 34-36
	17N	2W	1-36
	17N	1W	1-21, 27 (portion), 28-33
	17N	1E	6, 7, portions of 3, 8, 18
	18N	3W	1-4, 9-16, 21 (portion), 22 (portion), 23-25, 36
	18N	1W	1-36
	18N	1E	6, 7, 17-20, 29-32, portions of 5, 8, 16, 28

	19N	3W	12, 13, 23-28, 33-36, (portions in Thurston County)
	19N	2W	portion in Thurston County
	19N	1W	portion in Thurston County
	19N	1E	portion in Thurston County
Reservation Source of Supply Area			
Airport	17N	2W	3, 10-15, 22-24 & portions of 9, 16, 21 east of Interstate 5
	18N	2W	34
Allison Springs	18N	2W	18
Black Lake	17N	2W	4-8, 17-20, 29-31 & portions of 9, 16, 21, 18 & 33 west of Interstate 5
	18N	2W	31-33
Deschutes Valley	17N	2W	12
	18N	2W	25, 26, 35, 36
Hawks Prairie	18N	1W	1-8 & portions of 9-12 north of Interstate 5
	19N	1W	25-36
	18N	1E	portion of 6 west of Nisqually River
	19N	1E	portions of 30 & 31 west of Nisqually River
McAllister Springs	18N	1E	19
Mottman Industrial Park	18N	2W	27-29
Southeast	17N	1W	2-11, 14-23
	18N	1W	19-21, 28-34

[Statutory Authority: RCW 90.54.050(1), 86-15-029 (Order DE-86-16), § 173-591-040, filed 7/14/86.]

WAC 173-591-050 Definitions. For the purpose of this chapter the following definitions shall be used:

(1) "Community water use" means use of water associated with needs of a community including street cleaning, parks, public buildings, public swimming pools, fire fighting, and attendant commercial, industrial and irrigation uses.

(2) "Director" means the director of the state of Washington department of ecology or the director's authorized representative.

(3) "Department" means the department of ecology unless otherwise specified.

(4) "Domestic water use" means use of water associated with human health and welfare requirements, including water used for drinking, bathing, sanitary purposes, cooking, laundering, irrigation of not over one-half acre of lawn or garden per dwelling, and other incidental household uses.

(5) "Commercial and/or industrial use" means use of water associated with commercial and/or industrial requirements such as service, processing, cooling and conveying.

(6) "Public water supply" means any water supply intended or used for human consumption and community uses for more than one single-family residence.

(7) "Public water supply system" means a set of facilities including source, treatment, storage, transmission and distribution facilities whereby water is furnished to any municipality, community, collection, or number of individuals for human consumption and community uses.

(8) "Coordinated water system plan" means a plan adopted by utilities covering one or more public water

supply system(s), which identifies present and future needs of participating water systems and sets forth means for meeting those needs in the most efficient manner possible.

(9) "Reservation" means an allocation of water for a future beneficial use with the priority established as of the date when the reservation becomes effective.

(10) "Appropriation" means the process of legally acquiring the right to specific amounts of the public water resource for application to beneficial uses pursuant to RCW 90.03.250 through 90.03.340 and 90.44.060.

(11) "Person" means any individual, municipal, public, or private corporation, or other entity, including a federal or state agency or county which operates a public water supply system or who contemplates such an operation.

[Statutory Authority: RCW 90.54.050(1), 86-15-029 (Order DE-86-16), § 173-591-050, filed 7/14/86.]

WAC 173-591-060 Petition received—Notice. A petition requesting the reservation of ground waters in Thurston County pursuant to chapter 173-590 WAC, and a coordinated water system plan approved by the secretary of the department of social and health services were received and accepted by the department. Notice of the receipt of proper petition was published in a newspaper of general circulation in Thurston County for two consecutive weeks, and the director sent notice thereof to the directors of the departments of fisheries, wildlife, and social and health services for the purpose of soliciting their comments.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW, 88-13-037 (Order 88-11), § 173-591-060, filed 6/9/88. Statutory Authority: RCW 90.54.050(1), 86-15-029 (Order DE-86-16), § 173-591-060, filed 7/14/86.]

WAC 173-591-070 Reservation. (1) The department, having received a final environmental impact statement dated January 16, 1985, and having conducted an investigation of the surrounding impacts of the proposed reservation and having heard comments solicited through the notice of receipt of petition and having found ground waters to be generally available for the purposes of the reservation and that the proposed use of the ground waters will result in the maximum net benefit for the people of the state, does hereby reserve portions of those ground waters for future public water supplies in Thurston County.

(2) The department finds that to provide peaking capacity on a daily basis the appropriate amount of the reservation shall be 40,589 gallons per minute, limited to a maximum annual withdrawal of 22,931 acre-feet/year, provided that the total annual withdrawal and diversion from all sources shall not exceed 48,225 acre-feet/year. This is intended to serve the estimated population of 288,092 in fifty years. The amount of this reservation shall be reviewed by the department whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

(3) A map showing the reservation area boundary is shown in Figure II-1 of the coordinated water system plan for Thurston County, dated May 1982, as approved by the department of social and health services for the purposes of reserving water for future public water supply purposes, and

shown as the reservation area boundary map in WAC 173-591-130, Illus. 1.

(4) Due to the nature of the geographic distribution of the ground waters to be reserved and the development patterns that are anticipated in Thurston County, the reserved ground waters are intended to be beneficially utilized from the unconsolidated materials overlying bedrock, and are prorated to the subareas designated in Figure V-1 of the coordinated water system plan for Thurston County, dated May 1982, as approved by the department of social and health services for the purpose of reserving water for future public water supply purposes, and shown as the reservation source of supply subareas map in WAC 173-591-130, Illus. 2. The reserved ground waters are generally prorated to the reservation source of supply subareas as follows, with the totaled reserved quantity to be obtained from within the boundary area.

Source Location	Reservation Quantities	
	Instantaneous (GPM)	Annual (Af/Yr)
Airport	2,500	1,486
Allison Springs	2,000	1,888
Black Lake	2,000	1,888
Deschutes Valley	1,969	1,170
Hawks Prairie	7,000	4,160
McAllister Springs	2,000	—
Mottman Indust. Park	2,000	1,888
Southeast	14,426	8,573
Total	40,589	22,931

(5) The priority date of any permit issued pursuant to RCW 90.03.290 and 90.44.070 which authorizes withdrawal and use of public water for public water supply pursuant to the reservation provided in subsection (2) of this section shall be the effective date of this regulation.

(6) A record of all ground water permits issued pursuant to the reservation provided in subsection (2) of this section shall be maintained by the department in a manner that will readily show the quantities that have been allocated from the reserved ground waters for each subarea identified in subsection (4) of this section and the quantities of unappropriated ground waters that may remain in the reserved status available for appropriation.

(7) No permit issued as described in subsection (5) of this section shall authorize a withdrawal that causes a lowering of the water levels below a reasonable or feasible pumping lift in any withdrawal facilities of a senior ground water right holder.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-591-070, filed 6/9/88. Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-070, filed 7/14/86.]

WAC 173-591-080 Future nonpublic water supply—Policy uses. If applications are made for the use of the ground water reserved in WAC 173-591-070(2) for purposes other than public water supplies, as defined in WAC 173-591-050 (6) and (7), the director may issue a permit allowing such uses but these uses shall be junior in priority to all rights issued pursuant to WAC 173-591-070. Interim uses authorized in this section may be reduced or curtailed in right when necessary to allow to full utilization of higher priority rights established in WAC 173-591-070. The department may limit or otherwise condition junior

water rights permits as necessary to ensure availability of the reserved ground waters for public water supply purposes consistent with this chapter.

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-080, filed 7/14/86.]

WAC 173-591-090 Monitoring program. (1) The department, in cooperation with local government agencies, shall implement a comprehensive monitoring program, the purpose of which is to maintain accurate information on the quality and quantity of ground water reserved in WAC 173-591-070(2).

(2) Under this monitoring program surface and ground water levels will be periodically recorded as well as the levels of any lakes that are maintained by ground waters.

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-090, filed 7/14/86.]

WAC 173-591-100 Water quality. As a general rule, an element of a ground water right is the right to use waters of quality appropriate to the beneficial use. In addition to the protection of the availability of ground water to the water withdrawal facilities of ground water right holders, it shall be the policy of the department to protect the quality of the ground waters of the state and in relation thereto to discourage any withdrawal facilities, construction methods, water use, or disposal practices which would contaminate or otherwise reduce the quality of the ground waters or impair the beneficial uses of ground waters of the state. Local governments with land use authority are urged to exercise their authorities in such a manner as to protect the quality of the public ground waters reserved for future public water supply by this chapter.

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-100, filed 7/14/86.]

WAC 173-591-110 Exemptions. Wells for single family domestic, stock watering, or other purposes for which the withdrawal is less than 5,000 gallons per day, with priority dates subsequent to the effective date of this regulation, shall be junior to rights issued pursuant to WAC 173-591-070. The quantities of water withdrawn by such wells will not be subtracted from the waters reserved by this regulation.

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-110, filed 7/14/86.]

WAC 173-591-115 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-591-115, filed 6/9/88.]


WAC 173-591-120 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-591-120, filed 6/9/88. Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-120, filed 7/14/86.]

WAC 173-591-130 Reservation boundary maps.


Thurston County reservation area and reservation source of supply subareas shall include those lands that lie within the heavy outline on the following maps:

THURSTON COUNTY RESERVATION AREA BOUNDARY MAP

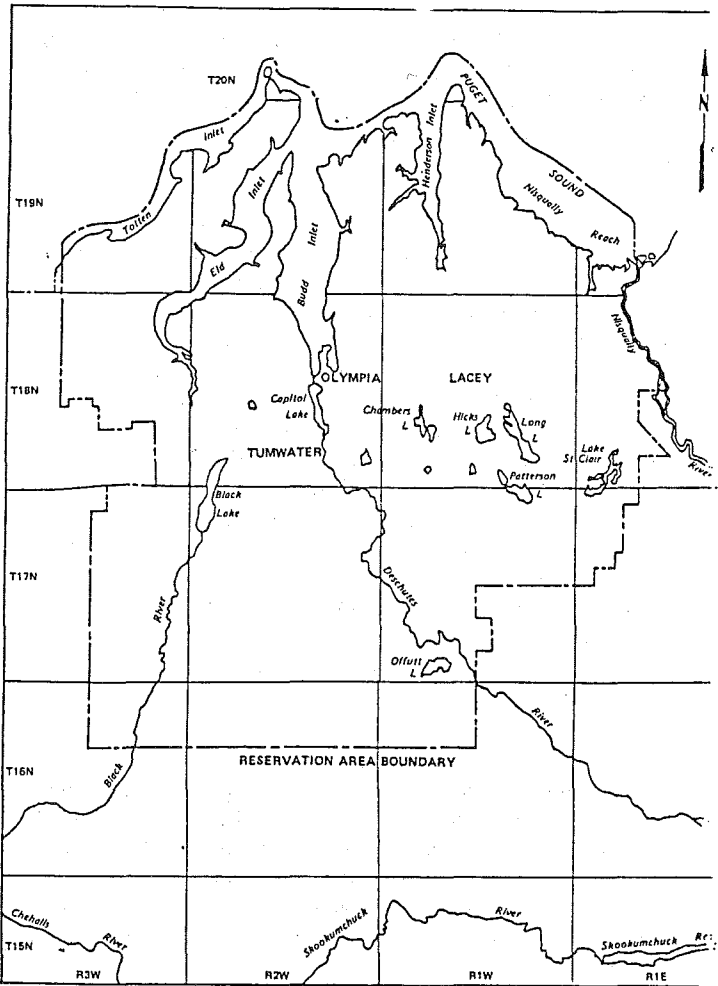

THURSTON COUNTY RESERVATION AREA BOUNDARY MAP
WAC 173-591-130
ILLUSTRATION 1

**THURSTON COUNTY RESERVATION SOURCE OF SUPPLY
SUBAREAS BOUNDARY MAP**

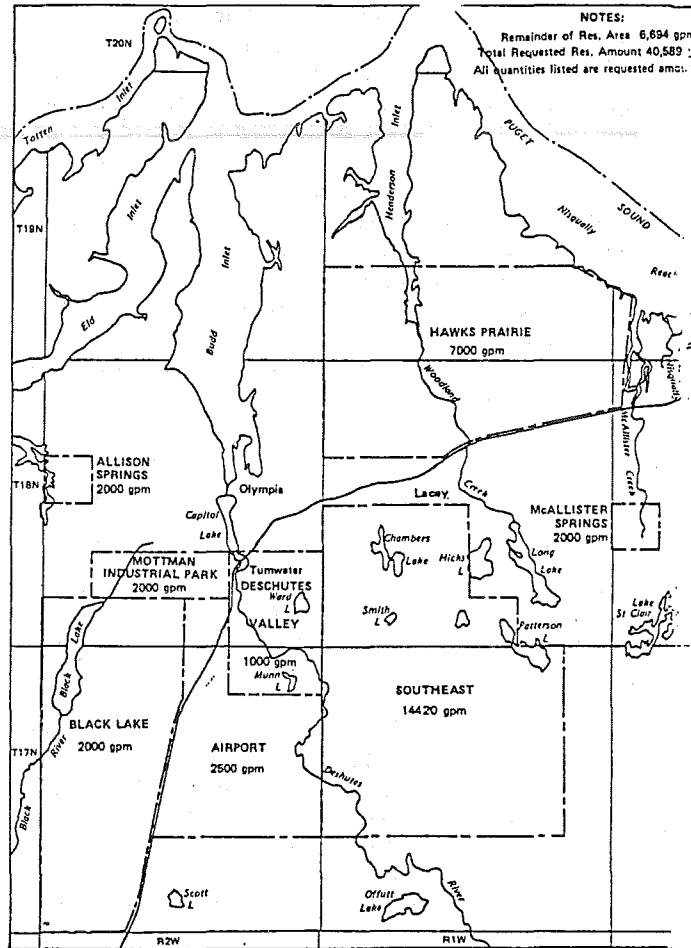

NOTES:
Remainder of Res. Area 6,694 gpm
Total Requested Res. Amount 40,589 gpm
All quantities listed are requested amounts.

THURSTON COUNTY RESERVATION SOURCE OF SUPPLY SUBAREAS BOUNDARY MAP
WAC 173-591-130
ILLUSTRATION 2

[Statutory Authority: RCW 90.54.050(1). 86-15-029 (Order DE-86-16), § 173-591-130, filed 7/14/86.]

**Chapter 173-592 WAC
RESERVATION OF FUTURE PUBLIC WATER
SUPPLY FOR CLARK COUNTY**

WAC

- 173-592-010 Purpose.
- 173-592-020 Authority.
- 173-592-030 General.
- 173-592-040 Reservation source of supply area defined.
- 173-592-050 Definitions.
- 173-592-060 Petition received—Notice.
- 173-592-070 Reservation.
- 173-592-080 Monitoring program.
- 173-592-090 Water quality.

- 173-592-100 Exemptions.
- 173-592-110 Regulation review.
- 173-592-115 Appeals.
- 173-592-120 Reservation source of supply area map.

WAC 173-592-010 Purpose. The purpose of this chapter is to reserve ground waters within Clark County for future public water supply.

[Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-010, filed 7/14/86.]

WAC 173-592-020 Authority. This regulation is adopted pursuant to the Water Resources Act of 1971, chapter 90.54 RCW and chapter 173-590 WAC.

[Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-020, filed 7/14/86.]

WAC 173-592-030 General. (1) These rules shall apply to ground waters in Clark County, as defined in WAC 173-592-040 and 173-592-070(5) as specified in the coordinated water system plan for Clark County, dated March, 1983, and approved by the department of social and health services for the purposes of reserving ground waters for future public supply. The location of the reserved waters is further defined in Attachment 1A of the revised petition requesting reservation of ground waters for future public water supply purposes, dated August 12, 1985, and shown on the reservation source of supply area boundary map in WAC 173-592-120, Illus. 1.

(2) Appropriation of reserved waters under this chapter shall be in accordance with the intent and procedures set forth in chapters 90.03 and 90.44 RCW.

[Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-030, filed 7/14/86.]

WAC 173-592-040 Reservation source of supply area defined. "Clark County reservation source of supply area" shall mean those lands lying within Clark County described as follows:

Township	Range	Sections
2N	1W	1, 2, 11, 12, 13, 24
3N	1W	1, 2, 12, 13, 24, 25, 36
4N	1W	1, 2, 11, 12, 13, 14, 15, 22, 23, 24, 25, 26, 27, 35, 36
5N	1W	36
2N	1E	1-29, 34-36
3N	1E	1-36
4N	1E	1-36
5N	1E	31-36
1N	2E	1-5, 11, 12
2N	2E	1-36
3N	2E	1-36
4N	2E	1-36
5N	2E	31-36
1N	3E	1-17
2N	3E	1-36
3N	3E	1-36
4N	3E	1-36
5N	3E	31-36
1N	4E	1-18, 20-24
2N	4E	6, 7, 18, 19, 25-36
3N	4E	6, 7, 18, 19, 30, 31
4N	4E	6, 7, 18, 19, 30, 31
5N	4E	31

[Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-040, filed 7/14/86.]

WAC 173-592-050 Definitions. For the purpose of this chapter the following definitions shall be used:

(1) "Community water use" means use of water associated with needs of a community including street cleaning, parks, public buildings, public swimming pools, fire fighting, and attendant commercial, industrial, and irrigation uses.

(2) "Director" means the director of the state of Washington department of ecology or the director's authorized representative.

(3) "Department" means the department of ecology unless otherwise specified.

(4) "Domestic water use" means use of water associated with human health and welfare requirements, including water used for drinking, bathing, sanitary purposes, cooking, laundering, irrigation of not over one-half acre of lawn or garden per dwelling, and other incidental household uses.

(5) "Commercial and/or industrial use" means use of water associated with commercial and/or industrial requirements such as service, processing, cooling, and conveying.

(6) "Public water supply" means any water supply intended or used for human consumption and community uses for more than one single-family residence.

(7) "Public water supply system" means a set of facilities including source, treatment, storage, transmission, and distribution facilities whereby water is furnished to any municipality, community, collection, or number of individuals for human consumption and community uses.

(8) "Coordinated water system plan" means a plan developed by utilities and adopted by Clark County and approved by the department of social and health services covering one or more public water supply system(s), which identifies present and future needs of participating water systems and sets forth means for meeting those needs in the most efficient manner possible.

(9) "Reservation" means an allocation of water for a future beneficial use with the priority established as of the date when the reservation becomes effective.

(10) "Appropriation" means the process of legally acquiring the right to specific amounts of the public water resource for application to beneficial uses pursuant to RCW 90.03.250 through 90.03.340 and 90.44.060.

(11) "Person" means any individual, municipal, public, or private corporation, or other entity, including a federal or state agency or county which operates a public water supply system or who contemplates such an operation.

[Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-050, filed 7/14/86.]

WAC 173-592-060 Petition received—Notice. A revised petition, dated August 12, 1985, requesting the reservation of ground waters in Clark County pursuant to chapter 173-590 WAC, and a coordinated water system plan approved by the secretary of the department of social and health services, dated March, 1983, were received and accepted by the department. Notice of the receipt of proper petition was published in a newspaper of general circulation in Clark County for two consecutive weeks, and the director sent notice thereof to the directors of the departments of fisheries, wildlife, and social and health services for the purpose of soliciting their comments.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW, 88-13-037 (Order 88-11), § 173-592-060, filed 6/9/88. Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-060, filed 7/14/86.]

WAC 173-592-070 Reservation. (1) The department, having heard comments solicited through the notice of receipt of petition and having reviewed a final declaration of nonsignificance under the authority of WAC 197-11-340 (State Environmental Policy Act) and having found ground waters to be generally available for the purposes of the reservation and that the proposed use of the ground waters will result in the maximum net benefit for the people of the state, does hereby reserve portions of those ground waters for future public water supplies in Clark County.

(2) The department finds that the appropriate amount of the reservation shall be 97,000 gallons per minute and 65,300 acre-feet/year. This is intended to serve the estimated population of 629,200 in fifty years. The amount of this reservation shall be reviewed by the department in consultation with local government whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.

(3) A map showing the reservation source of supply boundaries is shown in Attachment 1A of the revised petition, dated August 12, 1985, requesting reservation of ground water in Clark County for future public water supplies. The map showing the reservation source of supply area boundary is incorporated in this regulation in WAC 173-592-120, Illus. 1.

(4) Waters reserved herein may be utilized within the geographical boundaries of Clark County consistent with the department of social and health services approved coordinated water system plan, dated March 1983.

(5) Due to the nature of the geographic distribution of the ground waters to be reserved in Clark County, the reserved ground waters are intended to be beneficially utilized from the following aquifers, as identified in Attachment 1A of the revised petition, dated August 12, 1985:

- 1A Columbia River Alluvium
- 1B-2B Upper Troutdale
- 1C Sandy River Mudstone

(6) The priority date of any permit issued pursuant to RCW 90.03.290 and 90.44.060 which authorizes withdrawal and use of public water for public water supply pursuant to the reservation provided in subsection (2) of this section shall be the effective date of this regulation.

(7) A record of all ground water permits issued pursuant to the reservation provided in subsection (2) of this section shall be maintained by the department in a manner that will readily show the quantities that have been allocated from the reserved ground waters, and the quantities of unappropriated ground waters that may remain in the reserved status available for appropriation.

(8) No permit issued as described in subsection (6) of this section shall authorize a withdrawal that causes a lowering of the water levels below a reasonable or feasible pumping lift in any withdrawal facilities of a senior ground water right holder.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-592-070, filed 6/9/88. Statutory Authority: RCW 90.54.050(1). 86-15-030 (Order DE-86-17), § 173-592-070, filed 7/14/86.]

WAC 173-592-080 Monitoring program. (1) The department, in cooperation with local government agencies,

shall implement a comprehensive monitoring program, the purpose of which is to maintain accurate information on the quality and quantity of ground water reserved in WAC 173-592-070(2).

(2) Under this monitoring program surface and ground water levels will be periodically recorded as well as the levels of any lakes that are maintained by ground waters.

[Statutory Authority: RCW 90.54.050(1). 86-15-030 (Order DE-86-17), § 173-592-080, filed 7/14/86.]

WAC 173-592-090 Water quality. As a general rule, an element of a ground water right is the right to use waters of quality appropriate to the beneficial use. In addition to the protection of the availability of ground water to the water withdrawal facilities of ground water right holders, it shall be the policy of the department to protect the quality of the ground waters of the state and in relation thereto to discourage any withdrawal facilities, construction methods, water use, or disposal practices which would contaminate or otherwise reduce the quality of the ground waters or impair the beneficial uses of ground waters of the state. Local governments with land use authority shall be urged to exercise their authorities in such a manner as to protect the quality of the public ground waters reserved for future public water supply by this chapter.

[Statutory Authority: RCW 90.54.050(1). 86-15-030 (Order DE-86-17), § 173-592-090, filed 7/14/86.]

WAC 173-592-100 Exemptions. Wells for single family domestic, stock watering, or other purposes, for which the withdrawal is less than 5,000 gallons per day, with priority dates subsequent to the effective date of this regulation, shall be junior to it, and the quantities of water withdrawn by exempted wells will not be subtracted from the waters reserved by this regulation.

[Statutory Authority: RCW 90.54.050(1). 86-15-030 (Order DE-86-17), § 173-592-100, filed 7/14/86.]

WAC 173-592-110 Regulation review. The department of ecology shall initiate a review of the rules established in this chapter whenever new information, changing conditions, or statutory modifications make it necessary to consider revisions.


[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-592-110, filed 6/9/88. Statutory Authority: RCW 90.54.050(1). 86-15-030 (Order DE-86-17), § 173-592-110, filed 7/14/86.]

WAC 173-592-115 Appeals. All final written decisions of the department of ecology pertaining to permits, regulatory orders, and related decisions made pursuant to this chapter shall be subject to review by the pollution control hearings board in accordance with chapter 43.21B RCW.

[Statutory Authority: Chapters 43.21B, 43.27A, 90.22 and 90.54 RCW. 88-13-037 (Order 88-11), § 173-592-115, filed 6/9/88.]

WAC 173-592-120 Reservation source of supply area map. Clark County reservation source of supply area shall include those lands that lie with the heavy outline on the following map:

CLARK COUNTY RESERVATION SOURCE OF SUPPLY AREA BOUNDARY MAP

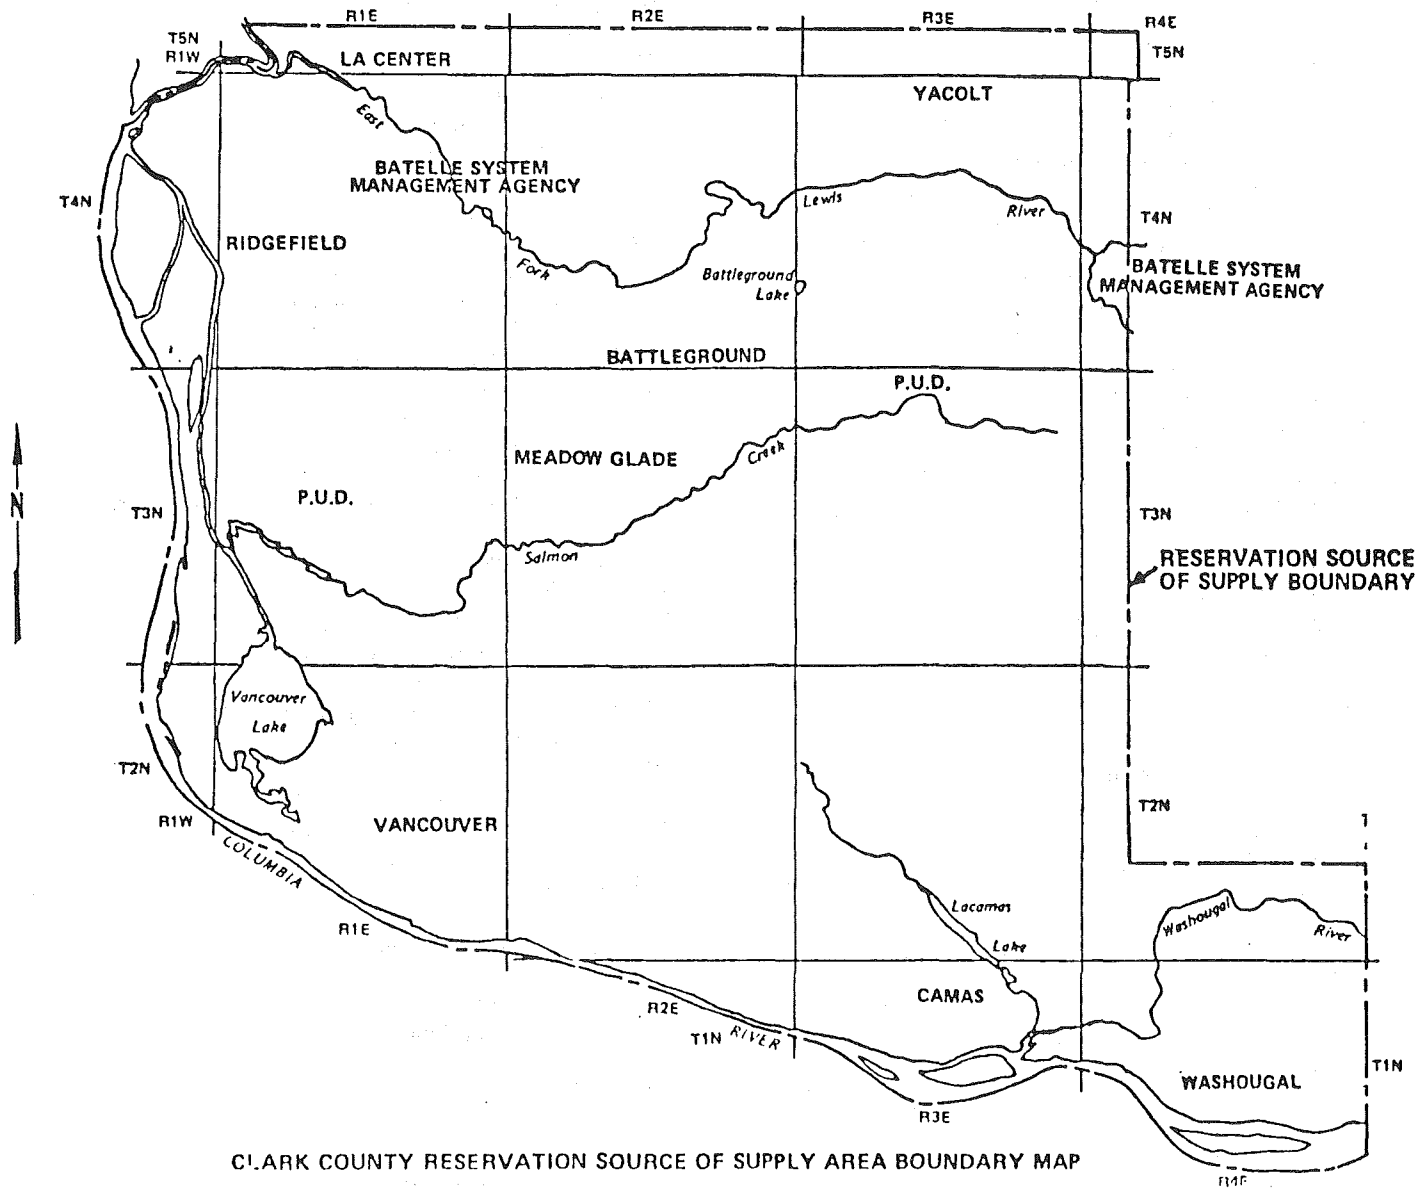

CLARK COUNTY RESERVATION SOURCE OF SUPPLY AREA BOUNDARY MAP

[Statutory Authority: RCW 90.54.050(1), 86-15-030 (Order DE-86-17), § 173-592-120, filed 7/14/86.]

**Chapter 173-802 WAC
SEPA PROCEDURES**

WAC

- 173-802-010 Authority.
- 173-802-020 Adoption by reference.
- 173-802-030 Purpose.
- 173-802-040 Additional definitions.
- 173-802-050 Designation of responsible official.
- 173-802-060 Additional timing considerations.
- 173-802-070 Threshold determination process—Additional considerations.
- 173-802-080 Mitigated DNS.
- 173-802-090 EIS preparation.

(1992 Ed.)

- 173-802-100 Public notice requirements.
- 173-802-110 Policies and procedures for conditioning or denying permits or other approvals.
- 173-802-120 Environmentally sensitive areas.
- 173-802-130 Threshold levels adopted by cities/counties.
- 173-802-140 Responsibilities of individuals and work units within the department.
- 173-802-150 Coordination on combined department—Federal action.
- 173-802-190 Severability.

WAC 173-802-010 Authority. These rules are promulgated under RCW 43.21C.120 (the State Environmental Policy Act) and chapter 197-11 WAC (SEPA rules).

[Title 173 WAC—p 977]

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-010, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-020 Adoption by reference. The department of ecology adopts the following sections or subsections of chapter 197-11 WAC by reference.

- 197-11-040 Definitions.
- 197-11-050 Lead agency.
- 197-11-055 Timing of the SEPA process.
- 197-11-060 Content of environmental review.
- 197-11-070 Limitations on actions during SEPA process.
- 197-11-080 Incomplete or unavailable information.
- 197-11-090 Supporting documents.
- 197-11-100 Information required of applicants.
- 197-11-300 Purpose of this part.
- 197-11-305 Categorical exemptions.
- 197-11-310 Threshold determination required.
- 197-11-315 Environmental checklist.
- 197-11-330 Threshold determination process.
- 197-11-335 Additional information.
- 197-11-340 Determination of nonsignificance (DNS).
- 197-11-350 Mitigated DNS.
- 197-11-360 Determination of significance (DS)/initiation of scoping.
- 197-11-390 Effect of threshold determination.
- 197-11-400 Purpose of EIS.
- 197-11-402 General requirements.
- 197-11-405 EIS types.
- 197-11-406 EIS timing.
- 197-11-408 Scoping.
- 197-11-410 Expanded scoping. (Optional)
- 197-11-420 EIS preparation.
- 197-11-425 Style and size.
- 197-11-430 Format.
- 197-11-435 Cover letter or memo.
- 197-11-440 EIS contents.
- 197-11-442 Contents of EIS on nonproject proposals.
- 197-11-443 EIS contents when prior nonproject EIS.
- 197-11-444 Elements of the environment.
- 197-11-448 Relationship of EIS to other considerations.
- 197-11-450 Cost-benefit analysis.
- 197-11-455 Issuance of DEIS.
- 197-11-460 Issuance of FEIS.
- 197-11-500 Purpose of this part.
- 197-11-502 Inviting comment.
- 197-11-504 Availability and cost of environmental documents.
- 197-11-508 SEPA register.
- 197-11-535 Public hearings and meetings.
- 197-11-545 Effect of no comment.
- 197-11-550 Specificity of comments.
- 197-11-560 FEIS response to comments.
- 197-11-570 Consulted agency costs to assist lead agency.
- 197-11-600 When to use existing environmental documents.
- 197-11-610 Use of NEPA documents.
- 197-11-620 Supplemental environmental impact statement—Procedures.
- 197-11-625 Addenda—Procedures.
- 197-11-630 Adoption—Procedures.
- 197-11-635 Incorporation by reference—Procedures.
- 197-11-640 Combining documents.
- 197-11-650 Purpose of this part.
- 197-11-655 Implementation.
- 197-11-660 Substantive authority and mitigation.
- 197-11-680 Appeals.
- 197-11-700 Definitions.
- 197-11-702 Act.
- 197-11-704 Action.
- 197-11-706 Addendum.
- 197-11-708 Adoption.
- 197-11-710 Affected tribe.
- 197-11-712 Affecting.
- 197-11-714 Agency.
- 197-11-716 Applicant.
- 197-11-718 Built environment.
- 197-11-720 Categorical exemption.
- 197-11-722 Consolidated appeal.
- 197-11-724 Consulted agency.
- 197-11-726 Cost-benefit analysis.
- 197-11-728 County/city.
- 197-11-730 Decisionmaker.
- 197-11-732 Department.
- 197-11-734 Determination of nonsignificance (DNS).
- 197-11-736 Determination of significance (DS).
- 197-11-738 EIS.
- 197-11-740 Environment.
- 197-11-742 Environmental checklist.
- 197-11-744 Environmental document.
- 197-11-746 Environmental review.
- 197-11-748 Environmentally sensitive area.
- 197-11-750 Expanded scoping.
- 197-11-752 Impacts.
- 197-11-754 Incorporation by reference.
- 197-11-756 Lands covered by water.
- 197-11-758 Lead agency.
- 197-11-760 License.
- 197-11-762 Local agency.
- 197-11-764 Major action.
- 197-11-766 Mitigated DNS.
- 197-11-768 Mitigation.
- 197-11-770 Natural environment.
- 197-11-772 NEPA.
- 197-11-774 Nonproject.
- 197-11-776 Phased review.
- 197-11-778 Preparation.
- 197-11-780 Private project.
- 197-11-782 Probable.
- 197-11-784 Proposal.
- 197-11-786 Reasonable alternative.
- 197-11-788 Responsible official.
- 197-11-790 SEPA.
- 197-11-792 Scope.
- 197-11-793 Scoping.
- 197-11-794 Significant.
- 197-11-796 State agency.
- 197-11-797 Threshold determination.
- 197-11-799 Underlying governmental action.
- 197-11-800 Categorical exemptions.
- 197-11-810 Exemptions and nonexemptions applicable to specific state agencies.
- 197-11-855 Department of ecology.
- 197-11-880 Emergencies.

- 197-11-890 Petitioning DOE to change exemptions.
- 197-11-900 Purpose of this part.
- 197-11-908 Environmentally sensitive areas.
- 197-11-912 Procedures on consulted agencies.
- 197-11-916 Application to ongoing actions.
- 197-11-917 Relationship to chapter 197-10 WAC.
- 197-11-920 Agencies with environmental expertise.
- 197-11-922 Lead agency rules.
- 197-11-924 Determining the lead agency.
- 197-11-926 Lead agency for governmental proposals.
- 197-11-928 Lead agency for public and private proposals.
- 197-11-930 Lead agency for private projects with one agency with jurisdiction.
- 197-11-932 Lead agency for private projects requiring licenses from more than one agency, when one of the agencies is a county/city.
- 197-11-934 Lead agency for private projects requiring licenses from a local agency, not a county/city, and one or more state agencies.
- 197-11-936 Lead agency for private projects requiring licenses from more than one state agency.
- 197-11-938 Lead agencies for specific proposals.
- 197-11-940 Transfer of lead agency status to a state agency.
- 197-11-942 Agreements on lead agency status.
- 197-11-944 Agreements on division of lead agency duties.
- 197-11-946 DOE resolution of lead agency disputes.
- 197-11-948 Assumption of lead agency status.
- 197-11-960 Environmental checklist.
- 197-11-965 Adoption notice.
- 197-11-970 Determination of nonsignificance (DNS).
- 197-11-980 Determination of significance and scoping notice (DS).
- 197-11-985 Notice of assumption of lead agency status.
- 197-11-990 Notice of action.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-020, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-030 Purpose. This chapter implements the state-wide rules in chapter 197-11 WAC as they apply to the department of ecology.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-030, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-040 Additional definitions. In addition to the definitions contained in WAC 197-11-700 through 197-11-799, the following terms shall have the listed meanings:

- (1) "Office" means one of the five offices in the department of ecology supervised by an assistant director.
- (2) "Region" means any one of the four regional offices of the department.
- (3) "Program" means any one of the department's headquarters sections or divisions that administers a program, such as water quality, water resources, shorelands, and hazardous waste.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-040, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-050 Designation of responsible official. Within the department of ecology, the ultimate

responsible official is the director. The responsible official for a specific proposal shall be the person who has been delegated signature authority per WAC 173-06-030, unless more than one person has such authority in a proposal; if so, the responsible official shall be either the next higher supervisor common to all involved persons, or any senior professional staff designated by the deputy director.

[Statutory Authority: Chapter 43.21A RCW. 89-11-021 and 90-07-014 (Order 89-6 and 89-6A), § 173-802-050, filed 5/11/89 and 3/13/90, effective 4/13/90. Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-050, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-060 Additional timing considerations.

(1) Department staff receiving a permit application will determine whether the proposal is an "action" and, if so, whether it is "categorically exempt" from SEPA. If the proposal is an action and is not exempt, the staff person should ask the applicant to complete an environmental checklist. A checklist is not needed if the department and applicant agree an EIS is required, SEPA compliance has been completed, SEPA compliance has been initiated by another agency, or a checklist is included with the application. The applicant should also complete an environmental checklist if the staff person is unsure whether the proposal is exempt.

(2) Department staff receiving a completed permit application and environmental checklist should determine whether WDOE or another agency is SEPA lead agency (see WAC 197-11-050 and 197-11-922 through 197-11-940) within five working days. If WDOE is not the lead agency, the staff person shall send the completed environmental checklist, a copy of the permit application, to the lead agency, and an explanation of the determination to the identified lead agency.

(3) When the department has prepared a draft regulation, the draft EIS or determination of nonsignificance (DNS) shall accompany the draft regulation to the ecological commission for its review.

(4) If the only nonexempt action is department approval of detailed project plans and specifications, an applicant may request that the department complete SEPA compliance before the applicant submits the detailed plans and specifications. If the applicant asks for early environmental review, the department shall complete such review at the final engineering report stage, but not earlier.

(5) Whenever possible, the department shall coordinate the comment periods for environmental documents and the planning documents and/or regulations for which they were written, circulating both documents together.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-060, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-070 Threshold determination process—Additional considerations. When reviewing a completed environmental checklist to make the threshold determination, the responsible official or his designee will:

- (1) Independently evaluate the responses of the applicant and note comments, concerns, corrections, or new information in the right margin of the checklist.

(2) Conduct the initial review of the checklist and any supporting documents without requiring additional information from the applicant.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-070, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-080 Mitigated DNS. (1) An applicant may ask the department whether issuance of a DS is likely for a proposal. This request for early notice must:

- (a) Be written;
- (b) Follow submission of a permit application and environmental checklist for a nonexempt proposal for which the department is lead agency; and
- (c) Precede the department's actual threshold determination for the proposal.

(2) The responsible official or his designee shall respond to the request within ten working days of receipt of the letter; the response shall:

- (a) Be written;
- (b) State whether the department is considering issuance of a DS;
- (c) Indicate the general or specific area(s) of concern that led the department to consider a DS; and
- (d) State that the applicant may change or clarify the proposal to mitigate the impacts indicated in the letter, revising the environmental checklist as necessary to reflect the changes or clarifications.

(3) The department shall not continue with the threshold determination until after receiving a written response from the applicant changing or clarifying the proposal or asking that the threshold determination be based on the original proposal.

(4) If the applicant submits a changed or clarified proposal, along with a revised environmental checklist, the department will make its threshold determination based on the changed or clarified proposal.

(5) If the department's response to the request for early notice indicated specific mitigation measures that would remove all probable significant adverse environmental impacts, and the applicant changes or clarifies the proposal to include all of those specific mitigation measures, the department shall issue a determination of nonsignificance and circulate the DNS for comments as in WAC 197-11-350(2).

(6) If the department indicated general or specific areas of concern, but did not indicate specific mitigation measures that would allow it to issue a DNS, the department shall determine if the changed or clarified proposal may have a probable significant environmental impact, issuing a DNS or DS as appropriate.

(7) The department may specify mitigation measures that would allow it to issue a DNS without a request for early notice from an applicant. If it does so, and the applicant changes or clarifies the proposal to include those measures, the department shall issue a DNS and circulate it for review under WAC 197-11-350(2).

(8) When an applicant changes or clarifies the proposal, the clarifications or changes may be included in written attachments to the documents already submitted. If the environmental checklist and supporting documents would be difficult to read and/or understand because of the need to

read them in conjunction with the attachment(s), the department may require the applicant to submit a new checklist.

(9) The department may change or clarify features of its own proposals before making the threshold determination.

(10) The department's written response under subsection (2) of this section shall not be construed as a determination of significance. In addition, preliminary discussion of clarification of or changes to a proposal, as opposed to a written request for early notice, shall not bind the department to consider the clarifications or changes in its threshold determination.

(11) When an applicant submits a changed or clarified proposal pursuant to this section, it shall be considered part of the applicant's application for a permit or other approval for all purposes, including enforcement of the permit or other approval. Unless the department's decision expressly states otherwise, when a mitigated DNS is issued for a proposal, any decision approving the proposal shall be based on the proposal as changed or clarified pursuant to this section.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-080, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-090 EIS preparation. (1) Preparation of draft and final EISs and SEISs is the responsibility of the environmental review section. Before the department issues an EIS, the responsible official shall be satisfied that it complies with these rules and chapter 197-11 WAC.

(2) The department normally will prepare its own draft and final EISs. It may require an applicant to provide information that the department does not possess, including specific investigations. However, the applicant is not required to supply information that is not required under these rules.

(3) If the department would be unable to prepare a draft and/or final EIS due to its commitments or other constraints or when a local agency transfers lead agency status to the department under WAC 197-11-940, the department may allow an applicant the following option for preparation of the draft and/or final EIS for the applicant's proposal:

(a) The department retains a mutually agreed upon and independent outside party to prepare the document.

(b) The applicant and the department agree upon a method of funding in which the applicant will bear the expense of the EIS preparation, but the consultant will work directly for the department.

(c) The outside party will prepare the document under the supervision of the environmental review section and the responsible official.

(d) Normally, the department will print and distribute the documents.

(4) Whenever someone other than the department prepares a draft or final EIS, the department shall:

(a) Direct the areas of research and examination to be undertaken and the content and organization of the document.

(b) Initiate and coordinate scoping, ensuring that the individual preparing the EIS receives all substantive information submitted by any agency or person.

(c) Assist in obtaining information on file with another agency that is needed by the person preparing the EIS.

(d) Allow the person preparing the EIS access to department records relating to the EIS (under chapter 42.17 RCW—Public disclosure and public records law).

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-090, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-100 Public notice requirements. (1)

The department shall give public notice when issuing a DNS under WAC 197-11-350(2), a scoping notice under WAC 173-802-090, or a draft EIS under WAC 197-11-455.

(2) Whenever possible, the department shall integrate the public notice required under this section with existing notice procedures for the department's permit or approval required for the proposal.

(a) When more than one permit or approval required from the department has public notice requirements, the notice procedures that would reach the widest audience should be used, if possible.

(b) If the public notice requirements for the permit or approval must be completed at a specific time in the permitting process and that timing does not coincide with the timing requirements for SEPA public notice, the department must use one or more public notice methods in subsection (4) of this section.

(c) If there are no public notice requirements for any of the permits/approvals required for a proposal, the department must use one or more public notice methods in subsection (4) of this section.

(3) The department may require an applicant to perform the public notice requirement at his or her expense.

(4) The department shall use one or more of the following methods of public notice, taking into consideration the geographic area affected by the proposal, the size and complexity of the proposal, the public notice requirements for the permit or approval required from the department, public interest expressed in the proposal, and whether the proposal is a project or regulation:

(a) Mailing to persons or groups who have expressed interest in the proposal, that type of proposal, or proposals in the geographic area in which the proposal will be implemented if approved;

(b) Publication in a newspaper of general circulation in the area in which the proposal will be implemented; and/or

(c) Posting the property, for site-specific proposals.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-100, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-110 Policies and procedures for conditioning or denying permits or other approvals. (1)(a)

The overriding policy of the department of ecology is to avoid or mitigate adverse environmental impacts which may result from the department's decisions.

(b) The department of ecology shall use all practicable means, consistent with other essential considerations of state policy, to improve and coordinate plans, functions, programs, and resources to the end that the state and its citizens may:

(i) Fulfill the responsibilities of each generation as trustee of the environment for succeeding generations;

(ii) Assure for all people of Washington safe, healthful, productive, and aesthetically and culturally pleasing surroundings;

(iii) Attain the widest range of beneficial uses of the environment without degradation, risk to health or safety, or other undesirable and unintended consequences;

(iv) Preserve important historic, cultural, and natural aspects of our national heritage;

(v) Maintain, wherever possible, an environment which supports diversity and variety of individual choice;

(vi) Achieve a balance between population and resource use which will permit high standards of living and a wide sharing of life's amenities; and

(vii) Enhance the quality of renewable resources and approach the maximum attainable recycling of depletable resources.

(c) The department recognizes that each person has a fundamental and inalienable right to a healthful environment and that each person has a responsibility to contribute to the preservation and enhancement of the environment.

(d) The department shall ensure that presently unquantified environmental amenities and values will be given appropriate consideration in decision making along with economic and technical considerations.

(2)(a) When the environmental document for a proposal shows it will cause significant adverse impacts that the proponent does not plan to mitigate, the responsible official shall consider whether:

(i) The environmental document identified mitigation measures that are reasonable and capable of being accomplished;

(ii) Other local, state, or federal requirements and enforcement would mitigate the significant adverse environmental impacts; and

(iii) Reasonable mitigation measures are sufficient to mitigate the significant adverse impacts.

(b) The responsible official may:

(i) Condition the approval for a proposal if mitigation measures are reasonable and capable of being accomplished and the proposal is inconsistent with the policies in subsection (1) of this section.

(ii) Deny the permit or approval for a proposal if reasonable mitigation measures are insufficient to mitigate significant adverse environmental impacts and the proposal is inconsistent with the policies in subsection (1) of this section.

(c) The procedures in WAC 197-11-660 must also be followed when conditioning or denying permits or other approvals.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-110, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-120 Environmentally sensitive areas. (1)

In determining whether a proposal is exempt from SEPA, the department shall respect "environmentally sensitive area" designations made by local governments under WAC 197-11-908.

(2) The department shall maintain files of the maps and SEPA procedures that cities/counties must send to the department under WAC 197-11-908. The department shall allow the public, groups, and agencies to review these SEPA procedures and maps during normal business hours.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-120, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-130 Threshold levels adopted by cities/counties. (1) In determining whether a proposal is exempt from SEPA, the department shall respect the threshold levels adopted by cities/counties under WAC 197-11-800(1).

(2) The department shall maintain files of the SEPA procedures that cities/counties must send to the department under WAC 197-11-800 (1)(c). The department shall allow the public, groups, and agencies access to these SEPA procedures during normal business hours.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-130, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-140 Responsibilities of individuals and work units within the department. (1) The environmental review section of the department shall be responsible for the following:

(a) Coordinating agency activities to comply with SEPA, encouraging consistency in SEPA compliance among all regions and programs.

(b) Providing information and guidance on SEPA and the SEPA rules to department staff, agencies, groups, and citizens.

(c) Receiving all SEPA documents sent to the department for review and comment, distributing documents and coordinating review with appropriate regions and programs, preparing the department's response, ensuring a timely response, and requesting extensions to the comment period of an EIS, when needed.

(d) Preparing and publishing the SEPA register weekly as required under WAC 197-11-508.

(e) Maintaining the department's files for EISs, DNSs, scoping notices, and notices of action sent to the department under SEPA and the SEPA rules.

(f) Maintaining files for the city/county SEPA procedures designating environmentally sensitive areas and flexible thresholds and making the information available to department staff and the public.

(g) Writing and/or coordinating EIS preparation, including scoping and the scoping notice, making sure to work with appropriate regions and programs.

(h) Preparing for, coordinating, and presenting annual SEPA workshops and publishing an annual SEPA handbook.

(i) Publishing and distributing the SEPA rules and amending the SEPA rules, as necessary.

(j) Responding to petitions for changes in exemptions from SEPA.

(k) Responding to petitions to resolve lead agency disputes.

(1) Fulfilling the department's other general responsibilities under SEPA and the SEPA rules.

(2) Regional offices and programs of the department shall be responsible for the following:

(a) Determining whether their decision on a permit or other approval, program, policy, plan, or regulation is an "action" under SEPA and, if so, whether it is exempt from SEPA's requirements (the first department official contacted may make these determinations).

(b) Determining whether WDOE or another agency is SEPA lead agency, contacting the environmental review

section if there is a question about which agency is the lead agency.

(c) Making the threshold determination (made by the responsible official, see WAC 173-802-050).

(i) Issuing a determination of nonsignificance, if appropriate (issued by responsible official) and ensuring compliance with the public notice requirements of WAC 173-802-100; or

(ii) Contacting the environmental review section if a determination of significance is appropriate.

(d) Reviewing SEPA documents and submitting comments to the environmental review section in a timely fashion, recognizing that SEPA and the SEPA rules impose strict time limits on commenting.

(e) Working with the environmental review section on preparation of EISs.

(f) Ensuring that permit decisions are consistent with the final EIS and DNS.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-140, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-150 Coordination on combined department—Federal action. When the department is considering an action which also involves federal actions, it shall attempt to coordinate the two governmental processes so that only one environmental impact statement need be prepared for that proposal.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-150, filed 6/15/84. Formerly chapter 173-801 WAC.]

WAC 173-802-190 Severability. If any provision of this chapter or its application to any person or circumstance is held invalid, the remainder of this chapter, or the application of the provision to other persons or circumstances, shall not be affected.

[Statutory Authority: RCW 43.21C.120 and 43.21C.135. 84-13-037 (Order DE 84-21), § 173-802-190, filed 6/15/84. Formerly chapter 173-801 WAC.]

**Chapter 173-806 WAC
MODEL ORDINANCE**

WAC	
	PART ONE AUTHORITY
173-806-010	Authority.
	PART TWO GENERAL REQUIREMENTS
173-806-020	Purpose of this part and adoption by reference.
173-806-030	Additional definitions.
173-806-040	Designation of responsible official.
173-806-050	Lead agency determination and responsibilities.
173-806-053	Transfer of lead agency status to a state agency.
173-806-055	Additional considerations in time limits applicable to the SEPA process.
173-806-058	Additional timing considerations.
	PART THREE CATEGORICAL EXEMPTIONS AND THRESHOLD DETERMINATIONS
173-806-065	Purpose of this part and adoption by reference.
173-806-070	Flexible thresholds for categorical exemptions.
173-806-080	Use of exemptions.

- 173-806-090 Environmental checklist.
- 173-806-100 Mitigated DNS.

PART FOUR
ENVIRONMENTAL IMPACT STATEMENT (EIS)

- 173-806-110 Purpose of this part and adoption by reference.
- 173-806-120 Preparation of EIS—Additional considerations.
- 173-806-125 Additional elements to be covered in an EIS.

PART FIVE
COMMENTING

- 173-806-128 Adoption by reference.
- 173-806-130 Public notice.
- 173-806-140 Designation of official to perform consulted agency responsibilities for the city/county.

PART SIX
USING EXISTING ENVIRONMENTAL DOCUMENTS

- 173-806-150 Purpose of this part and adoption by reference.

PART SEVEN
SEPA AND AGENCY DECISIONS

- 173-806-155 Purpose of this part and adoption by reference.
- 173-806-160 Substantive authority.
- 173-806-170 Appeals.
- 173-806-173 Notice/statute of limitations.

PART EIGHT
DEFINITIONS

- 173-806-175 Purpose of this part and adoption by reference.

PART NINE
CATEGORICAL EXEMPTIONS

- 173-806-180 Adoption by reference.

PART TEN
AGENCY COMPLIANCE

- 173-806-185 Purpose of this part and adoption by reference.
- 173-806-190 Environmentally sensitive areas.
- 173-806-200 Fees.
- 173-806-205 Effective date.
- 173-806-220 Severability.

PART ELEVEN
FORMS

- 173-806-230 Adoption by reference.

PART ONE
AUTHORITY

WAC 173-806-010 Authority. The city/county of adopts this ordinance under the State Environmental Policy Act (SEPA), RCW 43.21C.120, and the SEPA rules, WAC 197-11-904.

This ordinance contains this city's/county's SEPA procedures and policies.

The SEPA rules, chapter 197-11 WAC, must be used in conjunction with this ordinance.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-010, filed 6/15/84. Formerly WAC 173-805-010.]

PART TWO
GENERAL REQUIREMENTS

WAC 173-806-020 Purpose of this part and adoption by reference. This part contains the basic requirements that apply to the SEPA process. The city/county adopts the

following sections of chapter 197-11 of the Washington Administrative Code by reference:

WAC

- 197-11-040 Definitions.
- 197-11-050 Lead agency.
- 197-11-055 Timing of the SEPA process.
- 197-11-060 Content of environmental review.
- 197-11-070 Limitations on actions during SEPA process.
- 197-11-080 Incomplete or unavailable information.
- 197-11-090 Supporting documents.
- 197-11-100 Information required of applicants.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-020, filed 6/15/84. Formerly WAC 173-805-020.]

WAC 173-806-030 Additional definitions. In addition to those definitions contained within WAC 197-11-700 through 197-11-799, when used in this ordinance, the following terms shall have the following meanings, unless the context indicates otherwise:

(1) "Department" means any division, subdivision or organizational unit of the city/county established by ordinance, rule, or order.

(2) "SEPA rules" means chapter 197-11 WAC adopted by the department of ecology.

(3) "Ordinance" means the ordinance, resolution, or other procedure used by the city/county to adopt regulatory requirements.

(4) "Early notice" means the city's/county's response to an applicant stating whether it considers issuance of a determination of significance likely for the applicant's proposal (mitigated determination of nonsignificance (DNS) procedures).

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-030, filed 6/15/84. Formerly WAC 173-805-030.]

WAC 173-806-040 Designation of responsible official. (1) (*Note: Use Option 1 or 2, but not both.*) (*Option 1*) For those proposals for which the city/county is the lead agency, the responsible official shall be (*Note: Indicate position title, level within city's/county's organization, elected official title or legislative body*)

(*Option 2*) For public proposals, the head (administrative official) of the department making the proposal shall be the responsible official. For private proposals, the head (administrative official) of the department with primary responsibility for approving the permits and licenses for the proposal shall be the responsible official. When multiple officials have permitting authority, the assignment of responsibility shall be reached by agreement.

(2) For all proposals for which the city/county is the lead agency, the responsible official shall make the threshold determination, supervise scoping and preparation of any required environmental impact statement (EIS), and perform any other functions assigned to the "lead agency" or "responsible official" by those sections of the SEPA rules that were adopted by reference in WAC 173-806-020.

(3) The city/county shall retain all documents required by the SEPA rules (chapter 197-11 WAC) and make them available in accordance with chapter 42.17 RCW.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-040, filed 6/15/84. Formerly WAC 173-805-115.]

WAC 173-806-050 Lead agency determination and responsibilities. (1) The department within the city/county receiving an application for or initiating a proposal that involves a nonexempt action shall determine the lead agency for that proposal under WAC 197-11-050 and 197-11-922 through 197-11-940; unless the lead agency has been previously determined or the department is aware that another department or agency is in the process of determining the lead agency.

(2) When the city/county is the lead agency for a proposal, the department receiving the application shall determine the responsible official who shall supervise compliance with the threshold determination requirements, and if an EIS is necessary, shall supervise preparation of the EIS.

(3) When the city/county is not the lead agency for a proposal, all departments of the city/county shall use and consider, as appropriate, either the DNS or the final EIS of the lead agency in making decisions on the proposal. No city/county department shall prepare or require preparation of a DNS or EIS in addition to that prepared by the lead agency, unless required under WAC 197-11-600. In some cases, the city/county may conduct supplemental environmental review under WAC 197-11-600.

(4) If the city/county or any of its departments receives a lead agency determination made by another agency that appears inconsistent with the criteria of WAC 197-11-922 through 197-11-940, it may object to the determination. Any objection must be made to the agency originally making the determination and resolved within fifteen days of receipt of the determination, or the city/county must petition the department of ecology for a lead agency determination under WAC 197-11-946 within the fifteen-day time period. Any such petition on behalf of the city/county may be initiated by

.....
(5) Departments of the city/county are authorized to make agreements as to lead agency status or shared lead agency duties for a proposal under WAC 197-11-942 and 197-11-944: *Provided*, That the responsible official and any department that will incur responsibilities as the result of such agreement approve the agreement.

(6) Any department making a lead agency determination for a private project shall require sufficient information from the applicant to identify which other agencies have jurisdiction over the proposal (That is: Which agencies require nonexempt licenses?).

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-050, filed 6/15/84. Formerly WAC 173-805-070.]

WAC 173-806-053 Transfer of lead agency status to a state agency. (*Optional for cities or towns under 5,000 population and counties of fifth through ninth class.*) For any proposal for a private project where the city/county would be the lead agency and for which one or more state agencies have jurisdiction, the city's/county's responsible official may elect to transfer the lead agency duties to a state agency. The state agency with jurisdiction appearing first on the priority listing in WAC 197-11-936 shall be the lead

agency and the city/county shall be an agency with jurisdiction. To transfer lead agency duties, the city's/county's responsible official must transmit a notice of the transfer together with any relevant information available on the proposal to the appropriate state agency with jurisdiction. The responsible official of the city/county shall also give notice of the transfer to the private applicant and any other agencies with jurisdiction over the proposal.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-053, filed 6/15/84. Formerly WAC 173-805-053.]

WAC 173-806-055 Additional considerations in time limits applicable to the SEPA process. The following time limits (expressed in calendar days) shall apply when the city/county processes licenses for all private projects and those governmental proposals submitted to the city/county by other agencies:

(1) (*Optional. Not required under act or rules.*) Categorical exemptions. The city/county shall identify whether an action is categorically exempt within seven days of receiving a completed application.

(2) Threshold determinations.

(a) (*Optional. Further clarification of fifteen-day period for threshold determination.*) The city/county should complete threshold determinations that can be based solely upon review of the environmental checklist for the proposal within fifteen days of the date an applicant's adequate application and completed checklist are submitted.

(b) (*Optional. Not required.*) When the responsible official requires further information from the applicant or consultation with other agencies with jurisdiction:

(i) The city/county should request such further information within fifteen days of receiving an adequate application and completed environmental checklist;

(ii) The city/county shall wait no longer than thirty days for a consulted agency to respond;

(iii) The responsible official should complete the threshold determination within fifteen days of receiving the requested information from the applicant or the consulted agency.

(c) (*Optional. Not required.*) When the city/county must initiate further studies, including field investigations, to obtain the information to make the threshold determination, the city/county should complete the studies within thirty days of receiving an adequate application and a completed checklist.

(d) (*Optional.*) The city/county shall complete threshold determinations on actions where the applicant recommends in writing that an EIS be prepared, because of the probable significant adverse environmental impact(s) described in the application, within fifteen days of receiving an adequate application and completed checklist.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-055, filed 6/15/84. Formerly WAC 173-805-040.]

WAC 173-806-058 Additional timing considerations.

(1) For nonexempt proposals, the DNS or (*Note: Select either draft or final EIS.*) EIS for the proposal shall accompany the city's/county's staff recommendation to any appropriate advisory body, such as the planning commission.

(2) If the city's/county's only action on a proposal is a decision on a building permit or other license that requires detailed project plans and specifications, the applicant may request in writing that the city/county conduct environmental review prior to submission of the detailed plans and specifications. (Note: The following may be added.) The point at which environmental review may be initiated for specific permits or other licenses requiring detailed project plans and specifications is

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-058, filed 6/15/84. Formerly chapter 173-805 WAC.]

**PART THREE
CATEGORICAL EXEMPTIONS AND THRESHOLD
DETERMINATIONS**

WAC 173-806-065 Purpose of this part and adoption by reference. This part contains the rules for deciding whether a proposal has a "probable significant, adverse environmental impact" requiring an environmental impact statement (EIS) to be prepared. This part also contains rules for evaluating the impacts of proposals not requiring an EIS. The city/county adopts the following sections by reference, as supplemented in this part:

WAC

- 197-11-300 Purpose of this part.
- 197-11-305 Categorical exemptions.
- 197-11-310 Threshold determination required.
- 197-11-315 Environmental checklist.
- 197-11-330 Threshold determination process.
- 197-11-335 Additional information.
- 197-11-340 Determination of nonsignificance (DNS).
- 197-11-350 Mitigated DNS.
- 197-11-360 Determination of significance (DS)/initiation of scoping.
- 197-11-390 Effect of threshold determination.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-065, filed 6/15/84. Formerly WAC 173-805-020.]

WAC 173-806-070 Flexible thresholds for categorical exemptions. (Note: This section is optional. The lowest exempt level in the ranges below apply unless the city/county raises the level based on local conditions, such as previous DNSs on the activities or city/county development codes. The city/county may raise the level for an exemption to any point up to the maximum specified in WAC 197-11-800 (1)(c); once levels are established in this ordinance, the city/county must apply a level to all projects within the geographic area to which the level applies.)

(1) city/county establishes the following exempt levels for minor new construction under WAC 197-11-800 (1)(b) based on local conditions:

- (a) For residential dwelling units in WAC 197-11-800 (1)(b)(i) (Note: Range 4 - 20 units): Up to dwelling units.
- (b) For agricultural structures in WAC 197-11-800 (1)(b)(ii) (Note: Range 10,000 - 30,000 square feet): Up to square feet.
- (c) For office, school, commercial, recreational, service or storage buildings in WAC 197-11-800 (1)(b)(iii) (Note:

Range 4,000 - 12,000 square feet and 20 - 40 parking spaces): Up to square feet and up to parking spaces.

(d) For parking lots in WAC 197-11-800 (1)(b)(iv) (Note: Range 20 - 40 parking spaces): Up to parking spaces.

(e) For landfills and excavations in WAC 197-11-800 (1)(b)(v) (Note: Range 100 - 500 cubic yards): Up to cubic yards.

(2) Whenever the city/county establishes new exempt levels under this section, it shall send them to the Department of Ecology, Headquarters Office, Olympia, Washington, 98504 under WAC 197-11-800 (1)(c).

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-070, filed 6/15/84. Formerly chapter 173-805 WAC.]

WAC 173-806-080 Use of exemptions. (1) Each department within the city/county that receives an application for a license or, in the case of governmental proposals, the department initiating the proposal, shall determine whether the license and/or the proposal is exempt. The department's determination that a proposal is exempt shall be final and not subject to administrative review. If a proposal is exempt, none of the procedural requirements of this ordinance apply to the proposal. The city/county shall not require completion of an environmental checklist for an exempt proposal.

(2) In determining whether or not a proposal is exempt, the department shall make certain the proposal is properly defined and shall identify the governmental licenses required (WAC 197-11-060). If a proposal includes exempt and nonexempt actions, the department shall determine the lead agency, even if the license application that triggers the department's consideration is exempt.

(3) If a proposal includes both exempt and nonexempt actions, the city/county may authorize exempt actions prior to compliance with the procedural requirements of this ordinance, except that:

- (a) The city/county shall not give authorization for:
 - (i) Any nonexempt action;
 - (ii) Any action that would have an adverse environmental impact; or
 - (iii) Any action that would limit the choice of alternatives.

(b) A department may withhold approval of an exempt action that would lead to modification of the physical environment, when such modification would serve no purpose if nonexempt action(s) were not approved; and

(c) A department may withhold approval of exempt actions that would lead to substantial financial expenditures by a private applicant when the expenditures would serve no purpose if nonexempt action(s) were not approved.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-080, filed 6/15/84. Formerly WAC 173-805-060.]

WAC 173-806-090 Environmental checklist. (1) (Use Option 1 or 2, but not both) (Option 1, using checklist from the rules without changes.) A completed environmental checklist (or a copy), in the form provided in WAC 197-11-960, shall be filed at the same time as an application for a permit, license, certificate, or other approval not specifically exempted in this ordinance; except, a checklist is not needed

if the city/county and applicant agree an EIS is required, SEPA compliance has been completed, or SEPA compliance has been initiated by another agency. The city/county shall use the environmental checklist to determine the lead agency and, if the city/county is the lead agency, for determining the responsible official and for making the threshold determination.

(Option 2, adding questions to the checklist.) A completed environmental checklist shall be filed at the same time as an application for a permit, license, certificate, or other approval not exempted in this ordinance; except, a checklist is not needed if the city/county and applicant agree an EIS is required, SEPA compliance has been completed, or SEPA compliance has been initiated by another agency. The checklist shall be in the form of WAC 197-11-960 with the following additions: *(Indicate city's/county's additions.)*

(2) For private proposals, the city/county will require the applicant to complete the environmental checklist, providing assistance as necessary. For city/county proposals, the department initiating the proposal shall complete the environmental checklist for that proposal.

(3) *(Optional.)* The city/county may require that it, and not the private applicant, will complete all or part of the environmental checklist for a private proposal, if either of the following occurs: *(Either one or both of the following may be included.)*

(a) The city/county has technical information on a question or questions that is unavailable to the private applicant; or

(b) The applicant has provided inaccurate information on previous proposals or on proposals currently under consideration.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-090, filed 6/15/84. Formerly WAC 173-805-090.]

WAC 173-806-100 Mitigated DNS. (1) As provided in this section and in WAC 197-11-350, the responsible official may issue a DNS based on conditions attached to the proposal by the responsible official or on changes to, or clarifications of, the proposal made by the applicant.

(2) An applicant may request in writing early notice of whether a DS is likely under WAC 197-11-350. The request must:

(a) Follow submission of a permit application and environmental checklist for a nonexempt proposal for which the department is lead agency; and

(b) Precede the city's/county's actual threshold determination for the proposal.

(3) The responsible official should respond to the request for early notice within working days. The response shall:

(a) Be written;

(b) State whether the city/county currently considers issuance of a DS likely and, if so, indicate the general or specific area(s) of concern that is/are leading the city/county to consider a DS; and

(c) State that the applicant may change or clarify the proposal to mitigate the indicated impacts, revising the environmental checklist and/or permit application as necessary to reflect the changes or clarifications.

(4) As much as possible, the city/county should assist the applicant with identification of impacts to the extent necessary to formulate mitigation measures.

(5) When an applicant submits a changed or clarified proposal, along with a revised or amended environmental checklist, the city/county shall base its threshold determination on the changed or clarified proposal and should make the determination within fifteen days of receiving the changed or clarified proposal:

(a) If the city/county indicated specific mitigation measures in its response to the request for early notice, and the applicant changed or clarified the proposal to include those specific mitigation measures, the city/county shall issue and circulate a DNS under WAC 197-11-340(2).

(b) If the city/county indicated areas of concern, but did not indicate specific mitigation measures that would allow it to issue a DNS, the city/county shall make the threshold determination, issuing a DNS or DS as appropriate.

(c) The applicant's proposed mitigation measures (clarifications, changes or conditions) must be in writing and must be specific. For example, proposals to "control noise" or "prevent stormwater runoff" are inadequate, whereas proposals to "muffle machinery to X decibel" or "construct 200-foot stormwater retention pond at Y location" are adequate.

(d) Mitigation measures which justify issuance of a mitigated DNS may be incorporated in the DNS by reference to agency staff reports, studies or other documents.

(6) A mitigated DNS is issued under WAC 197-11-340(2), requiring a fifteen-day comment period and public notice.

(7) Mitigation measures incorporated in the mitigated DNS shall be deemed conditions of approval of the permit decision and may be enforced in the same manner as any term or condition of the permit, or enforced in any manner specifically prescribed by the city/county.

(8) If the city's/county's tentative decision on a permit or approval does not include mitigation measures that were incorporated in a mitigated DNS for the proposal, the city/county should evaluate the threshold determination to assure consistency with WAC 197-11-340 (3)(a) (withdrawal of DNS).

(9) The city's/county's written response under subsection (2) of this section shall not be construed as a determination of significance. In addition, preliminary discussion of clarifications or changes to a proposal, as opposed to a written request for early notice, shall not bind the city/county to consider the clarifications or changes in its threshold determination.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-100, filed 6/15/84. Formerly chapter 173-805 WAC.]

PART FOUR ENVIRONMENTAL IMPACT STATEMENT (EIS)

WAC 173-806-110 Purpose of this part and adoption by reference. This part contains the rules for preparing environmental impact statements. The city/county adopts the following sections by reference, as supplemented by this part:

WAC

- 197-11-400 Purpose of EIS.
- 197-11-402 General requirements.
- 197-11-405 EIS types.
- 197-11-406 EIS timing.
- 197-11-408 Scoping.
- 197-11-410 Expanded scoping. (Optional)
- 197-11-420 EIS preparation.
- 197-11-425 Style and size.
- 197-11-430 Format.
- 197-11-435 Cover letter or memo.
- 197-11-440 EIS contents.
- 197-11-442 Contents of EIS on nonproject proposals.
- 197-11-443 EIS contents when prior nonproject EIS.
- 197-11-444 Elements of the environment.
- 197-11-448 Relationship of EIS to other considerations.
- 197-11-450 Cost-benefit analysis.
- 197-11-455 Issuance of DEIS.
- 197-11-460 Issuance of FEIS.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-110, filed 6/15/84. Formerly WAC 173-805-020.]

WAC 173-806-120 Preparation of EIS—Additional considerations. (1) Preparation of draft and final EISs (DEIS and FEIS) and draft and final supplemental EISs (SEIS) is the responsibility of (*department*) under the direction of the responsible official. Before the city/county issues an EIS, the responsible official shall be satisfied that it complies with this ordinance and chapter 197-11 WAC.

(2) The DEIS and FEIS or draft and final SEIS shall be prepared by city/county staff, the applicant, or by a consultant selected by the city/county or the applicant. If the responsible official requires an EIS for a proposal and determines that someone other than the city/county will prepare the EIS, the responsible official shall notify the applicant immediately after completion of the threshold determination. The responsible official shall also notify the applicant of the city's/county's procedure for EIS preparation, including approval of the DEIS and FEIS prior to distribution.

(3) The city/county may require an applicant to provide information the city/county does not possess, including specific investigations. However, the applicant is not required to supply information that is not required under this ordinance or that is being requested from another agency. (This does not apply to information the city/county may request under another ordinance or statute.)

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-120, filed 6/15/84. Formerly WAC 173-805-100.]

WAC 173-806-125 Additional elements to be covered in an EIS. (*This entire section is optional. If used, you may select any of the listed elements or add your own.*) The following additional elements are part of the environment for the purpose of EIS content, but do not add to the criteria for threshold determinations or perform any other function or purpose under this ordinance:

- (1) Economy.
- (2) Social policy analysis.
- (3) Cost-benefit analysis.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-125, filed 6/15/84. Formerly WAC 173-805-105.]

**PART FIVE
COMMENTING**

WAC 173-806-128 Adoption by reference. This part contains rules for consulting, commenting, and responding on all environmental documents under SEPA, including rules for public notice and hearings. The city/county adopts the following sections by reference, as supplemented in this part:

WAC

- 197-11-500 Purpose of this part.
- 197-11-502 Inviting comment.
- 197-11-504 Availability and cost of environmental documents.
- 197-11-508 SEPA register.
- 197-11-535 Public hearings and meetings.
- 197-11-545 Effect of no comment.
- 197-11-550 Specificity of comments.
- 197-11-560 FEIS response to comments.
- 197-11-570 Consulted agency costs to assist leadagency.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-128, filed 6/15/84. Formerly WAC 173-805-020.]

WAC 173-806-130 Public notice. (*This section is required. Subsections (1) and (2) of this section may be combined.*) (1) Whenever city/county issues a DNS under WAC 197-11-340(2) or a DS under WAC 197-11-360(3) the city/county shall give public notice as follows:

(a) If public notice is required for a nonexempt license, the notice shall state whether a DS or DNS has been issued and when comments are due.

(b) If no public notice is required for the permit or approval, the city/county shall give notice of the DNS or DS by: (*Note: Select at least one of the following*)

- (i) Posting the property, for site-specific proposals;
- (ii) Publishing notice in a newspaper of general circulation in the county, city, or general area where the proposal is located;
- (iii) Notifying public or private groups which have expressed interest in a certain proposal or in the type of proposal being considered;
- (iv) Notifying the news media;
- (v) Placing notices in appropriate regional, neighborhood, ethnic, or trade journals; and/or
- (vi) Publishing notice in agency newsletters and/or sending notice to agency mailing lists (either general lists or lists for specific proposals for subject areas);
- (vii) (*or, specify other method*)

(c) Whenever the city/county issues a DS under WAC 197-11-360(3), the city/county shall state the scoping procedure for the proposal in the DS as required in WAC 197-11-408 and in the public notice.

(2) Whenever the city/county issues a DEIS under WAC 197-11-455(5) or a SEIS under WAC 197-11-620, notice of the availability of those documents shall be given by:

(a) Indicating the availability of the DEIS in any public notice required for a nonexempt license; and (*Note: In*

(b)

(c)

(d)

addition select at least one of the following or insert all of the list and require that at least one method be used.)

(b) Posting the property, for site-specific proposals;

(c) Publishing notice in a newspaper of general circulation in the county, city, or general area where the proposal is located;

(d) Notifying public or private groups which have expressed interest in a certain proposal or in the type of proposal being considered;

(e) Notifying the news media;

(f) Placing notices in appropriate regional, neighborhood, ethnic, or trade journals; and/or

(g) Publishing notice in agency newsletters and/or sending notice to agency mailing lists (general lists or specific lists for proposals or subject areas); (and/or

(h) *specify other*

!sc (3) Whenever possible, the city/county shall integrate the public notice required under this section with existing notice procedures for the city's/county's nonexempt permit(s) or approval(s) required for the proposal.

(4) The city/county may require an applicant to complete the public notice requirements for the applicant's proposal at his or her expense.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-130, filed 6/15/84. Formerly chapter 173-805 WAC.]

WAC 173-806-140 Designation of official to perform consulted agency responsibilities for the city/county.

(1) The (*position title, department, or office*) shall be responsible for preparation of written comments for the city/county in response to a consultation request prior to a threshold determination, participation in scoping, and reviewing a DEIS.

(2) This (*person, department or office*) shall be responsible for the city's/county's compliance with WAC 197-11-550 whenever the city/county is a consulted agency and is authorized to develop operating procedures that will ensure that responses to consultation requests are prepared in a timely fashion and include data from all appropriate departments of the city/county.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-140, filed 6/15/84. Formerly WAC 173-805-110.]

PART SIX USING EXISTING ENVIRONMENTAL DOCUMENTS

WAC 173-806-150 Purpose of this part and adoption by reference. This part contains rules for using and supplementing existing environmental documents prepared under SEPA or National Environmental Policy Act (NEPA) for the city's/county's own environmental compliance. The city/county adopts the following sections by reference:

WAC

197-11-600 When to use existing environmental documents.

197-11-610 Use of NEPA documents.

197-11-620 Supplemental environmental impact statement—Procedures.

197-11-625 Addenda—Procedures.

[Title 173 WAC—p 988]

197-11-630 Adoption—Procedures.

197-11-635 Incorporation by reference—Procedures.

197-11-640 Combining documents.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-150, filed 6/15/84. Formerly WAC 173-805-020.]

PART SEVEN SEPA AND AGENCY DECISIONS

WAC 173-806-155 Purpose of this part and adoption by reference. This part contains rules (and policies) for SEPA's substantive authority, such as decisions to mitigate or reject proposals as a result of SEPA. This part also contains procedures for appealing SEPA determinations to agencies or the courts. The city/county adopts the following sections by reference:

WAC

197-11-650 Purpose of this part.

197-11-655 Implementation.

197-11-660 Substantive authority and mitigation.

197-11-680 Appeals.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-155, filed 6/15/84. Formerly WAC 173-805-020.]

WAC 173-806-160 Substantive authority. (1) The policies and goals set forth in this ordinance are supplementary to those in the existing authorization of the city of / county.

(2) The (city/county) may attach conditions to a permit or approval for a proposal so long as:

(a) Such conditions are necessary to mitigate specific probable adverse environmental impacts identified in environmental documents prepared pursuant to this ordinance; and

(b) Such conditions are in writing; and

(c) The mitigation measures included in such conditions are reasonable and capable of being accomplished; and

(d) The city/county has considered whether other local, state, or federal mitigation measures applied to the proposal are sufficient to mitigate the identified impacts; and

(e) Such conditions are based on one or more policies in subsection (4) of this section and cited in the license or other decision document.

(3) The (city/county) may deny a permit or approval for a proposal on the basis of SEPA so long as:

(a) A finding is made that approving the proposal would result in probable significant adverse environmental impacts that are identified in a FEIS or final SEIS prepared pursuant to this ordinance; and

(b) A finding is made that there are no reasonable mitigation measures capable of being accomplished that are sufficient to mitigate the identified impact; and

(c) The denial is based on one or more policies identified in subsection (4) of this section and identified in writing in the decision document.

(4) The city/county designates and adopts by reference the following policies as the basis for the city's/county's exercise of authority pursuant to this section:

(a) The city/county shall use all practicable means, consistent with other essential considerations of state policy,

to improve and coordinate plans, functions, programs, and resources to the end that the state and its citizens may:

- (i) Fulfill the responsibilities of each generation as trustee of the environment for succeeding generations;
- (ii) Assure for all people of Washington safe, healthful, productive, and aesthetically and culturally pleasing surroundings;
- (iii) Attain the widest range of beneficial uses of the environment without degradation, risk to health or safety, or other undesirable and unintended consequences;
- (iv) Preserve important historic, cultural, and natural aspects of our national heritage;
- (v) Maintain, wherever possible, an environment which supports diversity and variety of individual choice;
- (vi) Achieve a balance between population and resource use which will permit high standards of living and a wide sharing of life's amenities; and
- (vii) Enhance the quality of renewable resources and approach the maximum attainable recycling of depletable resources.

(b) The city/county recognizes that each person has a fundamental and inalienable right to a healthful environment and that each person has a responsibility to contribute to the preservation and enhancement of the environment.

(c) (Optional.) The city/county adopts by reference the policies in the following city/county (codes, ordinances, resolutions, plans). (List the codes, ordinances, resolutions, or plans you have selected, such as zoning ordinance, building codes or comprehensive plans.)

(d) (Optional.) The city/county establishes the following additional policies:

(5) (Note: Required by RCW 43.21C.060, unless the city/county council/commission elects to eliminate such appeals and states so in this ordinance.) Except for permits and variances issued pursuant to chapter of the city/county code (chapter relating to shoreline management), when any proposal or action not requiring a decision of the city/county council/commission is conditioned or denied on the basis of SEPA by a nonelected official, the decision shall be appealable to the city/county council/commission. Such appeal may be perfected by the proponent or any aggrieved party by giving notice to the responsible official within ten days of the decision being appealed. Review by the city/county council/commission shall be on a de novo basis.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-160, filed 6/15/84. Formerly chapter 173-805 WAC.]

WAC 173-806-170 Appeals. (1) (Agency administrative appeal is optional. If allowed, the statute requires that all of this subsection be included, except (c) of this subsection which is optional.) city/county establishes the following administrative appeal procedures under RCW 43.21C.075 and WAC 197-11-680:

- (a) Any agency or person may appeal the city's/county's procedural compliance with chapter 197-11 WAC for issuance of the following: (Note: Select one or more.)
 - (i) A final DNS: (Note: Choose one of the following options.)

(Option 1) Appeal of the DNS must be made to within days of the date the DNS is final (see WAC 197-11-390 (2)(a)).

(Option 2) Appeal of the DNS must be made to within days of the date the DNS is final. Appeal of the substantive determination on the action must be made to within days of the issuance of the permit or other license.

(Option 3) Appeal of the (city/county must specify DNS, substantive determination on action, or both. If both are allowed, they must be consolidated.) must be made to within days of the date the permit or other approval is issued.

(ii) A DS: The appeal must be made to within days of the date the DS is issued.

(iii) An EIS: Appeal of the (city/county must specify FEIS, substantive determination on the action, or both. If both are allowed, they must be consolidated) must be made to within days of the date the permit or other approval is issued.

(b) For any appeal under this subsection, the city/county shall provide for a record that shall consist of the following:

- (i) Findings and conclusions;
- (ii) Testimony under oath; and
- (iii) A taped or written transcript.

(c) (Optional.) The city/county may require the appellant to provide an electronic transcript.

(d) The procedural determination by the city's/county's responsible official shall carry substantial weight in any appeal proceeding.

(2) The city/county shall give official notice under WAC 197-11-680(5) whenever it issues a permit or approval for which a statute or ordinance establishes a time limit for commencing judicial appeal. (The following is optional.) The following permits or approvals require official notice:

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-170, filed 6/15/84. Formerly chapter 173-805 WAC.]

WAC 173-806-173 Notice/statute of limitations. (Optional.) (1) The city/county, applicant for, or proponent of an action may publish a notice of action pursuant to RCW 43.21C.080 for any action.

(2) The form of the notice shall be substantially in the form provided in WAC 197-11-990. The notice shall be published by the city clerk or county auditor, applicant or proponent pursuant to RCW 43.21C.080.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-173, filed 6/15/84. Formerly WAC 173-805-135.]

**PART EIGHT
DEFINITIONS**

WAC 173-806-175 Purpose of this part and adoption by reference. This part contains uniform usage and definitions of terms under SEPA. The city/county adopts the following sections by reference, as supplemented by WAC 173-806-040:

WAC
197-11-700 Definitions.

197-11-702 Act.
 197-11-704 Action.
 197-11-706 Addendum.
 197-11-708 Adoption.
 197-11-710 Affected tribe.
 197-11-712 Affecting.
 197-11-714 Agency.
 197-11-716 Applicant.
 197-11-718 Built environment.
 197-11-720 Categorical exemption.
 197-11-722 Consolidated appeal.
 197-11-724 Consulted agency.
 197-11-726 Cost-benefit analysis.
 197-11-728 County/city.
 197-11-730 Decision maker.
 197-11-732 Department.
 197-11-734 Determination of nonsignificance (DNS).
 197-11-736 Determination of significance (DS).
 197-11-738 EIS.
 197-11-740 Environment.
 197-11-742 Environmental checklist.
 197-11-744 Environmental document.
 197-11-746 Environmental review.
 197-11-748 Environmentally sensitive area.
 197-11-750 Expanded scoping.
 197-11-752 Impacts.
 197-11-754 Incorporation by reference.
 197-11-756 Lands covered by water.
 197-11-758 Lead agency.
 197-11-760 License.
 197-11-762 Local agency.
 197-11-764 Major action.
 197-11-766 Mitigated DNS.
 197-11-768 Mitigation.
 197-11-770 Natural environment.
 197-11-772 NEPA.
 197-11-774 Nonproject.
 197-11-776 Phased review.
 197-11-778 Preparation.
 197-11-780 Private project.
 197-11-782 Probable.
 197-11-784 Proposal.
 197-11-786 Reasonable alternative.
 197-11-788 Responsible official.
 197-11-790 SEPA.
 197-11-792 Scope.
 197-11-793 Scoping.
 197-11-794 Significant.
 197-11-796 State agency.
 197-11-797 Threshold determination.
 197-11-799 Underlying governmental action.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-175, filed 6/15/84. Formerly WAC 173-805-020.]

PART NINE CATEGORICAL EXEMPTIONS

WAC 173-806-180 Adoption by reference. The city/county adopts by reference the following rules for categorical exemptions, as supplemented in this ordinance, including

WAC 173-806-070 (Flexible thresholds), WAC 173-806-080 (Use of exemptions), and WAC 173-806-190 (Environmentally sensitive areas):

WAC

197-11-800 Categorical exemptions.
 197-11-880 Emergencies.
 197-11-890 Petitioning DOE to change exemptions.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-180, filed 6/15/84. Formerly WAC 173-805-020.]

PART TEN AGENCY COMPLIANCE

WAC 173-806-185 Purpose of this part and adoption by reference. This part contains rules for agency compliance with SEPA, including rules for charging fees under the SEPA process, designating environmentally sensitive areas, listing agencies with environmental expertise, selecting the lead agency, and applying these rules to current agency activities. The city/county adopts the following sections by reference, as supplemented by WAC 173-806-045 through 173-806-043 and this part:

WAC

197-11-900 Purpose of this part.
 197-11-902 Agency SEPA policies.
 197-11-916 Application to ongoing actions.
 197-11-920 Agencies with environmental expertise.
 197-11-922 Lead agency rules.
 197-11-924 Determining the lead agency.
 197-11-926 Lead agency for governmental proposals.
 197-11-928 Lead agency for public and private proposals.
 197-11-930 Lead agency for private projects with one agency with jurisdiction.
 197-11-932 Lead agency for private projects requiring licenses from more than one agency, when one of the agencies is a county/city.
 197-11-934 Lead agency for private projects requiring licenses from a local agency, not a county/city, and one or more state agencies.
 197-11-936 Lead agency for private projects requiring licenses from more than one state agency.
 197-11-938 Lead agencies for specific proposals.
 197-11-940 Transfer of lead agency status to a state agency.
 197-11-942 Agreements on lead agency status.
 197-11-944 Agreements on division of lead agency duties.
 197-11-946 DOE resolution of lead agency disputes.
 197-11-948 Assumption of lead agency status.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-185, filed 6/15/84. Formerly WAC 173-805-020.]

WAC 173-806-190 Environmentally sensitive areas. (*Optional. If used, all subsections must be included.*) (1) (*Use Option 1 or 2, but not both.*)

(*Option 1: If maps have been prepared.*) The map(s) filed under designate the location of environmentally sensitive areas within the city/county and are adopted by reference. For each environmentally sensitive area, the exemptions within WAC 197-11-800 that are inapplicable for

that area are: Unidentified exemptions shall continue to apply within environmentally sensitive areas of the city/county.

(Option 2: *If environmentally sensitive areas have not been designated.*) shall designate environmentally sensitive areas under the standards of WAC 197-11-908 and shall file maps designating such areas, together with the exemptions from the list in WAC 197-11-908 that are inapplicable in such areas, with and the Department of Ecology, Headquarters Office, Olympia, Washington. The environmentally sensitive area designations shall have full force and effect of law as of the date of filing.

(2) The city/county shall treat proposals located wholly or partially within an environmentally sensitive area no differently than other proposals under this ordinance, making a threshold determination for all such proposals. The city/county shall not automatically require an EIS for a proposal merely because it is proposed for location in an environmentally sensitive area.

(3) Certain exemptions do not apply on lands covered by water, and this remains true regardless of whether or not lands covered by water are mapped.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-190, filed 6/15/84. Formerly WAC 173-805-050.]

WAC 173-806-200 Fees. (*This entire section is optional. You may use any or none of subsections (1), (2) or (4) of this section but you must use subsection (3) of this section if other subsections are used.*) The city/county shall require the following fees for its activities in accordance with the provisions of this ordinance:

(1) Threshold determination. For every environmental checklist the city/county will review when it is lead agency, the city/county shall collect a fee of (*\$50.00 or enter a different amount*) from the proponent of the proposal prior to undertaking the threshold determination. The time periods provided by this ordinance for making a threshold determination shall not begin to run until payment of the fee. (*Note: The following option may be added: When the city/county completes the environmental checklist at the applicant's request or under WAC 173-806-090(3) of this ordinance, an additional shall be collected.*)

(2) Environmental impact statement.

(a) When the city/county is the lead agency for a proposal requiring an EIS and the responsible official determines that the EIS shall be prepared by employees of the city/county, the city/county may charge and collect a reasonable fee from any applicant to cover costs incurred by the city/county in preparing the EIS. The responsible official shall advise the applicant(s) of the projected costs for the EIS prior to actual preparation; the applicant shall post bond or otherwise ensure payment of such costs.

(b) The responsible official may determine that the city/county will contract directly with a consultant for preparation of an EIS, or a portion of the EIS, for activities initiated by some persons or entity other than the city/county and may bill such costs and expenses directly to the applicant. The city/county may require the applicant to post bond or otherwise ensure payment of such costs. Such consultants shall be selected by mutual agreement of the city/county and applicant after a call for proposals.

(c) If a proposal is modified so that an EIS is no longer required, the responsible official shall refund any fees collected under (a) or (b) of this subsection which remain after incurred costs are paid.

(3) The city/county may collect a reasonable fee from an applicant to cover the cost of meeting the public notice requirements of this ordinance relating to the applicant's proposal.

(4) The city/county shall not collect a fee for performing its duties as a consulted agency.

(5) The city/county may charge any person for copies of any document prepared under this ordinance, and for mailing the document, in a manner provided by chapter 42.17 RCW.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-200, filed 6/15/84. Formerly WAC 173-805-130.]

WAC 173-806-205 Effective date. (Optional.) The effective date of this ordinance is

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-205, filed 6/15/84. Formerly chapter 173-805 WAC.]

WAC 173-806-220 Severability. If any provision of this ordinance or its application to any person or circumstance is held invalid, the remainder of this ordinance, or the application of the provision to other persons or circumstances, shall not be affected.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-220, filed 6/15/84. Formerly WAC 173-805-140.]

**PART ELEVEN
FORMS**

WAC 173-806-230 Adoption by reference. The city/county adopts the following forms and sections by reference:

WAC

- 197-11-960 Environmental checklist.
- 197-11-965 Adoption notice.
- 197-11-970 Determination of nonsignificance (DNS).
- 197-11-980 Determination of significance and scoping notice (DS).
- 197-11-985 Notice of assumption of lead agency status.
- 197-11-990 Notice of action.

[Statutory Authority: RCW 43.21C.130. 84-13-036 (Order DE 84-25), § 173-806-230, filed 6/15/84. Formerly WAC 173-805-020.]